

# ASSESSMENT

## OF THE POTENTIAL IMPACTS OF HYDRAULIC FRACTURING FOR OIL AND GAS ON DRINKING WATER RESOURCES

DRAFT- DO NOT CITE OR QUOTE



EPA/600/R-15/047a  
External Review Draft  
June 2015  
[www.epa.gov/hfstudy](http://www.epa.gov/hfstudy)

# **Assessment of the Potential Impacts of Hydraulic Fracturing for Oil and Gas on Drinking Water Resources**

## **NOTICE**

THIS DOCUMENT IS AN EXTERNAL REVIEW DRAFT, for review purposes only. It has not been formally disseminated by EPA. It does not represent and should not be construed to represent any Agency determination or policy.

Office of Research and Development  
U.S. Environmental Protection Agency  
Washington, DC 20460

## **DISCLAIMER**

This document is an external review draft. This information is distributed solely for the purpose of pre-dissemination peer review under applicable information quality guidelines. It has not been formally disseminated by EPA. It does not represent and should not be construed to represent any Agency determination or policy. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

# Contents

<b>Contents</b> .....	<b>iii</b>
<b>List of Tables</b> .....	<b>x</b>
<b>List of Figures</b> .....	<b>xii</b>
<b>List of Acronyms/Abbreviations</b> .....	<b>xvi</b>
<b>Preface</b> .....	<b>xx</b>
<b>Authors, Contributors, and Reviewers</b> .....	<b>xxi</b>
Authors.....	xxi
Contributors.....	xxii
Reviewers.....	xxiii
Acknowledgements.....	xxiv
<b>Executive Summary</b> .....	<b>ES-1</b>
What is Hydraulic Fracturing? .....	ES-1
Scope of the Assessment.....	ES-3
Approach .....	ES-5
Proximity of Current Activity and Drinking Water Resources.....	ES-5
Major Findings .....	ES-6
Water Acquisition.....	ES-6
Chemical Mixing.....	ES-10
Well Injection .....	ES-13
Flowback and Produced Water.....	16
Wastewater Management and Waste Disposal.....	ES-19
Key Data Limitations and Uncertainties.....	ES-22
Limitations in Monitoring Data and Chemical Information .....	ES-22
Other Contributing Limitations.....	ES-23
Conclusions.....	ES-23
References for Executive Summary.....	ES-24
<b>1. Introduction</b> .....	<b>1-1</b>
1.1. Background .....	1-1
1.2. Scope .....	1-1
1.3. Approach .....	1-6
1.3.1. EPA Hydraulic Fracturing Study Publications .....	1-6
1.3.2. Literature and Data Search Strategy .....	1-6
1.3.3. Literature and Data Evaluation Strategy.....	1-7
1.3.4. Quality Assurance and Peer Review .....	1-8
1.4. Organization.....	1-9
1.5. Intended Use.....	1-11
1.6. References for Chapter 1 .....	1-12
<b>2. Hydraulic Fracturing, Oil and Gas Production, and the U.S. Energy Sector</b> .....	<b>2-1</b>
2.1. What is Hydraulic Fracturing?.....	2-1
2.1. Hydraulic Fracturing and the Life of a Well.....	2-8



2.1.1.	Site and Well Development .....	2-9
2.1.1.	Hydraulic Fracturing .....	2-12
2.1.2.	Fluid Recovery, Management, and Disposal .....	2-17
2.1.3.	Oil and Gas Production .....	2-18
2.1.4.	Site and Well Closure .....	2-19
2.2.	How Widespread is Hydraulic Fracturing? .....	2-20
2.2.1.	Number of Wells Fractured per Year .....	2-25
2.2.2.	Hydraulic Fracturing Rates .....	2-27
2.3.	Trends and Outlook for the Future.....	2-28
2.3.1.	Natural Gas (Including Coalbed Methane).....	2-28
2.3.2.	Oil.....	2-31
2.4.	Conclusion.....	2-32
2.5.	References for Chapter 2.....	2-33
<b>3.</b>	<b>Drinking Water Resources in the United States .....</b>	<b>3-1</b>
3.1.	Current and Future Drinking Water Resources .....	3-1
3.2.	The Proximity of Drinking Water Resources to Hydraulic Fracturing Activity .....	3-3
3.3.	Conclusion.....	3-11
3.4.	References for Chapter 3.....	3-12
<b>4.</b>	<b>Water Acquisition.....</b>	<b>4-1</b>
4.1.	Introduction .....	4-1
4.2.	Types of Water Used .....	4-2
4.2.1.	Source.....	4-2
4.2.2.	Quality.....	4-4
4.2.3.	Provisioning .....	4-5
4.3.	Water Use Per Well.....	4-6
4.3.1.	Hydraulic Fracturing Water Use in the Life Cycle of Oil and Gas.....	4-6
4.3.2.	National Patterns of Water Use Per Well for Fracturing.....	4-6
4.3.3.	Factors Affecting Water Use Per Well.....	4-7
4.4.	Cumulative Water Use and Consumption .....	4-8
4.4.1.	National and State Scale.....	4-8
4.4.2.	County Scale .....	4-9
4.5.	Potential for Water Use Impacts by State .....	4-15
4.5.1.	Texas.....	4-17
4.5.2.	Colorado and Wyoming.....	4-28
4.5.3.	Pennsylvania, West Virginia, and Ohio.....	4-32
4.5.4.	North Dakota and Montana .....	4-36
4.5.5.	Oklahoma and Kansas.....	4-39
4.5.6.	Arkansas and Louisiana .....	4-41
4.5.7.	Utah, New Mexico, and California .....	4-44
4.6.	Chapter Synthesis .....	4-47
4.6.1.	Major Findings .....	4-47
4.6.2.	Factors Affecting Frequency or Severity of Impacts .....	4-49
4.6.3.	Uncertainties.....	4-50

---

4.6.4.	Conclusions.....	4-51
4.7.	References for Chapter 4.....	4-54
<b>5.</b>	<b>Chemical Mixing.....</b>	<b>5-1</b>
5.1.	Introduction.....	5-1
5.2.	Chemical Mixing Process.....	5-3
5.3.	Overview of Hydraulic Fracturing Fluids.....	5-6
5.3.1.	Water-Based Fracturing Fluids.....	5-11
5.3.2.	Alternative Fracturing Fluids.....	5-11
5.3.3.	Proppants.....	5-13
5.4.	Frequency and Volume of Hydraulic Fracturing Chemical Use.....	5-13
5.4.1.	National Frequency of Use of Hydraulic Fracturing Chemicals.....	5-15
5.4.2.	Nationwide Oil versus Gas.....	5-19
5.4.3.	State-by-State Frequency of Use of Hydraulic Fracturing Chemicals.....	5-19
5.4.4.	Volumes of Chemicals Used.....	5-24
5.5.	Chemical Management and Spill Potential.....	5-28
5.5.1.	Storage.....	5-30
5.5.2.	Hoses and Lines.....	5-34
5.5.3.	Blender.....	5-36
5.5.4.	Manifold.....	5-36
5.5.5.	High-Pressure Fracturing Pumps.....	5-37
5.5.6.	Surface Wellhead for Fracture Stimulation.....	5-39
5.6.	Spill Prevention, Containment, and Mitigation.....	5-41
5.7.	Overview of Chemical Spills Data.....	5-42
5.7.1.	EPA Analysis of Spills Associated with Hydraulic Fracturing.....	5-42
5.7.2.	Other Spill Reports.....	5-47
5.8.	Fate and Transport of Chemicals.....	5-50
5.8.1.	Potential Paths.....	5-52
5.8.2.	Physicochemical Properties.....	5-53
5.8.3.	Mobility of Chemicals.....	5-55
5.8.4.	Transformation Processes.....	5-64
5.8.5.	Fate and Transport of Chemical Mixtures.....	5-64
5.8.6.	Site and Environmental Conditions.....	5-65
5.8.7.	Peer-Reviewed Literature on the Fate and Transport of Hydraulic Fracturing Fluid Spills.....	5-66
5.8.8.	Potential and Documented Fate and Transport of Documented Spills.....	5-66
5.9.	Trends in Chemicals Use in Hydraulic Fracturing.....	5-70
5.10.	Synthesis.....	5-71
5.10.1.	Summary of Findings.....	5-71
5.10.2.	Factors Affecting the Frequency or Severity of Impacts.....	5-72
5.10.3.	Uncertainties.....	5-73
5.10.4.	Conclusions.....	5-74
5.11.	References for Chapter 5.....	5-77
<b>6.</b>	<b>Well Injection.....</b>	<b>6-1</b>
6.1.	Introduction.....	6-1

---

6.2.	Fluid Migration Pathways Within and Along the Production Well .....	6-3
6.2.1.	Overview of Well Construction.....	6-3
6.2.2.	Evidence of the Existence of Fluid Movement Pathways or of Fluid Movement.....	6-11
6.3.	Fluid Migration Associated with Induced Fractures within Subsurface Formations.....	6-27
6.3.1.	Overview of Subsurface Fracture Growth .....	6-28
6.3.2.	Migration of Fluids through Pathways Related to Fractures/Formations.....	6-31
6.4.	Synthesis.....	6-50
6.4.1.	Summary of Findings .....	6-51
6.4.2.	Factors Affecting Frequency and Severity of Impacts .....	6-53
6.4.3.	Uncertainties.....	6-55
6.4.4.	Conclusions.....	6-57
6.5.	References for Chapter 6.....	6-58
<b>7.</b>	<b>Flowback and Produced Water .....</b>	<b>7-1</b>
7.1.	Introduction .....	7-1
7.1.1.	Definitions.....	7-2
7.1.	Volume of Hydraulic Fracturing Flowback and Produced Water .....	7-2
7.1.1.	Flowback of Injected Hydraulic Fracturing Fluid.....	7-3
7.1.2.	Produced Water.....	7-10
7.2.	Flowback and Produced Water Data Sources.....	7-13
7.3.	Background on Formation Characteristics .....	7-15
7.4.	Flowback Composition.....	7-16
7.4.1.	General Characteristics .....	7-16
7.4.2.	Temporal Changes in Flowback Composition.....	7-16
7.4.3.	Total Dissolved Solids Enrichment .....	7-17
7.4.4.	Radionuclide Enrichment.....	7-18
7.4.5.	Leaching and Biotransformation of Naturally Occurring Organic Compounds .....	7-19
7.5.	Produced Water Composition.....	7-22
7.5.1.	Similarity of Produced Water from Conventional and Unconventional Formations .....	7-22
7.5.2.	Variability in Produced Water Composition Among Unconventional Formation Types.....	7-22
7.5.3.	General Water Quality Parameters.....	7-25
7.5.4.	Salinity and Inorganics .....	7-25
7.5.5.	Metals.....	7-26
7.5.6.	Naturally Occurring Radioactive Material (NORM) and Technologically Enhanced Naturally Occurring Radioactive Material (TENORM) .....	7-27
7.5.7.	Organics .....	7-28
7.5.8.	Reactions within Formations .....	7-28
7.6.	Spatial Trends .....	7-29
7.7.	Spill Impacts on Drinking Water Resources .....	7-30
7.7.1.	Produced Water Management and Spill Potential .....	7-30
7.7.2.	Spills of Hydraulic Fracturing Flowback and Produced Water from Unconventional Oil and Gas Production.....	7-31
7.7.3.	Case Studies of Potentially Impacted Sites.....	7-36
7.7.4.	Roadway Transport of Produced Water.....	7-39

7.7.5.	Studies of Environmental Transport of Released Produced Water .....	7-40
7.7.6.	Coalbed Methane.....	7-41
7.7.7.	Transport Properties.....	7-42
7.8.	Synthesis.....	7-43
7.8.1.	Summary of Findings .....	7-44
7.8.2.	Factors Affecting the Frequency or Severity of Impacts .....	7-44
7.8.3.	Uncertainties.....	7-45
7.8.4.	Conclusions.....	7-46
7.9.	References for Chapter 7.....	7-48
<b>8.</b>	<b>Wastewater Treatment and Waste Disposal .....</b>	<b>8-1</b>
8.1.	Introduction .....	8-1
8.2.	Volumes of Hydraulic Fracturing Wastewater .....	8-2
8.2.1.	National Level Estimate .....	8-4
8.2.2.	Regional/State and Formation Level Estimates.....	8-4
8.2.3.	Estimation Methodologies and Challenges.....	8-9
8.3.	Wastewater Characteristics .....	8-10
8.3.1.	Wastewater.....	8-10
8.3.2.	Constituents in Residuals .....	8-12
8.4.	Wastewater Management Practices.....	8-12
8.4.1.	Underground Injection .....	8-20
8.4.2.	Centralized Waste Treatment Facilities.....	8-23
8.4.3.	Water Reuse for Hydraulic Fracturing .....	8-27
8.4.4.	Evaporation .....	8-31
8.4.5.	Publicly Owned Treatment Works.....	8-33
8.4.6.	Other Management Practices and Issues .....	8-35
8.5.	Summary and Analysis of Wastewater Treatment .....	8-38
8.5.1.	Overview of Treatment Processes for Hydraulic Fracturing Wastewater .....	8-38
8.5.2.	Treatment of Hydraulic Fracturing Waste Constituents of Concern .....	8-38
8.5.3.	Design of Treatment Trains for CWTs.....	8-49
8.6.	Potential Impacts on Drinking Water Resources .....	8-58
8.6.1.	Bromide and Chloride.....	8-59
8.6.2.	Radionuclides .....	8-62
8.6.3.	Metals.....	8-65
8.6.4.	Volatile Organic Compounds .....	8-66
8.6.5.	Semi-Volatile Organic Compounds .....	8-67
8.6.6.	Oil and Grease.....	8-67
8.7.	Synthesis.....	8-67
8.7.1.	Summary of Findings .....	8-68
8.7.2.	Factors Affecting the Frequency or Severity of Impacts .....	8-71
8.7.3.	Uncertainties.....	8-72
8.7.4.	Conclusions.....	8-73
8.8.	References for Chapter 8.....	8-75

<b>9.</b>	<b>Identification and Hazard Evaluation of Chemicals across the Hydraulic Fracturing Water Cycle</b>	<b>9-1</b>
9.1.	Introduction .....	9-1
9.2.	Identification of Chemicals Associated with the Hydraulic Fracturing Water Cycle.....	9-3
9.2.1.	Chemicals Used in Hydraulic Fracturing Fluids .....	9-4
9.2.2.	Chemicals Detected in Flowback and Produced Water .....	9-4
9.3.	Toxicological and Physicochemical Properties of Hydraulic Fracturing Chemicals.....	9-4
9.3.1.	Selection of Toxicity Values: Reference Values (RfVs) and Oral Slope Factors (OSFs).....	9-5
9.3.2.	Physicochemical Properties.....	9-7
9.3.3.	Summary of Selected Toxicological and Physicochemical Property Data for Hydraulic Fracturing Chemicals.....	9-7
9.3.4.	Additional Sources of Toxicity Information .....	9-8
9.4.	Hazard Identification of Reported Hydraulic Fracturing Chemicals .....	9-10
9.4.1.	Selection of Additional Chemicals for Hazard Identification.....	9-11
9.4.2.	Hazard Identification Results .....	9-11
9.5.	Hazard Identification and Hazard Evaluation of Selected Subsets of Hydraulic Fracturing Chemicals	9-16
9.5.1.	Selection of Chemicals for Hazard Evaluation .....	9-16
9.5.2.	Multi Criteria Decision Analysis (MCDA) Framework for Hazard Evaluation: Integrating Toxicity, Occurrence, and Physicochemical Data.....	9-19
9.5.3.	Hazard Evaluation Results.....	9-23
9.5.4.	Summary of Chemicals Detected in Multiple Stages of the Hydraulic Fracturing Water Cycle	9-33
9.6.	Synthesis.....	9-35
9.6.1.	Summary of Findings .....	9-35
9.6.2.	Factors Affecting the Frequency or Severity of Impacts .....	9-37
9.6.3.	Uncertainties.....	9-37
9.6.4.	Conclusions.....	9-39
9.7.	References for Chapter 9.....	9-41
9.8.	Annex .....	9-43
9.8.1.	Calculation of Physicochemical Property Scores (MCDA Hazard Evaluation) .....	9-43
9.8.2.	Example of MCDA Score Calculation .....	9-44
<b>10.</b>	<b>Synthesis .....</b>	<b>10-1</b>
10.1.	Major Findings .....	10-1
10.1.1.	Water Acquisition (Chapter 4).....	10-2
10.1.2.	Chemical Mixing (Chapter 5) .....	10-5
10.1.3.	Well Injection (Chapter 6) .....	10-8
10.1.4.	Flowback and Produced Water (Chapter 7) .....	10-11
10.1.5.	Wastewater Management and Waste Disposal (Chapter 8) .....	10-14
10.2.	Key Data Limitations and Uncertainties.....	10-17
10.2.1.	Limitations in monitoring data and chemical information .....	10-17
10.2.2.	Other Contributing Limitations .....	10-19
10.3.	Conclusions .....	10-19
10.4.	Use of the Assessment .....	10-20

10.5. References for Chapter 10 ..... 10-21

**See Separate Supplemental Document for Appendices**

Appendix A. Chemicals Identified in Hydraulic Fracturing Fluids and/or Flowback and Produced Water ..... A-1

Appendix B. Water Acquisition Tables ..... B-1

Appendix C. Chemical Mixing Supplemental Tables and Information ..... C-1

Appendix D. Designing, Constructing, and Testing Wells for Integrity ..... D-1

Appendix E. Flowback and Produced Water Supplemental Tables and Information ..... E-1

Appendix F. Wastewater Treatment and Waste Disposal Supplemental Information ..... F-1

Appendix G. Identification and Hazard Evaluation of Chemicals across the Hydraulic Fracturing Water Cycle Supplemental Tables and Information ..... G-1

Appendix H. Description of EPA Hydraulic Fracturing Study Publications Cited in This Assessment ..... H-1

Appendix I. Unit Conversions ..... I-1

Appendix J. Glossary ..... J-1

## List of Tables

Table 1-1. Stages of the hydraulic fracturing water cycle have various potential effects on drinking water resources.....	1-4
Table 1-2. Criteria developed for the five factors used to evaluate literature and data cited in this assessment.....	1-8
Table 1-3. Research questions addressed by this assessment.....	1-9
Table 4-1. Percentage of injected water volume that comes from reused hydraulic fracturing wastewater in various states, basins, and plays.....	4-3
Table 4-2. Annual average hydraulic fracturing water use and consumption in 2011 and 2012 compared to total annual water use and consumption in 2010, by county.....	4-11
Table 4-3. Estimated proportions of hydraulic fracturing source water from surface and ground water.....	4-19
Table 4-4. Brackish water use as a percentage of total hydraulic fracturing water use in Texas’ main hydraulic fracturing areas, 2011.....	4-20
Table 5-1. Examples of common additives, their function, and the most frequently used chemicals reported to FracFocus for these additives.....	5-9
Table 5-2. Chemicals reported to FracFocus 1.0 from January 1, 2011 to February 28, 2013 in 10% or more disclosures, with the percent of disclosures for which each chemical is reported and the top four reported additives for the chemical.....	5-16
Table 5-3. The percentage of disclosures of the 20 most commonly reported chemical by state, where a chemical is reported in at least three states.....	5-21
Table 5-4. Example list of chemicals and volumes used in hydraulic fracturing.....	5-24
Table 5-5. Examples of typical hydraulic fracturing equipment and their functions.....	5-29
Table 5-6. Estimations of spill rates.....	5-49
Table 5-7. Ranking of the 20 most mobile organic chemicals, as determined by the largest log $K_{ow}$ , with CASRN, percent of wells where the chemical is reported from January 1, 2011 to February 28, 2013 (U.S. EPA, 2015b), and physicochemical properties (log $K_{ow}$ , solubility, and Henry’s Law constant) as estimated by EPI Suite™.....	5-56
Table 5-8. Ranking of the 20 least mobile organic chemicals, as determined by the largest log $K_{ow}$ , with CASRN, percent of wells where the chemical is reported from January 1, 2011 to February 28, 2013 (U.S. EPA, 2015b), and physicochemical properties (log $K_{ow}$ , solubility, and Henry’s Law constant) as estimated by EPI Suite™.....	5-59
Table 5-9. The 20 chemicals reported most frequently nationwide for hydraulic fracturing based on reported FracFocus 1.0 disclosures (U.S. EPA, 2015b), with EPI Suite™ physicochemical parameters where available, and estimated mean and median volumes of those chemicals, where density was available.....	5-62
Table 6-1. Results of studies of PA DEP violations data that examined well failure rates.....	6-21
Table 6-2. Comparing the approximate depth and thickness of selected U.S. shale gas plays and coalbed methane basins.....	6-33
Table 6-3. Modeling parameters and scenarios investigated by Reagan et al. (2015).....	6-41
Table 7-1. Data from one company’s operations indicating approximate total water use and approximate produced water volumes within 10 days after completion of wells (Mantell, 2013b).....	7-4
Table 7-2. Additional short-, medium-, and long-term produced water estimates.....	7-5
Table 7-3. Flowback and long-term produced water characteristics for wells in unconventional formations (U.S. EPA, 2015e).....	7-6
Table 7-4. Compiled minimum and maximum concentrations for various geochemical constituents in unconventional shale gas, tight gas, and CBM produced water (Alley et al., 2011).....	7-23

*This document is a draft for review purposes only and does not constitute Agency policy.*

Table 7-5. Concentration ranges (mg/L) of several classes of naturally occurring organic chemicals in conventional produced water worldwide (reported in Neff, 2002).....	7-28
Table 8-1. Estimated volumes (millions of gallons) of wastewater based on state data for selected years and numbers of wells producing fluid. ....	8-7
Table 8-2. Hydraulic fracturing wastewater management practices in recent years. ....	8-14
Table 8-3. Distribution of active Class IID wells across the United States.....	8-21
Table 8-4. Number, by state, of CWT facilities that have accepted or plan to accept wastewater from hydraulic fracturing activities.....	8-25
Table 8-5. Estimated percentages of reuse of hydraulic fracturing wastewater.....	8-29
Table 8-6. Studies of removal efficiencies and influent/effluent data for various processes and facilities.....	8-40
Table 8-7. Examples of centralized waste treatment facilities. ....	8-51
Table 9-1. Sources of selected toxicityRfVs and OSFs.....	9-5
Table 9-2. List of the most frequently used chemicals in hydraulic fracturing fluids, with their respective federal chronic RfVs where available.....	9-11
Table 9-3. List of the 20 most mobile chemicals used in hydraulic fracturing fluid, with their respective federal chronic RfVs where available.....	9-13
Table 9-4. List of the 20 least mobile chemicals used in hydraulic fracturing fluid, with their respective federal chronic RfVs where available.....	9-14
Table 9-5. Thresholds used for developing the toxicity score, occurrence score, and physicochemical properties score in this MCDA framework. ....	9-22
Table 9-6. Toxicological properties of the 37 chemicals used in hydraulic fracturing fluid that were identified for hazard evaluation and MCDA analysis.....	9-24
Table 9-7. MCDA results for 37 chemicals used in hydraulic fracturing fluid.....	9-27
Table 9-8. Toxicological properties of the 23 chemicals detected in flowback and produced water that were identified for hazard evaluation and MCDA analysis. ....	9-30
Table 9-9. MCDA results for 23 chemicals in hydraulic fracturing flowback and produced water.....	9-31
Table 9-10. List of the 23 chemicals with federal chronic RfVs identified to be used in hydraulic fracturing fluids and detected in the flowback/produced water stage of the hydraulic fracturing water cycle. ....	9-34



## List of Figures

Figure ES-1. Schematic cross-section of general types of oil and gas resources and the orientations of production wells used in hydraulic fracturing.....	ES-2
Figure ES-2. The stages of the hydraulic fracturing water cycle.....	ES-4
Figure ES-3. Water budgets representative of practices in the Marcellus Shale in the Susquehanna River Basin in Pennsylvania (a) and the Barnett Shale in Texas (b). .....	ES-8
Figure 1-1. Conceptualized view of the stages of the hydraulic fracturing water cycle.....	1-3
Figure 2-1. Schematic cross-section of general types of oil and gas resources and the orientations of production wells used in hydraulic fracturing.....	2-3
Figure 2-2. Shale gas and oil plays in the lower 48 United States. ....	2-6
Figure 2-3. Tight gas plays in the lower 48 United States.....	2-7
Figure 2-4. Coalbed methane fields in the lower 48 United States.....	2-7
Figure 2-5. Generalized timeline and summary of activities that take place during the operational phases of an oil or gas well site operation in which hydraulic fracturing is used.....	2-8
Figure 2-6. Pulling drill pipe onto the drilling platform. ....	2-11
Figure 2-7. Sections of surface casing lined up and being prepared for installation at a well site in Colorado. ....	2-12
Figure 2-8. Hydraulic fracturing operation in Troy, PA. ....	2-13
Figure 2-9. Two wellheads side-by-side being prepared for hydraulic fracturing at a well site in Pennsylvania. ....	2-14
Figure 2-10. Water tanks (blue, foreground) lined up for hydraulic fracturing at a well site in central Arkansas. ....	2-16
Figure 2-11. Impoundment on the site of a hydraulic fracturing operation in central Arkansas. ....	2-18
Figure 2-12. Aerial photograph of a well pad and service road in Springville Township, Pennsylvania. ....	2-21
Figure 2-13. Aerial photograph of hydraulic fracturing activities near Williston, North Dakota. ....	2-21
Figure 2-14. Landsat photo showing hydraulic fracturing well sites near Frierson, Louisiana. ....	2-22
Figure 2-15. Landsat photo showing hydraulic fracturing well sites near Pinedale, Wyoming. ....	2-23
Figure 2-16. Location of horizontal wells that began producing oil or natural gas in 2000, 2005, and 2012, based on data from DrillingInfo (2014a).....	2-24
Figure 2-17. Trends in U.S. oil and gas production. ....	2-29
Figure 2-18. Historic and projected natural gas production by source (trillion cubic feet).....	2-29
Figure 2-19. Natural gas prices and oil and gas drilling activity, 2008–2012. ....	2-30
Figure 2-20. (a) Production from U.S. shale gas plays, 2000–2014, in billion cubic feet per day; (b) Production from U.S. tight oil plays, 2000-2014.....	2-31
Figure 2-21. U.S. petroleum and other liquid fuels supply by source, past and projected future trends (million barrels per day).....	2-32
Figure 3-1. Geographic variability in drinking water sources for public water systems.....	3-2
Figure 3-2. Proximity of hydraulically fractured wells relative to populated areas. ....	3-5
Figure 3-3. Temporal trends (2000–2013) in the number and percent of hydraulically fractured wells located within populated areas. ....	3-6
Figure 3-4. Location and number of public water system (PWS) sources located within 1 mile of a hydraulically fractured well.....	3-8

Figure 3-5. The location of public water system sources within 1 mile of hydraulically fractured wells.. 3-9

Figure 3-6. Co-occurrence of hydraulic fracturing activity and populations supplied by private water systems.  
 .....3-10

Figure 4-1. Annual average hydraulic fracturing water use in 2011 and 2012 by county (U.S. EPA, 2015b).4-13

Figure 4-2. (a) Annual average hydraulic fracturing water use in 2011 and 2012 compared to total annual water use in 2010, by county, expressed as a percentage; (b) Annual average hydraulic fracturing water consumption in 2011 and 2012 compared to total annual water consumption in 2010, by county, expressed as a percentage. ....4-14

Figure 4-3. Locations of wells in the EPA FracFocus project database, with respect to U.S. EIA shale plays and basins (EIA, 2015; US. EPA, 2015b).....4-17

Figure 4-4. Major U.S. EIA shale plays and basins for Texas (EIA, 2015).....4-18

Figure 4-5. Annual average hydraulic fracturing water use in 2011 and 2012 compared to (a) fresh water available and (b) total water (fresh, brackish, and wastewater) available, by county, expressed as a percentage.....4-23

Figure 4-6. (a) Estimated annual surface water runoff from the USGS; (b) Reliance on ground water as indicated by the ratio of ground water pumping to stream flow and pumping.....4-25

Figure 4-7. Major U.S. EIA shale plays and basins for Colorado and Wyoming (EIA, 2015).....4-28

Figure 4-8. Major U.S. EIA shale plays and basins for Pennsylvania, West Virginia, and Ohio (EIA, 2015).4-32

Figure 4-9. Major U.S. EIA shale plays and basins for North Dakota and Montana (EIA, 2015b). ....4-36

Figure 4-10. Major U.S. EIA shale plays and basins for Oklahoma and Kansas (EIA, 2015).....4-40

Figure 4-11. Major U.S. EIA shale plays and basins for Arkansas and Louisiana (EIA, 2015b).....4-43

Figure 4-12. Major U.S. EIA shale plays and basins for Utah, New Mexico, and California (EIA, 2015). ...4-45

Figure 5-1. Factors governing potential impact to drinking water resources..... 5-1

Figure 5-2. Hydraulic fracturing site showing equipment used on-site during the chemical mixing process.5-3

Figure 5-3. Overview of a chemical mixing process of the hydraulic fracturing water cycle. .... 5-4

Figure 5-4. Example fracturing fluid decision tree for gas and oil wells..... 5-8

Figure 5-5. Estimated median volumes for chemicals reported in at least 100 FracFocus disclosures by February 28, 2013 for use in hydraulic fracturing from January 1, 2011 to February 28, 2013.5-27

Figure 5-6. Typical hydraulic fracturing equipment layout.....5-30

Figure 5-7. Metal and high-density polyethylene (HDPE) chemical additive units.....5-32

Figure 5-8. A worker adjusts hoses at a hydraulic fracturing site near Mead, Colorado. ....5-35

Figure 5-9. Manifold (pointed to by the white arrow). ....5-37

Figure 5-10. High-pressure pumps on either side of the manifold.....5-38

Figure 5-11. Multiple fracture heads.....5-39

Figure 5-12. Distribution of the causes of 151 hydraulic fracturing-related spills of chemicals and fracturing fluid.....5-44

Figure 5-13. Percent distribution of sources of 151 hydraulic fracturing-related spills of chemicals or fracturing fluid.....5-45

Figure 5-14. Total volume of fluids spilled for 151 hydraulic fracturing-related spills of chemicals and fracturing fluid, by spill source.....5-46

Figure 5-15. Number of hydraulic fracturing-related spills of chemicals or fracturing fluid that reported whether an environmental receptor was reached. ....5-47

Figure 5-16. Fate and transport schematic for a spilled hydraulic fracturing fluid. ....5-51

Figure 5-17. Histograms of physicochemical properties of chemicals used in the hydraulic fracturing process.  
 .....5-54

Figure 5-18. Histograms of physicochemical properties of confidential chemicals used in the hydraulic fracturing process. ....5-55

Figure 5-19. Fate and Transport Spill Example: Case 1. ....5-67

Figure 5-20. Fate and Transport Spill Example: Case 2. ....5-68

Figure 5-21. Fate and Transport Spill Example: Case 3. ....5-69

Figure 6-1. Overview of well construction..... 6-5

Figure 6-2. The various stresses to which the casing will be exposed. .... 6-7

Figure 6-3. Potential pathways for fluid movement in a cemented wellbore. ....6-12

Figure 6-4. Hydraulic fracture planes (represented as ovals), with respect to the principal subsurface compressive stresses:  $S_V$  (the vertical stress),  $S_H$  (the maximum horizontal stress), and  $S_h$  (the minimum horizontal stress). ....6-29

Figure 6-5. Conceptualized depiction of potential pathways for fluid movement out of the production zone: (a) induced fracture overgrowth into over- or underlying formations; (b) induced fractures intersecting natural fractures; and (c) induced fractures intersecting a transmissive fault. 6-37

Figure 6-6. Induced fractures intersecting an offset well (in a production zone, as shown, or in overlying formations into which fracture growth may have occurred). ....6-43

Figure 6-7. Well communication (a frac hit) via induced fractures intersecting another well or its fracture network.....6-43

Figure 7-1. Fraction of injected hydraulic fracturing fluid recovered from six vertical (top) and eight horizontal (bottom) wells completed in the Marcellus Shale..... 7-8

Figure 7-2. Example of flowback and produced water from the Marcellus Shale, illustrating rapid decline in water production and cumulative return of approximately 30% of the volume of injected fluid. .... 7-9

Figure 7-3. Percent of injected fluid recovered for Marcellus Shale wells in West Virginia (2010–2012).7-10

Figure 7-4. Barnett Shale monthly water-production percentiles (5<sup>th</sup>, 30<sup>th</sup>, 50<sup>th</sup>, 70<sup>th</sup>, and 90<sup>th</sup>) and number of wells with data (dashed line).....7-12

Figure 7-5. Barnett Shale production data for approximately 72 months. ....7-12

Figure 7-6. TDS concentrations measured through time for injected fluid (at 0 days), flowback, and produced water samples from four Marcellus Shale gas wells in three southwestern Pennsylvanian counties. ....7-18

Figure 7-7. Total radium and TDS concentrations measured through time for injected (day 0), flowback, and produced water samples from mutually exclusive Greene County, PA, Marcellus Shale gas wells. ....7-19

Figure 7-8. (a) Chloride (Cl) and (b) DOC concentrations measured through time for injected (day 0), flowback, and produced water samples obtained from three Marcellus Shale gas wells from a single well pad in Greene County, PA used for hydraulic fracturing. ....7-21

Figure 7-9. Histograms of physicochemical properties of 86 organic chemicals identified in produced water (physicochemical properties estimated by EPI Suite™). ....7-43

Figure 8-1. Produced and flowback water volumes and produced gas volumes from unconventional wells in Pennsylvania from July of 2009 through June of 2014..... 8-3

Figure 8-2. Wastewater quantities in the western United States (billions of gallons per year)..... 8-5

Figure 8-3. Schematic of wastewater management strategies. ....8-13

Figure 8-4. Percentages of Marcellus Shale wastewater managed via various practices for (top) the second half of 2009 and first half of 2010 (total estimated volume of 216 Mgal), and (bottom) 2013 (total estimated volume of 1.3 billion gallons). ....8-18

Figure 8-5. Management of wastewater in Colorado in regions where hydraulic fracturing is being performed. ....8-19

Figure 8-6. Lined evaporation pit in the Battle Creek Field (Montana).....8-32

Figure 8-7. Oil and gas wastewater volumes discharged to POTWs from 2001-2011 in the Marcellus Shale.  
.....8-34

Figure 8-8. Full discharge water process used in the Pinedale Anticline field.....8-50

Figure 9-1. Overall representation of the selected RfVs and OSFs, occurrence data, and physicochemical data  
available for the 1,173 hydraulic fracturing chemicals identified by the EPA..... 9-7

Figure 9-2. Fraction of chemicals with at least one data point in each ACToR data class. ....9-10

Figure 9-3. The two subsets of chemicals selected for hazard evaluation included 37 chemicals used in  
hydraulic fracturing fluid, and 23 chemicals detected in flowback or produced water. ....9-18

Figure 9-4. Overview of the MCDA framework applied to the hazard evaluations. ....9-20

Figure 10-1. Water budgets representative of practices in the Marcellus Shale in the Susquehanna River Basin  
in Pennsylvania (a) and the Barnett Shale in Texas (b). ....10-3

## List of Acronyms/Abbreviations

<b>Acronym</b>	<b>Definition</b>	<b>Acronym</b>	<b>Definition</b>
<b>2BE</b>	2-butoxyethanol	<b>CM</b>	chemical mixing
<b>ACToR</b>	Aggregated Computational Toxicology Resource database	<b>COGCC</b>	Colorado Oil and Gas Conservation Commission
<b>AMEC</b>	AMEC Environment & Infrastructure, Inc.	<b>CWCB</b>	Colorado Water Conservation Board
<b>ANRC</b>	Arkansas Natural Resources Commission	<b>CWT</b>	centralized waste treatment
<b>AO</b>	administrative order	<b>CWTF</b>	centralized water treatment facility
<b>AOGC</b>	Arkansas Oil and Gas Commission	<b>DBNM</b>	dibromochloronitromethane
<b>API</b>	American Petroleum Institute	<b>DBP</b>	disinfection by-products
<b>ATSDR</b>	Agency for Toxic Substance and Disease Registry	<b>DecaBDE</b>	decabromodipheyl ether
<b>AWWA</b>	American Water Works Association	<b>DfE</b>	Design for the Environment
<b>BLM</b>	Bureau of Land Management	<b>DI</b>	Drilling Info, Inc.
<b>BTEX</b>	benzene, toluene, ethylbenzene, and xylenes	<b>DMR</b>	Discharge Monitoring Report
<b>CARES</b>	Casella Altela Regional Environmental Services	<b>DNR</b>	Department of Natural Resources
<b>CASRN</b>	chemical abstract services registration number	<b>DO</b>	dissolved oxygen
<b>CBI</b>	confidential business information	<b>DOC</b>	dissolved organic carbon
<b>CBM</b>	coalbed methane	<b>DOE</b>	U.S. Department of Energy
<b>CCST</b>	California Council on Science and Technology	<b>DOGGR</b>	California Department of Conservation's Division of Oil, Gas & Geothermal Resources
<b>CDWR</b>	Colorado Division of Water Resources	<b>DOJ</b>	U.S. Department of Justice
<b>CFR</b>	Code of Federal Regulations	<b>DOT</b>	U.S. Department of Transportation
<b>CICAD</b>	Concise International Chemical Assessment Document	<b>DRO</b>	diesel range organics
		<b>EERC</b>	Energy and Environmental Research Center, University of North Dakota
		<b>EIA</b>	U.S. Energy Information Administration
		<b>EPA</b>	U.S. Environmental Protection Agency

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Acronym</b>	<b>Definition</b>	<b>Acronym</b>	<b>Definition</b>
<b>EPA OW</b>	U.S. Environmental Protection Agency’s Office of Water	<b>IRIS</b>	Integrated Risk Information System
<b>EPI</b>	estimation programs interface	<b>IUPAC</b>	International Union of Pure and Applied Chemistry
<b>ERCB</b>	Energy Resource Conservation Board	<b>KWO</b>	Kansas Water Office
<b>ERG</b>	Eastern Research Group	<b>LOAEL</b>	lowest observed adverse effect level
<b>ESN</b>	Environmental Services Network	<b>MCDA</b>	multicriteria decision analysis
<b>FRS</b>	fluids recovery services	<b>MCL</b>	maximum contaminant level
<b>GES</b>	Groundwater & Environmental Services, Inc.	<b>MCLG</b>	maximum containment level goal
<b>GNB</b>	Government of New Brunswick	<b>MCOR</b>	Marcellus Center for Outreach and Research
<b>GRO</b>	gasoline range organics	<b>MIT</b>	mechanical integrity test
<b>GTI</b>	Gas Technology Institute	<b>MRL</b>	minimum risk level
<b>GWPC</b>	Ground Water Protection Council	<b>MSC</b>	Marcellus shale coalition
<b>HBCD</b>	hexabromocyclododecane	<b>MT GWIC</b>	Montana Ground Water Information Center
<b>HDPE</b>	high-density polyethylene	<b>MTBE</b>	methyl tert-butyl ether
<b>HF</b>	hydraulic fracturing	<b>MVR</b>	mechanical vapor recompression
<b>HHBP</b>	Human Health Benchmarks for Pesticides	<b>NAS</b>	National Academy of Sciences
<b>HISA</b>	Highly Influential Scientific Assessment	<b>NDDMR</b>	North Dakota Department of Mineral Resources
<b>HUC</b>	hydrological unit code	<b>NDDOH</b>	North Dakota Department of Health
<b>IAEA</b>	International Atomic Energy Agency	<b>NDSWC</b>	North Dakota State Water Commission
<b>IARC</b>	International Agency for Research on Cancer	<b>NETL</b>	National Energy Technology Laboratory
<b>IOGCC</b>	Interstate Oil and Gas Compact Commission	<b>NGO</b>	non-governmental organization
<b>IPCC</b>	Intergovernmental Panel on Climate Change	<b>NM OCD</b>	New Mexico Oil Conservation Division
<b>IPCS</b>	International Programme on Chemical Safety		

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Acronym</b>	<b>Definition</b>	<b>Acronym</b>	<b>Definition</b>
<b>NM OSE</b>	New Mexico Office of the State Engineer	<b>PAH</b>	polycyclic aromatic hydrocarbon
<b>NOAEL</b>	no observed adverse effect level	<b>PFBC</b>	Pennsylvania Fish and Boat Commission
<b>NORM</b>	naturally occurring radioactive material	<b>PDL</b>	positive determination letter
<b>NPC</b>	National Petroleum Council	<b>PMF</b>	Positive Matrix Factorization
<b>NPDES</b>	National Pollution Discharge Elimination System	<b>POD</b>	point-of-departure
<b>NRC</b>	National Resource Council	<b>POTW</b>	publicly owned treatment work
<b>NTP</b>	U.S. National Toxicology Program	<b>PPRTV</b>	provisional peer-reviewed toxicity value
<b>NYSDEC</b>	New York State Department of Environmental Conservation	<b>QA</b>	quality assurance
<b>O&amp;G</b>	oil and gas	<b>QAPP</b>	quality assurance project plan
<b>ODNR</b>	Ohio Department of Natural Resources	<b>QC</b>	quality control
<b>ODNR, DMRM</b>	Ohio Department of Natural Resources, Division of Mineral Resources Management	<b>QSAR</b>	Quantitative Structure Activity Relationship
<b>OEPA</b>	Ohio Environmental Protection Agency	<b>RfD</b>	reference dose
<b>ORD</b>	Office of Research and Development	<b>RfV</b>	reference value
<b>OSF</b>	oral slope factor	<b>RO</b>	reverse osmosis
<b>OSHA</b>	Occupational Safety & Health Administration	<b>SAB</b>	Science Advisory Board
<b>OSWER</b>	Office of Solid Water and Emergency Response	<b>SAIC</b>	Science Applications International Corporation
<b>OWRB</b>	Oklahoma Water Resources Board	<b>SDWA</b>	Safe Drinking Water Act
<b>PA DCNR</b>	Pennsylvania Department of Conservation and Natural Resources	<b>SDWIS</b>	safe drinking water information system
<b>PA DEP</b>	Pennsylvania Department of Environmental Protection	<b>SEECO</b>	Southern Electrical Equipment Company
		<b>SGEIS</b>	supplemented generic environmental impact statement
		<b>SHS MSC</b>	statewide health standards for medium-specific concentrations
		<b>SMCL</b>	secondary maximum contaminant level

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Acronym</b>	<b>Definition</b>	<b>Acronym</b>	<b>Definition</b>
<b>SPE</b>	Society of Petroleum Engineers	<b>USGAO</b>	U.S. Government Accountability Office
<b>SRB</b>	Susquehanna River basin	<b>USGS</b>	U.S. Geological Survey
<b>SRBC</b>	Susquehanna River Basin Commission	<b>UWS</b>	Universal Well Services
<b>STO</b>	Statoil	<b>VOC</b>	volatile organic compounds
<b>STRONGER</b>	State review of oil and natural gas environmental regulations	<b>WAWSA</b>	Western Area Water Supply Authority
<b>SVOC</b>	semi-volatile organic compounds	<b>WFR</b>	Well File Review
<b>SWE</b>	Southwestern Energy	<b>WHO</b>	World Health Organization
<b>TARM</b>	TerrAqua Resource Management	<b>WRF</b>	Water Research Foundation
<b>TBA</b>	tert-butyl alcohol	<b>WVDEP</b>	West Virginia Department of Environmental Protection
<b>TDS</b>	total dissolved solids	<b>WWTP</b>	wastewater treatment plant
<b>TENORM</b>	technologically enhanced naturally occurring radioactive material	<b>WYOGCC</b>	Wyoming Oil and Gas Conservation Commission
<b>THM</b>	trihalomethane		
<b>TIPRO</b>	Texas Independent Producers and Royalty Owners Association		
<b>TMDL</b>	total maximum daily load		
<b>TOC</b>	total organic carbon		
<b>TPH</b>	total petroleum hydrocarbons		
<b>TSS</b>	total suspended solids		
<b>TTHM</b>	total trihalomethane		
<b>TWDB</b>	Texas Water Development Board		
<b>TXRRC</b>	Texas Railroad Commission		
<b>UCRB</b>	Upper Colorado River basin		
<b>UIC</b>	underground injection control		
<b>UOG</b>	unconventional oil and gas		

---

*This document is a draft for review purposes only and does not constitute Agency policy.*



## Preface

1 The U.S. Environmental Protection Agency (EPA) is conducting a study of the potential impacts of  
2 hydraulic fracturing for oil and gas on drinking water resources. This study was initiated in Fiscal  
3 Year 2010 when Congress urged the EPA to examine the relationship between hydraulic fracturing  
4 and drinking water resources in the United States. In response, EPA developed a research plan  
5 (*Plan to Study the Potential Impacts of Hydraulic Fracturing on Drinking Water Resources*) that was  
6 reviewed by the Agency's Science Advisory Board (SAB) and issued in 2011. A progress report on  
7 the study (*Study of the Potential Impacts of Hydraulic Fracturing on Drinking Water Resources:  
8 Progress Report*), detailing the EPA's research approaches and next steps, was released in late 2012  
9 and was followed by a consultation with individual experts convened under the auspices of the SAB.

10 The EPA's study includes the development of several research projects, extensive review of the  
11 literature and technical input from state, industry, and non-governmental organizations as well as  
12 the public and other stakeholders. A series of technical roundtables and in-depth technical  
13 workshops were held to help address specific research questions and to inform the work of the  
14 study. The study is designed to address research questions posed for each stage of the hydraulic  
15 fracturing water cycle:

- 16 • Water Acquisition: What are the possible impacts of large volume water withdrawals  
17 from ground and surface waters on drinking water resources?
- 18 • Chemical Mixing: What are the possible impacts of surface spills of hydraulic fracturing  
19 fluid on or near well pads on drinking water resources?
- 20 • Well Injection: What are the possible impacts of the injection and fracturing process on  
21 drinking water resources?
- 22 • Flowback and Produced Water: What are the possible impacts of surface spills of flowback  
23 and produced water on or near well pads on drinking water resources?
- 24 • Wastewater Treatment and Waste Disposal: What are the possible impacts of  
25 inadequate treatment of hydraulic fracturing wastewaters on drinking water resources?

26 This report, *Assessment of the Potential Impacts of Hydraulic Fracturing for Oil and Gas on Drinking  
27 Water Resources*, includes both the literature review and results from the research projects  
28 conducted as part of the EPA's study. It will undergo independent, external peer review in  
29 accordance with Agency policy and all of the peer review comments received will be considered in  
30 the development of the final report.

31 The EPA's study will contribute to the understanding of the potential impacts of hydraulic  
32 fracturing activities for oil and gas on drinking water resources and the factors that may influence  
33 those impacts. The study will help facilitate and inform dialogue among interested stakeholders,  
34 including Congress, other Federal agencies, states, tribal government, the international community,  
35 industry, non-governmental organizations, academia, and the general public.

## Authors, Contributors, and Reviewers

### Authors

William Bates, USEPA-Office of Water, Washington, DC

Glen Boyd, The Cadmus Group, Inc., Seattle, WA

Susan Burden, USEPA-Office of Research and Development, Washington, DC

Lyle Burgoon, USEPA- Office of Research and Development, Research Triangle Park, NC

Christopher M. Clark, USEPA-Office of Research and Development, Washington, DC

Maryam Cluff, Student Services Contractor to USEPA under contract EP-13-H-000438-Office of Research and Development, Washington, DC

Rebecca Daiss, USEPA-Office of Research and Development, Washington, DC

Jill Dean, USEPA-Office of Research and Development, Washington, DC

Deniz Inci Demirkanli, The Cadmus Group, Inc., Arlington, VA

Megan M. Fleming, USEPA-Office of Research and Development, Washington, DC

Jeffrey Frithsen, USEPA-Office of Research and Development, Washington, DC

Kenneth Klewicki, The Cadmus Group, Inc., Arlington, VA

Christopher D. Knightes, USEPA-Office of Research and Development, Athens, GA

Sandie Koenig, The Cadmus Group, Inc., Helena, MT

Jonathan Koplos, The Cadmus Group, Inc., Waltham, MA

Stephen D. LeDuc, USEPA-Office of Research and Development, Washington, DC

Claudia Meza-Cuadra, Student Services Contractor to USEPA under contract EP-13-H-000054-Office of Research and Development, Washington, DC

Brent Ranalli, The Cadmus Group, Inc., Waltham, MA

Caroline E. Ridley, USEPA-Office of Research and Development, Washington, DC

Shari Ring, The Cadmus Group, Inc., Arlington, VA

Alison Singer, Student Services Contractor to USEPA under contract EP-13-H-000474-Office of Research and Development, Washington, DC

John Stanek, USEPA- Office of Research and Development, Research Triangle Park, NC

M. Jason Todd, USEPA-Office of Research and Development, Washington, DC

Mary Ellen Tuccillo, The Cadmus Group, Inc., Waltham, MA

Jim Weaver, USEPA-Office of Research and Development, Ada, OK

Anna Weber, The Cadmus Group, Inc., Arlington, VA

Larke Williams, USEPA-Office of Research and Development, Washington, DC

Liabeth Yohannes, Student Services Contractor to USEPA under contract EP-14-H-000455-Office of Research and Development, Washington, DC

Erin Yost, ORISE Fellow to USEPA under interagency agreement DW89922983 with US DOE - Office of Research and Development, Research Triangle Park, NC

## **Contributors**

Natalie Auer, The Cadmus Group, Inc., Arlington, VA

Kevin Blackwood, Student Services Contractor to USEPA under contract EP-13-C-000133-Office of Research and Development, Ada, OK

Jeanne Briskin, USEPA-Office of Research and Development, Washington, DC

Rob Dewoskin, USEPA- Office of Research and Development, Research Triangle Park, NC

Linda Hills, The Cadmus Group, Inc., Helena, MT

Christopher Impellitteri, USEPA-Office of Research and Development, Cincinnati, OH

Richard Judson, USEPA- Office of Research and Development, Research Triangle Park, NC

Matt Landis, USEPA- Office of Research and Development, Research Triangle Park, NC

Ralph Ludwig, USEPA-Office of Research and Development, Ada, OK

John Martin, The Cadmus Group, Inc., Waltham, MA

Ashley McElmury, Student Services Contractor to USEPA under contract EP-12-C-000025-Office of Research and Development, Ada, OK

Gary Norris, USEPA- Office of Research and Development, Research Triangle Park, NC

Kay Pinley, Senior Environmental Employment Program under agreement CQ-835363 with NCCBA, USEPA-Office of Research and Development, Ada, OK

Susan Sharkey, USEPA-Office of Research and Development, Washington, DC

Sarah Solomon, Student Services Contractor to USEPA under contract EP-D-15-003-Office of Research and Development, Washington, DC

Holly Wooten, The Cadmus Group, Inc., Arlington, VA

Jie Xu, Student Services Contractor to USEPA under contract EP-13-C-00120-Office of Research and Development, Ada, OK

## Reviewers

USEPA internal technical reviewers

Lisa Biddle, Office of Water, Washington, DC

Frank Brock, Region 2, New York, NY

Kyle Carey, Office of Water, Washington, DC

Brian D'Amico, Office of Water, Washington, DC

Tim Elkins, Region 5, Chicago, IL

Malcolm Field, Office of Research and Development, Washington, DC

Greg Fritz, Office of Chemical Safety and Pollution Prevention, Washington, DC

Mohamed Hantush, Office of Research and Development, Cincinnati, OH

Jana Harvill, Region 6, Dallas, TX

Charles Hillenbrand, Region 2, New York, NY

Mark W. Howard, Office of Solid Waste and Emergency Response, Washington, DC

Junqi Huang, Office of Research and Development, Ada, OK

Thomas Johnson, Office of Research and Development, Washington, DC

Jeff Jollie, Office of Water, Washington, DC

James Kenney, Office of Enforcement and Compliance Assurance, Washington, DC

Kristin Keteles, Region 8, Denver, CO

Bruce Kobelski, Office of Water, Washington, DC

Stephen Kraemer, Office of Research and Development, Athens, GA

Paul Lewis, Office of Chemical Safety and Pollution Prevention, Washington, DC

Chris Lister, Region 6, Dallas, TX

Barbara Martinez, ORISE Fellow to USEPA- Office of Research and Development, Washington, DC

Damon McElroy, Region 6, Dallas, TX

Keara Moore, Office of Water, Washington, DC

Nathan Mottl, Office of Chemical Safety and Pollution Prevention, Washington, DC

Greg Oberley, Region 8, Denver, CO

Mike Overbay, Region 6, Dallas, TX

Steve Platt, Region 3, Philadelphia, PA

Dave Rectenwald, Region 3, Philadelphia, PA

Meredith Russell, Office of Water, Washington, DC

Greg Schweer, Office of Chemical Safety and Pollution Prevention, Washington, DC

Steve Souders, Office of Solid Waste and Emergency Response, Washington, DC

Kate Sullivan, Office of Research and Development, Athens, GA

Scott Wilson, Office of Water, Washington, DC

Nathan Wisner, Office of Research and Development, Denver, CO

## **Acknowledgements**

Contract support was provided by The Cadmus Group, Inc. under contract EP-C-08-015.

---

# Executive Summary

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

## Executive Summary

1 Since the early 2000s, oil and natural gas production in the United States has been transformed  
2 through technological innovation. Hydraulic fracturing, combined with advanced directional  
3 drilling techniques, made it possible to economically extract oil and gas resources previously  
4 inaccessible. The resulting surge in production increased domestic energy supplies and brought  
5 economic benefits to many areas of the United States.

6 The growth in domestic oil and gas production also raised concerns about potential impacts to  
7 human health and the environment, including potential effects on the quality and quantity of  
8 drinking water resources. Some residents living close to oil and gas production wells have reported  
9 changes in the quality of drinking water and assert that hydraulic fracturing is responsible for these  
10 changes. Other concerns include competition for water between hydraulic fracturing activities and  
11 other water users, especially in areas of the country experiencing drought, and the disposal of  
12 wastewater generated from hydraulic fracturing.

13 The U.S. Congress urged the U.S. Environmental Protection Agency (EPA) to study the relationship  
14 between hydraulic fracturing and drinking water. This report synthesizes available scientific  
15 literature and data to assess the potential for hydraulic fracturing for oil and gas to change the  
16 quality or quantity of drinking water resources, and identifies factors affecting the frequency or  
17 severity of any potential changes. This report can be used by federal, tribal, state, and local officials;  
18 industry; and the public to better understand and address any vulnerabilities of drinking water  
19 resources to hydraulic fracturing activities.

### What is Hydraulic Fracturing?


20 Hydraulic fracturing is a stimulation technique used to increase oil and gas production from  
21 underground rock formations. Hydraulic fracturing involves the injection of fluids under pressures  
22 great enough to fracture the oil- and gas-producing formations. The fluid generally consists of  
23 water, chemicals, and proppant (commonly sand). The proppant holds open the newly created  
24 fractures after the injection pressure is released. Oil and gas flow through the fractures and up the  
25 production well to the surface.

26 Hydraulic fracturing has been used since the late 1940s and, for the first 50 years, was mostly used  
27 in vertical wells in conventional formations.<sup>1</sup> Hydraulic fracturing is still used in these settings, but  
28 the process has evolved; technological developments (including horizontal and directional drilling)  
29 have led to the use of hydraulic fracturing in unconventional hydrocarbon formations that could not  
30 otherwise be profitably produced (see Figure ES-1). These formations include:

---

<sup>1</sup> Conventional formations often allow oil and natural gas to flow to the wellbore without hydraulic fracturing and typically contain trapped oil and natural gas that migrated from other subsurface locations. Hydraulic fracturing can be used to enhance oil and gas production from these formations. In unconventional formations, hydraulic fracturing is needed to extract economical quantities of oil and gas.

- 1       • **Shales.** Organic-rich, black shales are the source rocks in which oil and gas form on  
 2 geological timescales. Oil and gas are contained in the pore space of the shale. Some shales  
 3 contain predominantly gas or oil; many shale formations contain both.
- 4       • **Tight formations.** “Tight” formations are relatively low permeability, non-shale,  
 5 sedimentary formations that can contain oil and gas. Like in shales, oil and gas are  
 6 contained in the pore space of the formation. Tight formations can include sandstones,  
 7 siltstone, and carbonates, among others.
- 8       • **Coalbeds.** In coalbeds, methane (the primary component of natural gas) is generally  
 9 adsorbed to the coal rather than contained in the pore space or structurally trapped in the  
 10 formation. Pumping the injected and native water out of the coalbeds after fracturing  
 11 serves to depressurize the coal, thereby allowing the methane to desorb and flow into the  
 12 well and to the surface.

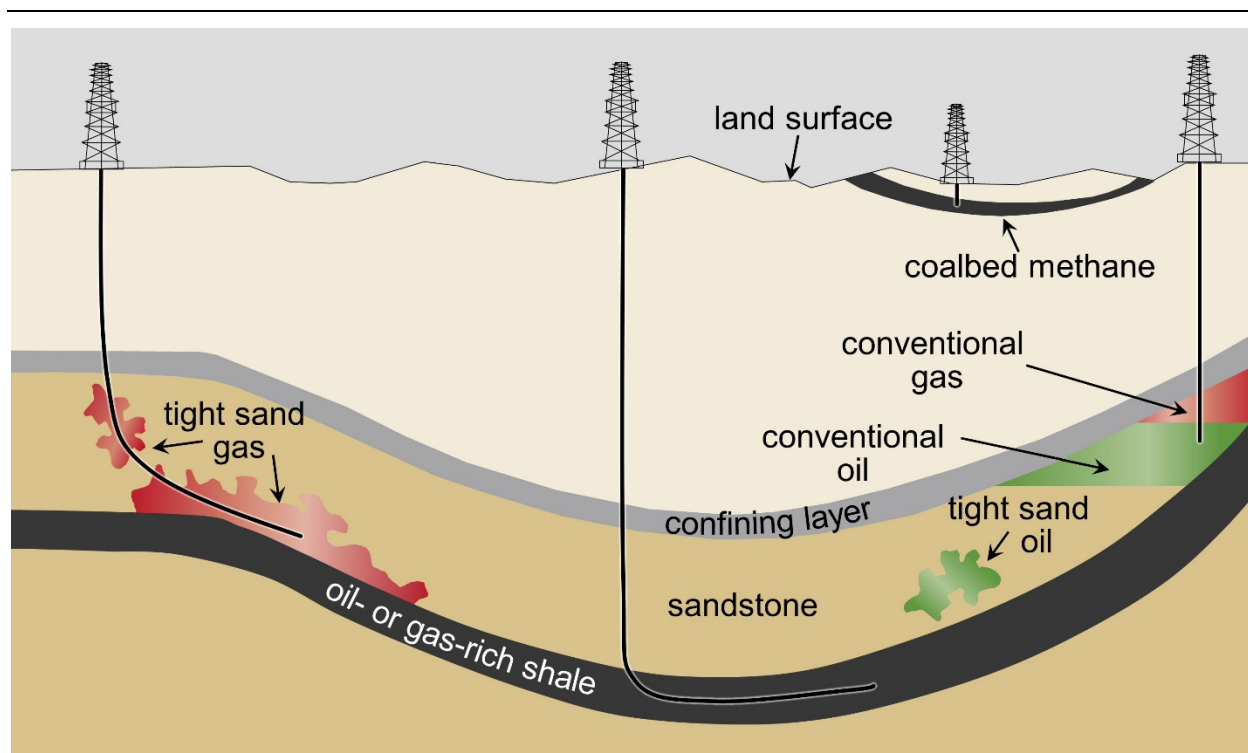

**Figure ES-1. Schematic cross-section of general types of oil and gas resources and the orientations of production wells used in hydraulic fracturing.**

Shown are conceptual illustrations of types of oil and gas wells. A vertical well is producing from a conventional oil and gas deposit (right). In this case, a gray confining layer serves to “trap” oil (green) or gas (red). Also shown are wells producing from unconventional formations: a vertical coalbed methane well (second from right); a horizontal well producing from a shale formation (center); and a well producing from a tight sand formation (left). Note: Figure not to scale. Modified from [USGS \(2002\)](#) and [Newell \(2011\)](#).



1 The combined use of hydraulic fracturing with horizontal (or more generically, directional) drilling  
2 has led to an increase in oil and gas activities in areas of the country with historical oil and gas  
3 production, and an expansion of oil and gas activities to new regions of the country.

## Scope of the Assessment

4 We defined the scope of this assessment by the following activities involving water that support  
5 hydraulic fracturing (i.e., the hydraulic fracturing water cycle; see Figure ES-2):<sup>1</sup>

- 6 • **Water acquisition:** the withdrawal of ground or surface water needed for hydraulic  
7 fracturing fluids;
- 8 • **Chemical mixing:** the mixing of water, chemicals, and proppant on the well pad to create  
9 the hydraulic fracturing fluid;
- 10 • **Well injection:** the injection of hydraulic fracturing fluids into the well to fracture the  
11 geologic formation;
- 12 • **Flowback and produced water:** the return of injected fluid and water produced from the  
13 formation (collectively referred to as produced water in this report) to the surface, and  
14 subsequent transport for reuse, treatment, or disposal; and
- 15 • **Wastewater treatment and waste disposal:** the reuse, treatment and release, or  
16 disposal of wastewater generated at the well pad, including produced water.

17 This assessment reviews, analyzes, and synthesizes information relevant to the potential impacts of  
18 hydraulic fracturing on drinking water resources at each stage of the hydraulic fracturing water  
19 cycle. Impacts are defined as any change in the quality or quantity of drinking water resources.  
20 Where possible, we identify the mechanisms responsible or potentially responsible for any impacts.  
21 For example, a spill of hydraulic fracturing fluid is a mechanism by which drinking water resources  
22 could be impacted.


23 Drinking water resources are defined within this report as any body of ground water or surface  
24 water that now serves, or in the future could serve, as a source of drinking water for public or  
25 private use. This is broader than most federal and state regulatory definitions of drinking water and  
26 encompasses both fresh and non-fresh bodies of water. Trends indicate that both types of water  
27 bodies are currently being used, and will continue to be used in the future, as sources of drinking  
28 water.

29 This assessment focuses on the potential impacts from activities in the hydraulic fracturing water  
30 cycle on drinking water resources. We do this so federal, tribal, state, and local officials; industry;  
31 and the public can better understand and address any vulnerabilities of drinking water resources to  
32 hydraulic fracturing activities. We do not address other concerns raised about hydraulic fracturing  
33 specifically or about oil and gas exploration and production activities more generally. Activities that

---

<sup>1</sup> In this assessment, we refer to the “EPA” when referencing other EPA studies. If a conclusion or analysis was done specifically by the authors of this assessment, we refer to it and its findings in the first person.

1 are not considered include: acquisition and transport of constituents of hydraulic fracturing fluids  
2 besides water (e.g., sand mining and chemical production) outside of the stated water cycle; site  
3 selection and well pad development; other infrastructure development (e.g., roads, pipelines,  
4 compressor stations); site reclamation; and well closure. A summary and evaluation of current or  
5 proposed regulations and policies is beyond the scope of this report. Additionally, this report does  
6 not discuss the potential impacts of hydraulic fracturing on other water users (e.g., agriculture or  
7 industry), other aspects of the environment (e.g., seismicity, air quality, or ecosystems), worker  
8 health or safety, or communities. Furthermore, this report is not a human health risk assessment. It  
9 does not identify populations that are exposed to chemicals, estimate the extent of exposure, or  
10 estimate the incidence of human health impacts.

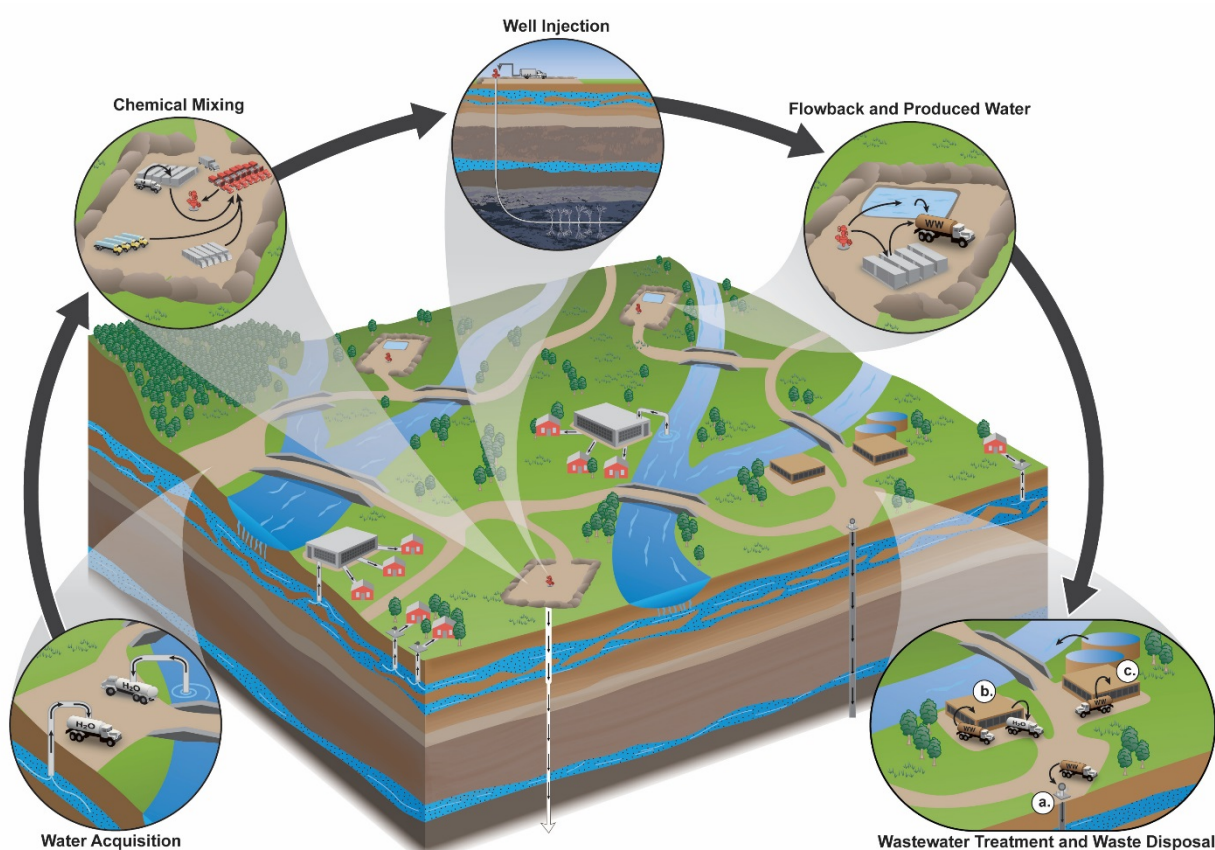

**Figure ES-2. The stages of the hydraulic fracturing water cycle.**

Shown here is a generalized landscape depicting the activities of the hydraulic fracturing water cycle and their relationship to each other, as well as their relationship to drinking water resources. Arrows depict the movement of water and chemicals. Specific activities in the “Wastewater Treatment and Waste Disposal” inset are (a) underground injection control (UIC) well disposal, (b) wastewater treatment and reuse, and (c) wastewater treatment and discharge at a centralized waste treatment (CWT) facility. Note: Figure not to scale.

## Approach

1 This assessment relies on relevant scientific literature and data. Literature evaluated included  
2 articles published in science and engineering journals, federal and state government reports, non-  
3 governmental organization (NGO) reports, and industry publications. Data sources examined  
4 included federal- and state-collected data sets, databases maintained by federal and state  
5 government agencies, other publicly-available data and information, and data, including  
6 confidential and non-confidential business information, submitted by industry to the EPA.<sup>1</sup> The  
7 relevant literature and data complement research conducted by the EPA under its *Plan to Study the*  
8 *Potential Impacts of Hydraulic Fracturing on Drinking Water Resources* (hereafter referred to as the  
9 “Study Plan”) and published by scientific journals or as peer-reviewed EPA reports; those articles  
10 and reports are cited throughout this assessment. The research topic areas and projects described  
11 in the Study Plan were designed to meet the data and information needs of this assessment and  
12 were developed with substantial expert and public input.

## Proximity of Current Activity and Drinking Water Resources

13 Thousands of wells are drilled and fractured every year in the United States, with activities  
14 concentrated in specific locations. We estimate 25,000-30,000 new wells were drilled and  
15 hydraulically fractured annually in the United States between 2011 and 2014. Additional, pre-  
16 existing wells (wells more than one year old that may or may not have been hydraulically fractured  
17 in the past) were also likely fractured. Hydraulic fracturing took place in at least 25 states between  
18 1990 and 2013. The EPA’s analysis of disclosures made to FracFocus 1.0 (hereafter “FracFocus”)  
19 contained wells from 20 of these states.<sup>2</sup> Almost half of these wells were in Texas. Colorado was a  
20 distant second, while Pennsylvania and North Dakota were third and fourth, respectively. Hydraulic  
21 fracturing activities were further localized within the 20 states. Of the approximately 1,500  
22 counties or county equivalents in these 20 states, slightly over 400 contained all of the wells  
23 disclosed to FracFocus during this time period. In Colorado, over 85% of the hydraulically fractured  
24 wells disclosed were located in two counties. The price of gas and oil may cause short term  
25 volatility in the number of wells drilled and fractured per year, yet hydraulic fracturing is expected  
26 to continue to expand and drive an increase in domestic oil and gas production in coming decades.

27 Hydraulically fractured wells can be located near residences and drinking water resources.  
28 Between 2000 and 2013, approximately 9.4 million people lived within one mile of a hydraulically

---

<sup>1</sup> Some information provided to the EPA in response to two separate information requests to service companies and well operators was claimed as confidential business information.

<sup>2</sup> FracFocus is a publicly accessible website ([www.fracfocus.org](http://www.fracfocus.org)) managed by the Ground Water Protection Council and the Interstate Oil and Gas Compact Commission where oil and gas production well operators may disclose information voluntarily or pursuant to state requirements about the ingredients used in hydraulic fracturing fluids at individual wells. The EPA analyzed disclosures from FracFocus 1.0 for over 38,000 oil and gas production wells hydraulically fractured between January 1, 2011 and February 28, 2013. A disclosure refers to data submitted for a specific oil and gas production well for a specific fracture date. Most wells had only one disclosure, but a small number of wells (876 wells) had multiple disclosures. For the purposes of this Executive Summary, we equate disclosures with wells when discussing this study.

1 fractured well. Approximately 6,800 sources of drinking water for public water systems were  
2 located within one mile of at least one hydraulically fractured well during the same period. These  
3 drinking water sources served more than 8.6 million people year-round in 2013.

4 Although proximity of hydraulic fracturing activities to a drinking water resource is not in of itself  
5 sufficient for an impact to occur,, it does increase the potential for impacts. Residents and drinking  
6 water resources in areas experiencing hydraulic fracturing activities are most likely to be affected  
7 by any potential impacts, should they occur. However, hydraulic fracturing can also affect drinking  
8 water resources outside the immediate vicinity of a hydraulically fractured well; a truck carrying  
9 wastewater could spill or a release of inadequately treated wastewater could have downstream  
10 effects.

## Major Findings

11 From our assessment, we conclude there are above and below ground mechanisms by which  
12 hydraulic fracturing activities have the potential to impact drinking water resources. These  
13 mechanisms include water withdrawals in times of, or in areas with, low water availability; spills of  
14 hydraulic fracturing fluids and produced water; fracturing directly into underground drinking  
15 water resources; below ground migration of liquids and gases; and inadequate treatment and  
16 discharge of wastewater.

17 We did not find evidence that these mechanisms have led to widespread, systemic impacts on  
18 drinking water resources in the United States. Of the potential mechanisms identified in this report,  
19 we found specific instances where one or more mechanisms led to impacts on drinking water  
20 resources, including contamination of drinking water wells. The number of identified cases,  
21 however, was small compared to the number of hydraulically fractured wells.

22 This finding could reflect a rarity of effects on drinking water resources, but may also be due to  
23 other limiting factors. These factors include: insufficient pre- and post-fracturing data on the quality  
24 of drinking water resources; the paucity of long-term systematic studies; the presence of other  
25 sources of contamination precluding a definitive link between hydraulic fracturing activities and an  
26 impact; and the inaccessibility of some information on hydraulic fracturing activities and potential  
27 impacts.

28 Below, we provide a synopsis of the assessment's key findings, organized by each stage of the  
29 hydraulic fracturing water cycle. We provide answers to the research questions presented in the  
30 Study Plan and Chapter 1. While come citations are provided here, individual chapters should be  
31 consulted for additional detail and citations.

### **Water Acquisition**

32 Water is a major component of nearly all hydraulic fracturing operations. It typically makes up  
33 almost 90% or more of the fluid volume injected into a well, and each hydraulically fractured well  
34 requires thousands to millions of gallons of water. Cumulatively, hydraulic fracturing activities in  
35 the United States used on average 44 billion gal of water a year in 2011 and 2012, according to the

1 EPA’s analysis of FracFocus disclosures. Although this represents less than 1% of total annual water  
2 use and consumption at this scale, water withdrawals could potentially impact the quantity and  
3 quality of drinking water resources at more local scales.<sup>1</sup>

### **Research Questions: Water Acquisition**

- **What are the types of water used for hydraulic fracturing?**

4 Water for hydraulic fracturing typically comes from surface water, ground water, or reused  
5 hydraulic fracturing wastewater. Hydraulic fracturing operations in the eastern United States  
6 generally rely on surface water, while operations in the more semi-arid to arid western states  
7 generally use mixed supplies of surface and ground water. In the Marcellus Shale in Pennsylvania,  
8 for example, most water used for hydraulic fracturing originates from surface water, whereas  
9 surface and ground water are used in approximately equal proportions in the Barnett Shale in  
10 Texas (see Figure ES-3a,b). In areas that lack available surface water (e.g., western Texas), ground  
11 water supplies most of the water needed for hydraulic fracturing.


12 Across the United States, the vast majority of water used in hydraulic fracturing is fresh, although  
13 operators also make use of lower-quality water, including reused hydraulic fracturing wastewater.<sup>2</sup>  
14 Based on available data, the median reuse of wastewater as a percentage of injected volumes is 5%  
15 nationally, with the percentage varying by location.<sup>3</sup> Available data on reuse trends indicate  
16 increased reuse of wastewater over time in both Pennsylvania and West Virginia. Reuse as a  
17 percentage of injected volumes is lower in other areas, including regions with more water stress,  
18 likely because of the availability of disposal wells. For example, reused wastewater is  
19 approximately 18% of injected volumes in the Marcellus Shale in Pennsylvania’s Susquehanna  
20 River Basin, whereas it is approximately 5% in the Barnett Shale in Texas (see Figure ES-3a,b).

---

<sup>1</sup> Water use is water withdrawn from ground- or surface water for a specific purpose, part or all of which may be returned to the local hydrologic cycle. If no water is returned, water use equals water consumption. Water consumption is water that is removed from the local hydrologic cycle following its use (e.g., via evaporation, transpiration, incorporation into products or crops, consumption by humans or livestock) and is therefore unavailable to other water users (Maupin et al., 2014). In the case of hydraulic fracturing, water can be consumed by the loss of injected water to subsurface zones or via underground disposal of wastewaters, among other means.

<sup>2</sup> In this assessment, hydraulic fracturing “wastewater” refers to both produced water and any other water generated as a hydraulic fracturing site. As used in this assessment, the term “wastewater” is not intended to constitute a term of art for legal or regulatory purposes.

<sup>3</sup> Reused wastewater as a percentage of injected water differs from the percentage of wastewater that is managed through reuse, as opposed to other wastewater management options. For example, in the Marcellus in Pennsylvania, approximately 18% of injected water is reused produced water, while approximately 70% of wastewater or more is managed through reuse (Figure ES-3a).

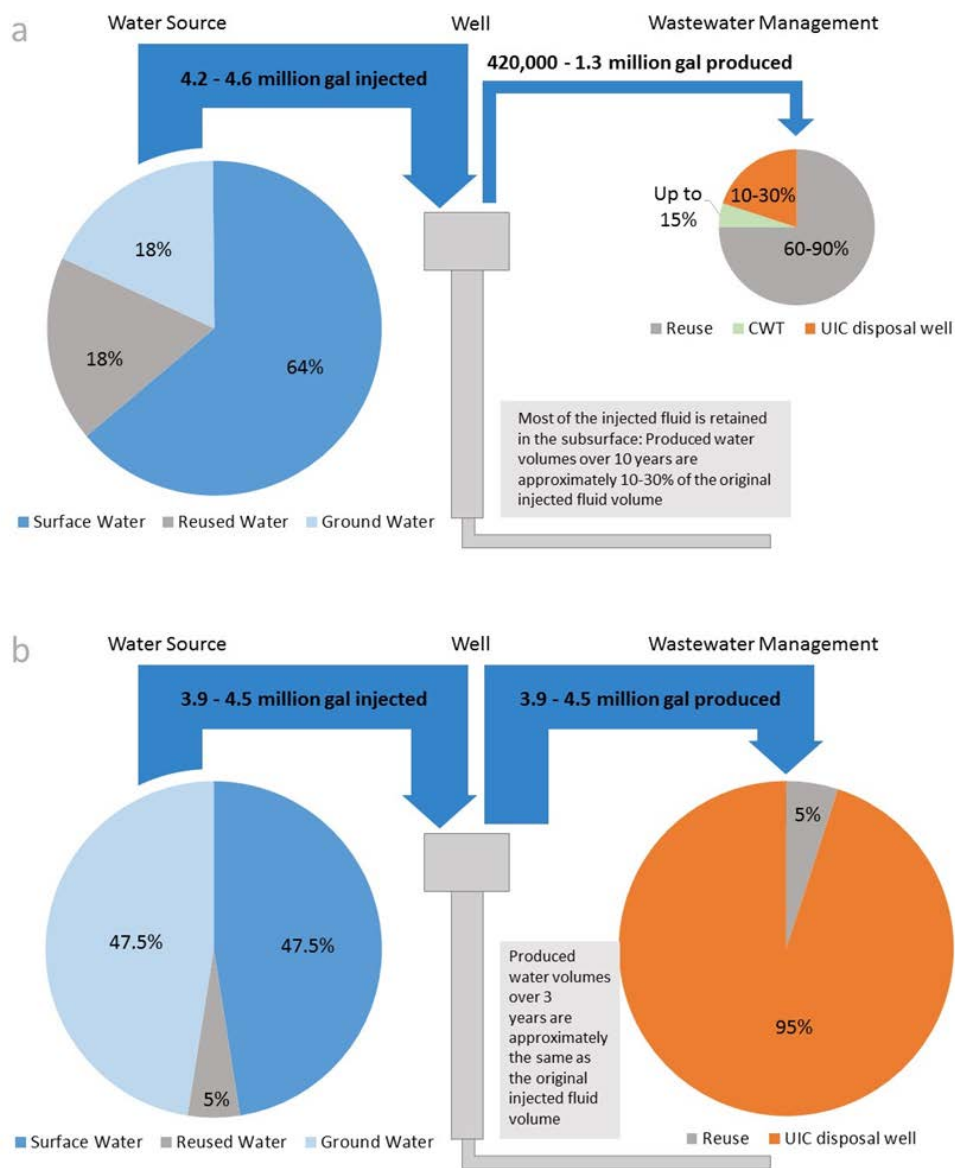

**Figure ES-3. Water budgets representative of practices in the Marcellus Shale in the Susquehanna River Basin in Pennsylvania (a) and the Barnett Shale in Texas (b).**

Pie size and arrow thickness represent the relative volume of water as it flows through the hydraulic fracturing water cycle. Wastewater going to a centralized waste treatment (CWT) facility may be either discharged to surface water or reused. Wastewater going to an underground injection control (UIC) well is disposed of below ground. These examples represent typical water management practices as depicted for the most recent time period reviewed by this assessment. They do not represent any specific well. Note: Values for Marcellus Shale are specific to the Susquehanna River Basin, except for the produced water volumes. The longest-term measurement available was from the West Virginia portion of the the Marcellus Shale.

*This document is a draft for review purposes only and does not constitute Agency policy.*



- **How much water is used per well?**

1 The national median volume of water used per hydraulically fractured well is approximately 1.5  
2 million gal (5.7 million L), according to the EPA's analysis of FracFocus disclosures. This estimate  
3 likely represents a wide variety of fractured well types, including vertical wells that generally use  
4 much less water per well than horizontal wells. Thus, published estimates for horizontal shale gas  
5 wells are typically higher (e.g., approximately 4 million gallons ([Vengosh et al., 2014](#))). There is also  
6 wide variation within and among states and basins in the median water volumes used per well,  
7 from more than 5 million gal (19 million L) in Arkansas, Louisiana and West Virginia to less than 1  
8 million gal (3.8 million L) in California, New Mexico, and Utah, among others. This variation results  
9 from several factors, including well length, formation geology, and fracturing fluid formulation.

- **How might cumulative water withdrawals for hydraulic fracturing affect drinking water quantity?**

10 Cumulatively, hydraulic fracturing uses billions of gallons of water each year at the national and  
11 state scales, and even in some counties. As noted above, hydraulic fracturing water use and  
12 consumption are generally less than 1% of total annual water use and consumption at these scales.  
13 However, there are a few counties in the United States where these percentages are higher. For  
14 2011 and 2012, annual hydraulic fracturing water use was 10% or more compared to 2010 total  
15 annual water use in 6.5% of counties with FracFocus disclosures analyzed by the EPA, 30% or more  
16 in 2.2% of counties, and 50% or more in 1.0% of counties. Consumption estimates followed the  
17 same general pattern. In these counties, hydraulic fracturing is a relatively large user and consumer  
18 of water.

19 High fracturing water use or consumption alone does not necessarily result in impacts to drinking  
20 water resources. Rather, impacts result from the combination of water use or consumption and  
21 water availability at local scales. In our survey of published literature, we did not find a case where  
22 hydraulic fracturing water use or consumption alone caused a drinking water well or stream to run  
23 dry. This could indicate an absence of effects or a lack of documentation in the literature we  
24 reviewed. Additionally, water availability is rarely impacted by just one use or factor alone. In  
25 Louisiana, for example, the state requested hydraulic fracturing operations switch from ground to  
26 surface water, due to concerns that ground water withdrawals for fracturing could, in combination  
27 with other uses, adversely affect drinking water supplies.

28 The potential for impacts to drinking water resources from hydraulic fracturing water withdrawals  
29 is highest in areas with relatively high fracturing water use and low water availability. Southern  
30 and western Texas are two locations where hydraulic fracturing water use, low water availability,  
31 drought, and reliance on declining ground water has the potential to affect the quantity of drinking  
32 water resources. Any impacts are likely to be realized locally within these areas. In a detailed case  
33 study of southern Texas, [Scanlon et al. \(2014\)](#) observed generally adequate water supplies for  
34 hydraulic fracturing, except in specific locations. They found excessive drawdown of local ground  
35 water in a small proportion (approximately 6% of the area) of the Eagle Ford Shale. They suggested  
36 water management, particularly a shift towards brackish water use, could minimize potential future  
37 impacts to fresh water resources.

1 The potential for impacts to drinking water quantity due to hydraulic fracturing water use appears  
2 to be lower—but not eliminated—in other areas of the United States. Future problems could arise if  
3 hydraulic fracturing increases substantially in areas with low water availability, or in times of water  
4 shortages. In detailed case studies in western Colorado and northeastern Pennsylvania, the EPA did  
5 not find current impacts, but did conclude that streams could be vulnerable to water withdrawals  
6 from hydraulic fracturing. In northeast Pennsylvania, water management, such as minimum stream  
7 flow requirements, limits the potential for impacts, especially in small streams. In western North  
8 Dakota, ground water is limited, but the industry may have sufficient supplies of surface water from  
9 the Missouri River system. These location-specific examples emphasize the need to focus on  
10 regional and local dynamics when considering potential impacts of hydraulic fracturing water  
11 acquisition on drinking water resources.

- ***What are the possible impacts of water withdrawals for hydraulic fracturing on water quality?***

12 Water withdrawals for hydraulic fracturing, similar to all water withdrawals, have the potential to  
13 alter the quality of drinking water resources. Ground water withdrawals exceeding natural  
14 recharge rates decrease water storage in aquifers, potentially mobilizing contaminants or allowing  
15 the infiltration of lower quality water from the land surface or adjacent formations. Withdrawals  
16 could also decrease ground water discharge to streams, potentially affecting surface water quality.  
17 Areas with large amounts of sustained ground water pumping are most likely to experience  
18 impacts, particularly drought-prone regions with limited ground water recharge.

19 Surface water withdrawals also have the potential to affect water quality. Withdrawals may lower  
20 water levels and alter stream flow, potentially decreasing a stream's capacity to dilute  
21 contaminants. Case studies by the EPA show that streams can be vulnerable to changes in water  
22 quality due to water withdrawals, particularly smaller streams and during periods of low flow.  
23 Management of the rate and timing of surface water withdrawals has been shown to help mitigate  
24 potential impacts of hydraulic fracturing withdrawals on water quality.

### ***Chemical Mixing***

25 Hydraulic fracturing fluids are developed to perform specific functions, including: create and  
26 extend fractures, transport proppant, and place proppant in the fractures. The fluid generally  
27 consists of three parts: (1) the base fluid, which is the largest constituent by volume and is typically  
28 water; (2) the additives, which can be a single chemical or a mixture of chemicals; and (3) the  
29 proppant. Additives are chosen to serve a specific purpose (e.g., adjust pH, increase viscosity, limit  
30 bacterial growth). Chemicals generally comprise a small percentage (typically 2% or less) of the  
31 overall injected fluid volume. Because over one million gallons of fluids are typically injected per  
32 well, thousands of gallons of chemicals can be potentially stored on-site and used during hydraulic  
33 fracturing activities.

34 On-site storage, mixing, and pumping of chemicals and hydraulic fracturing fluids have the potential  
35 to result in accidental releases, such as spills or leaks. Potential impacts to drinking water resources  
36 from spills of hydraulic fracturing fluids and chemicals depend on the characteristics of the spills,  
37 and the fate, transport, and the toxicity of chemicals spilled.



### **Research Questions: Chemical Mixing**

- ***What is currently known about the frequency, severity, and causes of spills of hydraulic fracturing fluids and additives?***

1 The frequency of on-site spills from hydraulic fracturing could be estimated for two states, but not  
2 for operations nationally or for other areas. Frequency estimates from data and literature ranged  
3 from one spill for every 100 wells in Colorado to between approximately 0.4 and 12.2 spills for  
4 every 100 wells in Pennsylvania.<sup>1</sup> These estimates include spills of hydraulic fracturing fluids and  
5 chemicals, and produced water reported in state databases. Available data generally precluded  
6 estimates of hydraulic fracturing fluid and/or chemical spill rates separately from estimates of an  
7 overall spill frequency. It is unknown whether these spill estimates are representative of national  
8 occurrences. If the estimates are representative, the number of spills nationally could range from  
9 approximately 100 to 3,700 spills annually, assuming 25,000 to 30,000 new wells are fractured per  
10 year.

11 The EPA characterized volumes and causes of hydraulic fracturing-related spills identified from  
12 selected state and industry data sources. The spills occurred between January 2006 and April 2012  
13 in 11 states and included 151 cases in which fracturing fluids or chemicals spilled on or near a well  
14 pad. Due to the methods used for the EPA's characterization of spills, these cases were likely a  
15 subset of all fracturing fluid and chemical spills during the study's time period. The reported  
16 volume of fracturing fluids or chemicals spilled ranged from 5 gal to more than 19,000 gal (19 to  
17 72,000 L), with a median volume of 420 gal (1,600 L) per spill. Spill causes included equipment  
18 failure, human error, failure of container integrity, and other causes (e.g., weather and vandalism).  
19 The most common cause was equipment failure, specifically blowout preventer failure, corrosion,  
20 and failed valves. More than 30% of the 151 fracturing fluid or chemical spills were from fluid  
21 storage units (e.g., tanks, totes, and trailers).

- ***What are the identities and volumes of chemicals used in hydraulic fracturing fluids, and how might this composition vary at a given site and across the country?***

22 In this assessment, we identified a list of 1,076 chemicals used in hydraulic fracturing fluids. This is  
23 a cumulative list over multiple wells and years. These chemicals include acids, alcohols, aromatic  
24 hydrocarbons, bases, hydrocarbon mixtures, polysaccharides, and surfactants. According to the  
25 EPA's analysis of disclosures to FracFocus, the number of unique chemicals per well ranged from 4  
26 to 28, with a median of 14 unique chemicals per well.

27 Our analysis indicates that chemical use varies and that no single chemical is used at all well sites  
28 across the country, although several chemicals are widely used. Methanol, hydrotreated light  
29 petroleum distillates, and hydrochloric acid were reported as used in 65% or more of wells,  
30 according to FracFocus disclosures analyzed by the EPA. Only 32 chemicals, excluding water,  
31 quartz, and sodium chloride, were used in more than 10% of wells according to the EPA's analysis

---

<sup>1</sup> Spill frequency estimates are for a given number of wells over a given period of time. These are not annual estimates nor are they for the lifetime of a well.

1 of FracFocus disclosures. The composition of hydraulic fracturing fluids varies by state, by well, and  
2 within the same service company and geologic formation. This variability likely results from several  
3 factors, including the geology of the formation, the availability and cost of different chemicals, and  
4 operator preference.

5 Estimates from the EPA's database developed from FracFocus suggest median volumes of  
6 individual chemicals injected per well ranged from a few gallons to thousands of gallons, with an  
7 overall median of 650 gal (2,500 L) per chemical per well. Based on this overall median and  
8 assuming 14 unique chemicals are used per well, an estimated 9,100 gal (34,000 L) of chemicals  
9 may be injected per well. Given that the number of chemicals per well ranges from 4 to 28, the  
10 estimated volume of chemicals injected per well may range from approximately 2,600 to 18,000 gal  
11 (9,800 to 69,000 L).

- ***What are the chemical, physical, and toxicological properties of hydraulic fracturing chemical additives?***

12 Measured or estimated physicochemical properties were obtained for 453 chemicals of the total  
13 1,076 chemicals reported in hydraulic fracturing fluids. We could not estimate physicochemical  
14 properties for the inorganic chemicals or mixtures. The 453 chemicals have a wide range of  
15 physicochemical properties.

16 Properties affecting the likelihood of a spilled chemical reaching and impacting a drinking water  
17 resource include mobility, solubility, and volatility. Of the 453 chemicals for which physicochemical  
18 properties were available, 18 of the top 20 most mobile ones were reported in the EPA's FracFocus  
19 database for 2% or less of wells. Choline chloride and tetrakis (hydroxymethyl) phosphonium were  
20 exceptions and were reported in 14% and 11% of wells, respectively. These two chemicals appear  
21 to be relatively more common, and, if spilled, would move quickly through the environment with  
22 the flow of water. The majority of the 453 chemicals associate strongly with soils and organic  
23 materials, suggesting the potential for these chemicals to persist in the environment as long-term  
24 contaminants. Many of the 453 chemicals fully dissolve in water, but their aqueous solubility varies  
25 greatly. Few of the chemicals volatilize, and thus a large proportion of most hydraulic fracturing  
26 chemicals tend to remain in water.

27 Oral reference values and oral slope factors meeting the criteria used in this assessment were not  
28 available for the majority of chemicals used in hydraulic fracturing fluids, representing a significant  
29 data gap for hazard identification.<sup>1,2</sup> Reference values and oral slope factors are important for  
30 understanding the potential human health effects resulting from exposure to a chemical. Chronic  
31 oral reference values and/or oral slope factors from selected federal, state, and international  
32 sources were available for 90 (8%) of the 1,076 chemicals used in hydraulic fracturing fluids. From

---

<sup>1</sup> A reference value is an estimate of an exposure to the human population (including susceptible subgroups) for a given duration that is likely to be without an appreciable risk of adverse health effects over a lifetime. Reference value is a generic term not specific to a given route of exposure.

<sup>2</sup> An oral slope factor is an upper-bound, approximating 95% confidence limit, on the increased cancer risk from a lifetime oral exposure to an agent.

1 U.S. federal sources alone, chronic oral reference values were available for 73 chemicals (7%) of the  
2 1,076 chemicals, and oral slope factors were available for 15 chemicals (1%). Of the 32 chemicals  
3 reported as used in at least 10% of wells in the EPA's FracFocus database (excluding water, quartz,  
4 and sodium chloride), seven (21%) have a federal chronic oral reference value. Oral reference  
5 values and oral slope factors are a key component of the risk assessment process, although  
6 comprehensive risk assessments that characterize the health risk associated with exposure to these  
7 chemicals are not available.

8 Of the chemicals that had values available, the health endpoints associated with those values  
9 include the potential for carcinogenesis, immune system effects, changes in body weight, changes in  
10 blood chemistry, cardiotoxicity, neurotoxicity, liver and kidney toxicity, and reproductive and  
11 developmental toxicity. However, it is important to note that evaluating any potential risk to human  
12 populations would require knowledge of the specific chemicals that are present at a particular site,  
13 whether or not humans are exposed to those chemicals and, if so, at what levels and for what  
14 duration, and the toxicity of the chemicals. Since most chemicals are used infrequently on a  
15 nationwide basis, potential exposure is likely to be a local or regional issue, rather than a national  
16 issue. Accordingly, consideration of hazards and risks associated with these chemical additives  
17 would be most useful on a site-specific basis and is beyond the scope of this assessment.

- ***If spills occur, how might hydraulic fracturing chemical additives contaminate drinking water resources?***

18 There are several mechanisms by which a spill can potentially contaminate drinking water  
19 resources. These include overland flow to nearby surface water, soil contamination and eventual  
20 transport to surface water, and infiltration and contamination of underlying ground water. Of the  
21 151 spills characterized by the EPA, fluids reached surface water in 13 (9% of 151) cases and soil in  
22 97 (64%) cases. None of the spills of hydraulic fracturing fluid were reported to have reached  
23 ground water. This could be due to an absence of impact; however, it can take several years for  
24 spilled fluids to infiltrate soil and leach into ground water. Thus, it may not be immediately  
25 apparent whether a spill has reached ground water or not.

26 Based on the relative importance of each of these mechanisms, impacts have the potential to occur  
27 quickly, be delayed short or long periods, or have a continual effect over time. In Kentucky, for  
28 example, a spill impacted a surface water body relatively quickly when hydraulic fracturing fluid  
29 entered a creek, significantly reducing the water's pH and increasing its conductivity ([Papoulias  
30 and Velasco, 2013](#)).

### ***Well Injection***

31 Hydraulic fracturing fluids are injected into oil or gas wells under high pressures. The fluids flow  
32 through the well (commonly thousands of feet below the surface) into the production zone (i.e., the  
33 geologic formation being fractured) where the fluid injection pressures are sufficient to create  
34 fractures in the rock.

35 There are two major subsurface mechanisms by which the injection of fluid and the creation and  
36 propagation of fractures can lead to contamination of drinking water resources: (1) the unintended

1 movement of liquids or gases out of the production well or along the outside of the production well  
2 into a drinking water resource via deficiencies in the well's casing or cement, and (2) the  
3 unintended movement of liquids or gases from the production zone through subsurface geologic  
4 formations into a drinking water resource. Combinations of these two mechanisms are also  
5 possible.

### **Research Questions: Well Injection**

- **How effective are current well construction practices at containing fluids—both liquids and gases—before, during, and after fracturing?**

6 Production wells are constructed to access and convey hydrocarbons from the formations in which  
7 they are found to the surface, and to isolate fluid-bearing zones (containing oil, gas, or water) from  
8 each other. Typically, multiple casings are emplaced and cemented along the wellbore to protect  
9 and isolate the oil and/or natural gas from the formations it must travel through to reach the  
10 surface.

11 Below ground drinking water resources are often separated from the production well using casing  
12 and cement. Cemented surface casing, in particular, is an important well construction feature for  
13 isolating drinking water resources from liquids and gases that may move through the subsurface. A  
14 limited risk modeling study of selected injection wells in the Williston Basin in North Dakota  
15 suggests that the risk of aquifer contamination from leaks inside the well to the drinking water  
16 resource decreases by a factor of approximately one thousand when surface casing extends below  
17 the bottom of the drinking water resource ([Michie and Koch, 1991](#)). Most wells used in hydraulic  
18 fracturing operations have casing and a layer of cement to protect drinking water resources, but  
19 there are exceptions: a survey conducted by the EPA of oil and gas production wells hydraulically  
20 fractured by nine oil and gas service companies in 2009 and 2010 estimated that at least 3% of the  
21 wells (600 out of 23,000 wells) did not have cement across a portion of the casing installed through  
22 the protected ground water resource identified by well operators. The absence of cement does not  
23 in and of itself lead to an impact. However, it does reduce the overall number of casing and cement  
24 barriers fluids must travel through to reach ground water resources.

25 Impacts to drinking water resources from subsurface liquid and gas movement may occur if casing  
26 or cement are inadequately designed or constructed, or fail. There are several examples of these  
27 occurrences in hydraulically fractured wells that have or may have resulted in impacts to drinking  
28 water resources. In one example, an inner string of casing burst during hydraulic fracturing, which  
29 resulted in a release of fluids on the land surface and possibly into the aquifer near Killdeer, North  
30 Dakota. The EPA found that, based on the data analysis performed for the study, the only potential  
31 source consistent with conditions observed in two impacted monitoring wells was the blowout that  
32 occurred during hydraulic fracturing ([U.S. EPA, 2015j](#)). In other examples, inadequately cemented  
33 casing has contributed to impacts to drinking water resources. In Bainbridge, Ohio, inadequately  
34 cemented casing in a hydraulically fractured well contributed to the buildup of natural gas and high  
35 pressures along the outside of a production well. This ultimately resulted in movement of natural  
36 gas into local drinking water aquifers ([Bair et al., 2010](#); [ODNR, 2008](#)). In the Mamm Creek gas field

1 in Colorado, inadequate cement placement in a production well allowed methane and benzene to  
2 migrate along the production well and through natural faults and fractures to drinking water  
3 resources ([Science Based Solutions LLC, 2014](#); [Crescent, 2011](#); [COGCC, 2004](#)). These cases illustrate  
4 how construction issues, sustained casing pressure, and the presence of natural faults and fractures  
5 can work together to create pathways for fluids to migrate toward drinking water resources.

6 Fracturing older wells may also increase the potential for impacts to drinking water resources via  
7 movement of gases and liquids from the inside of the production well or along the outside of the  
8 production well to ground water resources. The EPA estimated that 6% of 23,000 oil and gas  
9 production wells were drilled more than 10 years before being hydraulically fractured in 2009 or  
10 2010. Although new wells can be designed to withstand the stresses associated with hydraulic  
11 fracturing operations, older wells may not have been built or tested to the same specifications and  
12 their reuse for this purpose could be of concern. Moreover, aging and use of the well can contribute  
13 to casing degradation, which can be accelerated by exposure to corrosive chemicals, such as  
14 hydrogen sulfide, carbonic acid, and brines.

- ***Can subsurface migration of fluids—both liquids and gases—to drinking water resources occur, and what local geologic or artificial features might allow this?***

15 Physical separation between the production zone and drinking water resources can help protect  
16 drinking water. Many hydraulic fracturing operations target deep formations such as the Marcellus  
17 Shale or the Haynesville Shale (Louisiana/Texas), where the vertical distance between the base of  
18 drinking water resources and the top of the shale formation may be a mile or greater. Numerical  
19 modeling and microseismic studies based on a Marcellus Shale-like environment suggest that  
20 fractures created during hydraulic fracturing are unlikely to extend upward from these deep  
21 formations into shallow drinking water aquifers.

22 Not all hydraulic fracturing is performed in zones that are deep below drinking water resources.  
23 For example, operations in the Antrim Shale (Michigan) and the New Albany Shale  
24 (Illinois/Indiana/Kentucky) take place at shallower depths (100 to 1,900 ft or 30 to 579 m), with  
25 less vertical separation between the formation and drinking water resources. The EPA's survey of  
26 oil and gas production wells hydraulically fractured by nine service companies in 2009 and 2010  
27 estimated that 20% of 23,000 wells had less than 2,000 ft (610 m) of measured distance between  
28 the point of shallowest hydraulic fracturing and the base of the protected ground water resources  
29 reported by well operators.

30 There are also places in the subsurface where oil and gas resources and drinking water resources  
31 co-exist in the same formation. Evidence indicates that hydraulic fracturing occurs within these  
32 formations. This results in the introduction of fracturing fluids into formations that may currently  
33 serve, or in the future could serve, as a source of drinking water for public or private use. According  
34 to the data examined, the overall frequency of occurrence of this practice appears to be low, with  
35 the activity generally concentrated in some areas in the western United States. The practice of  
36 injecting fracturing fluids into a formation that also contains a drinking water resource directly  
37 affects the quality of that water, since some of the fluid likely remains in the formation following  
38 hydraulic fracturing. Hydraulic fracturing in a drinking water resource is a concern in the short-

1 term (should there be people currently using these zones as a drinking water supply) and the long-  
2 term (if drought or other conditions necessitate the future use of these zones for drinking water).

3 Liquid and gas movement from the production zone to underground drinking water resources may  
4 also occur via other production wells or injection wells near hydraulic fracturing operations.  
5 Fractures created during hydraulic fracturing can intersect nearby wells or their fracture networks,  
6 resulting in the flow of fluids into those wells. These well communications, or “frac hits,” are more  
7 likely to occur if wells are close to each other or on the same well pad. In the Woodford Shale in  
8 Oklahoma, the likelihood of well communication was less than 10% between wells more than 4,000  
9 ft (1,219 m) apart, but rose to nearly 50% between wells less than 1,000 ft (305 m) apart ([Ajani and  
10 Kelkar, 2012](#)). If an offset well is not able to withstand the stresses applied during the hydraulic  
11 fracturing of a neighboring well, well components may fail, which could result in a release of fluids  
12 at the surface from the offset well. The EPA identified incidents in which surface spills of hydraulic  
13 fracturing-related fluids were attributed to well communication events.

14 Older or inactive wells—including oil and gas wells, injection wells, or drinking water wells—near a  
15 hydraulic fracturing operation may pose an even greater potential for impacts. A study in Oklahoma  
16 found that older wells were more likely to be negatively affected by the stresses applied by  
17 hydraulic fracturing in neighboring wells ([Ajani and Kelkar, 2012](#)). In some cases, inactive wells in  
18 the vicinity of hydraulic fracturing activities may not have been plugged properly—many wells  
19 plugged before the 1950s were done so with little or no cement. The Interstate Oil and Gas Compact  
20 Commission estimates that over one million wells may have been drilled in the United States prior  
21 to a formal regulatory system being in place, and the status and location of many of these wells are  
22 unknown ([IOGCC, 2008](#)). State programs exist to plug identified inactive wells, and work is on-  
23 going to identify and address such wells.

### ***Flowback and Produced Water***

24 Water, of variable quality, is a byproduct of oil and gas production. After hydraulic fracturing, the  
25 injection pressure is released and water flows back from the well. Initially this water is similar to  
26 the hydraulic fracturing fluid, but as time goes on the composition is affected by the characteristics  
27 of the formation and possible reactions between the formation and the fracturing fluid. Water  
28 initially produced from the well after hydraulic fracturing is sometimes called flowback in the  
29 literature, and the term appears in this assessment. However, hydraulic fracturing fluids and any  
30 formation water returning to the surface are often referred to collectively as produced water. This  
31 definition of produced water is used in this assessment.

32 The amount of produced water varies, but typically averages 10% to 25% of injected volumes,  
33 depending upon the amount of time since fracturing and the particular well (see Figure ES-3a).  
34 However, there are exceptions to this, such as in the Barnett Shale in Texas where the total volume  
35 of produced water can equal or exceed the injected volume of hydraulic fracturing fluid (see Figure  
36 ES-3b). Flow rates are generally high initially, and then decrease over time throughout oil or gas  
37 production.

1 Impacts on drinking water resources have the potential to occur if produced water is spilled and  
2 enters surface water or ground water. Environmental transport of chemical constituents in  
3 produced water depends on the characteristics of the spill (e.g., volume and duration), the  
4 composition of spilled fluids, and the characteristics of the surrounding environment.

### **Research Questions: Flowback and Produced Water**

- **What is currently known about the frequency, severity, and causes of spills of flowback and produced water?**

5 Surface spills of produced water from hydraulically fractured wells have occurred. As noted in the  
6 Chemical Mixing section above, the frequency of on-site spills from hydraulic fracturing activities  
7 could be estimated for two states, but not nationally. Estimates of spill frequencies at hydraulic  
8 fracturing sites in Colorado and Pennsylvania, including spills of produced water, ranged from  
9 approximately 0.4 to 12.2 spills per 100 wells. Available data generally precluded estimates of  
10 produced water spill rates separately from estimates of overall spill frequency. Away from the well,  
11 produced water spills from pipelines and truck transport also have the potential to impact drinking  
12 water resources.

13 The EPA characterized spill volumes and causes for 225 cases in which produced water spilled on  
14 or near a well pad. These spills occurred between January 2006 and April 2012 in 11 states. The  
15 median reported volume per produced water spill was 990 gallons (3,750 L), more than double that  
16 for spills of hydraulic fracturing fluids and chemicals. The causes of produced water spills were  
17 reported as human error, equipment failure, container integrity failure, miscellaneous causes (e.g.,  
18 well communication), and unknown causes. Most of the total volume spilled (74%) for all 225 cases  
19 combined was caused by a failure of container integrity.

- **What is the composition of hydraulic fracturing flowback and produced water, and what factors might influence this composition?**

20 A combination of factors influence the composition of produced water, including: the composition  
21 of injected hydraulic fracturing fluids, the type of formation fractured, subsurface processes, and  
22 residence time. The initial chemical composition of produced water primarily reflects the chemistry  
23 of the injected fluids. At later times, the chemical composition of produced water reflects the  
24 geochemistry of the fractured formation.

25 Produced water varies in quality from fresh to highly saline, and can contain high levels of major  
26 anions and cations, metals, organics, and naturally occurring radionuclides. Produced water from  
27 shale and tight gas formations typically contains high levels of total dissolved solids (TDS) and ionic  
28 constituents (e.g., bromide, calcium, chloride, iron, potassium, manganese, magnesium, and  
29 sodium). Produced water also may contain metals (e.g., barium, cadmium, chromium, lead, and  
30 mercury), and organic compounds such as benzene. Produced water from coalbed methane  
31 typically has much lower TDS levels compared to other produced water types, particularly if the  
32 coalbed was deposited under fresh water conditions..

1 We identified 134 chemicals that have been detected in hydraulic fracturing produced water. These  
2 include chemicals added during the chemical mixing stage, as well as naturally occurring organic  
3 chemicals and radionuclides, metals, and other constituents of subsurface rock formations  
4 mobilized by the hydraulic fracturing process. Data on measured chemical concentrations in  
5 produced water were available for 75 of these 134 chemicals.

6 Most of the available data on produced water content are for shale and coalbed methane  
7 formations, while less data are available for tight formations, such as sandstones. The composition  
8 of produced water must be determined through sampling and analysis, both of which have  
9 limitations—the former due to challenges in accessing production equipment, and the latter due to  
10 difficulties identifying target analytes before analysis and the lack of appropriate analytical  
11 methods. Most current data are for inorganic chemicals, while less data exist for organic chemicals.  
12 Many more organic chemicals were reported as used in hydraulic fracturing fluid than have been  
13 identified in produced water. The difference may be due to analytical limitations, limited study  
14 scopes, and undocumented subsurface reactions.

- ***What are the chemical, physical, and toxicological properties of hydraulic fracturing flowback and produced water constituents?***

15 The identified constituents of produced water include inorganic chemicals (cations and anions, i.e.,  
16 metals, metalloids, non-metals, and radioactive materials), organic chemicals and compounds, and  
17 unidentified materials measured as total organic carbon and dissolved organic carbon. Some  
18 constituents are readily transported with water (i.e., chloride and bromide), while others depend  
19 strongly on the geochemical conditions in the receiving water body (i.e., radium and barium), and  
20 assessment of their transport is based on site-specific factors. We were able to obtain actual or  
21 estimated physicochemical properties for 86 (64%) of the 134 chemicals identified in produced  
22 water.

23 As in the case of chemicals in hydraulic fracturing fluid, chemical properties that affect the  
24 likelihood of an organic chemical in produced water reaching and impacting drinking water  
25 resources include: mobility, solubility, and volatility. In general, physicochemical properties suggest  
26 that organic chemicals in produced water tend to be less mobile in the environment. Consequently,  
27 if spilled, these chemicals may remain in soils or sediments near spill sites. Low mobility may result  
28 in smaller dissolved contaminant plumes in ground water, although these chemicals can be  
29 transported with sediments in surface water or small particles in ground water. Organic chemical  
30 properties vary with salinity, and effects depend on the nature of the chemical.

31 Oral reference values and/or oral slope factors from selected federal, state, and international  
32 sources were available for 83 (62%) of the 134 chemicals detected in produced water. From U.S.  
33 federal sources alone, chronic oral reference values were available for 70 (52%) of the 134  
34 chemicals, and oral slope factors were available for 20 chemicals (15%). Of the chemicals that had  
35 values available, noted health effects include the potential for carcinogenesis, immune system  
36 effects, changes in body weight, changes in blood chemistry, pulmonary toxicity, neurotoxicity, liver  
37 and kidney toxicity, and reproductive and developmental toxicity. As noted above, evaluating any  
38 potential risk to human populations would require knowledge of the specific chemicals that are



1 present at a particular site, whether or not humans are exposed to those chemicals and, if so, at  
2 what levels and for what duration, and the toxicity of the chemicals. The chemicals present in  
3 produced water can vary based on the formation and specific well, due to differences in fracturing  
4 fluid formulation and formation geology. Accordingly, consideration of hazards and risks associated  
5 with these chemicals would be most useful on a site-specific basis and is beyond the scope of this  
6 assessment.

- ***If spills occur, how might hydraulic fracturing flowback and produced water contaminate drinking water resources?***

7 Impacts to drinking water resources from spills or releases of produced water depend on the  
8 volume, timing, and composition of the produced water. Impacts are more likely the greater the  
9 volume of the spill, the longer the duration of the release, and the higher the concentration of  
10 produced water constituents (i.e., salts, naturally occurring radioactive material, and metals).

11 The EPA characterization of hydraulic fracturing-related spills found that 8% of the 225 produced  
12 water spills included in the study reached surface water or ground water. These spills tended to be  
13 of greater volume than spills that did not reach a water body. A well blowout in Bradford County,  
14 Pennsylvania spilled an estimated 10,000 gal (38,000 L) of produced water into a tributary of  
15 Towanda Creek, a state-designated trout fishery. The largest volume spill identified in this  
16 assessment occurred in North Dakota, where approximately 2.9 million gal (11 million L) of  
17 produced water spilled from a broken pipeline and impacted surface and ground water.

18 Chronic releases can and do occur from produced water disposed in unlined pits or impoundments,  
19 and can have long-term impacts. Ground water impacts may persist longer than surface water  
20 impacts because of lower flow rates and decreased mixing. Plumes from unlined pits used for  
21 produced water have been shown to persist for long periods and extend to nearby surface water  
22 bodies.

### ***Wastewater Management and Waste Disposal***

23 Hydraulic fracturing generates large volumes of produced water that require management. In this  
24 section we refer to produced water and any other waters generated onsite by the single term  
25 “wastewater.” [Clark and Veil \(2009\)](#) estimated that, in 2007, approximately one million active oil  
26 and gas wells in the United States generated 2.4 billion gal per day (9.1 billion L per day) of  
27 wastewater. There is currently no reliable way to estimate what fraction of this total volume can be  
28 attributed to hydraulically fractured wells. Wastewater volumes in a region can increase sharply as  
29 hydraulic fracturing activity increases.

30 Wastewater management and disposal could affect drinking water resources through multiple  
31 mechanisms, including: inadequate treatment of wastewater prior to discharge to a receiving  
32 water, accidental releases during transport or leakage from wastewater storage pits, unpermitted  
33 discharges, migration of constituents in wastewaters following land application, inappropriate  
34 management of residual materials from treatment, or accumulation of wastewater constituents in  
35 sediments near outfalls of centralized waste treatment facilities (CWTs) or publicly owned  
36 treatment works (POTWs) that have treated hydraulic fracturing wastewater. The scope of this

1 assessment excludes potential impacts to drinking water from the disposal of hydraulic fracturing  
2 wastewater in underground injection control (UIC) wells.

### **Research Questions: Wastewater Management and Waste Disposal**

- **What are the common treatment and disposal methods for hydraulic fracturing wastewater, and where are these methods practiced?**

3 Hydraulic fracturing wastewater is managed using several options, including: disposal in UIC wells  
4 (also called disposal wells); through evaporation ponds; treatment at CWTs, followed by reuse or  
5 by discharge to either surface waters or POTWs; reuse with minimal or no treatment; and land  
6 application or road spreading. Treatment of hydraulic fracturing wastewater by POTWs was used in  
7 the past in Pennsylvania. This decreased sharply following new state-level requirements and a  
8 request by the Pennsylvania Department of Environmental Protection (PA DEP) for well operators  
9 to stop sending Marcellus Shale wastewater to POTWs (and 15 CWTs) discharging to surface  
10 waters.

11 Wastewater management decisions are generally based on the availability and associated costs  
12 (including transportation) of disposal or treatment facilities. A survey of state agencies found that,  
13 in 2007, more than 98% of produced water from the oil and gas industry was managed via  
14 underground injection ([Clark and Veil, 2009](#)). Available information suggests that disposal wells are  
15 also the primary management practice for hydraulic fracturing wastewater in most regions in the  
16 United States (e.g., the Barnett Shale; see Figure ES-3b). The Marcellus Shale region is a notable  
17 exception, where most wastewater is reused because of the small number of disposal wells in  
18 Pennsylvania (see Figure ES-3a). Although this assessment does not address potential effects on  
19 drinking water resources from the use of disposal wells, any changes in cost of disposal or  
20 availability of disposal wells would likely influence wastewater management decisions.

21 Wastewater from some hydraulic fracturing operations is sent to CWTs, which may discharge  
22 treated wastewater to surface waters, POTWs, or back to well operators for reuse in other  
23 hydraulic fracturing operations. Available data indicate that the use of CWTs for treating hydraulic  
24 fracturing wastewater is greater in the Marcellus Shale region than other parts of the country. Most  
25 of the CWTs accepting hydraulic fracturing wastewater in Pennsylvania cannot significantly reduce  
26 TDS, and many of these facilities provide treated wastewater to well operators for reuse and do not  
27 currently discharge treated wastewater to surface water.

28 Reuse of wastewater for subsequent hydraulic fracturing operations may require no treatment,  
29 minimal treatment, or more extensive treatment. Operators reuse a substantial amount (ca. 70-  
30 90%) of Marcellus Shale wastewater in Pennsylvania (see Figure ES-3a). Lesser amounts of reuse  
31 occur in other areas (e.g., the Barnett Shale; see Figure ES-3b). In certain formations, such as the  
32 Bakken Shale in North Dakota, there is currently no indication of appreciable reuse.

33 In some cases, wastewater is used for land applications such as irrigation or road spreading for  
34 deicing or dust suppression. Land application has the potential to introduce wastewater  
35 constituents into surface water and ground water due to runoff and migration of brines. Studies of

1 road spreading of conventional oil and gas brines have found elevated levels of metals in soils and  
2 chloride in ground water.

- ***How effective are conventional POTWs and commercial treatment systems in removing organic and inorganic contaminants of concern in hydraulic fracturing wastewater?***

3 Publicly owned treatment works using basic treatment processes are not designed to effectively  
4 reduce TDS concentrations in highly saline hydraulic fracturing wastewater—although specific  
5 constituents or constituents groups can be removed (e.g., metals, oil, and grease by chemical  
6 precipitation or other processes). In some cases, wastewater treated at CWTs may be sent to a  
7 POTW for additional treatment and discharge. It is blended with POTW influent to prevent  
8 detrimental effects on biological processes in the POTW that aid in the treatment of wastewater.

9 Centralized waste treatment facilities with advanced wastewater treatment options such as reverse  
10 osmosis, thermal distillation, or mechanical vapor recompression, reduce TDS concentrations and  
11 can treat contaminants currently known to be in hydraulic fracturing wastewater. However, there  
12 are limited data on the composition of hydraulic fracturing wastewater, particularly for organic  
13 constituents. It is unknown whether advanced treatment systems are effective at removing  
14 constituents that are generally not tested for.

- ***What are the potential impacts from surface water disposal of treated hydraulic fracturing wastewater on drinking water treatment facilities?***

15 Potential impacts to drinking water resources may occur if hydraulic fracturing wastewater is  
16 inadequately treated and discharged to surface water. Inadequately treated hydraulic fracturing  
17 wastewater may increase concentrations of TDS, bromide, chloride, and iodide in receiving waters.  
18 In particular, bromide and iodide are precursors of disinfection byproducts (DBPs) that can form in  
19 the presence of organic carbon in drinking water treatment plants or wastewater treatment plants.  
20 Drinking water treatment plants are required to monitor for certain types of DBPs, because some  
21 are toxic and can cause cancer.

22 Radionuclides can also be found in inadequately treated hydraulic fracturing wastewater from  
23 certain shales, such as the Marcellus. A recent study by the [PA DEP \(2015b\)](#) found elevated radium  
24 concentrations in the tens to thousands of picocuries per liter and gross alpha and gross beta in the  
25 hundreds to thousands of picocuries per liter in effluent samples from some CWTs receiving oil and  
26 gas wastewater. Radium, gross alpha, and gross beta were also detected in effluents from POTWs  
27 receiving oil and gas wastewater (mainly as effluent from CWTs), though at lower concentrations  
28 than from the CWTs. Research in Pennsylvania also indicates the accumulation of radium in  
29 sediments and soils affected by the outfalls of some treatment plants that have handled oil and gas  
30 wastewater, including Marcellus Shale wastewater, and other wastewaters ([PA DEP, 2015b](#);  
31 [Warner et al., 2013a](#)). Mobilization of radium from sediments and potential impacts on downstream  
32 water quality depend upon how strongly the radium has sorbed to sediments. Impacts may also  
33 occur if sediment is resuspended (e.g., following storm events). There is no evidence of radionuclide  
34 contamination in drinking water intakes due to inadequately treated hydraulic fracturing  
35 wastewater.

1 Hydraulic fracturing wastewaters contain other constituents such as barium, boron, and heavy  
2 metals. Barium in particular has been documented in some shale gas produced waters. Little data  
3 exist on metal and organic compound concentrations in untreated and treated wastewaters in  
4 order to evaluate whether treatment is effective, and whether there are potential downstream  
5 effects on drinking water resources when wastewater is treated and discharged.

## Key Data Limitations and Uncertainties

6 This assessment used available data and literature to examine the potential impacts of hydraulic  
7 fracturing from oil and gas on drinking water resources nationally. As part of this effort, we  
8 identified data limitations and uncertainties associated with current information on hydraulic  
9 fracturing and its potential to affect drinking water resources. In particular, data limitations  
10 preclude a determination of the frequency of impacts with any certainty. These limitations and  
11 uncertainties are discussed in brief below.

### *Limitations in Monitoring Data and Chemical Information*

12 While many activities conducted as part of the hydraulic fracturing water cycle take place above  
13 ground, hydraulic fracturing itself occurs below ground and is not directly observable. Additionally,  
14 potential mechanisms identified in this assessment may result in impacts to drinking water  
15 resources that are below ground (e.g., spilled fluids leaching into ground water). Data that could be  
16 used to characterize the presence, migration, or transformation of chemicals in the subsurface  
17 before, during, and after hydraulic fracturing were found to be scarce relative to the number of  
18 hydraulically fractured oil and gas production wells. Specifically, local water quality data needed to  
19 compare pre- and post-hydraulic fracturing conditions are not consistently collected or readily  
20 available. The limited amount of data collected before and during hydraulic fracturing activities  
21 reduces the ability to determine whether hydraulic fracturing affected drinking water resources in  
22 cases of alleged contamination.

23 Information (identity, frequency of use, physicochemical and toxicological properties, etc.) on the  
24 chemicals associated with the hydraulic fracturing water cycle is not complete and limits  
25 understanding of potential impacts on drinking water resources. Well operators claimed at least  
26 one chemical as confidential at more than 70% of wells reported to FracFocus and analyzed by the  
27 EPA. The identity of these chemicals, and other chemicals in produced water, are needed to  
28 understand their properties and would also help inform what chemicals to test for to establish  
29 baseline conditions and to test for in the event of a suspected drinking water impact. Of the 1,173  
30 total chemicals identified by the EPA in hydraulic fracturing fluid and flowback and produced  
31 water, 147 have chronic oral reference values and/or oral slope factors from the sources that met  
32 the selection criteria for inclusion in this assessment. Because the majority of chemicals identified  
33 in this report do not have chronic oral reference values and/or oral slope factors, risk assessors at  
34 the local and regional level may need to use alternative sources of toxicity information that could  
35 introduce greater uncertainties.

### **Other Contributing Limitations**

1 We found other limitations that hamper the ability to fully assess the potential impacts of hydraulic  
2 fracturing on drinking water resources nationally. These include the number and location of  
3 hydraulically fractured wells, the location of drinking water resources, and information on changes  
4 in industry practices. The lack of a definitive well count particularly contributes to uncertainties  
5 regarding total water use or total wastewater volume estimates, and would limit any kind of  
6 cumulative impact assessment. Lack of specific information about private drinking water well  
7 locations and the depths of drinking water resources in relation to hydraulically fractured rock  
8 formations and well construction features (e.g., casing and cement) limits the ability to assess  
9 whether subsurface drinking water resources are isolated from hydraulically fractured oil and gas  
10 production wells. Finally, this assessment is a snapshot in time, and the industry is rapidly changing  
11 (e.g., the number of wells fractured, the location of activities, and the chemicals used). It is unclear  
12 how changes in industry practices could affect potential drinking water impacts in the future.  
13 Consideration of future development scenarios was not a part of this assessment, but such an  
14 evaluation could help establish potential short- and long-term impacts to drinking water resources  
15 and how to assess them.

### **Conclusions**

16 Through this national-level assessment, we have identified potential mechanisms by which  
17 hydraulic fracturing could affect drinking water resources. Above ground mechanisms can affect  
18 surface and ground water resources and include water withdrawals at times or in locations of low  
19 water availability, spills of hydraulic fracturing fluid and chemicals or produced water, and  
20 inadequate treatment and discharge of hydraulic fracturing wastewater. Below ground mechanisms  
21 include movement of liquids and gases via the production well into underground drinking water  
22 resources and movement of liquids and gases from the fracture zone to these resources via  
23 pathways in subsurface rock formations.

24 We did not find evidence that these mechanisms have led to widespread, systemic impacts on  
25 drinking water resources in the United States. Of the potential mechanisms identified in this report,  
26 we found specific instances where one or more of these mechanisms led to impacts on drinking  
27 water resources, including contamination of drinking water wells. The cases occurred during both  
28 routine activities and accidents and have resulted in impacts to surface or ground water. Spills of  
29 hydraulic fracturing fluid and produced water in certain cases have reached drinking water  
30 resources, both surface and ground water. Discharge of treated hydraulic fracturing wastewater has  
31 increased contaminant concentrations in receiving surface waters. Below ground movement of  
32 fluids, including gas, most likely via the production well, have contaminated drinking water  
33 resources. In some cases, hydraulic fracturing fluids have also been directly injected into drinking  
34 water resources, as defined in this assessment, to produce oil or gas that co-exists in those  
35 formations.

36 The number of identified cases where drinking water resources were impacted are small relative to  
37 the number of hydraulically fractured wells. This could reflect a rarity of effects on drinking water

1 resources, or may be an underestimate as a result of several factors. There is insufficient pre- and  
2 post-hydraulic fracturing data on the quality of drinking water resources. This inhibits a  
3 determination of the frequency of impacts. Other limiting factors include the presence of other  
4 causes of contamination, the short duration of existing studies, and inaccessible information related  
5 to hydraulic fracturing activities.

6 This state-of-the-science assessment contributes to the understanding of the potential impacts of  
7 hydraulic fracturing on drinking water resources and the factors that may influence those impacts.  
8 The findings in this assessment can be used by federal, state, tribal, and local officials; industry; and  
9 the public to better understand and address any vulnerabilities of drinking water resources to  
10 hydraulic fracturing activities. This assessment can also be used to help facilitate and inform  
11 dialogue among interested stakeholders, and support future efforts, including: providing context to  
12 site-specific exposure or risk assessments, local and regional public health assessments, and  
13 assessments of cumulative impacts of hydraulic fracturing on drinking water resources over time  
14 or over defined geographic areas of interest. Finally, and most importantly, this assessment  
15 advances the scientific basis for decisions by federal, state, tribal, and local officials, industry, and  
16 the public, on how best to protect drinking water resources now and in the future.

## References for Executive Summary

- [Ajani, A; Kelkar, M.](#) (2012). Interference study in shale plays. Paper presented at SPE Hydraulic Fracturing Technology Conference, February 6-8, 2012, The Woodlands, TX.
- [Bair, ES; Freeman, DC; Senko, JM.](#) (2010). Subsurface gas invasion Bainbridge Township, Geauga County, Ohio. (Expert Panel Technical Report). Columbus, OH: Ohio Department of Natural Resources. <http://oilandgas.ohiodnr.gov/resources/investigations-reports-violations-reforms#THR>
- [Clark, CE; Veil, JA.](#) (2009). Produced water volumes and management practices in the United States (pp. 64). (ANL/EVS/R-09/1). Argonne, IL: Argonne National Laboratory. [http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL\\_EVS\\_R09\\_produced\\_water\\_volume\\_report\\_2437.pdf](http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL_EVS_R09_produced_water_volume_report_2437.pdf)
- [COGCC.](#) Colorado Oil and Gas Conservation Commission Order No. 1V-276, (2004). <https://cogcc.state.co.us/orders/orders/1v/276.html>
- [Crescent](#) (Crescent Consulting, LLC). (2011). East Mamm creek project drilling and cementing study. Oklahoma City, OK. <http://cogcc.state.co.us/Library/PiceanceBasin/EastMammCreek/ReportFinal.pdf>
- [EIA](#) (Energy Information Administration). (2015a). Glossary. Available online at <http://www.eia.gov/tools/glossary/>
- [IOGCC](#) (Interstate Oil and Gas Compact Commission). (2008). Protecting our country's resources: The states' case, orphaned well plugging initiative. Oklahoma City, OK: Interstate Oil and Gas Compact Commission (IOGCC). <http://iogcc.myshopify.com/products/protecting-our-countrys-resources-the-states-case-orphaned-well-plugging-initiative-2008>
- [Maupin, MA; Kenny, JF; Hutson, SS; Lovelace, JK; Barber, NL; Linsey, KS.](#) (2014). Estimated use of water in the United States in 2010. (USGS Circular 1405). Reston, VA: U.S. Geological Survey. <http://dx.doi.org/10.3133/cir1405>
- [Michie, TW; Koch, CA.](#) (1991). Evaluation of injection-well risk management in the Williston Basin. J Pet Tech 43: 737-741. <http://dx.doi.org/10.2118/20693-PA>

- [Newell, R.](#) (2011). Shale gas and the outlook for U.S. natural gas markets and global gas resources. Presentation presented at US EIA presentation at OECD Meetings, June 21, 2011, Paris, France.
- [ODNR, DMRM.](#) (Ohio Department of Natural Resources, Division of Mineral Resources Management). (2008). Report on the investigation of the natural gas invasion of aquifers in Bainbridge Township of Geauga County, Ohio. Columbus, OH: ODNR.  
<http://oilandgas.ohiodnr.gov/portals/oilgas/pdf/bainbridge/report.pdf>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015b). Technologically enhanced naturally occurring radioactive materials (TENORM) study report. Harrisburg, PA.  
<http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study-Report-Rev.0-01-15-2015.pdf>
- [Papoulias, DM; Velasco, AL.](#) (2013). Histopathological analysis of fish from Acorn Fork Creek, Kentucky, exposed to hydraulic fracturing fluid releases. *Southeastern Naturalist* 12: 92-111.
- [Scanlon, BR; Reedy, RC; Nicot, JP.](#) (2014). Will water scarcity in semiarid regions limit hydraulic fracturing of shale plays? *Environmental Research Letters* 9. <http://dx.doi.org/10.1088/1748-9326/9/12/124011>
- [Science Based Solutions LLC.](#) (2014). Summary of hydrogeology investigations in the Mamm Creek field area, Garfield County. Laramie, Wyoming. <http://www.garfield-county.com/oil-gas/documents/Summary-Hydrogeologic-Studies-Mamm%20Creek-Area-Feb-10-2014.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015j). Retrospective case study in Killdeer, North Dakota: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/103). Washington, D.C.
- [USGS](#) (U.S. Geological Survey). (2002). Natural gas production in the United States [Fact Sheet]. (USGS Fact Sheet FS-113-01). Denver, CO.
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A.](#) (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. *Environ Sci Technol* 48: 36-52. <http://dx.doi.org/10.1021/es405118y>
- [Warner, NR; Christie, CA; Jackson, RB; Vengosh, A.](#) (2013a). Impacts of shale gas wastewater disposal on water quality in western Pennsylvania. *Environ Sci Technol* 47: 11849-11857.  
<http://dx.doi.org/10.1021/es402165b>

# Chapter 1

---

## Introduction



# 1. Introduction

## 1.1. Background

1 Since the early 2000s, oil and natural gas production in the United States has been transformed  
2 through the technological innovations of hydraulic fracturing and directional drilling. Hydraulic  
3 fracturing is a stimulation technique used to increase production of oil and gas. It involves the  
4 injection of fluids under pressures great enough to fracture the oil- and gas-production formations.  
5 Hydraulic fracturing in combination with advanced directional drilling techniques has made it  
6 possible to economically extract hydrocarbons from unconventional resources, such as shale, tight  
7 formations, and coalbeds.<sup>1</sup> It can also enhance production from conventional resources. The surge  
8 in use of hydraulic fracturing and associated technologies has significantly increased domestic  
9 energy supplies (see Chapter 2) and brought economic benefits to many areas of the United States.

10 The growth in domestic oil and gas exploration and production– the direct result of the expanded  
11 use of hydraulic fracturing– has also raised concerns about its potential for impacts to human  
12 health and the environment. Specific concerns have been raised by the public about the effects of  
13 hydraulic fracturing on the quality and quantity of drinking water resources. Some residents living  
14 close to oil and gas production well sites report changes in the quality of ground water resources  
15 used for drinking water and assert that hydraulic fracturing is responsible for these changes. Other  
16 concerns include competition for water between hydraulic fracturing operations and other water  
17 users, especially in areas of the country experiencing drought, and the disposal of wastewater  
18 generated from hydraulic fracturing. In response to public concerns, the U.S. Congress urged the  
19 U.S. Environmental Protection Agency (EPA) to study the relationship between hydraulic fracturing  
20 and drinking water ([H.R. Rep. 111-316, 2009](#)). In 2011, the EPA published its *Plan to Study the*  
21 *Potential Impacts of Hydraulic Fracturing on Drinking Water Resources* ([U.S. EPA, 2011c; hereafter](#)  
22 [Study Plan](#)). The research described in the Study Plan began the same year. In 2012, the EPA issued  
23 *Potential Impacts of Hydraulic Fracturing on Drinking Water Resources: Progress Report* ([U.S. EPA,](#)  
24 [2012f; hereafter Progress Report](#)) in order to update the public on the status of the research being  
25 conducted under the Study Plan. In this report, we review and synthesize scientific literature,  
26 including the publications resulting from the EPA’s research and information provided by  
27 stakeholders, to assess the potential for hydraulic fracturing for oil and gas to change the quality or  
28 quantity of drinking water resources. This report also identifies factors affecting the frequency or  
29 severity of any potential impacts.

## 1.2. Scope

30 This assessment focuses on hydraulic fracturing in onshore oil and gas wells in the contiguous  
31 United States; limited available information on hydraulic fracturing in Alaska is included. To the

---

<sup>1</sup> Unconventional resources is an umbrella term for oil and natural gas that is produced by means that do not meet the criteria for conventional production. What has qualified as unconventional at any particular time is a complex function of resource characteristics, the available exploration and production technologies, the economic environment, and the scale, frequency, and duration of production from the resource (see Text Box 2-2).

1 extent possible, this assessment addresses hydraulic fracturing in all types of oil- and gas-bearing  
2 formations in which it is conducted, including shale, so-called ‘tight’ formations (e.g., certain  
3 sandstones, siltstones, and carbonates), coalbeds, and conventional reservoirs. It tends to focus on  
4 hydraulic fracturing in shale, which reflects the relatively large amount of literature and available  
5 data on hydraulic fracturing in this type of geologic formation.

6 The scope of activities examined in this assessment is defined by the hydraulic fracturing water  
7 cycle. This cycle encompasses activities involving water that support hydraulic fracturing and  
8 consists of five stages: (1) acquisition of water needed to create hydraulic fracturing fluids; (2)  
9 mixing of water and chemicals on the well pad to create hydraulic fracturing fluids; (3) injection of  
10 hydraulic fracturing fluids into the well to fracture the geologic formation; (4) management of  
11 flowback and produced water on the well pad and in transit for reuse, treatment, or disposal; and  
12 (5) reuse, treatment and discharge, or disposal of hydraulic fracturing wastewater (see Figure  
13 1-1).<sup>1,2,3,4</sup>

14 Activities within the hydraulic fracturing water cycle can take place on or near the well pad or some  
15 distance away. On-site activities include mixing and injecting hydraulic fracturing fluids and  
16 capturing flowback and produced water. Water withdrawals and wastewater treatment and  
17 disposal may occur in the same watershed, adjacent watersheds, or watersheds many miles away  
18 from the production site.

19 This assessment focuses on impacts on drinking water resource quantity and quality. Consistent  
20 with the Study Plan ([U.S. EPA, 2011c](#)), drinking water resources are defined broadly within this  
21 report as any body of ground water or surface water that now serves, or in the future could serve,  
22 as a source of drinking water for public or private use. This is broader than most regulatory  
23 definitions of “drinking water” and encompasses both fresh and non-fresh bodies of water, since  
24 trends indicate both types of water bodies are now and in the future will be used as sources of  
25 drinking water (see Chapter 3). We note that drinking water resources provide not only water that  
26 individuals actually drink but also water used for many additional purposes such as cooking and  
27 bathing.

28 We assess potential effects on drinking water resources from business-as-usual operations as well  
29 as from accidents and unintended releases that may occur during the hydraulic fracturing water  
30 cycle (see Table 1-1).


---

<sup>1</sup> Hydraulic fracturing fluids are engineered fluids, typically consisting of a base fluid, additives, and proppants, that are pumped under high pressure into the well to create and hold open fractures in the formation.

<sup>2</sup> Flowback is defined multiple ways in the literature. In general, it is either fluids predominantly containing hydraulic fracturing fluid that return from a well to the surface or a process used to prepare the well for production (see Chapter 7).

<sup>3</sup> Produced water is water that flows from oil and gas wells.

<sup>4</sup> Hydraulic fracturing wastewater is flowback and produced water that is managed using practices that include but are not limited to reuse in subsequent hydraulic fracturing operations, treatment and discharge, and injection into disposal wells (see Chapter 8).

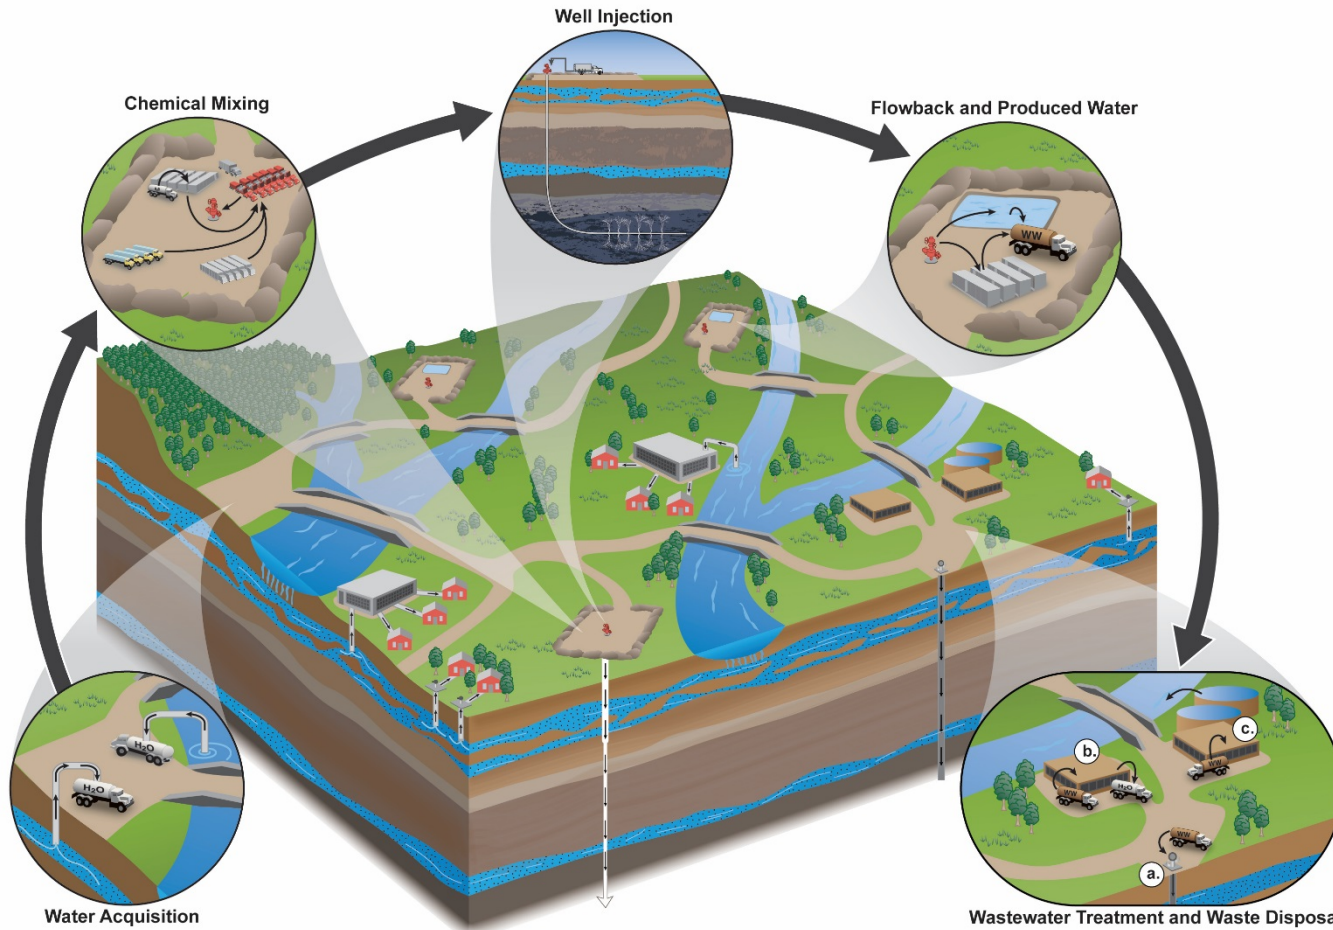

**Figure 1-1. Conceptualized view of the stages of the hydraulic fracturing water cycle.**

Shown here is a generalized landscape depicting the activities of the hydraulic fracturing water cycle and their relationship to each other, as well as their relationship to drinking water resources. Activities may take place in the same watershed or different watersheds and close to or far from drinking water resources. Drinking water resources are any body of ground water or surface water that now serves, or in the future could serve, as a source of drinking water for public or private use. Arrows depict the movement of water and chemicals. Specific activities in the “Wastewater Treatment and Waste Disposal” inset are (a) underground injection control (UIC) well disposal, (b) wastewater treatment and reuse, and (c) wastewater treatment and discharge at a centralized waste treatment (CWT) facility. Note: Figure not to scale.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table 1-1. Stages of the hydraulic fracturing water cycle have various potential effects on drinking water resources.**

The potential effects addressed in this assessment, and how they are related to the activities within each stage, are summarized here.

Water cycle stage	Activities or processes potentially affecting drinking water resources	Potential drinking water effects addressed in this assessment			
		Quality		Quantity	
		Ground water	Surface water	Ground water	Surface water
<b>Water acquisition</b>	Water withdrawals	X	X	X	X
<b>Chemical mixing</b>	Spills of hydraulic fracturing fluids	X	X		
<b>Well injection</b>	Subsurface migration of hydraulic fracturing fluids or formation fluids	X	X		
<b>Flowback and produced water</b>	Spills of flowback or produced water	X	X		
<b>Wastewater treatment and waste disposal</b>	Discharge of untreated or inadequately treated wastewater and inappropriate disposal of waste solids	X	X		

1 As part of the assessment, we evaluated immediate, near-term, and long-term effects on drinking  
 2 water resources. For example, we considered how surface spills of hydraulic fracturing fluids may  
 3 potentially have immediate or near-term impacts on neighboring surface water and shallow ground  
 4 water quality (see Chapters 5 and 7). We also considered how the potential release of hydraulic  
 5 fracturing fluids in the subsurface may take years to impact ground water resources, because  
 6 liquids and gas often move slowly in the subsurface (see Chapter 6). Additionally, effects may be  
 7 detected near the activity or at some distance away. For instance, we considered that, depending on  
 8 the constituents of treated hydraulic fracturing wastewater discharged to a stream and the flow in  
 9 that stream, drinking water resource quality could be affected a significant distance downstream  
 10 (see Chapter 8).

11 This assessment focuses predominantly on activities supporting a single well or multiple wells on a  
 12 single well pad, accompanied by a more limited discussion of cumulative activities and the effects  
 13 that could result from having many wells on a landscape. Studies of cumulative effects are generally  
 14 lacking, but we use the scientific literature to address this topic where possible.<sup>1</sup>

15 We address *mechanisms* for impacts as well as *impacts* of hydraulic fracturing for oil and gas on  
 16 drinking water resources. In general, a mechanism is the means or series of events that links an  
 17 activity to an impact, while an impact is the end result of a mechanism and represents a change in  
 18 the entity of interest. Specific definitions used in this assessment are provided below.

<sup>1</sup> Cumulative effects refer to combined changes in the environment that can take place as a result of multiple activities over time and/or space.

- 1 • A **mechanism** is a means or series of events by which an activity within the hydraulic  
2 fracturing water cycle has been observed to change the quality or quantity of drinking  
3 water resources.
- 4 • A **suspected mechanism** is a means or series of events by which hydraulic fracturing  
5 activities could logically have resulted in an observed change in the quality or quantity of  
6 drinking water resources. Available evidence may or may not be sufficient to determine if  
7 it is the *only* mechanism that caused the observed change.
- 8 • A **potential mechanism** is a means or series of events by which hydraulic fracturing  
9 activities could logically or theoretically (for instance, based on modeling) change the  
10 quality or quantity of drinking water resources but one that has not yet been observed.
- 11 • An **impact** is any observed change in the quality or quantity of drinking water resources,  
12 regardless of severity, that results from a mechanism.
- 13 • A **potential impact** is any change in the quality or quantity of drinking water resources  
14 that could logically occur as the result of a mechanism or potential mechanism but has not  
15 yet been observed.

16 Potential mechanisms and impacts, as well as suspected mechanisms, are addressed because data  
17 required to document mechanisms and impacts may be inaccessible, incomplete, or nonexistent. In  
18 addition, evidence may be insufficient to isolate the contribution of hydraulic fracturing to changes  
19 in the quality or quantity of drinking water resources from other human activities occurring  
20 nearby. We anticipate that our understanding of mechanisms and impacts will be advanced as the  
21 scientific community continues to evaluate potential health and environmental effects of hydraulic  
22 fracturing.

23 In this assessment, we also identify and discuss factors affecting the frequency or severity of  
24 changes to avoid a simple inventory of all specific situations in which hydraulic fracturing might  
25 alter drinking water quality or quantity. This allows knowledge about the conditions under which  
26 effects are likely or unlikely to occur to be applied to new circumstances (e.g., a new area of oil or  
27 gas development where hydraulic fracturing is expected to be used) and could inform the  
28 development of strategies to prevent impacts. Although no attempt has been made in this  
29 assessment to identify or evaluate comprehensive best practices for states, tribes, or the industry,  
30 we describe ways to avoid or reduce the impacts of hydraulic fracturing activities as they have been  
31 reported in the scientific literature. A summary and evaluation of current or proposed regulations  
32 and policies is beyond the scope of this report.

33 For this assessment, we did not conduct site-specific predictive modeling to quantitatively estimate  
34 environmental concentrations of contaminants in drinking water resources, although modeling  
35 studies conducted by others are described. Further, this report is not a human health risk  
36 assessment. It does not identify populations that are exposed to chemicals or other stressors in the  
37 environment, estimate the extent of exposure, or estimate the incidence of human health impacts  
38 (see Chapter 9).

1 This assessment focuses on the potential impacts from activities in the hydraulic fracturing water  
2 cycle on drinking water resources. It does not address all concerns that have been raised about  
3 hydraulic fracturing nor about oil and gas exploration and production more generally. Activities  
4 that are not considered include acquisition and transport of constituents of hydraulic fracturing  
5 fluids besides water (e.g., sand mining and chemical production); site selection and well pad  
6 development; other infrastructure development (e.g., roads, pipelines, compressor stations); site  
7 reclamation; and well closure. We consider these activities to be outside the scope of the hydraulic  
8 fracturing water cycle and, therefore, their impacts are not addressed in this assessment.  
9 Additionally, this report does not discuss the potential impacts of hydraulic fracturing on other  
10 water uses (e.g., agriculture or industry), other aspects of the environment (e.g., air quality or  
11 ecosystems), worker health or safety, or communities.

### 1.3. Approach

12 This assessment relies on scientific literature and data that address topics within the scope of the  
13 hydraulic fracturing water cycle. Scientific journal articles and peer-reviewed EPA reports that have  
14 been published containing results from the EPA’s hydraulic fracturing study comprise one set of  
15 applicable literature. Other literature evaluated includes articles published in science and  
16 engineering journals, federal and state government reports, non-governmental organization (NGO)  
17 reports, and oil and gas industry publications. Data sources examined include federal- and state-  
18 collected data sets, databases curated by federal and state government agencies, other publicly  
19 available data and information, and data including confidential and non-confidential business  
20 information submitted by industry to the EPA.<sup>1</sup>

#### 1.3.1. EPA Hydraulic Fracturing Study Publications

21 The research topic areas and projects described in the Study Plan were developed with substantial  
22 expert and public input, and they were designed to meet the data and information needs of this  
23 assessment. As such, published, peer-reviewed results of the research conducted under the Study  
24 Plan are incorporated and cited frequently throughout this assessment. As is customary in  
25 assessments that synthesize a large body of literature and data, the results of EPA research are  
26 contextualized and interpreted in combination with the other literature and data described in  
27 Section 1.3.2. The articles and EPA reports themselves that give complete and detailed project  
28 results can be found on the EPA’s hydraulic fracturing website ([www.epa.gov/hfstudy](http://www.epa.gov/hfstudy)). For ease of  
29 reference, a description of the individual projects, the type of research activity they represent (i.e.,  
30 analysis of existing data, scenario evaluation, laboratory study, or case study), and the  
31 corresponding citations of published articles and EPA reports that are referenced in this  
32 assessment can be found in Appendix H.

#### 1.3.2. Literature and Data Search Strategy

33 The EPA used a broad search strategy to identify approximately 3,700 sources of scientific  
34 information that could be applicable to this assessment. This search strategy included both

---

<sup>1</sup> Information was provided to the EPA by nine hydraulic fracturing service companies in response to a September 2010 information request and by nine oil and gas well operators in response to an August 2011 information request.



1 requesting input from scientists, stakeholders, and the public about relevant data and information,  
2 and thorough searching of published information and applicable data.<sup>1</sup>

3 Over 1,400 articles, reports, data, and other sources of information were obtained through outreach  
4 to the public, stakeholders, and scientific experts. The EPA requested material through many  
5 venues, as follows. We received recommended literature from the Science Advisory Board (SAB),  
6 the EPA’s independent federal scientific advisory committee, from its review of the EPA’s draft  
7 Study Plan; its consultation on the EPA’s Progress Report ([U.S. EPA, 2012f](#)); and during an SAB  
8 briefing on new and emerging information related to hydraulic fracturing in fall 2013. Subject  
9 matter experts and stakeholders also recommended literature through a series of technical  
10 workshops and roundtables organized by the EPA between 2011 and 2013. In addition, the public  
11 submitted material to the SAB during the SAB review of the draft Study Plan, Progress Report, and  
12 briefing on emerging information, as well as in response to a formal request for data and  
13 information posted in the *Federal Register* (EPA-HQ-ORD-2010-0674) in November 2012. The  
14 submission deadline was extended from April to November 2013 to provide the public with  
15 additional opportunity to provide input to the EPA.

16 Approximately 2,300 additional sources were identified by conducting searches for material that  
17 could be applicable to the assessment via online scientific databases and federal, state, and  
18 stakeholder websites. We searched these databases and websites in particular for (1) materials  
19 addressing topics not covered by the documents submitted by experts, stakeholders, and the public  
20 as noted above, and (2) newly emerging scientific studies. Multiple targeted and iterative searches  
21 on topics determined to be within the scope of the assessment were conducted until fall 2014. After  
22 that time, we largely included newer literature as it was recommended to us during our internal  
23 technical reviews or as it came to our attention and was determined to be important for filling a gap  
24 in information. In many cases, our searches uncovered the same material submitted by the public,  
25 but approximately 2,300 new sources were also identified.

### 1.3.3. Literature and Data Evaluation Strategy

26 We evaluated the literature and data identified in the search strategy above using the five  
27 assessment factors outlined by the EPA Science Policy Council in *A Summary of General Assessment*  
28 *Factors for Evaluating the Quality of Scientific and Technical Information* ([U.S. EPA, 2003](#)). The  
29 factors are (1) applicability and utility, (2) evaluation and review, (3) soundness, (4) clarity and  
30 completeness, and (5) uncertainty and variability. Table 1-2 lists these factors along with the  
31 specific criteria for each that were developed for this assessment. We first evaluated all materials  
32 for applicability. If “applicable” under the criteria, the reference was evaluated on the basis of the  
33 other four factors.

34 Our objective was to consider and then cite literature in the assessment that fully conforms to all  
35 criteria defining each assessment factor. However, the preponderance of literature on some topics  
36 did not fully conform to some aspects of the outlined criteria. For instance, there were many white

---

<sup>1</sup> This study did not review information contained in state and federal enforcement actions concerning alleged contamination of drinking water resources.

1 papers and reports in technical areas in which independent peer review is not standard practice or  
 2 is not well documented. Therefore, we included references in the assessment that were not peer-  
 3 reviewed but that addressed topics not found in the peer-reviewed literature, that provided useful  
 4 background information, or that corroborated conclusions in the peer-reviewed literature.

**Table 1-2. Criteria developed for the five factors used to evaluate literature and data cited in this assessment.**

Criteria are consistent with those outlined by the EPA’s Science Policy Council ([U.S. EPA, 2003](#)). Criteria are incorporated into the Quality Assurance Project Plans for this assessment ([U.S. EPA, 2014g, 2013d](#)).

Factor	Criteria
<b>Applicability</b>	Document provides information useful for assessing the potential pathways for hydraulic fracturing activities to change the quality or quantity of drinking water resources, identifies factors that affect the frequency and severity of impacts, or suggests ways that potential impacts may be avoided or reduced.
<b>Review</b>	Document has been peer-reviewed.
<b>Soundness</b>	Document relies on sound scientific theory and approaches, and conclusions are consistent with data presented.
<b>Clarity/completeness</b>	Document provides underlying data, assumptions, procedures, and model parameters, as applicable, as well as information about sponsorship and author affiliations.
<b>Uncertainty/variability</b>	Document identifies uncertainties, variability, sources of error, and/or bias and properly reflects them in any conclusions drawn.

#### 1.3.4. Quality Assurance and Peer Review

5 The use of quality assurance (QA) and peer review helps ensure that the EPA conducts high-quality  
 6 science that can be used to inform policymakers, industry, and the public. QA activities performed  
 7 by the EPA ensure that the agency’s environmental data are of sufficient quantity and quality to  
 8 support the data’s intended use. The EPA prepared a programmatic Quality Management Plan ([U.S.  
 9 EPA, 2014h](#)) for all of the research conducted under the EPA’s Study Plan, including the review and  
 10 synthesis of the scientific literature in this assessment. The hydraulic fracturing Quality  
 11 Management Plan describes the QA program’s organizational structure; defines and assigns QA and  
 12 quality control (QC) responsibilities; and describes the processes and procedures used to plan,  
 13 implement, and assess the effectiveness of the quality system. The broad plan is then supported by  
 14 more detailed QA Project Plans (QAPPs). For instance, the QAPPs developed for this assessment  
 15 provide the technical approach and associated QA/QC procedures for our data and literature search  
 16 and evaluation strategies introduced in Section 1.3.2 and 1.3.3 ([U.S. EPA, 2014g, 2013d](#)). A QA audit  
 17 was conducted by the QA Manager during the preparation of this assessment in order to verify that  
 18 the appropriate QA procedures, criteria, reviews, and data verification were adequately performed  
 19 and documented. Identifying uncertainties is another aspect of QA; uncertainty, including data gaps  
 20 and data limitations, is discussed throughout this assessment.

*This document is a draft for review purposes only and does not constitute Agency policy.*



1 This report is classified as a Highly Influential Scientific Assessment (HISA), defined by the Office of  
 2 Management and Budget (OMB) as a scientific assessment that (1) could have a potential impact of  
 3 more than \$500 million in any year or (2) is novel, controversial, or precedent-setting or has  
 4 significant interagency interest (OMB, 2004). The OMB describes specific peer review requirements  
 5 for HISAs. The EPA often engages the SAB as an external federal advisory committee to conduct  
 6 peer reviews of high-profile scientific matters relevant to the agency. Members of an ad hoc panel,  
 7 the same panel that was convened under the auspices of the SAB to provide comment on the  
 8 Progress Report, will also provide comment on this assessment.<sup>1</sup> Panel members were nominated  
 9 by the public and chosen to create a balanced review panel based on factors such as technical  
 10 expertise, knowledge, experience, and absence of any real or perceived conflicts of interest.

#### 1.4. Organization

11 This assessment begins with a general description of hydraulic fracturing activities and the role of  
 12 hydraulic fracturing in the oil and gas industry in the United States (see Chapter 2). It follows with a  
 13 characterization of drinking water resources in the continental United States, with a focus on areas  
 14 in which we estimate hydraulic fracturing has taken place over the time period of 2000–2013 (see  
 15 Chapter 3).

16 Chapters 4 through 8 are organized around the stages of the hydraulic fracturing water cycle (see  
 17 Figure 1-1) and address the potential for activities conducted during those stages to change the  
 18 quality or quantity of drinking water resources. Each of the stages is covered by a separate chapter.  
 19 There is also a chapter devoted to an examination of the properties of chemicals and constituents  
 20 that have been or may be used in hydraulic fracturing fluids or present in flowback and produced  
 21 water (see Chapter 9).

22 Each chapter addresses research questions developed under the Study Plan, as data and  
 23 information allow (see Table 1-3). Concise answers appear in text boxes at the end of each chapter.  
 24 The final chapter provides major conclusions and a synthesis of information presented across the  
 25 assessment. It also highlights significant gaps in information that contribute to uncertainties about  
 26 those conclusions (see Chapter 10).

**Table 1-3. Research questions addressed by this assessment.**

Each chapter addresses research questions developed under the Study Plan. Chapters 2 and 3 develop background on hydraulic fracturing and drinking water resources, respectively.

Chapter and water cycle stage	Research questions
-------------------------------	--------------------

<sup>1</sup> Information about this process is available online at <http://yosemite.epa.gov/sab/sabproduct.nsf/02ad90b136fc21ef85256eba00436459/b436304ba804e3f885257a5b00521b3b!OpenDocument>.

Chapter and water cycle stage	Research questions
<b>Chapter 4 - Water Acquisition</b>	<ul style="list-style-type: none"> <li>• What are the types of water used for hydraulic fracturing?</li> <li>• How much water is used per well?</li> <li>• How might cumulative water withdrawals for hydraulic fracturing affect drinking water quantity?</li> <li>• What are the possible impacts of water withdrawals for hydraulic fracturing on water quality?</li> </ul>
<b>Chapter 5 - Chemical Mixing</b>	<ul style="list-style-type: none"> <li>• What is currently known about the frequency, severity, and causes of spills of hydraulic fracturing fluids and chemical additives?</li> <li>• What are the identities and volumes of chemicals used in hydraulic fracturing fluids, and how might this composition vary at a given site and across the country?</li> <li>• What are the chemical and physical properties of hydraulic fracturing chemical additives?</li> <li>• If spills occur, how might hydraulic fracturing chemical additives contaminate drinking water resources?</li> </ul>
<b>Chapter 6 - Well Injection</b>	<ul style="list-style-type: none"> <li>• How effective are current well construction practices at containing fluids- both liquids and gases- before, during, and after fracturing?</li> <li>• Can subsurface migration of fluids- both liquids and gases- to drinking water resources occur, and what local geologic or artificial features might allow this?</li> </ul>
<b>Chapter 7 - Flowback and Produced Water</b>	<ul style="list-style-type: none"> <li>• What is currently known about the frequency, severity, and causes of spills of flowback and produced water?</li> <li>• What is the composition of hydraulic fracturing flowback and produced water, and what factors might influence this composition?</li> <li>• What are the chemical and physical properties of hydraulic fracturing flowback and produced water constituents?</li> <li>• If spills occur, how might hydraulic fracturing flowback and produced water contaminate drinking water resources?</li> </ul>

Chapter and water cycle stage	Research questions
<b>Chapter 8 - Wastewater Treatment and Waste Disposal</b>	<ul style="list-style-type: none"> <li>• What are the common treatment and disposal methods for hydraulic fracturing wastewater, and where are these methods practiced?</li> <li>• How effective are conventional publicly owned treatment works and commercial treatment systems in removing organic and inorganic contaminants of concern in hydraulic fracturing wastewater?</li> <li>• What are the potential impacts from surface water disposal of treated hydraulic fracturing wastewater on drinking water treatment facilities?</li> </ul>
<b>Chapter 9 - Hazard Evaluation of Chemicals Across the Water Cycle Stages</b>	<ul style="list-style-type: none"> <li>• What are the toxicological properties of hydraulic fracturing chemical additives?</li> <li>• What are the toxicological properties of hydraulic fracturing flowback and produced water constituents?</li> </ul>

### 1.5. Intended Use

1 We expect that this report, as a synthesis of the science, will contribute to the understanding of the  
 2 potential impacts of hydraulic fracturing on drinking water resources and the factors that may  
 3 influence those impacts. The data and findings in this report can be used by federal, tribal, state,  
 4 and local officials; industry; and the public to better understand and address any vulnerabilities of  
 5 drinking water resources to hydraulic fracturing activities.

6 We expect this report will be used to help facilitate and inform dialogue among interested  
 7 stakeholders, including Congress, other federal agencies, states, tribal governments, the  
 8 international community, industry, NGOs, academia, and the general public. Additionally, the  
 9 identification of knowledge gaps will promote greater attention to these areas by researchers.

10 We also expect this report may support future assessment efforts. For instance, we anticipate that it  
 11 could contribute context to site-specific exposure or risk assessments of hydraulic fracturing, to  
 12 regional public health assessments, or to assessments of cumulative impacts of hydraulic fracturing  
 13 on drinking water resources over time or over defined geographic areas of interest.

14 Finally, and most importantly, this assessment advances the scientific basis for decisions by federal,  
 15 state, tribal, and local officials; industry; and the public on how best to protect drinking water  
 16 resources now and in the future.

## 1.6. References for Chapter 1

- [H.R. Rep. 111-316. Department of the Interior, Environment, and Related Agencies Appropriation Act, 2010: Conference report](#) (to accompany H.R. 2996), (2009). <http://www.gpo.gov/fdsys/pkg/CRPT-111hrpt316/pdf/CRPT-111hrpt316.pdf>
- [OMB](#) (U.S. Office of Management and Budget). (2004). Final information quality bulletin for peer review. Washington, DC: US Office of Management and Budget (OMB). <http://www.whitehouse.gov/sites/default/files/omb/assets/omb/memoranda/fy2005/m05-03.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2003). A summary of general assessment factors for evaluating the quality of scientific and technical information [EPA Report]. (EPA/100/B-03/001). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://www.epa.gov/spc/assess.htm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011c). Plan to study the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA/600/R-11/122). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/plan-study-potential-impacts-hydraulic-fracturing-drinking-water-resources-epa600r-11122>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012f). Study of the potential impacts of hydraulic fracturing on drinking water resources: Progress report. (EPA/601/R-12/011). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://nepis.epa.gov/exe/ZyPURL.cgi?Dockey=P100FH8M.txt>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013d). Supplemental programmatic quality assurance project plan for work assignment 5-83 technical support for the hydraulic fracturing drinking water assessment. Washington, D.C. <http://www2.epa.gov/sites/production/files/documents/literature-review-qapp1.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014g). Quality assurance project plan - Revision no. 2: Data and literature evaluation for the EPA's study of the potential impacts of hydraulic fracturing (HF) on drinking water resources [EPA Report]. Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014h). Quality management plan- Revision no. 2: Study of the potential impacts of hydraulic fracturing for oil and gas on drinking water resources [EPA Report]. Washington, D.C. <http://www2.epa.gov/hfstudy/quality-management-plan-revision-no-2-study-potential-impacts-hydraulic-fracturing-oil-and>

## **Chapter 2**

---

# Hydraulic Fracturing, Oil and Gas Production, and the U.S. Energy Sector

## 2. Hydraulic Fracturing, Oil and Gas Production, and the U.S. Energy Sector

1 This chapter provides general background information useful for understanding the in-depth  
2 technical chapters that follow. We describe the process and purpose of hydraulic fracturing and the  
3 situations and settings in which it is used (Section 2.1). Then, to place hydraulic fracturing in the  
4 context of well site operations, we describe activities from site assessment and selection through  
5 production to site closure. This helps illustrate the intensive nature of activities during the  
6 relatively short hydraulic fracturing phase during the life of a production well (Section 2.2). Finally,  
7 we characterize the prevalence of hydraulic fracturing in the United States, its importance in the oil  
8 and gas industry today and into the future, and its role in the U.S. energy sector (Sections 2.3 and  
9 2.4).

### 2.1. What is Hydraulic Fracturing?

10 Hydraulic fracturing is a stimulation technique used to increase production of oil and gas. Hydraulic  
11 fracturing involves the injection of fluids under pressures great enough to fracture the oil- and gas-  
12 production formations. Hydraulic fracturing fluid transfers the pressure generated by equipment at  
13 the surface into the subsurface to create fractures, and it carries and places the proppant into the  
14 fractures so that they remain “propped” open after the injection pumping pressure is terminated  
15 ([Gupta and Valkó, 2007](#)). Oil and gas can then flow through the fractures into the well and through  
16 the well to the surface. Hydraulic fracturing has been used since the late 1940s and for the first  
17 almost 50 years was used in vertical wells in conventional hydrocarbon reservoirs.<sup>1</sup> Hydraulic  
18 fracturing is still used in these settings, but the process has evolved; technological developments  
19 have led to the use of hydraulic fracturing in low-permeability (unconventional) hydrocarbon  
20 reservoirs that could not otherwise be profitably produced (see Text Box 2-1). Wells stimulated by  
21 hydraulic fracturing may be vertical, deviated, or horizontal in orientation (see Figure 2-1), and  
22 they may be newly drilled or older at the time the fracturing is done.

23

---


<sup>1</sup> A conventional reservoir is a reservoir in which buoyant forces keep hydrocarbons in place below a sealing caprock. Reservoir and fluid characteristics of conventional reservoirs typically permit oil or natural gas to flow readily into wellbores. The term is used to make a distinction from shale and other unconventional reservoirs, in which gas might be distributed throughout the reservoir at the basin scale, and in which buoyant forces or the influence of a water column on the location of hydrocarbons within the reservoir are not significant.

### Text Box 2-1. Is Hydraulic Fracturing “New”?

1 Hydraulic fracturing in one form or another has been in use since the late 1940s, when a fracturing technique  
2 was patented by the Stanolind Oil and Gas Company and licensed to the Halliburton Oil Well Cementing  
3 Company. There are precedents that go back even further: reports from the early days of the oil and gas  
4 industry in the mid-19th century show producers trying to increase production by pumping fluids or  
5 dropping explosives into wells ([Montgomery and Smith, 2010](#)). Throughout its history, hydraulic fracturing  
6 has been used as a production technique to increase, or “stimulate,” production from a well (some hydraulic  
7 fracturing methods are used to stimulate production in water wells, which is outside the scope of this report).

8 The groundwork for the transformation to modern hydraulic fracturing was laid in the 1970s and early  
9 1980s, when a coalition of private companies, government agencies, and industry groups began sponsoring  
10 research into shale gas development technologies. During that period, Congress began to offer tax incentives  
11 to induce producers to apply the developing technologies in the field ([Wang and Krupnick, 2013](#); [EIA, 2011a](#);  
12 [Yergin, 2011](#)). The first horizontal wells were drilled in the mid-1980s in the Austin Chalk oil-bearing  
13 formation in Texas ([Pearson, 2011](#); [Haymond, 1991](#)). Directional drilling and other emerging technologies  
14 matured in the late 1990s. In 2001, the Mitchell Energy company found a way to economically fracture the  
15 Barnett Shale in Texas. The company was bought by Devon Energy, a company with advanced experience in  
16 horizontal drilling. In 2002, seven wells were drilled and developed in the Barnett Shale using both horizontal  
17 drilling and hydraulic fracturing. Fifty-five more wells were completed in 2003 ([Yergin, 2011](#)). The  
18 techniques were rapidly adopted and further developed by others. By 2003/2004, modern hydraulic  
19 fracturing in the Barnett Shale was producing more gas than all other shale gas wells in the rest of the country  
20 (mostly shallow shale gas production in the Appalachian and Michigan Basins, see Section 2.4.1) ([DOE,](#)  
21 [2011b](#); [Montgomery and Smith, 2010](#)). By 2005, the new techniques were being used in low-permeability  
22 hydrocarbon plays outside of Texas, and modern hydraulic fracturing soon became the industry standard,  
23 driving the surge in U.S. production of natural gas.

24 Despite the long history of hydraulic fracturing, the culmination of technical innovations in the early 2000s  
25 represent an appreciable change. These innovations have made hydraulic fracturing economical enough to  
26 become standard practice in the oil and gas industry. Modern hydraulic fracturing (sometimes referred to as  
27 high-volume hydraulic fracturing) is characterized by the use of long horizontal wells and higher volumes of  
28 more complex mixtures of water, proppants, and chemical additives for injection as compared to earlier  
29 fracturing practices. Wells are often deep and long: shale gas production wells are commonly 5,000 to 13,500  
30 ft (1,524 to 4,115 m) deep with long horizontal sections of 2,000 to 5,000 ft (610 to 1,524 m) or more in  
31 length. Other important advances occurred in oil and gas geophysical survey techniques (such as downhole  
32 telemetry and 3D seismic imaging) ([Wang and Krupnick, 2013](#); [EIA, 2011a](#)). Hydraulic fracturing continues to  
33 be conducted in vertical production wells as well as conventional reservoirs using some of these newer  
34 techniques. Modern hydraulic fracturing has made it possible to extract resources in previously untapped  
35 hydrocarbon-bearing geologic settings, altering and expanding the geographic range of oil and gas production  
36 activities.

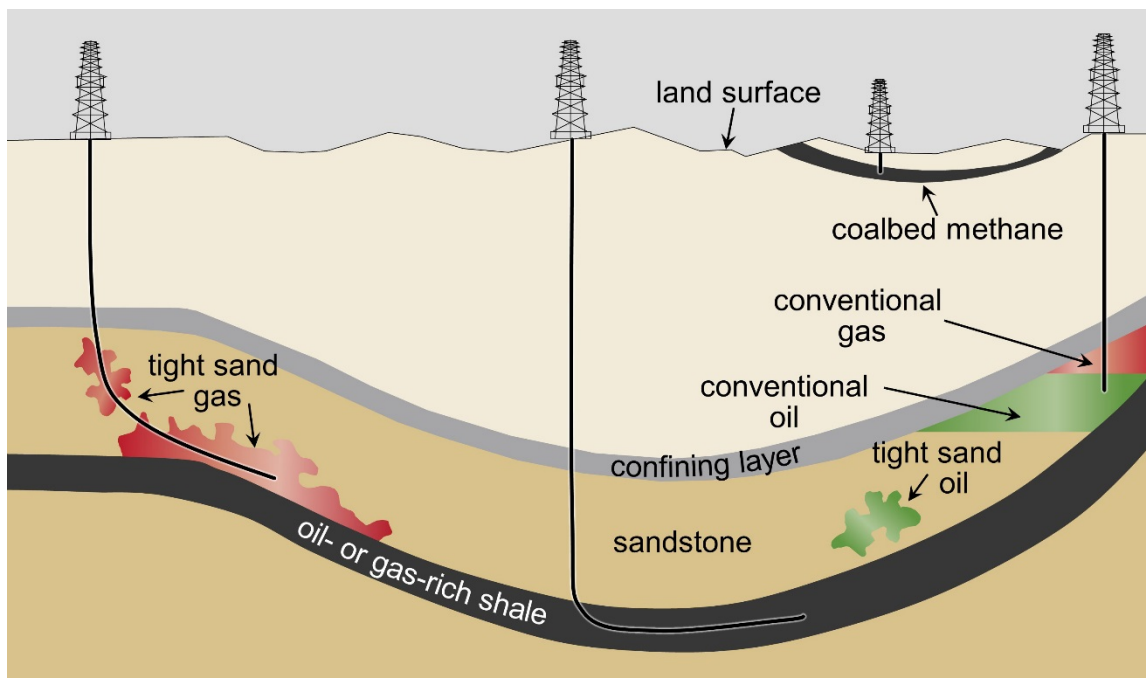

**Figure 2-1. Schematic cross-section of general types of oil and gas resources and the orientations of production wells used in hydraulic fracturing.**

Shown are conceptual illustrations of types of oil and gas wells. A vertical well is producing from a conventional oil and gas deposit (right). In this case, a thin, gray confining layer serves to “trap” oil (green) or gas (red). Also shown are wells producing from unconventional formations: a vertical coalbed methane well (second from right); a horizontal well producing from a shale formation (center); and a deviated well producing from a tight sand formation (left). Note: Figure not to scale. Modified from [USGS \(2002\)](#) and [Newell \(2011\)](#).

1 Historically, oil and gas have been extracted from conventional reservoirs that develop when  
 2 hydrocarbons formed in deeper geologic source formations migrate until they accumulate  
 3 underneath an impermeable layer (see Figure 2-1). Extraction practices vary. In settings where a  
 4 reservoir is permeable enough and under enough pressure to yield a relatively high rate of  
 5 hydrocarbon flow into a well, the economic extraction of oil and/or gas may be as simple as using a  
 6 drilled well to enable hydrocarbons to flow to the surface under the natural pressure of the  
 7 reservoir. In other cases, producers may inject water and/or carbon dioxide under pressure into  
 8 the reservoir via one or more nearby wells to help move and enhance production of the oil and gas.  
 9 But essentially, producers are drawing on hydrocarbons that have already accumulated in a  
 10 relatively accessible form.

11 Hydraulic fracturing is one of several methods used to enhance production from oil and gas  
 12 reservoirs. It is distinct from other methods of hydrocarbon extraction (known generally as  
 13 enhanced recovery techniques) that involve injecting fluids to influence either reservoir pressure,  
 14 fluid viscosity, or both. The primary purpose of hydraulic fracturing is to increase the surface area  
 15 of the reservoir rock by creating fractures that are propped open, allowing the hydrocarbon to flow  
 16 from the rock through the fractures to the well and through the well up to the surface.



1 Hydraulic fracturing, in conjunction with horizontal and directional drilling, has made it possible to  
2 economically extract oil and gas from “unconventional” geologic formations (see Text Box 2-2),  
3 such as the relatively low permeability shales in which oil and gas form (see Figure 2-1). With  
4 modern horizontal drilling techniques, producers can, for example, drill a single well that follows  
5 the contours of a relatively thin, horizontal shale formation. Such drilling allows fracturing to be  
6 conducted in a long horizontal section of the well that accesses an extensive portion of the oil- or  
7 gas-bearing formation. Unconventional formations include:

- 8 • **Shales.** Organic-rich black shales are the source rocks in which oil and gas form on geologic  
9 timescales. Shales have very low permeability, and the hydrocarbons are contained in the  
10 pore space in the shales. Some shales produce predominantly gas and others predominantly  
11 oil; often there will be some coproduction of gas from oil wells and coproduction of liquid  
12 hydrocarbons from gas wells ([USGS, 2013a](#); [EIA, 2011a](#)).
- 13 • **Tight formations.** “Tight” sands (sandstones), siltstone, carbonates, etc., are relatively low  
14 permeability, non-shale, sedimentary formations that can contain hydrocarbons. The  
15 hydrocarbons are contained in the pore space of the formations. There is a continuum in  
16 permeability between “tight” formations which require hydraulic fracturing to be produced  
17 economically and sandstone (and other) formations that do not. In the literature, “tight gas”  
18 is generally distinguished from “shale gas,” while oil resources from shale and tight  
19 formations are frequently lumped together under the label “shale oil” or “tight oil”  
20 ([Schlumberger, 2014](#); [USGS, 2014a](#)).
- 21 • **Coalbeds.** Hydraulic fracturing can be used to extract methane (the primary component of  
22 natural gas) from coal seams. In coalbeds, the methane is adsorbed to the coal surface  
23 rather than contained in pore space or structurally trapped in the formation. Pumping the  
24 injected and formation water out of the coalbeds after fracturing serves to depressurize the  
25 coal, thereby allowing the methane to desorb and flow into the well and to the surface  
26 ([USGS, 2000](#)).

### Text Box 2-2. “Conventional” Versus “Unconventional.”

27 The terms “conventional” and “unconventional” are widely used in the literature to distinguish types of oil  
28 and gas reservoirs, plays, wells, production techniques, and more. In this report, the terms are used to  
29 distinguish different types of hydrocarbon resources: “conventional” resources are those that can  
30 economically be extracted using long-established technologies, and “unconventional” resources are those  
31 whose extraction has become economical only with the advances that have occurred in modern hydraulic  
32 fracturing (often coupled with directional drilling) in recent years.

33 Note that as modern hydraulic fracturing has become industry standard, the word “unconventional” is less  
34 apt than it once was to describe these resources. In a sense, “the unconventional has become the new  
35 conventional” ([NETL, 2013](#)).

36 Although the goal of stimulation by hydraulic fracturing is the same wherever it is employed, the  
37 way it is accomplished varies due to a number of factors. General location and geologic conditions,

1 whether the well is existing or newly drilled, the proximity of the well to infrastructure and raw  
2 materials, operator preferences, and other factors can affect how a hydraulic fracturing operation is  
3 designed and carried out. Technological advances have made it possible to drill deeper and longer  
4 horizontal wells, to conduct fracturing through longer portions of the well, and to place multiple  
5 wells on a single well pad ([NETL, 2013](#); [Montgomery and Smith, 2010](#)). Many facets of hydraulic  
6 fracturing-related technology have changed since they were first pioneered (see Text Box 2-1). How  
7 hydraulic fracturing is practiced now (especially in the long horizontal wells) is different from how  
8 it was conducted during the first decades of its use. As operators gain experience with both  
9 evolving and new technologies, practices will continue to change.

10 The following three maps show the locations of major shale oil and gas resources, tight gas  
11 resources, and coalbed methane resources, respectively, in the continental United States (see  
12 Figure 2-2, Figure 2-3, and Figure 2-4). These maps represent resources that are being exploited  
13 now or could be exploited in the future. Hydraulic fracturing continues to be used to enhance  
14 production in conventional reservoirs (not shown), although it is uncertain how often this occurs.

15 The formations hydraulically fractured for gas or oil vary in their depth below the surface. For  
16 example, the Marcellus Shale (found primarily in Pennsylvania, New York, and West Virginia) is  
17 found at depths of 4,000 to 8,500 ft (1,200 to 2,600 m), the Barnett Shale (Texas) is found at depths  
18 of 6,500 to 8,500 ft (2,000 to 2,600 m), and the Haynesville-Bossier Shale (Louisiana and Texas) is  
19 found at depths of 10,500 to 13,500 ft (3,200 to 4,100 m) ([NETL, 2013](#)). These represent some of  
20 the largest gas-producing shale formations or shale plays. However, some other plays are  
21 shallower. Parts of the Antrim (Michigan), Fayetteville (Arkansas), and New Albany (Indiana and  
22 Kentucky) shale plays, for example, are less than 2,000 ft (600 m) deep ([NETL, 2013](#); [GWPC and  
23 ALL Consulting, 2009](#)). Exploitation of thin coal seams often takes place close to the surface as well.  
24 In the San Juan Basin (New Mexico), coal seams are 550 to 4,000 ft (170 to 1,200 m) deep; in the  
25 Powder River Basin (Wyoming and Montana) they are 450 to greater than 6,500 ft (140 to 2,000 m)  
26 deep, and in the Black Warrior Basin (Alabama and Mississippi) depths can range from the ground  
27 surface to 3,500 ft (1,100 m) ([ALL Consulting, 2004](#)). See Chapter 6 for more information on the  
28 depths of these formations and plays.

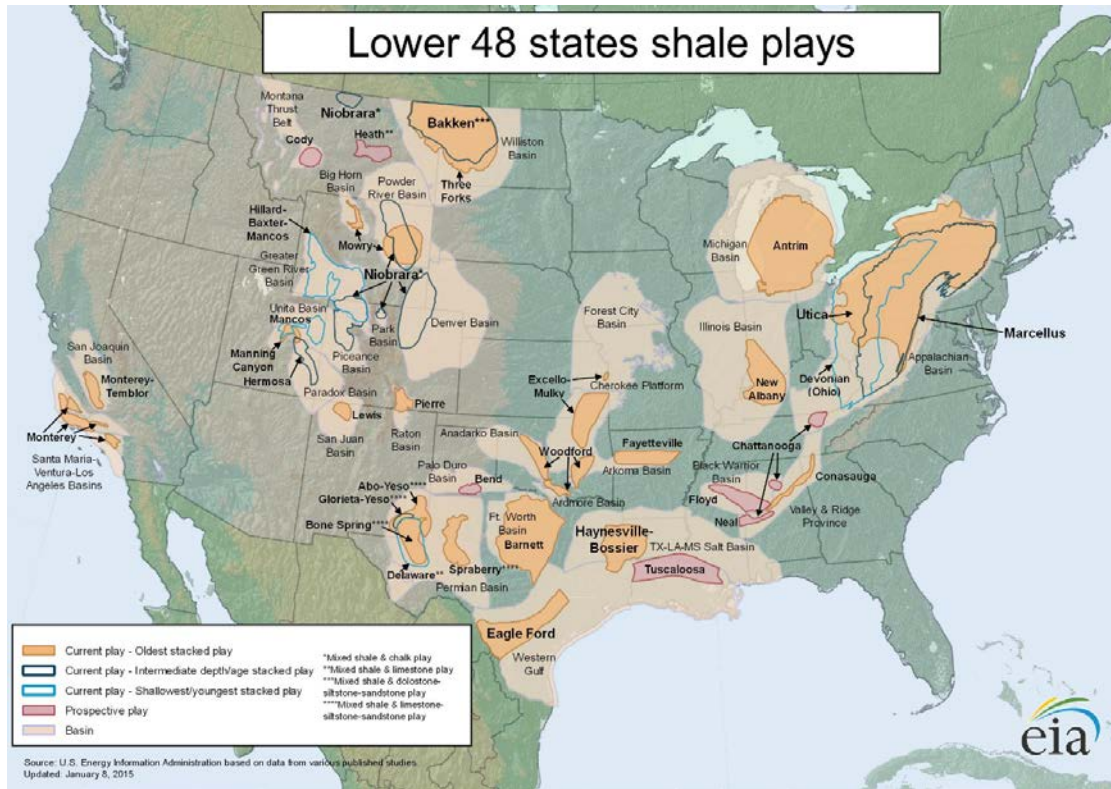


Figure 2-2. Shale gas and oil plays in the lower 48 United States.

Source: [EIA \(2015b\)](#).



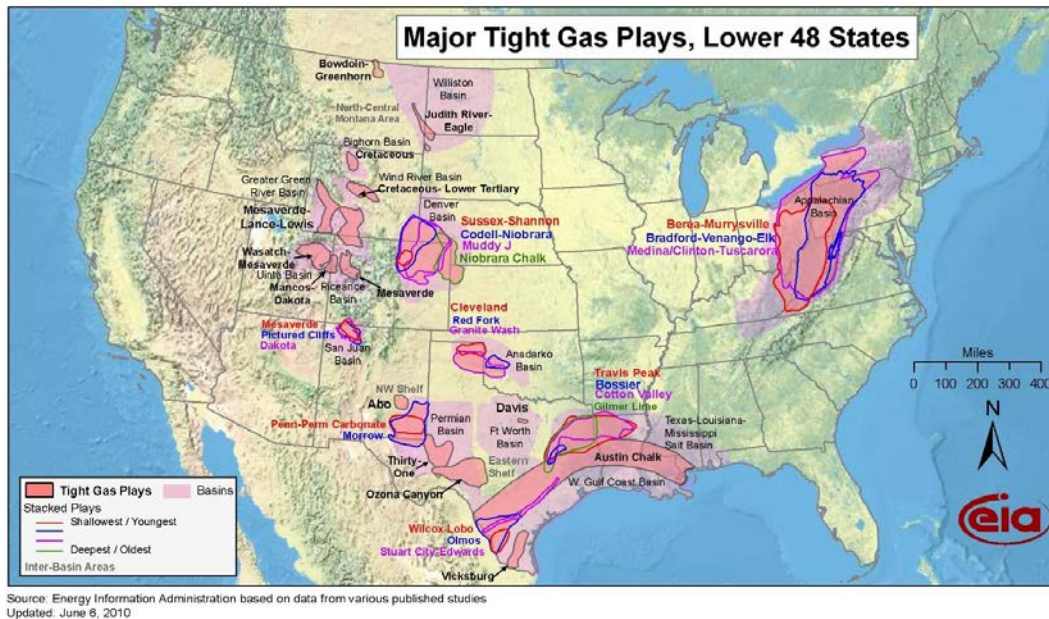


Figure 2-3. Tight gas plays in the lower 48 United States.

Source: [EIA \(2011b\)](http://www.eia.doe.gov).

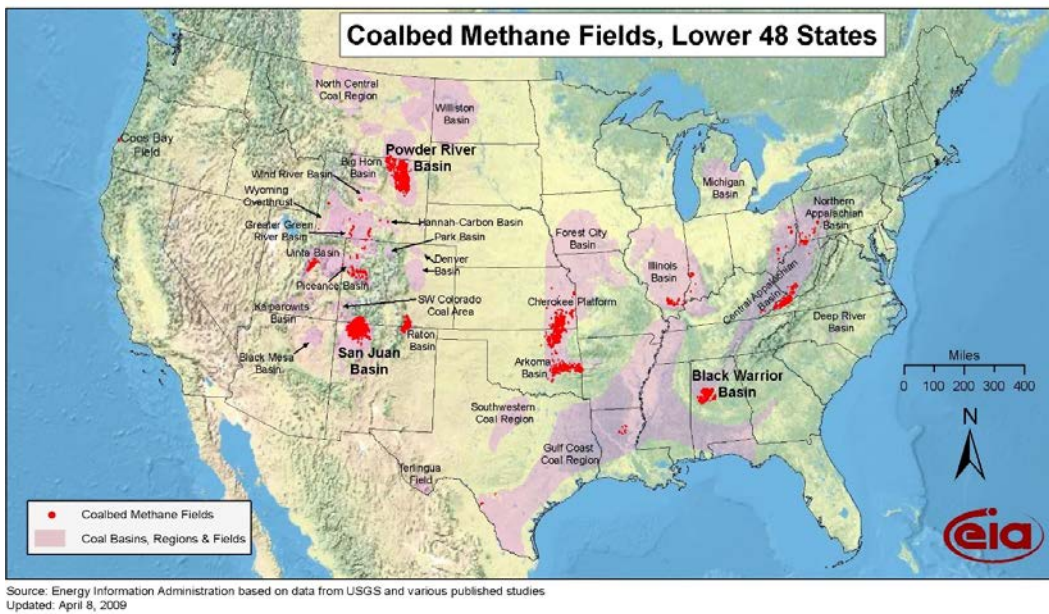


Figure 2-4. Coalbed methane fields in the lower 48 United States.


Source: [EIA \(2011b\)](http://www.eia.doe.gov).

## 2.1. Hydraulic Fracturing and the Life of a Well

1 Hydraulic fracturing itself is a relatively short-term process, with the timeframe for a typical  
 2 fracturing treatment being two to 10 days during which fluids are injected into the well to fracture  
 3 the oil- and gas-bearing geologic formations (Halliburton, 2013; NYSDEC, 2011). However, it is a  
 4 period of intense activity—the most activity that takes place at a well site during its existence.

5 In this section, we briefly describe some of the supporting and ancillary activities that take place at  
 6 the well site, from initial site development through production and ultimately to closure (see Figure  
 7 2-5). This time period likely ranges from years to decades, depending on factors such as rate of  
 8 depletion of the oil or gas, cost of production, and the price of oil and gas. The rate of oil and gas  
 9 depletion in the reservoir is somewhat uncertain in unconventional formations because there is  
 10 relatively little history on which to base predictions.

11 The overview of well operations presented in this section is broad and is provided to illustrate  
 12 common activities and describe some specific operational details. The details of well preparation,  
 13 operations, and closure vary from company to company, from play to play, from jurisdiction to  
 14 jurisdiction, and from well to well. The various activities involved in well development and  
 15 operations can be conducted by the well owner and/or operator, owner/operator representatives,  
 16 service companies, or other third parties contractors working for the well owner.

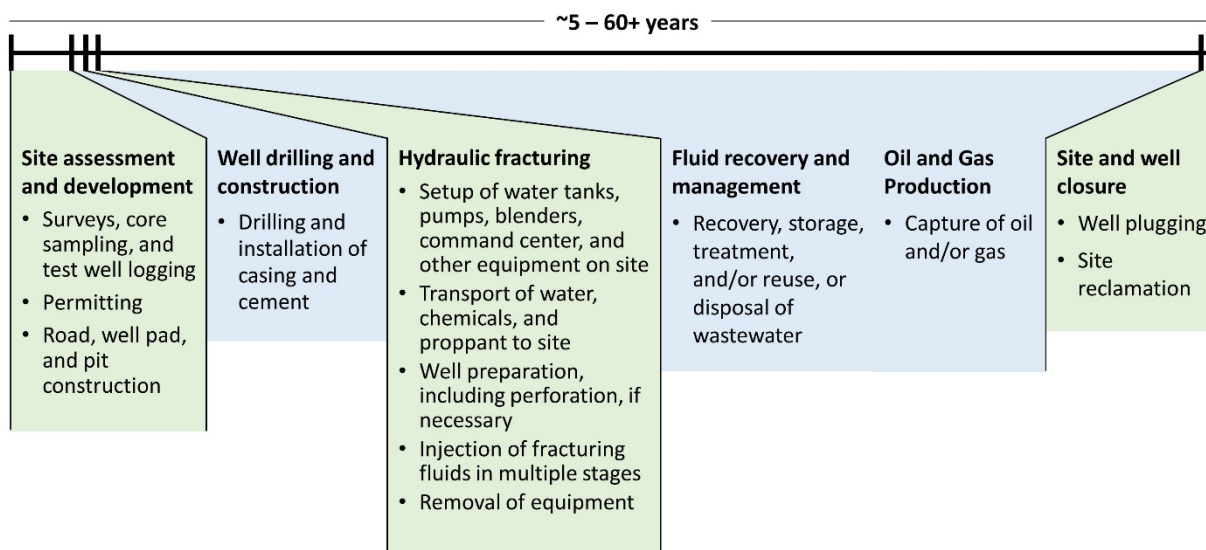

**Figure 2-5. Generalized timeline and summary of activities that take place during the operational phases of an oil or gas well site operation in which hydraulic fracturing is used.**

Relative duration of phases is approximate.

### 2.1.1.1. Site and Well Development

1 Numerous activities occur to assess and develop the site and to drill and construct the production  
2 well before hydraulic fracturing and production can occur.

#### 2.1.1.1.1. Site Assessment and Development

3 Identifying a geologically suitable well site requires integrating data from geophysical surveys  
4 (including seismic surveys) that help to delineate subsurface features with other geologic  
5 information from rock core samples. Cores may be obtained while drilling exploratory wells or test  
6 holes. Core samples provide firsthand information on the characteristics of the oil- or gas-bearing  
7 formation, such as porosity, permeability, and details about the quantities and qualities of the  
8 hydrocarbon resource. Drilling rates and drill cuttings help identify the strata being drilled through  
9 and can help confirm and correlate stratigraphy and formation depths, including the depths of  
10 water-bearing formations.<sup>1</sup> Well logging (also known as wireline logging) is especially useful  
11 combined with core analysis for understanding the properties of formations ([Kundert and Mullen,  
12 2009](#)).<sup>2</sup>

13 Logistical factors involved in the selection of the well drilling site include topography; proximity to  
14 facilities such as roads, pipelines, and water sources; well spacing considerations; well setback  
15 requirements; potential for site erosion; location relative to environmentally sensitive areas; and  
16 proximity to populated areas ([Drohan and Brittingham, 2012](#); [Arthur et al., 2009a](#)). Before  
17 developing the site and initiating well drilling, the oil and gas company (or their representative)  
18 obtains a mineral rights lease, negotiates with landowners, and applies for a drilling permit from  
19 the appropriate state and local authorities. During the project, leases and permissions are also  
20 needed for other activities including performing seismic surveys and drilling exploratory holes  
21 ([Hyne, 2012](#)). This initial site assessment phase of the process may take several months ([King,  
22 2012](#)).

23 Site preparation is necessary to enable equipment and supplies to reach the well area. Typically, the  
24 site is surveyed first, and then an access road may need to be built to accommodate truck traffic  
25 ([Hyne, 2012](#)). The operator then levels and grades the site to manage drainage and to allow  
26 equipment to be hauled to and placed on site. Next, the operator may excavate and grade several  
27 impoundments or storage pits near the well pad. In some cases, steel tanks may be used to hold  
28 fluids instead of, or in addition to, pits. The pits may hold water intended for drilling fluids,  
29 materials generated during drilling such as used drilling mud and drill cuttings, or the flowback and  
30 produced waters after fracturing ([Hyne, 2012](#)). Pit construction is generally governed by local  
31 regulations; federal regulations may also apply on federal and Indian Country. In some areas,  
32 regulations may require pits to be lined to prevent fluid seepage into the shallow subsurface or may

---

<sup>1</sup> Drill cuttings are ground rock produced by the drilling process.

<sup>2</sup> Well logging consists of a continuous measurement of physical properties in or around the well with electrically powered instruments to infer formation properties. Measurements may include electrical properties (resistivity and conductivity), sonic properties, active and passive nuclear measurements, measurements of the wellbore, pressure measurement, formation fluid sampling, sidewall coring tools and others. Measurements may be taken via a wireline, which is a wire or cable that is used to deploy tools and instruments downhole and that transmits data to the surface.

1 prohibit pits altogether. Some sites have piping along the surface of the well pad or in the shallow  
2 subsurface that delivers water used for hydraulic fracturing, removes flowback and produced  
3 water, or transports the oil and gas once production begins ([Arthur et al., 2009a](#)).

4 After site and well pad preparation, drill rigs and associated equipment (e.g., the drill rig platform,  
5 drilling mud system components, generators, chemical storage tanks, blowout preventer, fuel  
6 storage tanks, cement pumps, drill pipe, and casing) are moved on and off the pad at the different  
7 stages of well drilling and completion. During drilling and completion, well pads can range in size  
8 from less than an acre to several acres depending on the scope of the operations ([King, 2012](#);  
9 [NYSDEC, 2011](#)).

### 10 *Well Drilling and Construction*

11 Construction of the production well involves the drilling of the hole (or wellbore), along with the  
12 installation and cementing of a series of casing strings to support the wellbore and isolate and  
13 protect both the hydrocarbons being produced and any water-bearing zones through which the  
14 well passes.<sup>1</sup> In certain settings, some portions of the well can be completed as open holes.<sup>2</sup> Details  
15 on these and other well construction activities are presented in Chapter 6 and Appendix D.

16 The operator begins drilling by lowering and rotating the drill string, which consists of the drill bit,  
17 drill pipe (see Figure 2-6), and drill collars (heavy pieces of pipe that add weight to the bit). The  
18 drill pipe attaches to the drill bit, rotating and advancing the bit; as drilling advances, new sections  
19 of pipe are added at the surface, enabling the drilling to proceed deeper ([Hyne, 2012](#)). A drilling  
20 fluid is circulated during drilling.<sup>3</sup> The drilling fluid, which may be water-based or oil-based, is  
21 pumped down to the drill bit, where it cools and lubricates the drill bit, counterbalances downhole  
22 pressures, and lifts the drill cuttings to the surface ([King, 2012](#)).

23 Although all wells are initially drilled vertically, finished well orientations include vertical, deviated,  
24 and horizontal. The operator selects the well orientation that will provide access to the targeted  
25 zone(s) within a formation and that will align the well with existing fractures and other geologic  
26 structures to optimize production. Deviated wells may be “S” shaped or continuously slanted.  
27 Horizontal wells have lateral sections oriented approximately 90 degrees from the vertical portion  
28 of the well. In wells completed horizontally, the lengths of these laterals can range from 2,000 to  
29 5,000 ft (610 to 1,524 m) or more ([Hyne, 2012](#); [Miskimins, 2008](#); [Bosworth et al., 1998](#)).<sup>4</sup>  
30 Horizontal wells are instrumental in accessing productive areas of thin and laterally extensive oil-  
31 and gas-bearing shales. Although the portion of hydraulically fractured wells that are horizontal is  
32 growing, in some areas, such as California, hydraulic fracturing is still primarily conducted in  
33 vertical wells ([CCST, 2015](#)).

---

<sup>1</sup> Casing is steel pipe that is lowered into a wellbore. Casing extends from the bottom of the hole to the surface.

<sup>2</sup> An open hole completion is a well completion that has no casing or liner set across the reservoir formation, allowing the produced fluids to flow directly into the wellbore.

<sup>3</sup> Drilling fluid is any of a number of liquid and gaseous fluids and mixtures of fluids and solids (as solid suspensions, mixtures, and emulsions of liquids, gases, and solids) used when drilling boreholes ([Schlumberger, 2014](#)).

<sup>4</sup> A lateral is a horizontal section of a well.





**Figure 2-6. Pulling drill pipe onto the drilling platform.**

Source: Joshua Doubek, Wikicommons, CC-BY-SA-3.0.

1 The drilling and well construction proceeds with repeated steps (the drill string is lowered, rotated,  
2 drilled to a certain depth, pulled out, and then the casing is lowered into the hole, set, and  
3 cemented). Successively smaller diameters of casing are used as the hole is drilled deeper (see  
4 Figure 2-7). Selection and installation of the casing strings is important for several purposes,  
5 including isolating hydrocarbon reservoirs from nearby aquifers, isolating over-pressured zones,  
6 and transporting hydrocarbons to the surface ([Hyne, 2012](#)). Newly installed casing strings are  
7 cemented in place before drilling continues (or before the well is completed in the instance of the  
8 production casing). The cement protects the casing from corrosion by formation fluids, stabilizes  
9 the casing and the wellbore, and prevents fluid movement along the well between the outside of the  
10 casing and wellbore ([Renpu, 2011](#)). The well can be cemented continuously from the surface down  
11 to the production zone of the well. Partially cemented wells are also possible with, for example,  
12 cement from the surface to some distance below the deepest fresh water-bearing formation and  
13 perhaps cement across other deeper formations. Chapter 6 and Appendix D contain more details on  
14 casing and cement.





**Figure 2-7. Sections of surface casing lined up and being prepared for installation at a well site in Colorado.**

Photo credit: Gregory Oberley (U.S. EPA).

1 When drilling, casing, and cementing are finished, the well can be completed in the production zone  
2 in several ways. The production casing may be cemented all the way through the production zone  
3 and perforated prior to hydraulic fracturing in the desired locations. Alternatively, operators may  
4 use an open hole completion, in which the casing is set just into the production zone and cemented.  
5 The remainder of the wellbore within the production zone is left open with no cement ([Hyne,  
6 2012](#)). Once all aspects of well construction are completed, the operator can remove the drilling rig,  
7 install the wellhead, and prepare the well for stimulation by hydraulic fracturing and subsequent  
8 production.

### **2.1.1. Hydraulic Fracturing**

9 Hydraulic fracturing is typically a short, intense, repetitive process requiring specialized equipment  
10 and (for high volume horizontal wells) large amounts of water, chemicals, and proppant. Machinery  
11 and equipment are often brought to the site mounted on trucks and remain that way during use.  
12 Tanks, totes, and other storage containers of various sizes holding water and chemicals are also  
13 transported and installed on site. Figure 2-8 shows a well pad prepared for hydraulic fracturing  
14 with the necessary equipment and structures.




**Figure 2-8. Hydraulic fracturing operation in Troy, PA.**

Site with all equipment on site in preparation for injection. Source: [NYSDEC \(2011\)](#).

### **2.1.1.2. Injection Process**

- 1 Prior to injection, hydraulic fracturing fluids are mixed using specialized feeding and mixing
- 2 equipment. The mixing is generally performed mechanically on a truck-mounted blender and is
- 3 electronically monitored and controlled by the operator in a separate van (see Chapter 5).
- 4 Numerous hoses and pipes are used to transfer hydraulic fracturing fluid components from storage
- 5 units to the mixing equipment and ultimately to the wellhead.
  
- 6 A wellhead assembly is temporarily installed on the wellhead during the fracture treatment to
- 7 allow high pressures and volumes of proppant-laden fluid to be injected into the well. Pressures
- 8 required for fracturing can vary widely depending on depth, formation pressure, and rock type.
- 9 Fracturing pressures have been reported ranging from 4,000 psi to 12,000 psi ([Ciezobka and Salehi,](#)
- 10 [2013; Abou-Sayed et al., 2011; Thompson, 2010](#)). The pressure during fracturing is measured using
- 11 pressure gauges, which can be installed at the surface and/or downhole ([Ross and King, 2007](#)).
- 12 Figure 2-9 shows two wellheads side-by-side being prepared for fracturing.



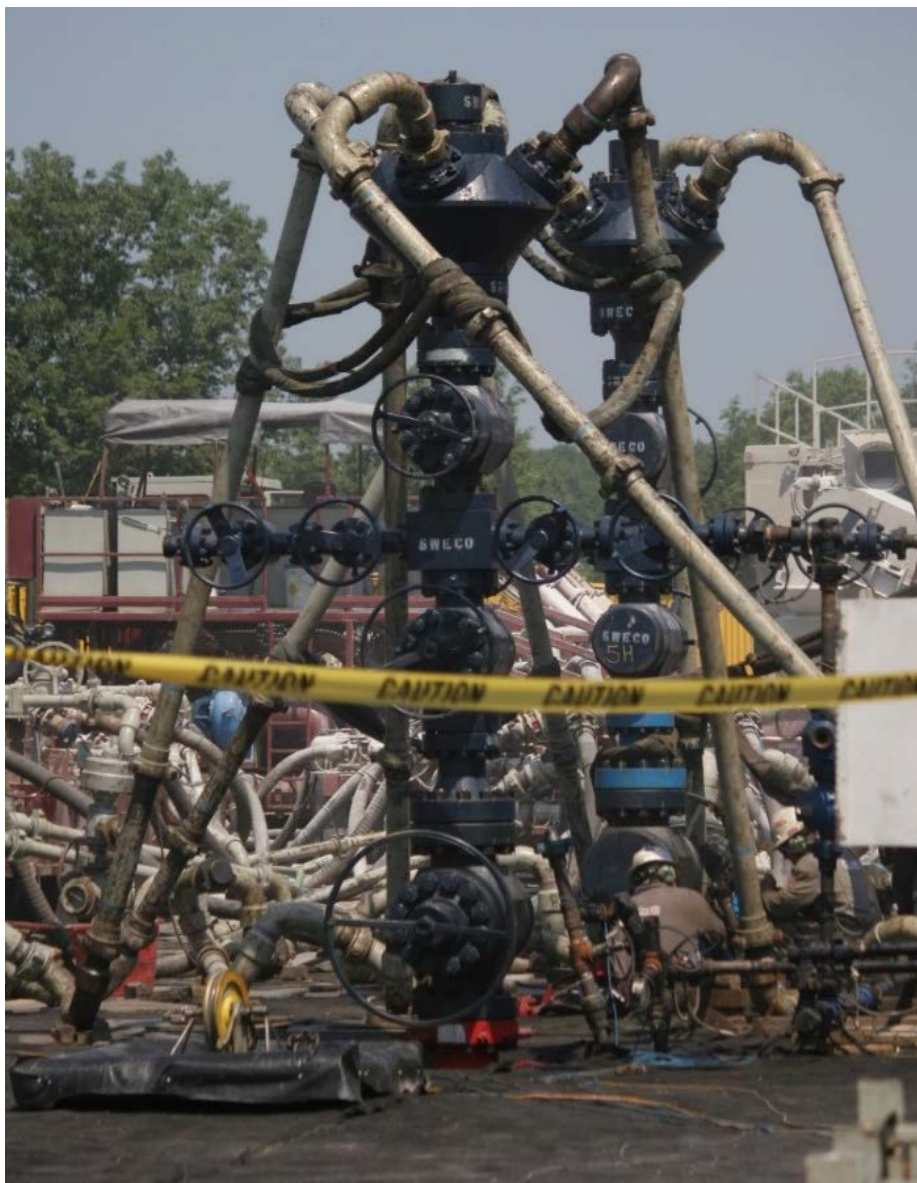

**Figure 2-9. Two wellheads side-by-side being prepared for hydraulic fracturing at a well site in Pennsylvania.**

Photo credit: Mark Seltzer (U.S. EPA).

- 1 The entire length of the well in the production zone is not fractured all at once; instead, shorter
- 2 lengths or segments of the well in the production zone are isolated and fractured in “stages” ([Lee et](#)
- 3 [al., 2011](#)). Each stage of a fracturing job can consist of phased injection of different fluids consisting
- 4 of varying components (i.e., chemicals and additives). These different fluids (1) remove excess
- 5 drilling fluid or cement from the formation (often using acid) ([GWPC and ALL Consulting, 2009](#)),
- 6 (2) initiate fractures (“pad fluid” without proppant), (3) carry the proppant ([Hyne, 2012](#)), and
- 7 (4) flush the wellbore to ensure that all proppant-laden fluids reach the fractures. Each phase

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 requires moving up to millions of gallons of fluids around the site through various hoses and lines,  
2 blending the fluids, and injecting them at high pressures down the well.

3 The total number of stages depends on the formation properties and the orientation and length of  
4 the well. As technology has improved, the lengths of laterals in horizontal wells and the numbers of  
5 stages per well have tended to increase ([NETL, 2013](#); [Pearson et al., 2013](#)). The number of stages  
6 per well can vary, with several sources suggesting that between 10 and 20 is typical ([GNB, 2015](#);  
7 [Lowe et al., 2013](#)). The full range reported in the literature is much wider, with one source  
8 documenting between 1 and 59 stages per well ([Pearson et al., 2013](#)) and others reporting values  
9 within this range ([NETL, 2013](#); [STO, 2013](#); [Allison et al., 2009](#)). For more details on hydraulic  
10 fracturing stages, see Chapter 5, Section 5.2.

11 The induced fractures are designed to achieve the optimum drainage of hydrocarbons from the  
12 reservoir formations. Engineers can design fracture systems using modeling software that requires  
13 a significant amount of data on formation permeability, porosity, in situ stress, mineralogy, and  
14 geologic barrier locations, among other factors ([Holditch, 2007](#)). Microseismic monitoring during  
15 fracturing can be used to characterize the horizontal and vertical extent of the fractures created and  
16 assist with the design of future fracturing jobs ([Cipolla et al., 2011](#)). Post-fracture monitoring of  
17 pressure or tracers can also help characterize the results of a fracturing job. More details of  
18 injection, fracturing, and related monitoring are provided in Chapter 6 and Appendix D.

### **2.1.1.3. Fracturing Fluids**

19 The fracturing fluids injected into the well serve a variety of purposes and require chemical  
20 additives to perform properly (see Chapter 5, Section 5.3). Depending on the geologic setting,  
21 reservoir geochemistry, production type, proppant size, and other factors, operators typically  
22 choose to use one of several common types of fracturing fluid systems ([Arthur et al., 2014](#);  
23 [Spellman, 2012](#); [Gupta and Valkó, 2007](#)). Water-based fracturing fluids are the most common, but  
24 other fluid types can be used such as: foams or emulsions made with nitrogen, carbon dioxide, or  
25 hydrocarbons; acid-based fluids; and others ([Montgomery, 2013](#); [Saba et al., 2012](#); [Gupta and](#)  
26 [Hlidek, 2009](#); [Gupta and Valkó, 2007](#); [Halliburton, 1988](#)). The most common water-based fluid  
27 systems are slickwater formulations, which are typically used in very low permeability reservoirs,  
28 and gelled fracturing fluids, which can be used in reservoirs with higher permeability ([Barati and](#)  
29 [Liang, 2014](#)).<sup>1,2</sup> More details of hydraulic fracturing fluid systems are discussed in Section 5.3.  
30 Importantly, chemical usage in the industry is continually changing as processes are tested and  
31 refined by companies. Shifts in fluid formulations are driven by economics, technological  
32 developments, and concerns about environmental and health impacts.

---

<sup>1</sup> Slickwater is a type of fracturing fluid that consists mainly of water with a very low portion of additives like polymers that serve as friction reducers to reduce friction loss when pumping the fracturing fluid downhole ([Barati and Liang, 2014](#)).

<sup>2</sup> Gelled fluids are fracturing fluids that are usually water-based with added gels to increase the fluid viscosity to aid in the transport of proppants ([Spellman, 2012](#); [Gupta and Valkó, 2007](#)).

1 The largest constituent of a typical hydraulic fracturing fluid is water (see Figure 2-10). The water  
2 sources used for hydraulic fracturing base fluid include ground water, surface water, treated  
3 wastewater, and reused flowback or produced water from other wells ([URS Corporation, 2011](#);  
4 [Blauch, 2010](#); [Kargbo et al., 2010](#)).<sup>1</sup> The water may be brought to the production well site via trucks  
5 or piping, or it may be locally sourced (for example, pumped from a local river or obtained from a  
6 water well tapping local ground water). Selection of water sources depends upon availability, cost,  
7 quality of the water, and the logistics of delivering it to the site. Chapter 4 provides additional  
8 details on water acquisition and the amount of water used for hydraulic fracturing.



**Figure 2-10. Water tanks (blue, foreground) lined up for hydraulic fracturing at a well site in central Arkansas.**

Photo credit: Martha Roberts (U.S. EPA).

9 Proppants are, by volume, second to the base fluid in the hydraulic fracturing fluid system. Silicate  
10 minerals, most notably quartz sand, are the most commonly used proppants. Increasingly, silicate  
11 proppants are being coated with resins that help prevent development and flowback of particles or  
12 fragments of particles. Ceramic materials, such as those based on calcined (heated) bauxite or  
13 calcined kaolin (mullite) are also used as proppants due to their high strength and resistance to  
14 crushing and deformation ([Beckwith, 2011](#)).

---

<sup>1</sup> Base fluid is the fluid into which additives and proppants are mixed to formulate a hydraulic fracturing fluid.



1 Additives comprise relatively small percentages of hydraulic fracturing fluid systems, generally  
2 constituting  $\leq 2.0\%$  of the fluid ([GWPC and ALL Consulting, 2009](#)). The EPA analyzed additive data  
3 in the EPA FracFocus project database 1.0 and estimated that hydraulic fracturing additives in 2011  
4 and 2012 totaled 0.43% of the total amount of fluid injected for hydraulic fracturing ([U.S. EPA,  
5 2015a](#)). Note that this small percentage can total tens of thousands of gallons of chemical additives  
6 for a typical high-volume hydraulic fracturing job (see Chapter 5, Section 5.4 for details on additive  
7 volumes). A given additive may consist of a single chemical ingredient, or it may have multiple  
8 ingredients. The mix of chemicals used in any particular fracturing job is influenced by the  
9 properties of the target formation, the amount and type of proppant that needs to be carried,  
10 operator preference, and to some degree, by local or regional availability of chemicals and potential  
11 interactions between chemicals ([King, 2012](#)). Chapter 5 includes details on the number, types, and  
12 estimated quantities of chemicals that can be used in hydraulic fracturing.

### 2.1.2. Fluid Recovery, Management, and Disposal

13 When the injection pressure is reduced at the end of the fracturing process, the direction of fluid  
14 flow reverses, with some of the injected hydraulic fracturing fluid flowing into the well and to the  
15 surface along with some naturally-occurring fluids from the production zone ([NYSDEC, 2011](#)). The  
16 fluid is initially a portion of the injected fluid, which decreases over the first few weeks or months  
17 until produced water originating from the fractured oil- or gas-bearing rock formation  
18 predominates. This recovery of produced water continues over the life of the well ([Barbot et al.,  
19 2013](#)). Chapter 7 presents descriptions and discussions of the composition and quantities of fluids  
20 recovered at the well, referred to as flowback and produced water.

21 The hydraulic fracturing flowback and produced water (sometimes referred to as hydraulic  
22 fracturing wastewater), as well as any other liquid waste from the well pad itself (e.g., rainwater  
23 runoff), is typically stored on-site in impoundments (see Figure 2-11) or tanks. This wastewater can  
24 be moved offsite via truck or pipelines. The majority of these hydraulic fracturing wastewaters  
25 nationally are managed through disposal into deep Class II injection wells regulated under the  
26 Underground Injection Control (UIC) program under the Safe Drinking Water Act (see Chapter 8).  
27 Other management strategies include treatment followed by discharge to surface water bodies, or  
28 reuse for subsequent fracturing operations either with or without treatment ([U.S. EPA, 2012f](#); [U.S.  
29 GAO, 2012](#)). Decisions regarding wastewater management are driven by factors such as cost  
30 (including costs of storage and transportation), availability of facilities for treatment, reuse, or  
31 disposal, and regulations ([Rassenfoss, 2011](#)). Wastewater management is yet another aspect of  
32 fracturing-related oil and gas production that is changing significantly. Chapter 8 contains details of  
33 the treatment, reuse and recycling, and disposal of wastewater.



**Figure 2-11. Impoundment on the site of a hydraulic fracturing operation in central Arkansas.**

Photo credit: Caroline E. Ridley (U.S. EPA).

### 2.1.3. Oil and Gas Production

1 After hydraulic fracturing, equipment is removed and partial site reclamation may take place if  
2 drilling of additional wells or laterals is not planned ([NYSDEC, 2011](#)). Operators may dewater, fill  
3 in, and regrade pits that are no longer needed. Parts of the pad may be reseeded, and the well pad  
4 may be reduced in size (e.g., from 3 to 5 acres (1 to 2 hectares) during the drilling and fracturing  
5 process to 1 to 3 acres (0.4 to 1 hectares) during production) ([NYSDEC, 2011](#)).

6 Wells may be shut-in immediately after completion if there is no infrastructure to receive the  
7 product or if prices are unfavorable. Prior to bringing a well into production, the operator typically  
8 runs a production test to determine the maximum flow rate the well can sustain and to optimize  
9 equipment settings ([Hyne, 2012](#); [Schlumberger, 2006](#)). Such tests may be repeated throughout the  
10 life of the well. During production, monitoring (e.g., mechanical integrity testing, corrosion  
11 monitoring), including any compliance with state monitoring requirements, may be conducted to  
12 enable operators to be sure that the well is operating as intended.

13 In the case of gas wells, the produced gas typically flows through a flowline to a separator that  
14 separates the gas from water or any liquid hydrocarbons ([NYSDEC, 2011](#)). The finished gas is sent  
15 to a compressor station where it is compressed to pipeline pressure and sent to a pipeline for sale.  
16 Production at oil wells proceeds similarly, although oil/water or oil/water/gas separation occurs

1 most typically on the well pad, no compressor is needed, and the oil can be hauled (by truck or  
2 train) or piped from the well pad.

3 During the life of the well it may be necessary to perform workovers to maintain or repair portions  
4 or components of the well and replace old equipment. Such workovers involve ceasing production  
5 and removing the wellhead, and may include cleaning out sand or deposits from the well, repairing  
6 casing, replacing worn well components such as tubing or packers, or installing or replacing lift  
7 equipment to pump hydrocarbons to the surface ([Hyne, 2012](#)). In some cases, wells may be  
8 recompleted after the initial construction, with re-fracturing if production has decreased ([Vincent,  
9 2011](#)). Recompletion also may include additional perforations in the well at a different interval to  
10 produce from a different formation than originally done, lengthening the wellbore, or drilling new  
11 laterals from an existing wellbore.

12 As of 2012, [Shires and Lev-On \(2012\)](#) suggested that the rate of re-fracturing in natural gas wells  
13 was about 1.6%. Analysis for the EPA’s 2012 Oil and Gas Sector New Source Performance Standards  
14 indicated a re-fracture rate of 1% for gas wells ([U.S. EPA, 2012d](#)). In the EPA’s Inventory of U.S.  
15 Greenhouse Gas Emissions and Sinks ([U.S. EPA, 2015g](#)), the number of gas wells that were re-  
16 fractured in a given year as a percent of the total existing population of hydraulically fractured  
17 producing gas wells in a given year ranges from 0.3% to 1% across the 1990-2013 period.

#### **2.1.1.4. Production Rates and Duration**

18 The production life of a well depends on a number of factors, such as the amount of hydrocarbons  
19 in place, the reservoir pressure, production rate, and the economics of well operations. It may be as  
20 short as three or four years in deep-water, high-permeability formations and as long as 40 to 60  
21 years in onshore tight gas reservoirs ([Ross and King, 2007](#)). In hydraulically fractured wells in  
22 unconventional reservoirs, production is often characterized by a rapid drop followed by a slower  
23 decline compared to conventional hydrocarbon production wells ([Patzek et al., 2013](#)). However,  
24 most modern, high-volume fractured wells are less than a decade old. Consequently, there is a  
25 limited historical basis to determine the full extent of the production decline ([Patzek et al., 2013](#))  
26 and to ultimately determine how much they will produce.

#### **2.1.4. Site and Well Closure**

27 Once a well reaches the end of its useful life, it is plugged, and the well site is closed. If a wellbore is  
28 not properly plugged, fluids from higher pressure zones may eventually migrate through the  
29 wellbore to the surface or to other zones such as fresh water aquifers ([NPC, 2011b](#)). Plugging is  
30 usually performed according to state regulations governing the locations and materials for plugs  
31 ([Calvert and Smith, 1994](#)). Operators typically use cement plugs placed across fresh water  
32 formations and oil or gas formations ([NPC, 2011b](#)). Some surface structures can be left in place, and  
33 the local topography and land cover are restored to predevelopment conditions to the extent  
34 possible, per state regulations. The wellhead and any surface equipment are removed.  
35 Impoundments are dewatered, filled in, and graded. The well casing is typically cut off below the  
36 surface and a steel plate or cap is emplaced to seal the top of the casing and wellbore ([API, 2010a](#)),  
37 although there may also be an aboveground marker used in some locations. Some states require  
38 notification of the landowner or a government agency of the location of the well.



## 2.2. How Widespread is Hydraulic Fracturing?

1 Hydraulic fracturing activity in the United States and worldwide is substantial. One industry  
2 cumulative estimate stated that by the time of writing in 2010, close to 2.5 million fracture  
3 treatments had been performed globally ([Montgomery and Smith, 2010](#)). In 2002, the Interstate Oil  
4 and Gas Compact Commission (IOGCC) stated that close to 1 million wells had been hydraulically  
5 fractured in the United States since the 1940s ([IOGCC, 2002](#)). A recent U.S. Geological Survey  
6 (USGS) publication analyzed 1 million hydraulically fractured wells and 1.8 million hydraulic  
7 fracturing treatment records from the United States from 1947 to 2010 ([USGS, 2015](#)). Although  
8 some form of hydraulic fracturing has been used for more than 60 years, the technological  
9 advancements that combined hydraulic fracturing and directional drilling in the early 2000s  
10 resulted in the new era of modern hydraulic fracturing, which uses higher volumes of fracturing  
11 fluids than were typically used in prior decades. Modern hydraulic fracturing is typically associated  
12 with horizontal wells producing from unconventional shale reservoirs, but hydraulic fracturing  
13 continues to be done in vertical wells in conventional reservoirs also. This ongoing mix of  
14 traditional and modern hydraulic fracturing activities makes estimates of the total number of  
15 hydraulic fracturing wells challenging.

16 The following series of images illustrates hydraulic fracturing activities and the scale of those  
17 activities in the United States. Figure 2-12 (taken in Springville Township, in northeastern  
18 Pennsylvania) and Figure 2-13 (taken near Williston, in northwestern North Dakota) show  
19 individual well pads in the context of the local landscape. Landsat images in Figure 2-14 and Figure  
20 2-15 provide satellite views of areas in northwest Louisiana and southeast Wyoming, respectively,  
21 where hydraulic fracturing activities currently occur as identified by the well pads in the images.  
22 These images serve to illustrate activity at a wider scale, though they are not representative of all  
23 hydraulic fracturing activities in the eastern or western United States. The light red circles around  
24 some of the well pads identify them as hydraulic fracturing wells that were reported by well  
25 operators to the FracFocus registry (as summarized in the EPA FracFocus project database 1.0)  
26 ([U.S. EPA, 2015b](#)). (The FracFocus well locations reflect information in the EPA FracFocus project  
27 database for well operations reporting hydraulic fracturing activities between January 2011 and  
28 February 2013. The Landsat images are from a later period, July and August of 2014, so additional  
29 well pads in the images now may be represented in the FracFocus registry.)



**Figure 2-12. Aerial photograph of a well pad and service road in Springville Township, Pennsylvania.**


[Image © | Henry Fair](#) / Flights provided by [LightHawk](#).



**Figure 2-13. Aerial photograph of hydraulic fracturing activities near Williston, North Dakota.**

[Image © | Henry Fair](#) / Flights provided by [LightHawk](#).



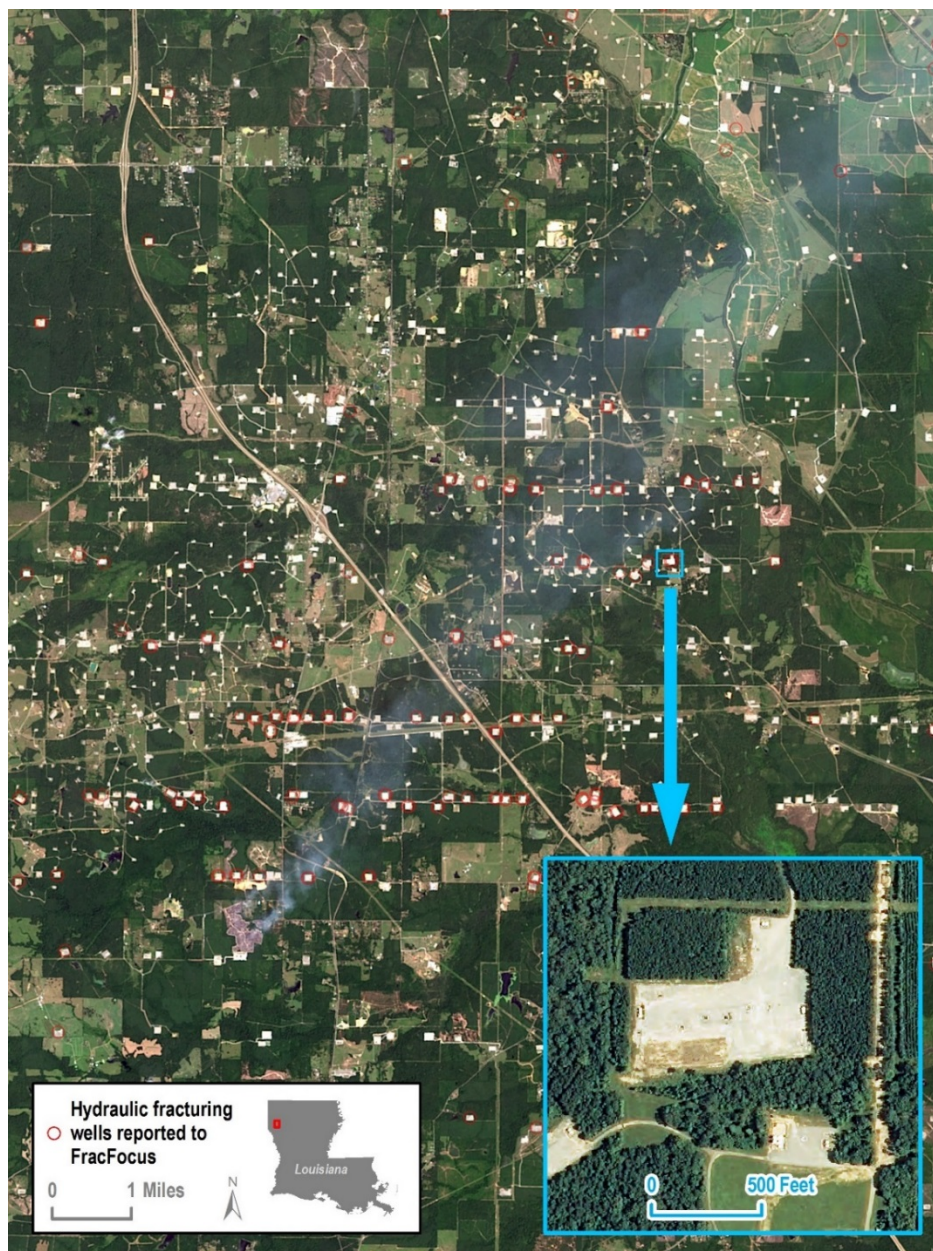


**Figure 2-14. Landsat photo showing hydraulic fracturing well sites near Frierson, Louisiana.**

Source: Imagery from USGS Earth Resources Observation and Science, Landsat 8 Operational Land Imager (scene LC80250382014232LGN00) captured August 20, 2014 and accessed on May 1, 2015 from USGS's EarthExplorer (<http://earthexplorer.usgs.gov/>).

Inset imagery from USDA National Agriculture Imagery Program (entity M 3209351\_NE 15\_1\_20130703\_20131107) captured July 3, 2013 and accessed May 1, 2015 from USGS's EarthExplorer (<http://earthexplorer.usgs.gov/>).

FracFocus well locations are from the EPA FracFocus project database 1.0 ([U.S. EPA, 2015b](http://www.epa.gov/fracfocus)).



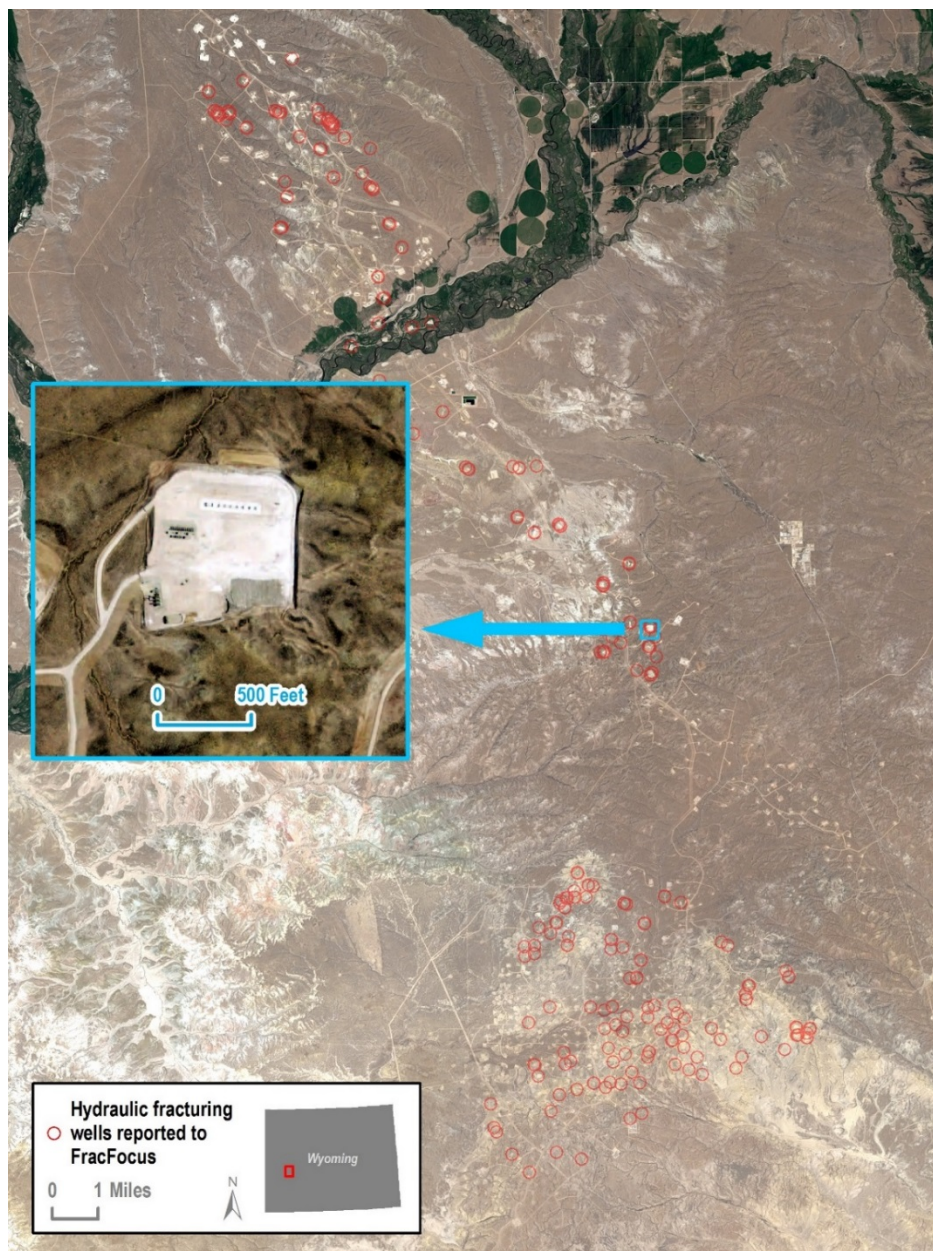

**Figure 2-15. Landsat photo showing hydraulic fracturing well sites near Pinedale, Wyoming.**

Source: Imagery from USGS Earth Resources Observation and Science, Landsat 8 Operational Land Imager (scene LC80370302014188LGN00) captured July 7, 2014 and accessed May 1, 2015 from USGS's EarthExplorer (<http://earthexplorer.usgs.gov/>).

Inset imagery from USDA National Agriculture Imagery Program (entity M 4210927\_NW 12\_1\_20120623\_20121004) captured June 23, 2012 and accessed May 1, 2015 from USGS's EarthExplorer (<http://earthexplorer.usgs.gov/>).

FracFocus well locations are from the EPA FracFocus project database 1.0 ([U.S. EPA, 2015b](http://www.epa.gov/fracfocus)).

- 1 The maps in Figure 2-16 show recent changes nationally in the geography of oil and gas production
- 2 through the increased use of horizontal drilling, which occurs together with hydraulic fracturing.

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 Some traditional oil- and gas-producing parts of the country, such as Texas, have seen an expansion  
2 of historically strong production activity as a result of the deployment of horizontal drilling and  
3 modern hydraulic fracturing. Pennsylvania, a century ago one of the leading oil- and gas-producing  
4 states, has seen a resurgence in oil and gas activity. Other states currently experiencing a steep  
5 increase in production activity, such as North Dakota, Arkansas, and Montana, have historically  
6 produced less oil and gas and are therefore undergoing new development.

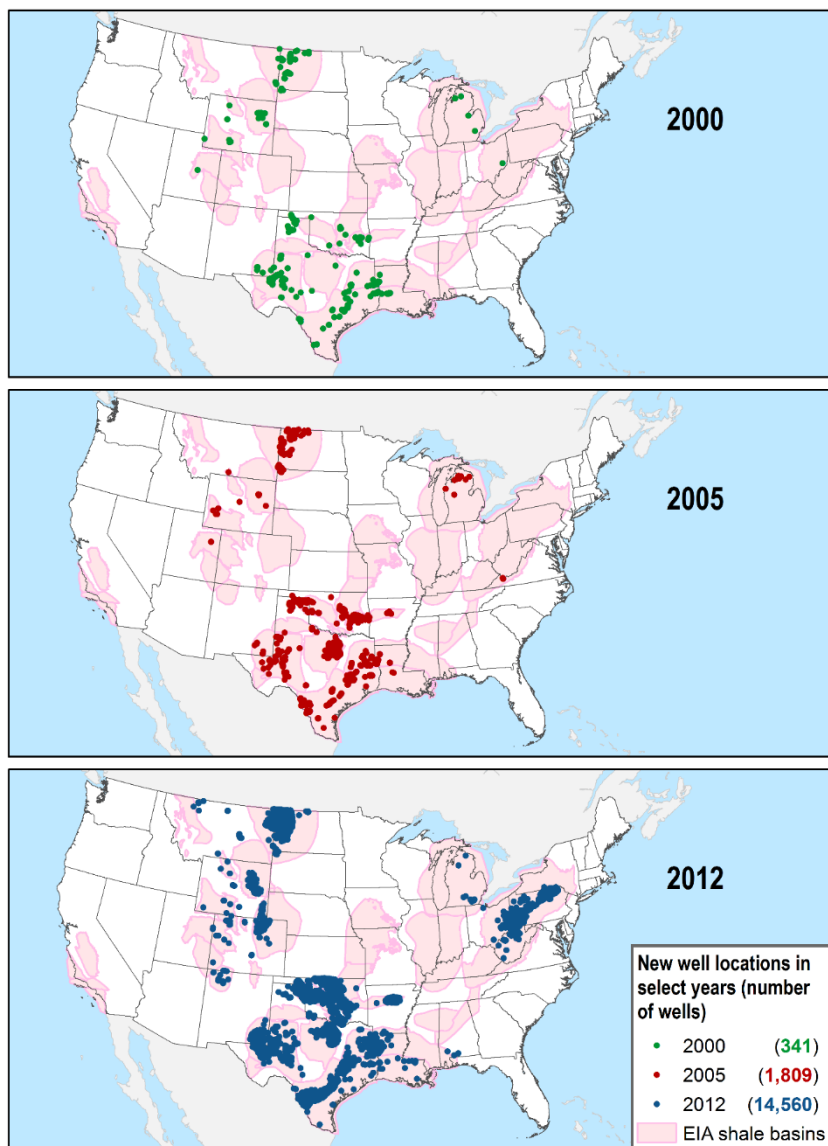


Figure 2-16. Location of horizontal wells that began producing oil or natural gas in 2000, 2005, and 2012, based on data from [DrillingInfo \(2014a\)](#).

### 2.2.1. Number of Wells Fractured per Year

1 We estimate that from roughly 2011 to 2014, approximately 25,000 to 30,000 new oil and gas wells  
2 were hydraulically fractured each year. Additional, pre-existing wells (wells more than one year old  
3 that may or may not have been hydraulically fractured in the past) were also likely fractured each  
4 year. Since the early 2000s, the percentage of all hydraulically fractured wells that are either  
5 horizontal or deviated has steadily grown. Our estimates are based on data detailed below from  
6 several public and private sector organizations that track drilling and various aspects of hydraulic  
7 fracturing activity. There is no complete database or registry of wells that are hydraulically  
8 fractured in the United States. Another source of uncertainty is the rate at which relatively new  
9 hydraulic fracturing wells are re-fractured or the rate at which operators use older, existing wells  
10 for hydraulic fracturing. Future trends in the number of wells hydraulically fractured per year will  
11 be affected by the cost of well operation and the price of oil and gas. Scenarios of increasing, flat,  
12 and decreasing hydraulic fracturing activity all appear to be possible ([Weijermars, 2014](#)).

13 The number of wells reported to the FracFocus registry provides a low estimate of the number of  
14 hydraulically fractured wells.<sup>1</sup> As of early April 2015, the FracFocus registry reported receiving  
15 information on a cumulative total of approximately 95,000 fracturing jobs, or roughly 22,400 per  
16 year over the 51-month period from January 2011 through March 2015 ([GWPC, 2015](#)). In a more  
17 detailed review of FracFocus data from 2011 and 2012, the EPA found there were approximately  
18 14,000 and 22,500 fracturing jobs reported to the FracFocus website in those years, respectively,  
19 across 20 states ([U.S. EPA, 2015a](#)). These 2011 and 2012 numbers are likely underestimates of  
20 wells hydraulically fractured annually, in part because FracFocus reporting was voluntary for most  
21 states for at least a portion of 2011 to 2012 (though the increase from 2011 to 2012 in part reflects  
22 more states requiring reporting to the registry). Hydraulic fracturing practices may alternately (or  
23 in addition to FracFocus) be tracked by states. Compared to state records of hydraulic fracturing  
24 from North Dakota, Pennsylvania, and West Virginia in 2011 and 2012, we found that the count of  
25 wells based on records submitted to FracFocus was an underestimate of the number of fracturing  
26 jobs in those states by an average of approximately 30% (see Text Box 4-1).

27 An additional estimate of the number of hydraulically fractured wells can be obtained from  
28 DrillingInfo, a commercial database compiling data from individual state oil and gas agencies  
29 ([DrillingInfo, 2014a](#)). The data indicate an increase in the number of new hydraulically fractured  
30 wells drilled each year, from approximately 12,800 in 2000 to slightly more than 21,600 in 2005, to  
31 nearly 23,000 in 2012. The number of new horizontal wells (which are likely all hydraulically  
32 fractured) show a significant increase, from 344 (about 1% of all new production wells) in 2000, to  
33 1,810 in 2005, to 14,560 (nearly 41% of all new production wells) in 2012 (see Figure 2-16).

---

<sup>1</sup> The FracFocus registry was developed by the Ground Water Protection Council and the Interstate Oil and Gas Compact Commission. Oil and gas well operators can use the FracFocus registry to disclose information about hydraulic fracturing well locations, and water and chemical use during hydraulic fracturing operations. Submission of information to FracFocus was initially voluntary (starting in January 2011), but now about half of the 20 states represented in FracFocus have enacted reporting requirements for well operators that either mandate reporting to FracFocus or allow it as one reporting option. FracFocus data are discussed in more detail in Chapter 4 (regarding water volumes) and Chapter 5 (regarding chemical use). For more information see [www.fracfocus.org](http://www.fracfocus.org) and [U.S. EPA \(2015a\)](#).



1 Because DrillingInfo data do not directly report whether a well has been hydraulically fractured, we  
2 relied on properties of the well and the oil or gas producing formation to infer which wells were  
3 hydraulically fractured and when. First, we assumed that *all* horizontal wells were hydraulically  
4 fractured in the year they started producing. Second, we assumed that all wells within a shale,  
5 coalbed, or low-permeability formation, regardless of well orientation, were hydraulically fractured  
6 in the year they started producing.<sup>1</sup>

7 We used well-specific data provided by oil and gas well operators to the EPA to supplement our  
8 estimates of hydraulic fracturing using DrillingInfo data ([U.S. EPA, 2015o](#)). Matching wells in each  
9 dataset using API well numbers, we found that 80% of 171 newly drilled wells known to be  
10 fractured in 2009 and 2010 according to their well files were correctly identified as fractured using  
11 well and formation properties in DrillingInfo.<sup>2</sup> We did not correctly identify all of the vertical or  
12 deviated wells that were known to be fractured. (We were unable to identify wells for which  
13 hydraulic fracturing was inferred using the properties in DrillingInfo but were not fractured.) This  
14 comparison suggests that the estimates of hydraulically fractured wells from DrillingInfo are likely  
15 underestimates.

16 Another source of estimates is from a U.S. Geological Survey publication that reviewed data from  
17 the commercial IHS database of U.S. oil and gas production and well data ([USGS, 2015](#)). The study  
18 period was from 1947 through 2010. The authors estimated a total of approximately 277,000  
19 hydraulically fractured wells between 2000 and 2010 (compared to close to 212,000 during the  
20 same time period estimated based on DrillingInfo data). This is roughly 25,000 wells per year over  
21 that time period. Approximately three-quarters of these wells were vertical. Reflecting advances in  
22 directional drilling technology over the decade ending in 2010, the percentage of total wells  
23 fractured that were horizontal or deviated wells grew from less than 10% to over 60%.

24 Well counts tracked by Baker Hughes provide another estimate of new wells fractured annually.  
25 Since 2012, this oilfield service company has published a quarterly count of new wells spudded; it  
26 includes only new inland U.S. wells “identified to be significant consumers of oilfield services and  
27 supplies.”<sup>3</sup> A reported total of 36,824 oil and gas wells were spudded in the United States in 2012,  
28 with new wells per quarter fluctuating between about 8,500 and 9,500 ([Baker Hughes, 2014b](#)).  
29 While 100% of new wells are probably not hydraulically fractured (see below for estimates of  
30 hydraulic fracturing rates in new wells), a count of new wells also does not include hydraulic  
31 fracturing taking place in older, existing wells.

---

<sup>1</sup> The assignment of formation type (shale, coalbed, low-permeability, or conventional) for each well was based on a crosswalk of information on basin/play provided in [DrillingInfo \(2014a\)](#) with expert knowledge of those basins/plays at [EIA \(2012a\)](#). If formation type could not be determined, it was considered conventional by default. This is similar methodology to that used by the EPA for its greenhouse gas inventory ([U.S. EPA, 2013c](#)).

<sup>2</sup> An API well number is a unique identifying number given to each oil and gas well drilled in the United States. The system was developed by the American Petroleum Institute.

<sup>3</sup> To spud a well is to start the well drilling process by removing rock, dirt, and other sedimentary material with the drill bit.

1 Data collected under the EPA’s Greenhouse Gas Reporting Program (GHGRP) provide information  
2 on completions and workovers with hydraulic fracturing (i.e., re-fracturing) of gas wells. Data  
3 reported to GHGRP for years 2011 to 2013 suggest that 9-14% of the gas wells reported to be  
4 hydraulically fractured in each year were pre-existing wells undergoing re-fracturing ([U.S. EPA,  
5 2014e](#)).<sup>1</sup> The GHGRP requirements do not include reporting of re-fracturing in oil wells, and other  
6 data sources for information specifically on re-fracturing of existing oil wells compared to initial  
7 fracturing of oil wells were not identified. For comparison, an EPA survey of an estimated 23,200 oil  
8 and gas production wells that were hydraulically fractured by nine oil and gas service companies in  
9 2009 and 2010 suggests that 42% of the wells were pre-existing (i.e., more than one year old) when  
10 they were hydraulically fractured ([U.S. EPA, 2015o](#)). Differences in data (including data from  
11 different years and data from gas wells only (GHGRP) versus oil and gas wells, for instance),  
12 definitions, and assumptions used to estimate the percentage of pre-existing wells hydraulically  
13 fractured in a year could account for the different results.

14 In summary, determination of the national scope of hydraulic fracturing activities in the United  
15 States is complicated by a lack of a centralized source of information and the fact that well and  
16 drilling databases each track different information. There is also uncertainty about whether  
17 information sources are representative of the nation, whether they include data for all production  
18 types, whether they represent only modern (high volume) hydraulic fracturing, and whether they  
19 include activities in both conventional and unconventional reservoirs. Taking these limitations into  
20 account, however, it is reasonable to assume that between approximately 25,000 and 30,000 new  
21 wells (and, likely, additional pre-existing wells) were hydraulically fractured each year in the  
22 United States from about 2011 to 2014.

### 2.2.2. Hydraulic Fracturing Rates

23 Estimates of hydraulic fracturing rates, or the proportion of all oil and gas production wells that are  
24 associated with hydraulic fracturing, also indicate widespread use of the practice. Based on an  
25 assessment described above of data from [DrillingInfo \(2014a\)](#), hydraulic fracturing rates have  
26 increased over time. From 2005 to 2012, rates of hydraulic fracturing increased from 57% to 64%  
27 of all new production wells (including oil wells, gas wells, and wells producing both oil and gas).

28 In 2009, industry consultants stated that hydraulic fracturing was used on nearly 79% of all wells  
29 and more than 95% of “unconventional” wells ([IHS, 2009](#)). A 2010 article in an industry publication  
30 noted “some believe that approximately 60% of all wells drilled today are fractured” ([Montgomery  
31 and Smith, 2010](#)). Of 11 important oil and gas producing states that responded to an IOGCC survey  
32 (Arkansas, Colorado, Louisiana, New Mexico, North Dakota, Ohio, Oklahoma, Pennsylvania, Texas,  
33 Utah, and West Virginia), ten estimated that 78% to 99% of new oil and gas wells in their states  
34 were hydraulically fractured in 2012; Louisiana was the one exception, reporting a fracturing rate  
35 of 3.9% in 2012 ([IOGCC, 2015](#)). Although estimates of fracturing rates are variable, largely ranging  
36 from near 60% to over 90% (as described above), they are often higher for gas wells than they are  
37 for oil wells. A 2010 to 2011 industry survey of 20 companies involved in natural gas production

---

<sup>1</sup> The GHGRP reporting category that covers re-fracturing is “workovers with hydraulic fracturing.”



1 found that 94% of the wells that they operated were fractured; among those, roughly half were  
2 vertical and half were horizontal ([Shires and Lev-On, 2012](#)).

### 2.3. Trends and Outlook for the Future


3 Fossil fuels are the largest source of all energy generated in the United States. They currently  
4 comprise approximately 80% of the energy produced ([EIA, 2014f](#)). However, the mix of fossil fuels  
5 has shifted in recent years. Coal, the leading fossil fuel produced by the U.S. since the 1980s, has  
6 experienced a significant decrease in production. In 2007, coal accounted for approximately 33% of  
7 U.S. energy production, and by 2013 it decreased to approximately 24% ([EIA, 2014f](#)). On the other  
8 hand, natural gas production has risen to unprecedented levels, and oil production has resurged to  
9 levels not seen since the 1980s (see Figure 2-17). Oil went from accounting for 15% of U.S. energy  
10 production to 19% between 2007 and 2013, and natural gas (both dry and liquid) went from 31%  
11 to 35% ([EIA, 2014f](#)).

12 Below, we discuss recent and projected shifts in oil and natural gas production that can primarily  
13 be attributed to hydraulic fracturing and directional drilling technologies.

#### 2.3.1. Natural Gas (Including Coalbed Methane)


14 Natural gas production in the United States peaked in the early 1970s, reached those levels again in  
15 the mid-1990s, and between the mid- to late-2000s has increased to even higher levels (see Figure  
16 2-17). The recent increase in total gas production has been driven almost entirely by shale gas (see  
17 Figure 2-18).

18 As natural gas prices fell between 2008 and 2012 ([EIA, 2014e](#)), drilling of new natural gas wells  
19 declined markedly ([EIA, 2014g](#)) (see Figure 2-19). Nevertheless, natural gas production is expected  
20 to increase over the coming decades (see Figure 2-18). [EIA \(2013b\)](#) predicts that shale gas  
21 production will more than double between 2011 and 2040 and that the portion of total natural gas  
22 production represented by shale gas will increase from one-third to one-half. The EIA projects  
23 steady growth in the development of tight gas as well (about a 25% increase in production over the  
24 30-year period) and delayed growth in the development of coalbed methane resources, for which  
25 production is not expected to increase again until sufficiently high natural gas prices are realized  
26 around 2035. Overall, the EIA projects that the share of U.S. natural gas production from shales,  
27 tight formations, and coalbeds will increase from 65% in 2011 to nearly 80% in 2040.

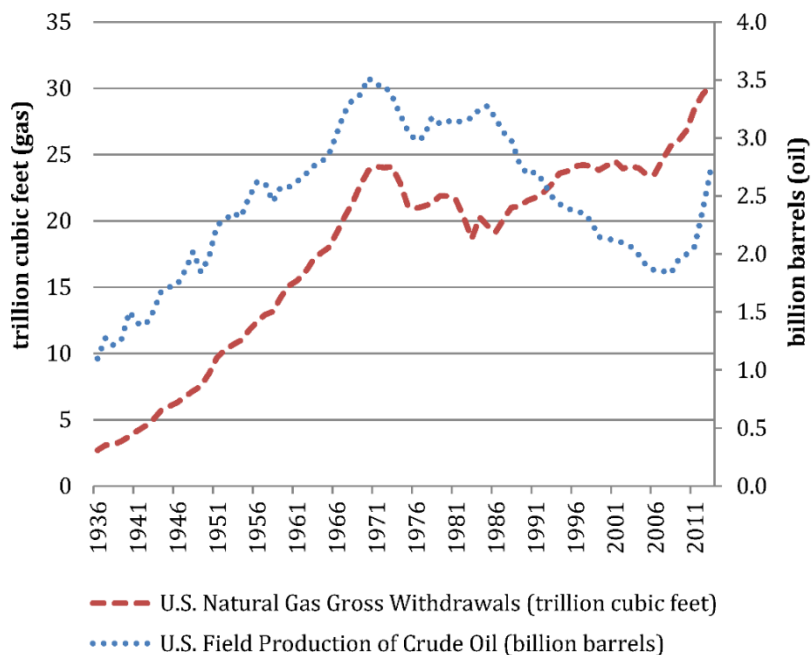


**Figure 2-17. Trends in U.S. oil and gas production.**

Source: [EIA \(2013d\)](#) and [EIA \(2014d\)](#).

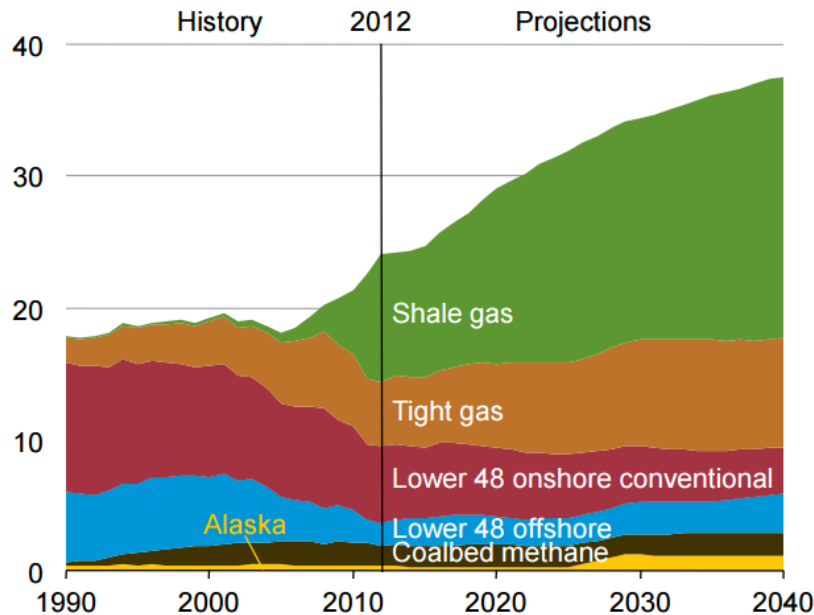

**Figure 2-18. Historic and projected natural gas production by source (trillion cubic feet).**

Source: [EIA \(2014a\)](#).

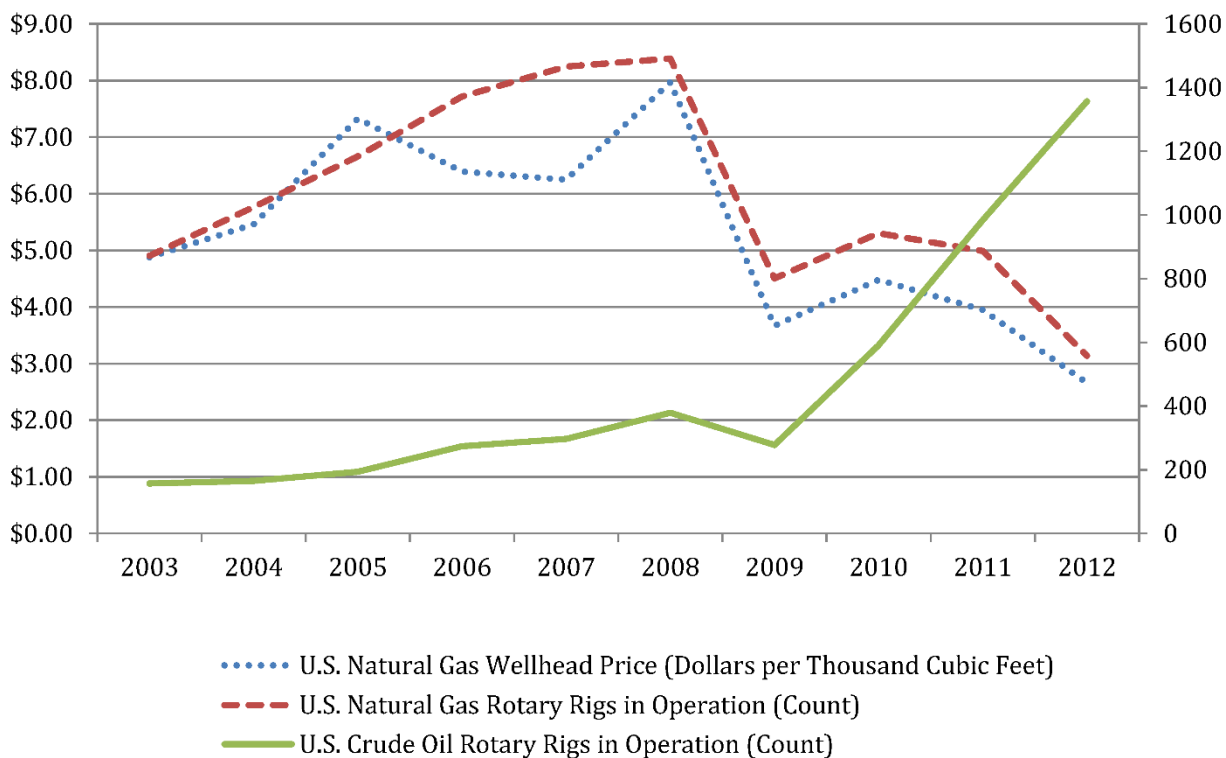


**Figure 2-19. Natural gas prices and oil and gas drilling activity, 2008–2012.**

Source: [EIA \(2014e\)](#), [EIA \(2014g\)](#), and [EIA \(2013b\)](#).

- 1 Shale gas production varies by play (see Figure 2-20a). Until 2010, the Texas Barnett Shale was the
- 2 play with the most production. Although production from the Barnett Shale is still significant,
- 3 production has increased sharply in other plays. By 2012, production from the Haynesville play (on
- 4 the Louisiana/Texas border) surpassed that in the Barnett play, and by 2013 the Marcellus Shale
- 5 (in the Appalachian Basin underlying Pennsylvania, West Virginia, and other states) was the play
- 6 with the most production. Because technically recoverable resources are an order of magnitude
- 7 higher in the Marcellus than in any other U.S. shale gas play, it is likely that the Marcellus Shale will
- 8 be very active in shale gas production for the foreseeable future ([EIA, 2011a](#)).<sup>1</sup>
- 9 In the 1970s, most tight gas production in the United States was in the San Juan Basin centered in
- 10 New Mexico. As modern hydraulic fracturing came into common usage in the mid-2000s, the lead in
- 11 tight gas production shifted to Texas (especially East Texas) and the Rocky Mountain states ([Vidas](#)
- 12 [and Hugman, 2008](#)).

<sup>1</sup> Technically recoverable resources represent the volumes of oil and natural gas that could be produced with current technology, regardless of oil and natural gas prices and production costs ([EIA, 2013c](#)).

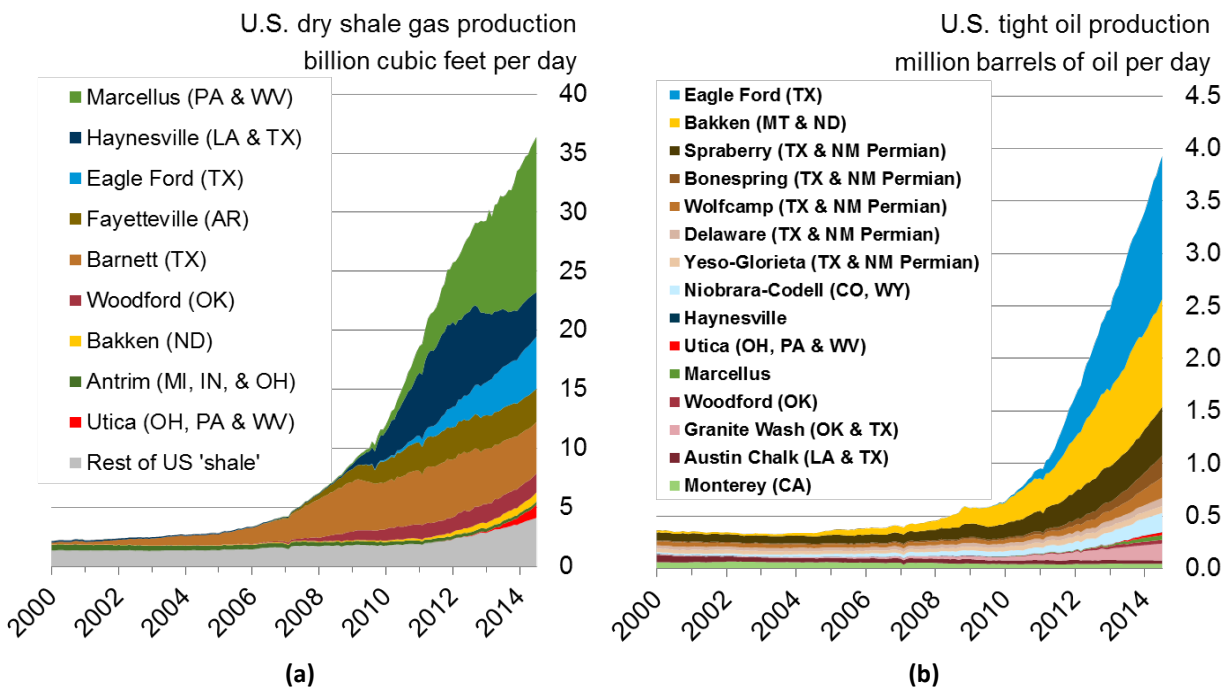


**Figure 2-20. (a) Production from U.S. shale gas plays, 2000–2014, in billion cubic feet per day; (b) Production from U.S. tight oil plays, 2000-2014.**

Tight oil includes oil from shale and other tight formations, plus lease condensate from natural gas production. Source: [EIA \(2012c\)](#).

1 Modern coalbed methane production techniques were pioneered in the Black Warrior Basin in  
 2 Alabama and in the San Juan Basin ([Vidas and Hugman, 2008](#)). With the use of hydraulic fracturing,  
 3 most coalbed methane production in the United States now comes from the San Juan Basin and  
 4 from Rocky Mountain Basins (e.g., the Uinta-Piceance Basin in Colorado and Utah and the Powder  
 5 River Basin centered in Wyoming) ([Vidas and Hugman, 2008](#)).

### 2.3.2. Oil

6 The EIA data indicate that as drilling activity for natural gas declined between 2008 and 2012,  
 7 drilling for oil increased by a similar order of magnitude (see Figure 2-19). Figure 2-21 shows past  
 8 and projected future trends in U.S. oil production and importation ([EIA, 2013a](#)). Note that this  
 9 graph shows production and importation in millions of barrels (bbl) *per day*. The current surge in  
 10 tight oil production is expected to continue until the latter part of the current decade and then  
 11 taper, while conventional oil production is projected to remain fairly level. However, downward  
 12 trends in the price of oil since mid-2014 are not reflected in these projections.

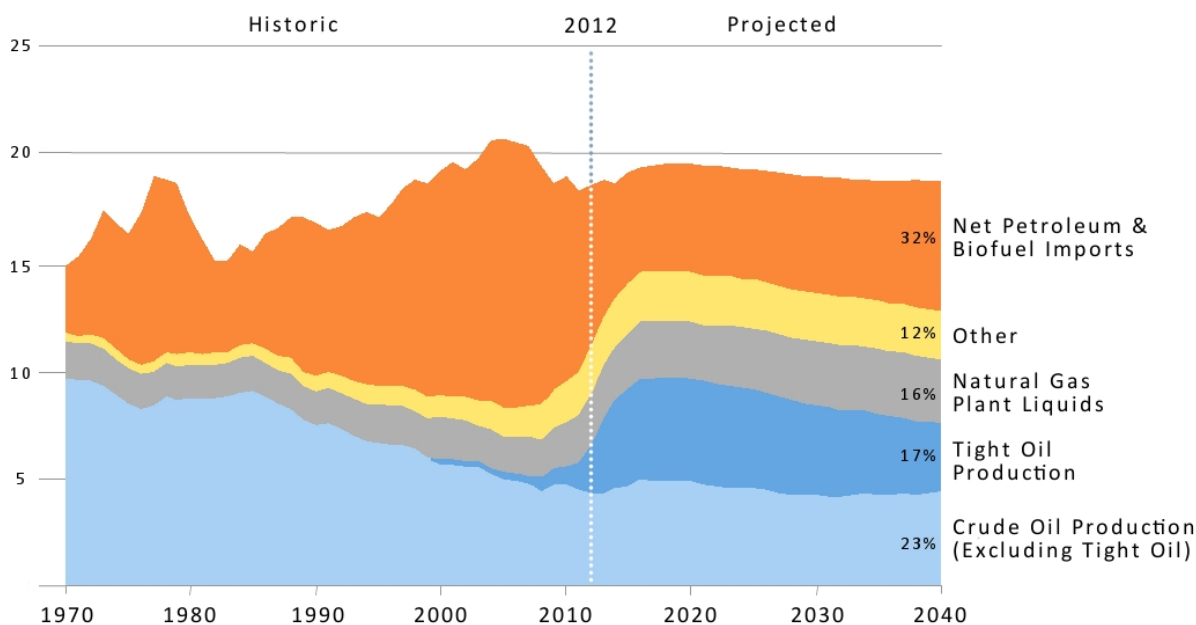

**Figure 2-21. U.S. petroleum and other liquid fuels supply by source, past and projected future trends (million barrels per day).**

Source: [EIA \(2013a\)](#).

1 Like shale gas production, tight oil production varies by play (Figure 2-20b). The Bakken Shale play,  
 2 centered in western North Dakota, is important for shale oil production with production increasing  
 3 from 123 million bbl (20 billion L) in 2011 to 213 million bbl (34 billion L) in 2012. Proved reserves  
 4 in the Bakken have increased from almost 2 billion to over 3 billion bbl (316 billion L to 503 billion  
 5 L). The Eagle Ford play in Texas is another major area of shale oil activity, with production  
 6 increasing from 71 million bbl (11 billion L) in 2011 to 210 million bbl (33 billion L) in 2012, and  
 7 proved reserves increasing from 1.25 billion to 3.4 billion bbl (199 billion to 536 billion L) ([EIA,](#)  
 8 [2014b](#)). Oil production from the Eagle Ford surpassed that from the Bakken in 2013 ([EIA, 2014h](#)).  
 9 Among other shale oil plays that might become important in future domestic U.S. oil production, the  
 10 Niobrara (centered in Colorado) and Austin Chalk (in Texas, Louisiana, and Mississippi) are  
 11 believed to have quantities of recoverable resources on the same order of magnitude as the Bakken  
 12 and Eagle Ford plays ([EIA, 2012b](#)).

## 2.4. Conclusion

13 Since about 2005, the combination of hydraulic fracturing and horizontal drilling pioneered in the  
 14 Barnett Shale have become widespread in the oil and gas industry. Hydraulic fracturing is now a  
 15 standard industry practice and has significantly contributed to a surge in U.S. production of both oil  
 16 and gas. Modern hydraulic fracturing has resulted in additional types of geological formations being  
 17 tapped, and sometimes these formations are located in regions of the country new to intensive oil

1 and gas exploration and production. In other areas, the improved techniques have made possible a  
2 resurgence of production.

3 An estimated 25,000 to 30,000 new wells drilled in the United States were hydraulically fractured  
4 as a production-enhancing technique in each year from 2011 to 2014. Additional pre-existing wells  
5 were also fractured. Since the early 2000s, the percentage of all hydraulically fractured wells that  
6 are either horizontal or deviated has steadily grown. Reserves of oil and gas that are now accessible  
7 with modern hydraulic fracturing are considerable, and if technical improvements outpace  
8 depletion of oil and gas resources, the quantity of resources that are deemed economically and  
9 technically recoverable may continue to grow. Given current trends, it appears likely that hydraulic  
10 fracturing will continue to play an important role in the oil and gas industry, and the United States’  
11 energy portfolio, in the decades ahead.

## 2.5. References for Chapter 2

[Abou-Sayed, IS; Sorrell, MA; Foster, RA; Atwood, EL; Youngblood, DR.](#) (2011). Haynesville shale development program: From vertical to horizontal. Paper presented at North American Unconventional Gas Conference and Exhibition, June 14-16, 2011, The Woodlands, TX.

[ALL Consulting](#) (ALL Consulting, LLC). (2004). Coal bed methane primer: New source of natural gas and environmental implications. Tulsa, OK: U.S. Department of Energy, National Petroleum Technology Center. <http://bogc.dnrc.mt.gov/PDF/Web%20Version.pdf>

[Allison, D; Folds, DS; Harless, DJ; Howell, M; Vargus, GW; Stipetich, A.](#) (2009). Optimizing openhole completion techniques for horizontal foam-drilled wells. Paper presented at SPE Eastern Regional Meeting, September 23-25, 2009, Charleston, WV.

[API](#) (American Petroleum Institute). (2010a). Isolating potential flow zones during well construction [Standard] (1st ed.). (RP 65-2). Washington, DC: API Publishing Services. <http://www.techstreet.com/products/preview/1695866>

[Arthur, JD; Bohm, B; Cornue, D.](#) (2009a). Environmental considerations of modern shale gas development. Paper presented at SPE Annual Technical Conference and Exhibition, October 4-7, 2009, New Orleans, LA.

[Arthur, JD; Layne, MA; Hochheiser, HW; Arthur, R.](#) (2014). Spatial and statistical analysis of hydraulic fracturing activities in U.S. shale plays and the effectiveness of the FracFocus chemical disclosure system. In 2014 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168640-MS>

[Baker Hughes.](#) (2014b). Well count. U.S. onshore well count [Database]. Houston, TX: Baker Hughes, Inc. Retrieved from <http://phx.corporate-ir.net/phoenix.zhtml?c=79687&p=irol-wellcountus>

[Barati, R; Liang, JT.](#) (2014). A review of fracturing fluid systems used for hydraulic fracturing of oil and gas wells. J Appl Polymer Sci Online pub. <http://dx.doi.org/10.1002/app.40735>

[Barbot, E; Vidic, NS; Gregory, KB; Vidic, RD.](#) (2013). Spatial and temporal correlation of water quality parameters of produced waters from Devonian-age shale following hydraulic fracturing. Environ Sci Technol 47: 2562-2569.

[Beckwith, R.](#) (2011). Proppants: Where in the world. J Pet Tech 63: 36-41.

[Blauch, ME.](#) (2010). Developing effective and environmentally suitable fracturing fluids using hydraulic fracturing flowback waters. Paper presented at SPE Unconventional Gas Conference, February 23-25, 2010, Pittsburgh, PA.

- [Bosworth, S; El-Sayed, HS; Ismail, G; Ohmer, H; Stracke, M; West, C; Retnanto, A.](#) (1998). Key issues in multilateral technology. *Oilfield Rev* 10: 14-28.
- [Calvert, DG; Smith, DK.](#) (1994). Issues and techniques of plugging and abandonment of oil and gas wells. Paper presented at SPE Annual Technical Conference and Exhibition, September 25-28, 1994, New Orleans, LA.
- [CCST](#) (California Council on Science and Technology). (2015). An independent scientific assessment of well stimulation in California, Volume 1: Well stimulation technologies and their past, present, and potential future use in California. Sacramento, CA. <http://www.ccst.us/publications/2015/2015SB4-v1.pdf>
- [Ciezobka, J; Salehi, I.](#) (2013). Controlled hydraulic fracturing of naturally fractured shales: A case study in the Marcellus Shale examining how to identify and exploit natural fractures. (SPE-164524-MS). Ciezobka, J; Salehi, I. <http://dx.doi.org/10.2118/164524-MS>
- [Cipolla, C; Weng, X; Mack, M; Ganguly, U; Gu, H; Kresse, O; Cohen, C.](#) (2011). Integrating microseismic mapping and complex fracture modeling to characterize hydraulic fracture complexity. Paper presented at SPE Hydraulic Fracturing Technology Conference, January 24-26, 2011, The Woodlands, TX.
- [DOE](#) (U.S. Department of Energy). (2011b). Shale gas Applying technology to solve americas energy challenges. Available online at <http://groundwork.iogcc.org/topics-index/shale-gas/topic-resources/shale-gas-applying-technology-to-solve-americas-energy-challe>
- [DrillingInfo, Inc.](#) (2014a). DI Desktop June 2014 download [Database]. Austin, TX: DrillingInfo. Retrieved from <http://info.drillinginfo.com/>
- [Drohan, PJ; Brittingham, M.](#) (2012). Topographic and soil constraints to shale-gas development in the northcentral Appalachians. *Soil Sci Soc Am J* 76: 1696-1706. <http://dx.doi.org/10.2136/sssaj2012.0087>
- [EIA](#) (Energy Information Administration). (2011a). Review of emerging resources: U.S. shale gas and shale oil plays. United States Department of Energy. <http://www.eia.gov/analysis/studies/usshalegas/>
- [EIA](#) (Energy Information Administration). (2011b). Shale gas and oil plays, lower 48 States [Map]. Available online at [http://www.eia.gov/pub/oil\\_gas/natural\\_gas/analysis\\_publications/maps/maps.htm](http://www.eia.gov/pub/oil_gas/natural_gas/analysis_publications/maps/maps.htm)
- [EIA](#) (Energy Information Administration). (2012a). Formation crosswalk. Washington, DC: U.S. Energy Information Administration.
- [EIA](#) (Energy Information Administration). (2012b). Today in energy: Geology and technology drive estimates of technically recoverable resources. Washington, DC: U.S. Energy Information Administration. <http://www.eia.gov/todayinenergy/detail.cfm?id=7190>
- [EIA](#) (Energy Information Administration). (2012c). What is shale gas and why is it important? [December 5]. Washington, DC: U.S. Energy Information Administration. [http://www.eia.gov/energy\\_in\\_brief/article/about\\_shale\\_gas.cfm](http://www.eia.gov/energy_in_brief/article/about_shale_gas.cfm)
- [EIA](#) (Energy Information Administration). (2013a). Analysis & projections: AEO2014 early release overview. Release date: December 16, 2013. Washington, DC: U.S. Energy Information Administration. [http://www.eia.gov/forecasts/aeo/er/executive\\_summary.cfm](http://www.eia.gov/forecasts/aeo/er/executive_summary.cfm)
- [EIA](#) (Energy Information Administration). (2013b). Annual energy outlook 2013 with projections to 2040. (DOE/EIA-0383). Washington, DC: U.S. Energy Information Administration. [http://www.eia.gov/forecasts/archive/aeo13/pdf/0383\(2013\).pdf](http://www.eia.gov/forecasts/archive/aeo13/pdf/0383(2013).pdf)
- [EIA](#) (Energy Information Administration). (2013c). Technically recoverable shale oil and shale gas resources: an assessment of 137 shale formations in 41 countries outside the United States (pp. 730). Washington, D.C.: Energy Information Administration, U.S. Department of Energy. <http://www.eia.gov/analysis/studies/worldshalegas/>
- [EIA](#) (Energy Information Administration). (2013d). U.S. field production of crude oil. Release date: September 27, 2014. Washington, DC: U.S. Energy Information Administration. <http://www.eia.gov/dnav/pet/hist/LeafHandler.ashx?n=pet&s=mcrfps1&f=a>



- [EIA](#) (Energy Information Administration). (2014a). Annual energy outlook 2014 with projections to 2040. (DOE/EIA-0383(2014)). Washington, D.C.: U.S. Energy Information Administration.  
[http://www.eia.gov/forecasts/aeo/pdf/0383\(2014\).pdf](http://www.eia.gov/forecasts/aeo/pdf/0383(2014).pdf)
- [EIA](#) (Energy Information Administration). (2014b). Natural gas. U.S. crude oil and natural gas proved reserves. With data for 2012. Table 2. Principal tight oil plays: oil production and proved reserves, 2011-12. Release date: April 10, 2014. Washington, DC: U.S. Energy Information Administration.  
<http://www.eia.gov/naturalgas/crudeoilreserves/>
- [EIA](#) (Energy Information Administration). (2014d). Natural gas. U.S. natural gas gross withdrawals. Washington, DC: U.S. Energy Information Administration.  
[http://www.eia.gov/dnav/ng/ng\\_prod\\_sum\\_a\\_EPG0\\_FGW\\_mmcf\\_a.htm](http://www.eia.gov/dnav/ng/ng_prod_sum_a_EPG0_FGW_mmcf_a.htm)
- [EIA](#) (Energy Information Administration). (2014e). Natural gas: Natural gas prices [Database]. Washington, DC: U.S. Energy Information Administration. Retrieved from  
[http://www.eia.gov/dnav/ng/ng\\_pri\\_sum\\_dcu\\_nus\\_a.htm](http://www.eia.gov/dnav/ng/ng_pri_sum_dcu_nus_a.htm)
- [EIA](#) (Energy Information Administration). (2014f). October 2014 month energy review. (DOE/EIA-0035(2014/10)). Washington, D.C.: U.S. Energy Information Administration.  
<http://www.eia.gov/totalenergy/data/monthly/archive/00351410.pdf>
- [EIA](#) (Energy Information Administration). (2014g). Petroleum & other liquids. Crude oil and natural gas drilling activity. Washington, DC: U.S. Energy Information Administration.  
[http://www.eia.gov/dnav/pet/pet\\_crd\\_drill\\_s1\\_a.htm](http://www.eia.gov/dnav/pet/pet_crd_drill_s1_a.htm)
- [EIA](#) (Energy Information Administration). (2014h). Today in energy: Tight oil production pushes U.S. crude supply to over 10% of world total. Washington, DC: U.S. Energy Information Administration.  
<http://www.eia.gov/todayinenergy/detail.cfm?id=15571>.
- [EIA](#) (Energy Information Administration). (2015b). Lower 48 states shale plays. Available online at  
[http://www.eia.gov/oil\\_gas/rpd/shale\\_gas.pdf](http://www.eia.gov/oil_gas/rpd/shale_gas.pdf)
- [GNB](#) (Government of New Brunswick). (2015). FAQs hydraulic fracturing (fracking). New Brunswick, Canada.  
[http://www2.gnb.ca/content/dam/gnb/Corporate/pdf/ShaleGas/en/FAQ\\_HydraulicFracturing.pdf](http://www2.gnb.ca/content/dam/gnb/Corporate/pdf/ShaleGas/en/FAQ_HydraulicFracturing.pdf)
- [Gupta, DVS; Hlidek, BT.](#) (2009). Frac fluid recycling and water conservation: A case history. In 2009 Hydraulic fracturing technology conference. Woodlands, Texas: Society of Petroleum Engineers.  
<http://dx.doi.org/10.2118/119478-MS>
- [Gupta, DVS; Valkó, P.](#) (2007). Fracturing fluids and formation damage. In M Economides; T Martin (Eds.), Modern fracturing: enhancing natural gas production (pp. 227-279). Houston, TX: Energy Tribune Publishing Inc.
- [GWPC](#) (Groundwater Protection Council). (2015). FracFocus - chemical disclosure registry. Available online at  
<http://fracfocus.org/>
- [GWPC and ALL Consulting](#) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory.  
<http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>
- [Halliburton.](#) (1988). Primer on Hydraulic Fracturing. Provided to EPA on March 2, 2011. Available at Docket ID: EPA-HQ-ORD-2010-0674-1634. (HESI-3031). Halliburton.  
<http://www.regulations.gov/#!documentDetail:D=EPA-HQ-ORD-2010-0674-1634>
- [Halliburton.](#) (2013). Hydraulic fracturing 101. Available online at  
[http://www.halliburton.com/public/projects/pubsdata/hydraulic\\_fracturing/index.html](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/index.html)
- [Haymond, D.](#) (1991). The Austin Chalk - An overview. HGS Bulletin 33: 27-30, 32, 34.



- [Holditch, SA.](#) (2007). Chapter 8: Hydraulic fracturing. In JD Clegg (Ed.), Petroleum engineering handbook (pp. IV-323 - IV-366). Richardson, TX: Society of Petroleum Engineers. <http://store.spe.org/Petroleum-Engineering-Handbook-Volume-IV-Production-Operations-Engineering-P61.aspx>
- [Hyne, NJ.](#) (2012). Nontechnical guide to petroleum geology, exploration, drilling and production. In Nontechnical guide to petroleum geology, exploration, drilling and production (3 ed.). Tulsa, OK: PennWell Corporation.
- [IHS](#) (Global Insight). (2009). Measuring the economic and energy impacts of proposals to regulate hydraulic fracturing. Prepared for American Petroleum Institute. Lexington, MA: IHS Global Insight. [http://s3.amazonaws.com/propublica/assets/natural\\_gas/ihs\\_gi\\_hydraulic\\_fracturing\\_task1.pdf](http://s3.amazonaws.com/propublica/assets/natural_gas/ihs_gi_hydraulic_fracturing_task1.pdf)
- [IOGCC](#) (Interstate Oil and Gas Compact Commission). (2002). States experience with hydraulic fracturing. A survey of the interstate oil and gas compact commission. IOGCC (Interstate Oil and Gas Compact Commission). <http://energyindepth.org/docs/pdf/IOGCC%20Hydraulic%20Fracturing%20Study%2007-2002.pdf>
- [IOGCC](#) (Interstate Oil and Gas Compact Commission). (2015). Groundwork: hydraulic fracturing - state progress. Available online at <http://groundwork.iogcc.ok.gov/topics-index/hydraulic-fracturing/state-progress>
- [Kargbo, DM; Wilhelm, RG; Campbell, DJ.](#) (2010). Natural gas plays in the Marcellus Shale: Challenges and potential opportunities. Environ Sci Technol 44: 5679-5684. <http://dx.doi.org/10.1021/es903811p>
- [King, GE.](#) (2012). Hydraulic fracturing 101: What every representative, environmentalist, regulator, reporter, investor, university researcher, neighbor and engineer should know about estimating frac risk and improving frac performance in unconventional gas and oil wells. SPE Hydraulic Fracturing Technology Conference, February 6-8, 2012, The Woodlands, TX.
- [Kundert, D; Mullen, M.](#) (2009). Proper evaluation of shale gas reservoirs leads to a more effective hydraulic-fracture stimulation. Paper presented at SPE Rocky Mountain Petroleum Technology Conference, April 14-16, 2009, Denver, CO.
- [Lee, DS; Herman, JD; Elsworth, D; Kim, HT; Lee, HS.](#) (2011). A critical evaluation of unconventional gas recovery from the marcellus shale, northeastern United States. K S C E Journal of Civil Engineering 15: 679-687. <http://dx.doi.org/10.1007/s12205-011-0008-4>
- [Lowe, T; Potts, M; Wood, D.](#) (2013). A case history of comprehensive hydraulic fracturing monitoring in the Cana Woodford. In 2013 SPE annual technical conference and exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/166295-MS>
- [Miskimins, JL.](#) (2008). Design and life cycle considerations for unconventional reservoir wells. In 2008 SPE Unconventional Reservoirs Conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/114170-MS>
- [Montgomery, C.](#) (2013). Fracturing fluid components. In A Bunder; J McLennon; R Jeffrey (Eds.), Effective and Sustainable Hydraulic Fracturing. Croatia: InTech. <http://dx.doi.org/10.5772/56422>
- [Montgomery, CT; Smith, MB.](#) (2010). Hydraulic fracturing - History of an enduring technology. J Pet Tech 62: 26-32.
- [NETL](#) (National Energy Technology Laboratory). (2013). Modern shale gas development in the United States: An update. Pittsburgh, PA: U.S. Department of Energy. National Energy Technology Laboratory. <http://www.netl.doe.gov/File%20Library/Research/Oil-Gas/shale-gas-primer-update-2013.pdf>
- [Newell, R.](#) (2011). Shale gas and the outlook for U.S. natural gas markets and global gas resources. Presentation presented at US EIA presentation at OECD Meetings, June 21, 2011, Paris, France.
- [NPC](#) (National Petroleum Council). (2011b). Plugging and abandonment of oil and gas wells. (Paper #2-25). Washington, DC: National Petroleum Council (NPC).

- [NYSDEC](http://www.dec.ny.gov/energy/75370.html) (New York State Department of Environmental Conservation). (2011). Revised draft supplemental generic environmental impact statement (SGEIS) on the oil, gas and solution mining regulatory program: Well permit issuance for horizontal drilling and high-volume hydraulic fracturing to develop the Marcellus shale and other low-permeability gas reservoirs. Albany, NY: NY SDEC. <http://www.dec.ny.gov/energy/75370.html>
- [Patzek, TW; Male, F; Marder, M.](http://dx.doi.org/10.1073/pnas.1313380110) (2013). Gas production in the Barnett Shale obeys a simple scaling theory. PNAS 110: 19731-19736. <http://dx.doi.org/10.1073/pnas.1313380110>
- [Pearson, CM; Griffin, L; Wright, CA; Weijers, L.](http://dx.doi.org/10.2118/163827-MS) (2013). Breaking up is hard to do: creating hydraulic fracture complexity in the Bakken central basin. In 2013 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/163827-MS>
- [Pearson, K.](http://pubs.usgs.gov/sir/2012/5159/) (2011). Geologic models and evaluation of undiscovered conventional and continuous oil and gas resources Upper Cretaceous Austin Chalk, U.S. Gulf Coast. In US Geological Survey Scientific Investigations Report. (20125159). U.S. Geological Survey. <http://pubs.usgs.gov/sir/2012/5159/>
- [Rassenfoss, S.](#) (2011). From flowback to fracturing: Water recycling grows in the Marcellus shale. J Pet Tech 63: 48-51.
- [Renpu, W.](#) (2011). Advanced well completion engineering (Third ed.). Houston, TX: Gulf Professional Publishing.
- [Ross, D; King, G.](#) (2007). Well completions. In MJ Economides; T Martin (Eds.), Modern fracturing: Enhancing natural gas production (1 ed., pp. 169-198). Houston, Texas: ET Publishing.
- [Saba, T; Mohsen, F; Garry, M; Murphy, B; Hilbert, B.](#) (2012). White paper: Methanol use in hydraulic fracturing fluids. (1103844.000 0101 0711 TS26). Maynard, MA: Exponent.
- [Schlumberger](http://www.slb.com/~media/Files/evaluation/books/fundamentals_formation_testing_overview.pdf) (Schlumberger Limited). (2006). Fundamentals of formation testing. Sugar Land, Texas. [http://www.slb.com/~media/Files/evaluation/books/fundamentals\\_formation\\_testing\\_overview.pdf](http://www.slb.com/~media/Files/evaluation/books/fundamentals_formation_testing_overview.pdf)
- [Schlumberger](http://www.glossary.oilfield.slb.com/) (Schlumberger Limited). (2014). Schlumberger oilfield glossary. Available online at <http://www.glossary.oilfield.slb.com/>
- [Shires, T; Lev-On, M.](#) (2012). Characterizing pivotal sources of methane emissions from unconventional natural gas production - summary and analysis of API and ANGA survey responses. Washington, DC: American Petroleum Institute. American Natural Gas Alliance.
- [Spellman, FR.](#) (2012). Environmental impacts of hydraulic fracturing. In Environmental impacts of hydraulic fracturing. Boca Raton, Florida: CRC Press.
- [STO](http://www.statoil.com/no/OurOperations/ExplorationProd/ShaleGas/FactSheets/Downloads/Shale_DrillingHydraulicFracturing.pdf) (Statoil). (2013). Shale facts: drilling and hydraulic fracturing, how it's done, responsibly. (Global Version, April 2013). Stavanger, Norway. [http://www.statoil.com/no/OurOperations/ExplorationProd/ShaleGas/FactSheets/Downloads/Shale\\_DrillingHydraulicFracturing.pdf](http://www.statoil.com/no/OurOperations/ExplorationProd/ShaleGas/FactSheets/Downloads/Shale_DrillingHydraulicFracturing.pdf)
- [Thompson, AM.](#) (2010) Induced fracture detection in the Barnett Shale, Ft. Worth Basin, Texas. (Master's Thesis). University of Oklahoma, Norman, OK.
- [U.S. EPA](http://www.epa.gov/airquality/oilandgas/pdfs/20120418tsd.pdf) (U.S. Environmental Protection Agency). (2012d). Oil and natural gas sector: standards of performance for crude oil and natural gas production, transmission, and distribution. Background supplemental technical support document for the final new source performance standards. Washington, D.C. <http://www.epa.gov/airquality/oilandgas/pdfs/20120418tsd.pdf>
- [U.S. EPA](http://nepis.epa.gov/exe/ZyPURL.cgi?Dockey=P100FH8M.txt) (U.S. Environmental Protection Agency). (2012f). Study of the potential impacts of hydraulic fracturing on drinking water resources: Progress report. (EPA/601/R-12/011). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://nepis.epa.gov/exe/ZyPURL.cgi?Dockey=P100FH8M.txt>

- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013c). Inventory of U.S. greenhouse gas emissions and sinks: 1990-2011. Washington, DC: U.S. Environmental Protection Agency, Office of Atmospheric Programs. <http://www.epa.gov/climatechange/Downloads/ghgemissions/US-GHG-Inventory-2013-Main-Text.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014e). Greenhouse gas reporting program, Subpart W - Petroleum and natural gas systems. Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015b). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Project database [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocus-1-disclosures>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015g). Inventory of U.S. greenhouse gas emissions and sinks: 1990-2013. (EPA 430-R-15-004). Washington, D.C. <http://www.epa.gov/climatechange/Downloads/ghgemissions/US-GHG-Inventory-2015-Main-Text.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015n). Review of well operator files for hydraulically fractured oil and gas production wells: Well design and construction [EPA Report]. (EPA/601/R-14/002). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [U.S. GAO](#) (U.S. Government Accountability Office). (2012). Energy-water nexus: Information on the quantity, quality, and management of water produced during oil and gas production. (GAO-12-156). Washington, D.C. <http://www.gao.gov/products/GAO-12-156>
- [URS Corporation](#). (2011). Water-related issues associated with gas production in the Marcellus shale: Additives use flowback quality and quantities regulations on-site treatment green technologies alternate water sources water well-testing. (NYSERDA Contract PO Number 10666).
- [USGS](#) (U.S. Geological Survey). (2000). Coal-bed methane: Potential and concerns [Fact Sheet]. (Fact Sheet 123-00). <http://pubs.usgs.gov/fs/fs123-00/fs123-00.pdf>
- [USGS](#) (U.S. Geological Survey). (2002). Natural gas production in the United States [Fact Sheet]. (USGS Fact Sheet FS-113-01). Denver, CO.
- [USGS](#) (U.S. Geological Survey). (2013a). Map of assessed shale gas in the United States, 2012. <http://pubs.usgs.gov/dds/dds-069/dds-069-z/>
- [USGS](#) (U.S. Geological Survey). (2014a). Energy glossary and acronym list. Available online at <http://energy.usgs.gov/GeneralInfo/HelpfulResources/EnergyGlossary.aspx#>
- [USGS](#) (U.S. Geological Survey). (2015). Trends in hydraulic fracturing distributions and treatment fluids, additives, proppants, and water volumes applied to wells drilled in the United States from 1947 through 2010 data analysis and comparison to the literature. (U.S. Geological Survey Scientific Investigations Report 20145131). Reston, VA. <http://dx.doi.org/10.3133/sir20145131>
- [Vidas, H; Hugman, B.](#) (2008). Availability, economics, and production potential of North American unconventional natural gas supplies. (F-2008-03). Washington, DC: The INGAA Foundation, Inc. <http://www.ingaa.org/File.aspx?id=7878>
- [Vincent, M.](#) (2011). Restimulation of unconventional reservoirs: when are refracs beneficial? Journal of Canadian Petroleum Technology 50: 36-52. <http://dx.doi.org/10.2118/136757-PA>

Wang, Z; Krupnick, A. (2013). A retrospective review of shale gas development in the United States. What led to the boom? (RFF DP 13-12). Washington, DC: Resources for the Future.  
<http://www.rff.org/RFF/documents/RFF-DP-13-12.pdf>

Weijermars, R. (2014). US shale gas production outlook based on well roll-out rate scenarios. Appl Energy 124: 283-297. <http://dx.doi.org/10.1016/j.apenergy.2014.02.058>

Yergin, D. (2011). The quest : energy, security and the remaking of the modern world. In The quest : energy, security and the remaking of the modern world. New York, NY: Penquin Press.

## Chapter 3

---

# Drinking Water Resources in the United States

### 3. Drinking Water Resources in the United States

1 Consideration of how and where hydraulic fracturing activities potentially impact drinking water  
2 resources requires an understanding of both the activities and the potentially impacted resources.  
3 In Chapter 2, we provided background on hydraulic fracturing and in this chapter, we provide an  
4 overview of drinking water resources in the United States. We describe the use of these resources,  
5 including patterns in current use and trends for future use (Section 3.1). We then characterize the  
6 spatial distribution of hydraulically fractured wells and current surface and ground water supplies  
7 throughout the United States (Section 3.2) to evaluate where potential impacts of hydraulic  
8 fracturing on drinking water resources may occur.

#### 3.1. Current and Future Drinking Water Resources

9 In this assessment, drinking water resources are defined broadly as any body of ground water or  
10 surface water that now serves, or in the future could serve, as a source of drinking water for public  
11 or private use. Drinking water resources provide not only water that individuals actually drink but  
12 also water used for many additional purposes such as cooking and bathing. Our definition of  
13 drinking water resources includes both fresh and non-fresh bodies of water.

14 The average American uses about 90 gal (341 L) of drinking water per day for indoor and outdoor  
15 purposes (e.g., drinking, food preparation, washing clothes and dishes, flushing toilets, and  
16 watering lawns or gardens ([Maupin et al., 2014](#); [AWWA, 1999](#)). Drinking water is supplied to  
17 households by either public water systems (PWSs) or private water systems (private ground water  
18 wells and surface water intakes).<sup>1</sup> In 2011, approximately 270 million people (86% of the  
19 population) in the United States relied on water supplied to their homes by one of the more than  
20 51,000 community water systems ([Maupin et al., 2014](#); [U.S. EPA, 2013b](#)).<sup>2</sup> These systems provided  
21 households with nearly 24 billion gal (91 billion L) of water per day ([Maupin et al., 2014](#)).<sup>3</sup> In areas  
22 without service by PWSs, approximately 43 million people (14% of the population) relied on  
23 private sources for drinking water, and private water systems account for about 3.6 billion gal (14  
24 billion L) of daily water withdrawals ([Maupin et al., 2014](#)).

25 Drinking water resources can be surface waters such as rivers, streams, lakes, or reservoirs, as well  
26 as ground water aquifers. In 2011, approximately 70% of the population receiving drinking water  
27 from PWSs relied on surface water, and 30% relied on ground water ([U.S. EPA, 2013b](#)). However,

---


<sup>1</sup> Public water systems (PWSs) provide water for human consumption from surface or ground water through pipes or other infrastructure to at least 15 service connections or serve an average of at least 25 people for at least 60 days a year ([U.S. EPA, 2012e](#)). Private (non-public) water systems serve fewer than 15 connections and fewer than 25 individuals ([U.S. EPA, 1991](#)).

<sup>2</sup> The EPA categorizes public water systems as either community water systems, which supply water to the same population year-round, or non-community water systems, which supply water to at least 25 of the same people at least six months per year, but not year-round. Approximately 101,000 non-community water systems provide water to non-residential facilities (e.g., schools, small businesses, churches, and campgrounds ([U.S. EPA, 2013b](#)).

<sup>3</sup> The U.S. Geological Survey (USGS) compiles data in cooperation with local, state, and federal environmental agencies to produce water-use information aggregated at the county, state, and national levels. Every five years, data at the county level are compiled into a national water use census and state-level data are published. The most recent USGS water use report was released in 2014, and contains water use estimates from 2010 ([Maupin et al., 2014](#); [USGS, 2014b](#)).



1 the relative importance of surface and ground water sources for supplying drinking water varies  
 2 geographically (see Figure 3-1). Most larger PWSs rely on surface water and are located in urban  
 3 areas ([U.S. EPA, 2011b](#)), whereas most smaller PWSs rely on ground water and are located in rural  
 4 areas ([U.S. EPA, 2014j, 2013b](#)). In fact, more than 95% of households in rural areas obtain their  
 5 drinking water from ground water aquifers ([U.S. EPA, 2011b](#)).

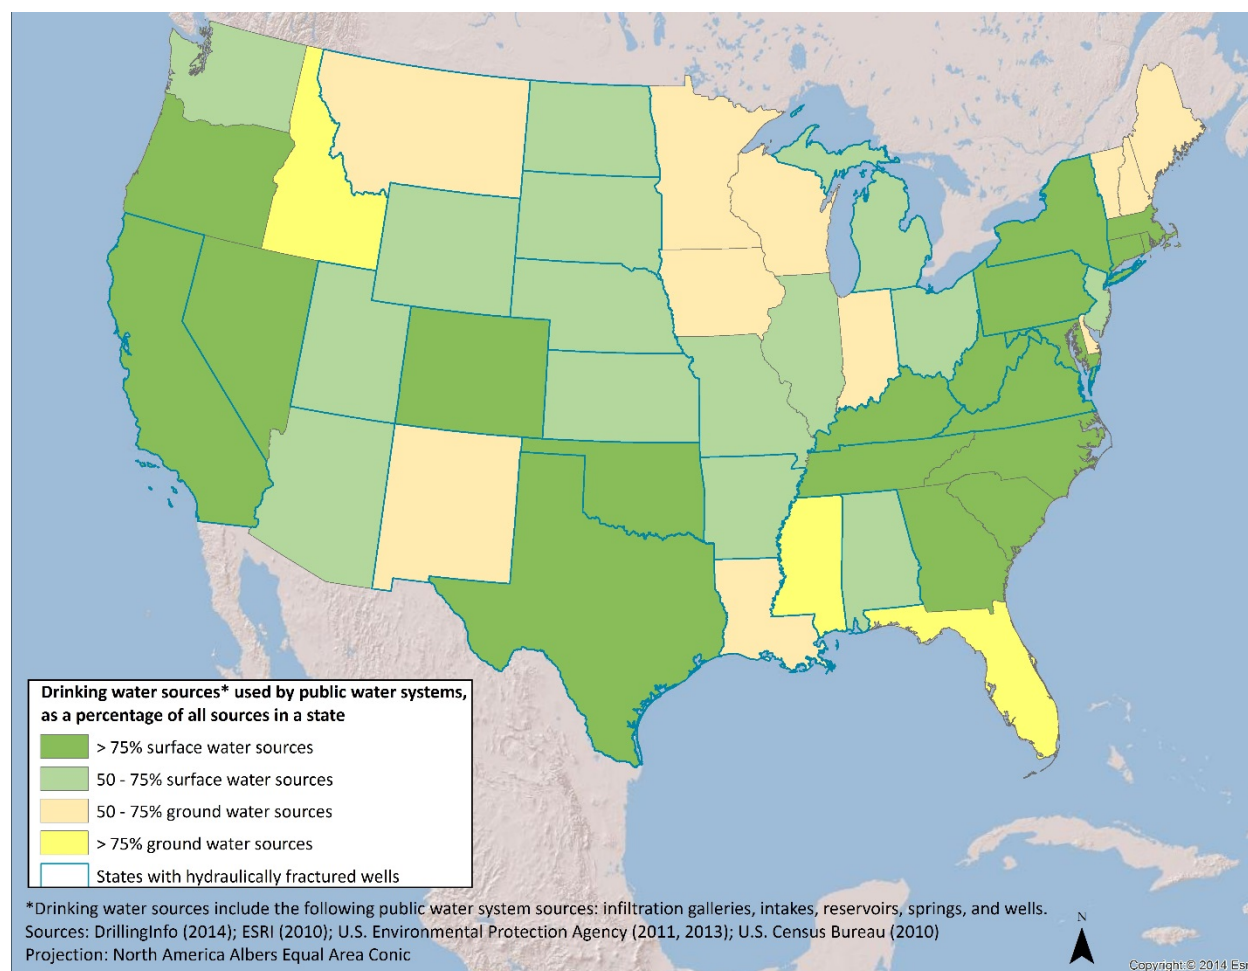

**Figure 3-1. Geographic variability in drinking water sources for public water systems.**

The relative importance of surface and ground water as drinking water sources varies by state. The public water system sources used in this analysis include infiltration galleries, intakes, reservoirs, springs, and wells. States with hydraulically fractured wells were identified from DrillingInfo data.

6 The future availability of drinking water resources that are considered fresh in the United States  
 7 will be affected by changes in climate and water use ([Georgakakos et al., 2014](#); [U.S. Global Change](#)

1 [Research Program, 2009](#)).<sup>1</sup> Since 2000, about 30% of the total area of the contiguous United States  
2 has experienced moderate drought conditions and about 20% has experienced severe drought  
3 conditions ([National Drought Mitigation Center, 2015](#); [U.S. EPA, 2015r](#)). Declines in surface water  
4 resources have already led to increased withdrawals and cumulative net depletions of ground  
5 water in some areas ([Castle et al., 2014](#); [Georgakakos et al., 2014](#); [Konikow, 2013a](#); [Famiglietti et al.,  
6 2011](#)). Other sources of water that might not be considered fresh, such as wastewater from sewage  
7 treatment plants, brackish (containing 3,000–10,000 mg/L TDS) and saline (containing more than  
8 10,000 mg/L TDS) surface and ground water, as well as seawater (containing about 35,000 mg/L  
9 TDS) are also increasingly being used to meet water demand. Through treatment or desalination,  
10 these water sources can reduce the use of high-quality, potable fresh water for industrial processes,  
11 irrigation, recreation, and toilet flushing (i.e., non-potable uses). In addition, in 2010, approximately  
12 355 million gal per day (1.3 billion L per day) of treated wastewater was reclaimed through potable  
13 reuse projects ([NRC, 2012](#)). Such projects use reclaimed wastewater to augment surface drinking  
14 water resources or to recharge aquifers that supply drinking water to PWSs ([NRC, 2012](#); [Sheng,  
15 2005](#)).

16 An increasing number of states are developing new water supplies to augment existing water  
17 through reuse of reclaimed water, recycling of storm water, and desalination ([U.S. GAO, 2014](#)). Most  
18 desalination programs currently use brackish water, although plans are underway to expand the  
19 use of seawater for desalination in some states. States with the highest installed capacity for  
20 desalination include Florida, California, Arizona, and Texas ([Cooley et al., 2006](#)). It is likely that  
21 various water treatment technologies will continue to expand drinking water resources beyond  
22 those currently being considered for use as drinking water. Therefore, these potential future  
23 sources are also considered drinking water resources in this assessment.

### 3.2. The Proximity of Drinking Water Resources to Hydraulic Fracturing Activity

24 The colocation of hydraulic fracturing activities with surface and ground water increases the  
25 potential for impacts to current and future drinking water resources ([Vengosh et al., 2014](#); [Entrekin  
26 et al., 2011](#)). In this section, we analyze the aboveground proximity of hydraulically fractured well  
27 sites, drinking water resources (including the location of surface water bodies and ground water  
28 wells that supply public water systems), and populated areas.<sup>2</sup>

29 To determine the spatial relationship between hydraulically fractured wells and populated areas,  
30 we analyzed the locations of the approximately 273,000 oil and gas wells that were hydraulically  
31 fractured in 25 states between 2000 and 2013 (see Chapter 2) with respect to where people live  
32 (i.e., census blocks).<sup>3</sup> Nationwide, approximately 9.4 million people lived within one mile of a

---

<sup>1</sup> Fresh water qualitatively refers to water with relatively low TDS that is most readily available for drinking water currently.

<sup>2</sup> The vertical proximity of ground water resources to geologic formations and hydraulic fracturing operations is addressed in Chapter 6.

<sup>3</sup> In the analyses in this chapter, we only include the oil and gas production wells that we identified were hydraulically fractured using criteria outlined in Chapter 2 and that began producing between 2000 and 2013. The well data found in DrillingInfo may not represent the full year for 2013 since the frequency with which DrillingInfo updates the database varies by state. The final update performed by DrillingInfo for 2013 ranges by state from June 2013 to December 2013.




1 hydraulically fractured well for some period of time between 2000 and 2013 ([DrillingInfo, 2014a](#);  
2 [U.S. Census Bureau, 2010](#)); more than 5.7 million people lived within half a mile of a hydraulically  
3 fractured well.

4 We then analyzed trends in the proximity of hydraulically fractured wells to highly populated areas.  
5 For this analysis, we considered metropolitan areas (areas with more than 50,000 people) and  
6 micropolitan areas (areas with 10,000 to 49,999 people) ([U.S. Census Bureau, 2013c](#)).<sup>1</sup>  
7 Approximately 81,300 (30%) of new wells hydraulically fractured between 2000 and 2013 were  
8 located within a metropolitan or micropolitan area (see Figure 3-2) ([DrillingInfo, 2014a](#); [U.S.](#)  
9 [Census Bureau, 2013c](#); [U.S. EPA, 2013b](#); [ESRI, 2010](#)). From 2000 to 2008, the number of new wells  
10 hydraulically fractured per year within metropolitan and micropolitan areas increased 300%; the  
11 proportion of wells hydraulically fractured per year in metropolitan and micropolitan areas almost  
12 doubled over the same eight-year period (see Figure 3-3).<sup>2</sup> From 2008 to 2012, however, the  
13 number of wells hydraulically fractured per year in metropolitan and micropolitan areas decreased  
14 by about half in comparison to the peak of approximately 10,000 wells in 2008 (see Figure 3-3),  
15 whereas hydraulic fracturing in areas outside of metropolitan and micropolitan areas increased or  
16 remained relatively constant ([DrillingInfo, 2014a](#); [U.S. Census Bureau, 2013b](#)).

---


<sup>1</sup> Metropolitan and micropolitan combined statistical areas are geographic entities delineated by the Office of Management and Budget. Specifically, a metropolitan combined statistical area is a core urban area of 50,000 or more people while a micropolitan combined statistical area is an urban core of at least 10,000, but less than 50,000, people ([U.S. Census Bureau, 2013c](#)). These terms are referred to as metropolitan and micropolitan areas in this assessment.

<sup>2</sup> For comparison, the DrillingInfo data indicate an increase in the number of wells estimated to be hydraulically fractured each year, regardless of location, from approximately 12,800 in 2000 to slightly more than 21,600 in 2005 to nearly 23,000 in 2012, the last year for which complete data are available.

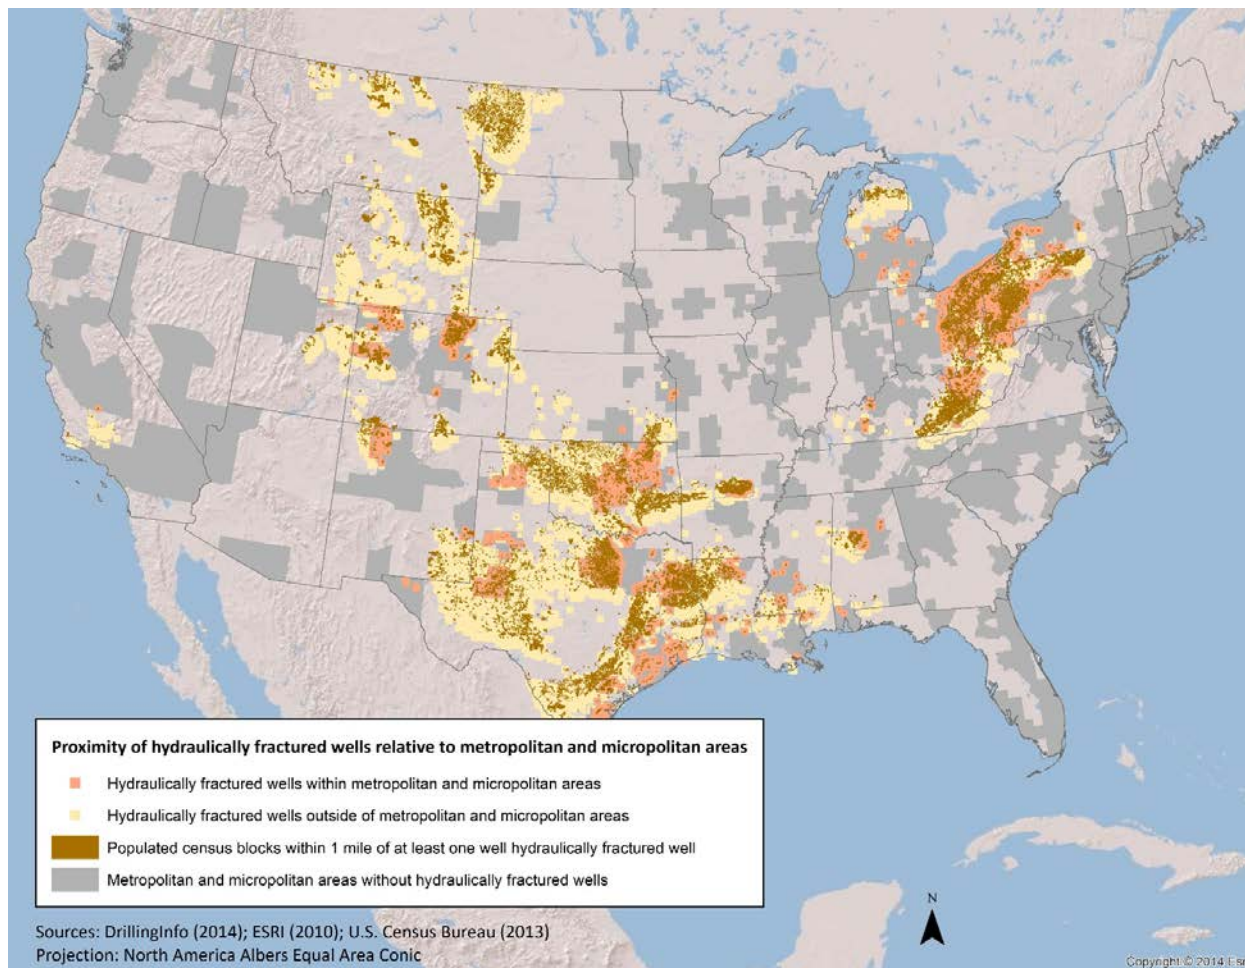

**Figure 3-2. Proximity of hydraulically fractured wells relative to populated areas.**

The estimates of hydraulically fractured wells from 2000 to 2013 developed from the DrillingInfo data were based on several assumptions described in Chapter 2.

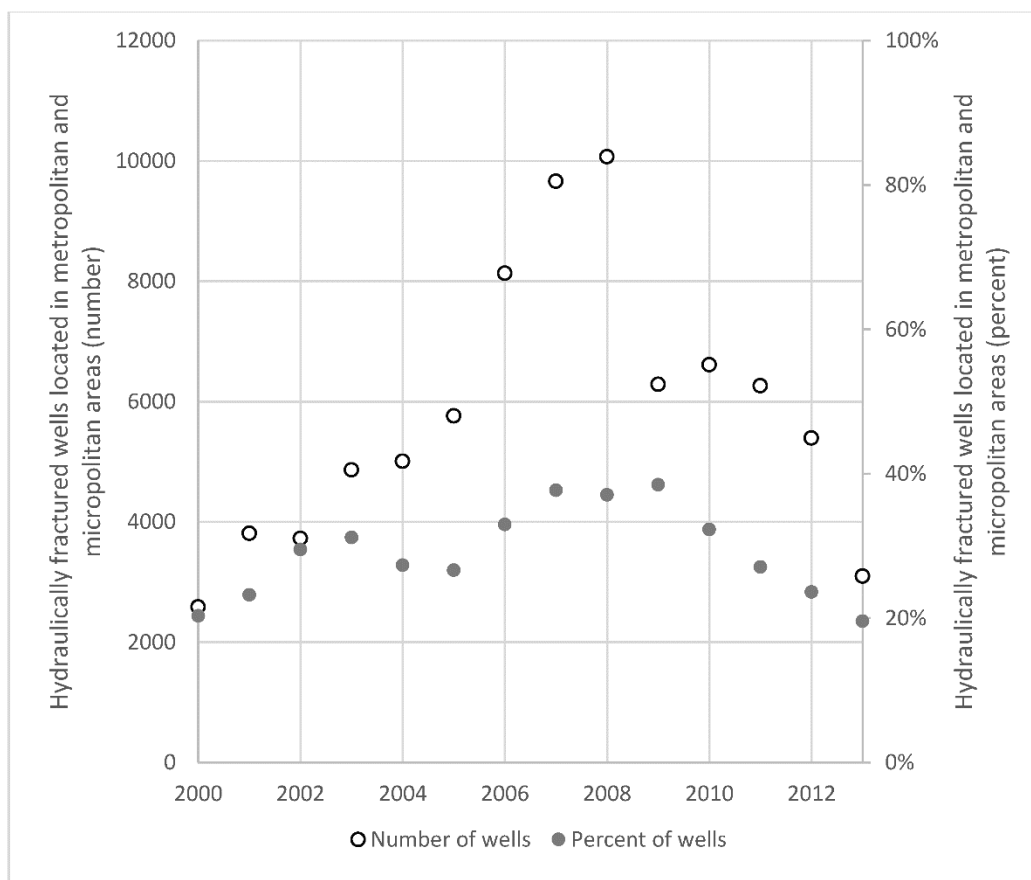

**Figure 3-3. Temporal trends (2000–2013) in the number and percent of hydraulically fractured wells located within populated areas.**

The estimates of hydraulically fractured wells from 2000 to 2013 developed from the DrillingInfo data were based on several assumptions described in Chapter 2. The graph shows the number of hydraulically fractured wells by the year they started producing. Well data may not be complete for 2013 since final updates to the database for 2013 ranged from June 2013 to December 2013, depending on the state. Original data from [DrillingInfo \(2014a\)](#) and [U.S. Census Bureau \(2013c\)](#).

- 1 We next considered the proximity of hydraulically fractured wells to water sources for PWSs. We
- 2 present proximity from both the vantage point of hydraulically fractured wells (e.g., on average,
- 3 how far away is the nearest PWS source?) and from the vantage point of PWSs (e.g., if there is at
- 4 least one fractured well within 1 mile of a PWS, are there usually more?).
- 5 Based on the 2000–2013 DrillingInfo data, the distance from hydraulically fractured wells to the
- 6 nearest source supplying a PWS ranged from 0.01 to 41 miles, with an average distance of 6.2 miles
- 7 (9.9 km) and a median distance of 4.8 miles (7.6 km) ([DrillingInfo, 2014a](#); [U.S. EPA, 2014j](#)). These
- 8 PWS sources included both surface water sources (e.g., infiltration galleries, intakes, reservoirs, and
- 9 springs) and ground water wells. An estimated 21,900 of hydraulically fractured oil and gas wells
- 10 (8%) were within 1 mile of at least one PWS source (see Figure 3-4). The maximum number was 40
- 11 PWS sources within 1 mile of a single hydraulically fractured well.

1 Between 2000 and 2013, approximately 6,800 PWS sources had a hydraulically fractured well  
2 within a 1 mile radius. Most of these PWS sources were located in Colorado, Louisiana, Michigan,  
3 North Dakota, Ohio, Oklahoma, Pennsylvania, Texas, and Wyoming (see Figure 3-5). These PWS  
4 sources had an average of seven fractured wells and a maximum of 144 fractured wells within that  
5 one mile proximity. They also supplied water to 3,924 PWSs—1,609 of which are community water  
6 systems—that served more than 8.6 million people year-round in 2013 ([U.S. EPA, 2014j](#); [U.S.  
7 Census Bureau, 2013a](#); [U.S. EPA, 2013b](#)).<sup>1</sup>


8 We also analyzed the location of hydraulically fractured wells relative to populations where a high  
9 proportion ( $\geq 30\%$ , or twice the national average) obtain drinking water from private systems  
10 (private ground water wells and surface water intakes).<sup>2</sup> Between 2000 and 2013, approximately  
11 3.6 million people obtained drinking water from private systems in counties with at least one  
12 hydraulically fractured well ([DrillingInfo, 2014a](#); [USGS, 2014b](#)), and approximately 740,000 people  
13 obtained drinking water from private supplies in counties with more than 400 fractured wells  
14 ([DrillingInfo, 2014a](#); [USGS, 2014b](#)) (see Figure 3-6).<sup>3</sup> These counties were located in Colorado,  
15 Kentucky, Michigan, Montana, New Mexico, New York, Oklahoma, Pennsylvania, Texas, and  
16 Wyoming (see Figure 3-6).

---

<sup>1</sup> All PWS types were included in the locational analyses performed. However, only community water systems were used to calculate the number of customers obtaining water from a PWS with at least one source within 1 mile of a hydraulically fractured well. If non-community water systems are included, the estimated number of customers increases by 533,000 people ([U.S. EPA, 2012e](#)).

<sup>2</sup> There is no national data set of private water systems. The USGS estimates the proportion of the population reliant on private water systems, referred to as the “self-supplied population,” by county, based on estimates of the population without connections to a public water system ([Maupin et al., 2014](#)). We used the USGS estimates for this analysis.


<sup>3</sup> Approximately 14% of the U.S. population is supplied by private water systems ([Maupin et al., 2014](#)). In this analysis, we only considered counties in which more than double the national average—that is, at least 30% of the county’s population—was supplied by private water systems.

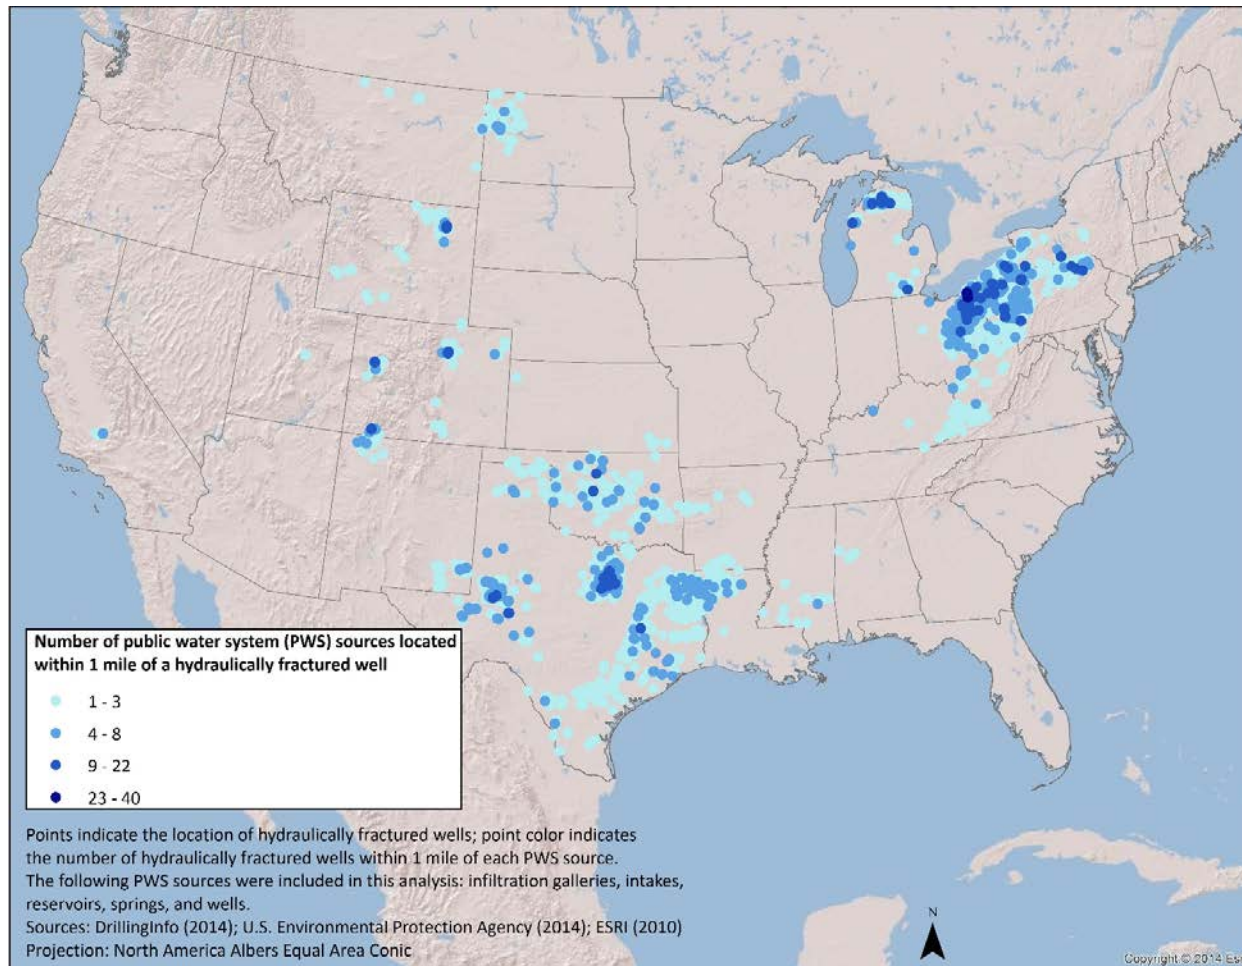

**Figure 3-4. Location and number of public water system (PWS) sources located within 1 mile of a hydraulically fractured well.**


Points indicate the location of hydraulically fractured wells; point color indicates the number of hydraulically fractured wells within 1 mile of each PWS source. The following PWS sources were included in this analysis: infiltration galleries, intakes, reservoirs, springs, and wells. The estimates of wells hydraulically fractured from 2000 to 2013 developed from the DrillingInfo data were based on several assumptions described in Chapter 2.



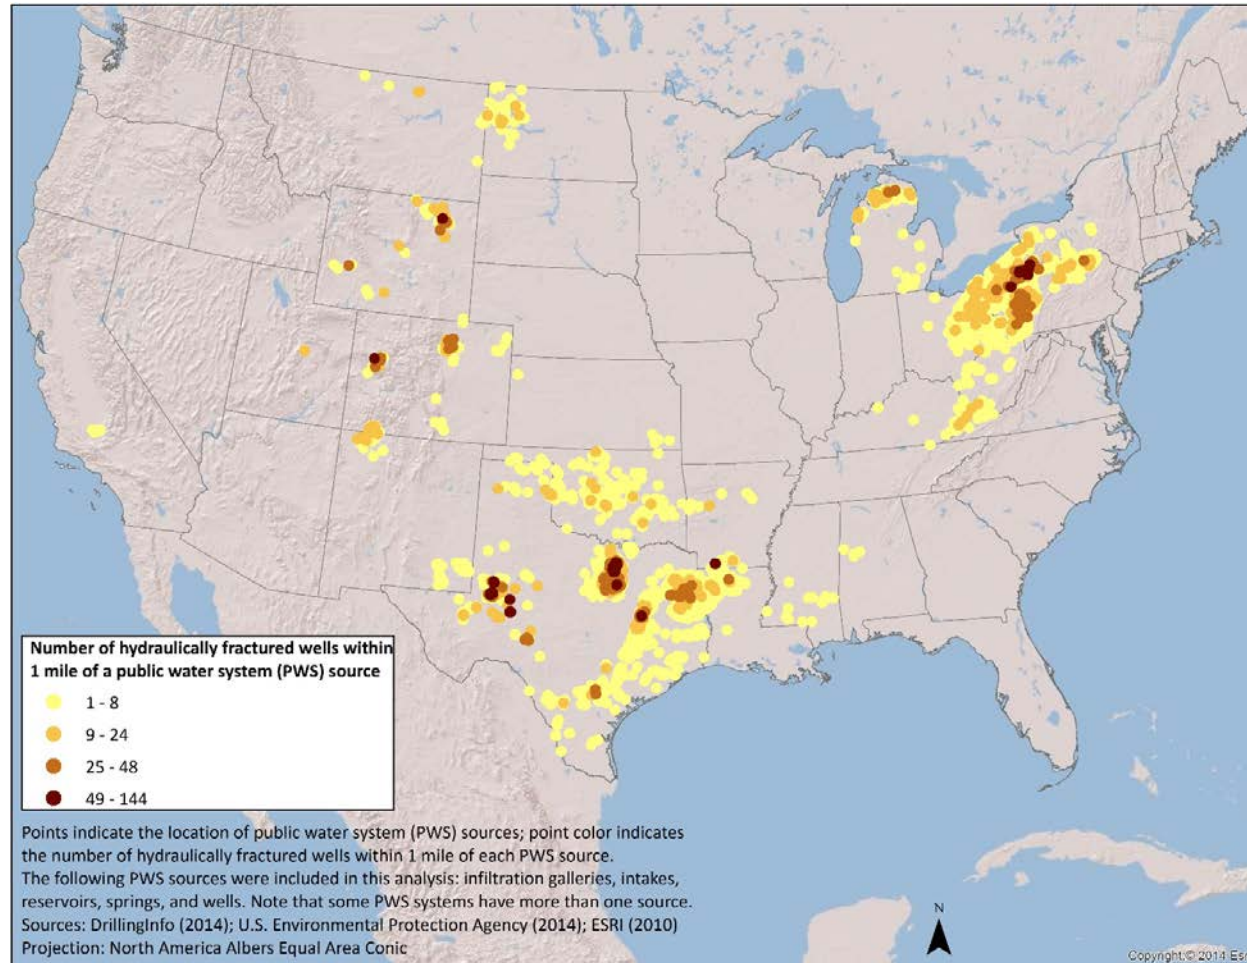

**Figure 3-5. The location of public water system sources within 1 mile of hydraulically fractured wells.**

Points indicate the location of public water system (PWS) sources; point color indicates the number of hydraulically fractured wells within 1 mile of each PWS source. The estimates of wells hydraulically fractured from 2000 to 2013 developed from the DrillingInfo data were based on several assumptions described in Chapter 2.

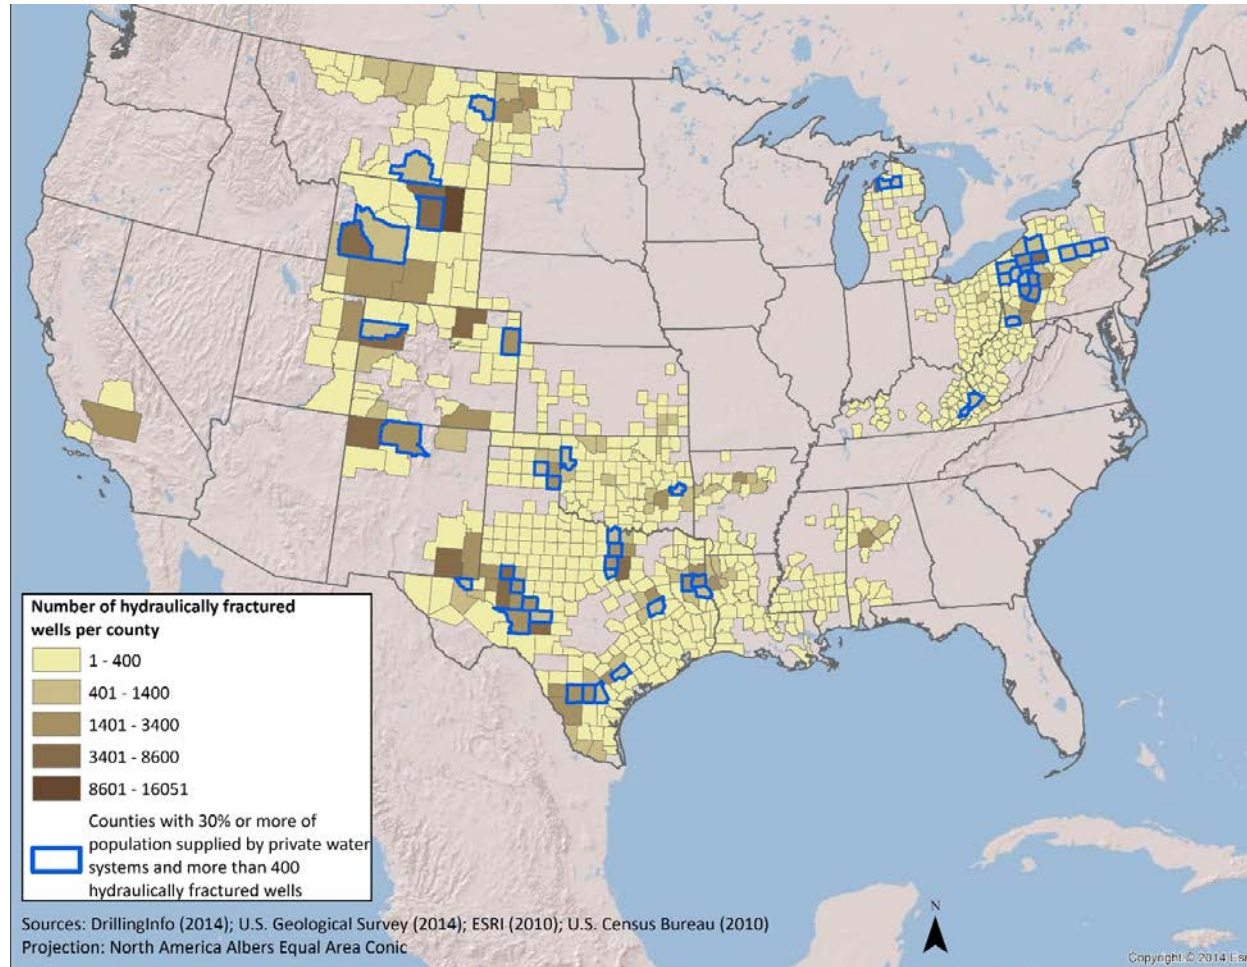

**Figure 3-6. Co-occurrence of hydraulic fracturing activity and populations supplied by private water systems.**

Color indicates the number of hydraulically fractured wells per county. The estimates of wells hydraulically fractured from 2000 to 2013 developed from the DrillingInfo data were based on several assumptions described in Chapter 2. Counties with more than 400 hydraulically fractured wells and in which at least 30% of the population is supplied by private water systems are outlined in blue.



### 3.3. Conclusion

1 The evaluation of potential hydraulic fracturing impacts on drinking water resources in the United  
2 States depends on an understanding of how the country's current and future drinking water needs  
3 are and will be met. The U.S. population requires sufficient drinking water resources—that is,  
4 bodies of fresh or non-fresh surface or ground water that now serve, or in the future could serve, as  
5 a source of water for drinking water for public or private use—to meet everyday needs. Currently,  
6 most people in the United States rely on water supplied to their homes via public water systems,  
7 and most of this water comes from fresh surface water bodies. Shortages in fresh water availability  
8 in the United States, especially in the western United States, have already led some states to  
9 augment their water supplies with other water sources (e.g., brackish and saline surface and  
10 ground water, seawater, and reclaimed wastewater), suggesting that additional water bodies may  
11 provide drinking water as the quantity and quality of existing sources change.

12 The collocation of hydraulic fracturing activities with drinking water resources increases the  
13 potential for these activities to affect the quality and quantity of current and future drinking water  
14 resources. While close proximity of hydraulically fractured wells to drinking water resources does  
15 not necessarily indicate that an impact has or will occur, information about the relative location of  
16 wells and water supplies is an initial step in understanding where potential impacts might occur.

17 Millions of people live in areas where their drinking water resources are located near hydraulically  
18 fractured wells. While most hydraulic fracturing activity from 2000 to 2013 did not occur in close  
19 proximity to public water supplies, a sizeable number of hydraulically fractured wells (21,900)  
20 were located within 1 mile of at least one PWS source (e.g., infiltration galleries, intakes, reservoirs,  
21 springs and ground water wells). Approximately 6,800 sources of drinking water for public water  
22 systems, serving more than 8.6 million people year-round, were located within 1 mile of at least one  
23 hydraulically fractured well. An additional 3.6 million people obtain drinking water from private  
24 systems in counties with at least one hydraulically fractured well and in which at least 30% of the  
25 population is reliant on private water systems.

**Text Box 3-1. Major Findings*****Current and future drinking water resources***

- Most of the U.S. population (270 million in 2011, or 86%) relies on water supplied to their homes through a public water system, 70% of which comes from surface water and 30% of which comes from ground water.
- An estimated 14% of the U.S. population relies on private water systems for drinking water.
- An increasing number of states are developing new drinking water supplies via reuse of reclaimed water, recycling of storm water, and desalination. These new supplies can augment existing water sources.
- Most of the U.S. population (270 million in 2011, or 86%) relies on water supplied to their homes through a public water system, 70% of which comes from surface water and 30% of which comes from ground water.
- An estimated 14% of the U.S. population relies on private water systems for drinking water.
- An increasing number of states are developing new drinking water supplies via reuse of reclaimed water, recycling of storm water, and desalination. These new supplies can augment existing water sources.

***Proximity of drinking water resources to hydraulic fracturing activity***

- Nationwide, while most hydraulic fracturing activity from 2000 to 2013 did not occur in close proximity to public water supplies, a sizeable number of hydraulically fractured wells (21,900) were located within 1 mile of at least one PWS source.
- The distance between wells that were hydraulically fractured between 2000 and 2013 and the nearest source supplying a PWS ranged from 0.01 to 41 miles, with an average distance of 6.2 miles (9.9 km).
- An estimated 6,800 public water system sources were located within 1 mile of a hydraulically fractured oil and gas well between 2000 and 2013. These PWS sources supplied water to 3,924 public water systems and served more than 8.6 million people year-round in 2013.
- Approximately 9.4 million people lived within 1 mile of at least one hydraulically fractured oil and gas well between 2000 and 2013.
- Approximately 3.6 million people obtain drinking water from private systems in counties with at least one hydraulically fractured well and in which at least 30% of the population (i.e., double the national average) is reliant on private water systems.

**3.4. References for Chapter 3**

[AWWA](http://www.waterrf.org/PublicReportLibrary/RFR90781_1999_241A.pdf) (American Water Works Association). (1999). Residential end uses of water. In PW Mayer; WB DeOreo (Eds.). Denver, CO: AWWA Research Foundation and American Water Works Association. [http://www.waterrf.org/PublicReportLibrary/RFR90781\\_1999\\_241A.pdf](http://www.waterrf.org/PublicReportLibrary/RFR90781_1999_241A.pdf)

- [Castle, SL; Thomas, BF; Reager, JT; Rodell, M; Swenson, SC; Famiglietti, JS.](#) (2014). Groundwater depletion during drought threatens future water security of the Colorado River Basin. *Geophys Res Lett* 41: 5904-5911. <http://dx.doi.org/10.1002/2014GL061055>
- [Cooley, H; Gleick, PH; Wolff, G.](#) (2006). Desalination, with a grain of salt: A California perspective. Oakland, CA: Pacific Institute for Studies in Development, Environment, and Security. [http://www.pacinst.org/wp-content/uploads/2013/02/desalination\\_report3.pdf](http://www.pacinst.org/wp-content/uploads/2013/02/desalination_report3.pdf)
- [DrillingInfo, Inc.](#) (2014a). DI Desktop June 2014 download [Database]. Austin, TX: DrillingInfo. Retrieved from <http://info.drillinginfo.com/>
- [Entrekin, S; Evans-White, M; Johnson, B; Hagenbuch, E.](#) (2011). Rapid expansion of natural gas development poses a threat to surface waters. *Front Ecol Environ* 9: 503-511. <http://dx.doi.org/10.1890/110053>
- [ESRI](#) (Environmental Systems Research Institute Inc.). (2010). US states shapefile. Redlands, California. Retrieved from <http://www.arcgis.com/home/item.html?id=1a6cae723af14f9cae228b133aebc620>
- [Famiglietti, JS; Lo, M; Ho, SL; Bethune, J; Anderson, KJ; Syed, TH; Swenson, SC; de Linage, CR; Rodell, M.](#) (2011). Satellites measure recent rates of groundwater depletion in California's Central Valley. *Geophys Res Lett* 38: L03403. <http://dx.doi.org/10.1029/2010GL046442>
- [Georgakakos, A; Fleming, P; Dettinger, M; Peters-Lidard, C; Richmond, TC; Reckhow, K; White, K; Yates, D.](#) (2014). Water resources. In JM Melillo; TC Richmond; GW Yohe (Eds.), *Climate change impacts in the United States* (pp. 69-112). Washington, D.C.: U.S. Global Change Research Program. <http://www.globalchange.gov/ncadac>
- [Konikow, LF.](#) (2013a). Groundwater depletion in the United States (1900-2008): U.S. Geological Survey Scientific Investigations Report 2013-5079. Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2013/5079>
- [Maupin, MA; Kenny, JF; Hutson, SS; Lovelace, JK; Barber, NL; Linsey, KS.](#) (2014). Estimated use of water in the United States in 2010. (USGS Circular 1405). Reston, VA: U.S. Geological Survey. <http://dx.doi.org/10.3133/cir1405>
- [National Drought Mitigation Center.](#) (2015). U.S. drought monitor. Available online at <http://droughtmonitor.unl.edu/Home.aspx> (accessed February 27, 2015).
- [NRC](#) (National Research Council). (2012). *Water reuse: Potential for expanding the nations water supply through reuse of municipal wastewater*. Committee on the Assessment of Water Reuse as an Approach for Meeting Future Water Supply Need. Washington, DC: The National Academies Press. [http://www.nap.edu/openbook.php?record\\_id=13303](http://www.nap.edu/openbook.php?record_id=13303)
- [Sheng, Z.](#) (2005). An aquifer storage and recovery system with reclaimed wastewater to preserve native groundwater resources in El Paso, Texas. *J Environ Manage* 75: 367-377. <http://dx.doi.org/10.1016/j.jenvman.2004.10.007>
- [U.S. Census Bureau.](#) (2010). Special release - census blocks with population and housing unit counts, 2010 TIGER/Line shapefiles [Computer Program]. Suitland, MD: U.S. Census Bureau, Geography Division. Retrieved from <https://www.census.gov/geo/maps-data/data/tiger-line.html>
- [U.S. Census Bureau.](#) (2013a). Annual estimates of the resident population: April 1, 2010 to July 1, 2013. Suitland, MD: U.S. Census Bureau, Population Division. <http://factfinder2.census.gov/faces/tableservices/jsf/pages/productview.xhtml?src=bkmlk>
- [U.S. Census Bureau.](#) (2013b). Cartographic boundary shapefiles metropolitan and micropolitan statistical areas and related statistical areas (Combined statistical areas, 500k). Suitland, MD. Retrieved from [https://www.census.gov/geo/maps-data/data/cbf/cbf\\_msa.html](https://www.census.gov/geo/maps-data/data/cbf/cbf_msa.html)
- [U.S. Census Bureau.](#) (2013c). Metropolitan and micropolitan statistical areas main. Available online at <http://www.census.gov/population/metro/> (accessed January 12, 2015).

- [U.S. EPA](#) (U.S. Environmental Protection Agency). (1991). Manual of individual and non-public water supply systems [EPA Report]. (EPA 570/9-91-004). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011b). Ground water cleanup at Superfund Sites [EPA Report]. (EPA 540-K-96 008). Washington, DC: U. S. Environmental Protection Agency, Office Water. <http://www.epa.gov/superfund/health/conmedia/gwdocs/brochure.htm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012e). Public drinking water systems: facts and figures. Washington, DC: U.S. Environmental Protection Agency, Office of Water. <http://water.epa.gov/infrastructure/drinkingwater/pws/factoids.cfm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013b). Drinking water and ground water statistics, fiscal year 2011. Washington, DC: U.S. Environmental Protection Agency, Office of Water. <http://water.epa.gov/scitech/datait/databases/drink/sdwisfed/upload/epa816r13003.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014j). Safe drinking water information system (SDWIS). Data obtained from the Office of Water [Database]. Washington, D.C.: Office of Water. Retrieved from <http://water.epa.gov/scitech/datait/databases/drink/sdwisfed/index.cfm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015r). WaterSense: water supply in the U.S. Available online at <http://www.epa.gov/WaterSense/pubs/supply.html> (accessed January 12, 2015).
- [U.S. GAO](#) (U.S. Government Accountability Office). (2014). Freshwater: Supply concerns continue, and uncertainties complicate planning. Report to Congressional requesters. (GAO-14-430). Washington, DC: U.S. Government Accountability Office (GAO). <http://www.gao.gov/assets/670/663343.pdf>
- [U.S. Global Change Research Program](#). (2009). Global climate change impacts in the United States. New York, NY: Cambridge University Press. <http://downloads.globalchange.gov/usimpacts/pdfs/climate-impacts-report.pdf>
- [USGS](#) (U.S. Geological Survey). (2014b). Estimated use of water in the United States, county-level data for 2010. Reston, VA. <http://water.usgs.gov/watuse/data/2010/>
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A](#). (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. Environ Sci Technol 48: 36-52. <http://dx.doi.org/10.1021/es405118y>

## **Chapter 4**

---

### **Water Acquisition**

## 4. Water Acquisition

### 4.1. Introduction

1 Water is a crucial component of nearly all hydraulic fracturing operations, making up  
2 approximately 90% or more of fluid injected into a well ([U.S. EPA, 2015a](#); [GWPC and ALL](#)  
3 [Consulting, 2009](#)). Given that at least 25,000 to 30,000 wells may be fractured each year  
4 (Chapter 2), and that each well requires thousands to millions of gallons of water (Section 4.3), the  
5 potential exists for effects on the quantity of drinking water resources. Large volume water  
6 withdrawals also could alter the quality of drinking water resources by decreasing dilution of  
7 pollutants by surface waters, or in the case of ground water, allowing the infiltration of lower-  
8 quality water from the land surface or adjacent formations.

9 In this chapter, we consider potential effects of water acquisition for hydraulic fracturing on both  
10 drinking water resource quantity and quality, and where possible, identify factors that affect the  
11 frequency or severity of impacts. We define drinking water resources broadly, to include not just  
12 currently designated drinking waters, but waters that could in the future be used as drinking water  
13 sources (see Chapter 1). Although most available data and literature pertain to water use, we  
14 discuss water consumption where possible.<sup>1</sup>

15 We provide an overview of the types of hydraulic fracturing water used (Section 4.2); the amount of  
16 water used per well (Section 4.3); and cumulative water use and consumption estimates  
17 (Section 4.4).<sup>2</sup> We then discuss these three factors for 15 states where hydraulic fracturing  
18 presently occurs and consider the potential for hydraulic fracturing water withdrawals to affect  
19 water quantity and quality in localities within those states (Section 4.5). We primarily discuss  
20 results at the state and county level because data are most available at these scales. Moreover,  
21 states and localities often differ in industry activity, formation type, and water availability, all of  
22 which affect potential impacts.<sup>3</sup> Lastly, we provide a synthesis that summarizes major findings,  
23 factors affecting the frequency or severity of impacts, uncertainties, and conclusions (Section 4.6).

---

<sup>1</sup> Water use is water withdrawn for a specific purpose, part or all of which may be returned to the local hydrologic cycle. Water consumption is water that is removed from the local hydrologic cycle following its use (e.g., via evaporation, transpiration, incorporation into products or crops, consumption by humans or livestock), and is therefore unavailable to other water users ([Maupin et al., 2014](#)). Hydraulic fracturing water consumption can occur through evaporation from storage ponds, the retention of water in the subsurface through imbibition, or disposal in Underground Injection Control (UIC) Class II injection wells.

<sup>2</sup> In this chapter, cumulative annual water use or water consumption refers to the amount of water used or consumed by all hydraulic fracturing wells in a given area per year.

<sup>3</sup> There is no standard definition for water availability, and it has not been assessed recently at the national scale ([U.S. GAO, 2014](#)). Instead, a number of water availability indicators have been suggested (e.g., [Roy et al., 2005](#)). Here, availability is most often used to qualitatively refer to the amount of a location's water that could, currently or in the future, serve as a source of drinking water ([U.S. GAO, 2014](#)), which is a function of water inputs to a hydrologic system (e.g., rain, snowmelt, groundwater recharge) and water outputs from that system occurring either naturally or through competing demands of users. Where specific numbers are presented, we note the specific water availability indicator used.

## 4.2. Types of Water Used

1 Water used for hydraulic fracturing generally comes from surface water (i.e., rivers, streams, lakes,  
2 and reservoirs), ground water aquifers, or reused hydraulic fracturing wastewater.<sup>1,2,3</sup> These  
3 sources can vary in their initial water quality and in how they are provisioned to hydraulic  
4 fracturing operations. In this section, we provide an overview of the sources (Section 4.2.1), water  
5 quality (Section 4.2.2), and provisioning of water (Section 4.2.3) required for hydraulic fracturing.  
6 Detailed information on the types of water used by state and locality is presented in Section 4.5.

### 4.2.1. Source

7 Whether water used in hydraulic fracturing originates from surface or ground water resources is  
8 largely determined by the amount of water needed and the type of locally available water sources.  
9 Water transportation costs can be high, so the industry tends to acquire water from nearby sources  
10 if available ([Nicot et al., 2014](#); [Mitchell et al., 2013a](#); [Kargbo et al., 2010](#)). Surface water is typically  
11 available to supply most of the water needed in the eastern United States, whereas mixed supplies  
12 of surface and ground water are used in the more semi-arid to arid western states. In western  
13 states that lack available surface water resources, ground water supplies the majority of water  
14 needed for fracturing unless alternative sources, such as reused wastewater, are available and  
15 utilized. Local policies also may direct the industry to seek withdrawals from designated sources  
16 ([U.S. EPA, 2013a](#)): for instance, some states have encouraged the industry to seek water  
17 withdrawals from surface water rather than ground water due to concerns over aquifer depletion  
18 (Section 4.5).

19 The reuse of wastewater from past hydraulic fracturing operations can reduce the need for fresh  
20 surface or ground water and offset total new water withdrawals for hydraulic fracturing.<sup>4,5</sup> Based  
21 on available data, the median reuse of wastewater as a percentage of injected volume is 5%  
22 nationally, but this percentage varies by location (Table 4-1).<sup>6,1</sup>

---

<sup>1</sup> Throughout this chapter we sometimes refer to “reused hydraulic fracturing wastewater” as simply “reused wastewater” because this is the dominant type of wastewater reused by the industry. When referring to other types of reused wastewater not associated with hydraulic fracturing (e.g., acid mine drainage, wastewater treatment plant effluent) we specify the source of the wastewater.

<sup>2</sup> We use the term “reuse” regardless of the extent to which the wastewater is treated ([Nicot et al., 2014](#)); we do not distinguish between reuse and recycling except when specifically reported in the literature.

<sup>3</sup> We use “wastewater” as a general term to include both flowback and produced water that may be reused in hydraulic fracturing; we do not distinguish between flowback and produced water except when specifically reported in the literature.

<sup>4</sup> Hydraulic fracturing wastewater may be stored on-site in open pits, which may also collect rainwater and runoff water. We do not distinguish between the different types of water that are collected on-site during oil and gas operations, and assume that most of the water collected on-site at well pads is hydraulic fracturing wastewater.

<sup>5</sup> We use the term “fresh water” to qualitatively refer to water with relatively low TDS that is most readily and currently available for drinking water. We do not use the term to imply an exact TDS limit.

<sup>6</sup> Throughout this chapter, we preferentially report medians where possible because medians are less sensitive to outlier values than averages. Where medians are not available, averages are reported.



1 The reuse of wastewater for hydraulic fracturing is limited by the amount of water that returns to  
 2 the surface during production (Nicot et al., 2012). In the first 10 days of well production, 5% to  
 3 almost 50% of injected fluid volume may be collected, with values varying across geologic  
 4 formations (see Chapter 7, Table 7-1). Longer duration measurements are rare, but between 10%  
 5 and 30% of injected fluid volume has been collected in the Marcellus Shale in Pennsylvania over 9  
 6 years of production, while over 100% has been collected in the Barnett Shale in north-central Texas  
 7 over six years of production (see Chapter 7, Table 7-2). Assuming that 10% of injected fluid volume  
 8 is collected in the first 30 days and the reuse rate is 100%, it would take 10 wells to produce  
 9 enough water to hydraulically fracture a new well. As more wells are hydraulically fractured in a  
 10 given area, the potential for wastewater reuse increases.

11 Besides hydraulic fracturing wastewater, other wastewaters may be reclaimed for use in hydraulic  
 12 fracturing. These may include acid mine drainage, wastewater treatment plant effluent, and other  
 13 sources of industrial and municipal wastewater (Nicot et al., 2014; Ziemkiewicz et al., 2013).  
 14 Limited information is available on the extent to which these other wastewaters are used.

**Table 4-1. Percentage of injected water volume that comes from reused hydraulic fracturing wastewater in various states, basins, and plays.**

States listed by order of appearance in the chapter. See Section 4.5 for additional discussion of reuse practices by state and locality and variation over time where data are available.

State, basin, or play	Available estimate	Year of estimate (NA = not available)
-----------------------	--------------------	--

<sup>1</sup> This chapter examines reused wastewater as a percentage of injected volume because reused wastewater may offset total fresh water acquired for hydraulic fracturing. In contrast, Chapter 8 of this assessment discusses the total percentage of the generated wastewater that is reused rather than managed by different means (e.g., disposal in Class II injection wells). This distinction is sometimes overlooked, which sometimes leads to a misrepresentation of the extent to which wastewater is reused to offset total fresh water used for hydraulic fracturing.

State, basin, or play	Available estimate	Year of estimate (NA = not available)
Texas—Barnett Shale	5% <sup>a</sup>	2011
Texas—Eagle Ford Shale	0% <sup>a</sup>	2011
Texas—TX-LA-MS Salt Basin <sup>b</sup>	5% <sup>a</sup>	2011
Texas—Permian Basin (far west portion)	0% <sup>a</sup>	2011
Texas—Permian Basin (Midland portion)	2% <sup>a</sup>	2011
Texas—Anadarko Basin	20% <sup>a</sup>	2011
Colorado—Garfield County, Uinta-Piceance Basin	100% <sup>c</sup>	NA
Colorado—Wattenberg Field, Denver-Julesburg Basin	0% <sup>d</sup>	NA
Pennsylvania—Marcellus Shale, Susquehanna River Basin	18% <sup>e</sup>	2012
West Virginia—Marcellus Shale, Statewide	15% <sup>f</sup>	2012
California—Monterey Shale, Statewide	4% <sup>g</sup>	2014
<b>Overall Mean<sup>h</sup></b>	15%	
<b>Overall Median<sup>i</sup></b>	5%	

<sup>a</sup> Estimated percentage of recycling/reused water in 2011 ([Nicot et al., 2012](#)).

<sup>b</sup> [Nicot et al. \(2012\)](#) refer to this region of Texas as the East Texas Basin.

<sup>c</sup> Based on industry practices reported in [U.S. EPA \(2015c\)](#).

<sup>d</sup> Reflects an assumption of reuse practices by Noble Energy in the Wattenberg Field of Colorado's Denver-Julesburg Basin, as reported by [Goodwin et al. \(2014\)](#).

<sup>e</sup> Volume of flowback injected as a percentage of total water injected, 2012 ([Hansen et al., 2013](#)). This is the most recent estimate available. For 2008 to 2011, reuse as a percentage of injected volume averaged 13%, with a median of 8%, according to [U.S. EPA \(2015c\)](#).

<sup>f</sup> Reused fracturing water as a percentage of total water used for hydraulic fracturing, 2012, calculated from data provided by the [West Virginia DEP \(2014\)](#).

<sup>g</sup> Reported data on planned hydraulic fracturing operations as described in 249 well stimulation notices submitted during the first half of January 2014 to [CCST \(2014\)](#). Of these notices, 4% indicated planned use of produced water (sometimes blended with fresh water) for fracturing, while 96% indicated planned use of only fresh water.

<sup>h</sup> The overall mean is not weighted by the number of wells in a given state, basin, or play.

<sup>i</sup> The overall median is not weighted by the number of wells in a given state, basin, or play.

#### 4.2.2. Quality

- 1 Water quality is an important consideration when sourcing water for hydraulic fracturing. Fresh
- 2 water is often preferred to maximize hydraulic fracturing fluid performance and to ensure
- 3 compatibility with the geologic formation being fractured. This finding is supported by the EPA's
- 4 analysis of disclosures to FracFocus 1.0 (hereafter the EPA FracFocus report) ([U.S. EPA, 2015a](#)), as
- 5 well as by regional analyses from Texas ([Nicot et al., 2012](#)) and the Marcellus ([Mitchell et al.,](#)

1 [2013a](#)).<sup>1,2</sup> Fresh water was the most commonly cited water source by companies included in an  
2 analysis of nine hydraulic fracturing service companies on their operations from 2005 to 2010 ([U.S.  
3 EPA, 2013a](#)). Three service companies noted that the majority of their water was fresh because it  
4 required minimal testing and treatment ([U.S. EPA, 2013a](#)).<sup>3</sup> The majority of the nine service  
5 companies recommended testing for certain water quality parameters (pH and maximum  
6 concentrations of specific cations and anions) in order to ensure compatibility among the water,  
7 other fracturing fluid constituents, and the geologic formation ([U.S. EPA, 2013a](#)).

8 The reuse of hydraulic fracturing wastewater may be limited by water quality. As a hydraulically  
9 fractured well ages, the wastewater quality begins to resemble the water quality of the geologic  
10 formation and may be characterized by high TDS ([Goodwin et al., 2014](#)). High concentrations of  
11 TDS and other individual dissolved constituents in wastewater, including specific cations (calcium,  
12 magnesium, iron, barium, strontium), anions (chloride, bicarbonate, phosphate, and sulfate), and  
13 microbial agents, can interfere with hydraulic fracturing fluid performance by producing scale in  
14 the wellbore or by interfering with certain chemical additives in the hydraulic fracturing fluid (e.g.,  
15 high TDS may inhibit the effectiveness of friction reducers) ([Gregory et al., 2011](#); [North Dakota  
16 State Water Commission, 2010](#)). Due to these limitations, wastewater may require treatment to  
17 meet the level of water quality desired in the hydraulic fracturing fluid formulation. Minimal  
18 treatment or blending of wastewater and fresh water is sometimes done to dilute high TDS or other  
19 constituents. Fresh water typically makes up the largest proportion of the base fluid when blended  
20 with water sources of lesser quality ([U.S. EPA, 2015a](#)).<sup>4</sup> However, direct reuse of wastewater with  
21 minimal or no treatment is sometimes possible with higher-quality wastewater ([U.S. EPA, 2015c](#))  
22 (Section 4.5.2). No data are currently available to characterize the relative frequency of reuse done  
23 with treatment, minimal treatment, or no treatment.

#### 4.2.3. Provisioning

24 Water for hydraulic fracturing is typically either self-supplied by the industry or purchased from  
25 public water systems.<sup>5</sup> Self-supplied water for fracturing generally refers to permitted direct

---

<sup>1</sup> FracFocus is a national hydraulic fracturing registry for oil and gas well operators to disclose information about hydraulic fracturing well locations, and water and chemical use during hydraulic fracturing operations developed by the Ground Water Protection Council and the Interstate Oil and Gas Compact Commission ([U.S. EPA, 2015a](#)). The registry was originally established in 2011 for voluntary reporting. However, six of the 20 states discussed in this assessment required disclosure to FracFocus at various points between January 1, 2011 and February 28, 2013, the time period analyzed by the EPA; another three of the 20 states offered the choice of reporting to FracFocus or the state during this same time period (see Appendix Table B-5 for states and disclosure start dates) ([U.S. EPA, 2015a](#)).

<sup>2</sup> Of all disclosures to FracFocus that indicated a source of water for the hydraulic fracturing base fluid, 68% listed “fresh” as the only source of water used. Note, 29% of all disclosures considered in the EPA’s FracFocus report included information on the source of water used for the base fluid ([U.S. EPA, 2015a](#)).

<sup>3</sup> Service companies did not provide data on the percentage of fresh water versus non-fresh water used for hydraulic fracturing ([U.S. EPA, 2015a](#)).

<sup>4</sup> In FracFocus disclosures indicating that fresh water was used in any combination with “recycled,” “produced,” or “brine,” the median concentration of fresh water across all states ranged from 69% to 93% ([U.S. EPA, 2015a](#)).

<sup>5</sup> According to Section 1401(4) of the Safe Drinking Water Act, a public water system is defined as system that provides water for human consumption from surface or ground water through pipes or other infrastructure to at least 15 service connections, or an average of at least 25 people, for at least 60 days per year. Public water systems may either be publicly or privately owned.

1 withdrawals from surface or ground water or the reuse of wastewater. Nationally, self-supplied  
2 water is more common, although there is much regional variation ([U.S. EPA, 2015a](#); [CCST, 2014](#);  
3 [Mitchell et al., 2013a](#); [Nicot et al., 2012](#)). Public water systems encompass a variety of water  
4 suppliers ([U.S. EPA, 2015c](#)). Water purchased from municipal public water systems can be provided  
5 either before or after treatment ([Nicot et al., 2014](#)). Water for hydraulic fracturing is also  
6 sometimes purchased from smaller private entities, such as local land owners ([Nicot et al., 2014](#)).

### 4.3. Water Use Per Well

7 In this section, we provide an overview of the amount of water used per well during hydraulic  
8 fracturing. We discuss water use in the life cycle of oil and gas operations (Section 4.3.1), national  
9 patterns and associated variability (Section 4.3.2), as well as the factors affecting water use per well  
10 including well length, geology, and fracturing fluid formulation (Section 4.3.3). More detailed state-  
11 and locality-specific information on water use per well is provided in Section 4.5.

#### 4.3.1. Hydraulic Fracturing Water Use in the Life Cycle of Oil and Gas

12 Water is needed throughout the life cycle of oil and gas production and use, including both at the  
13 well for processes such as well pad preparation, drilling, and fracturing (i.e., the upstream portion),  
14 and later for end uses such as electricity generation, home heating, or transportation (i.e., the  
15 downstream portion) ([Jiang et al., 2014](#); [Laurenzi and Jersey, 2013](#)). Most of the water used and  
16 consumed in the upstream portion of the life cycle occurs during hydraulic fracturing ([Jiang et al.,](#)  
17 [2014](#); [Clark et al., 2013](#); [Laurenzi and Jersey, 2013](#)).<sup>1</sup> Water use per well estimates in this chapter  
18 focus on hydraulic fracturing in the upstream portion of the oil and gas life cycle.<sup>2</sup>

#### 4.3.2. National Patterns of Water Use Per Well for Fracturing

19 Hydraulic fracturing for oil and gas requires a large volume of water to create sufficient pressures.  
20 According to the EPA's project database of disclosures to FracFocus 1.0 (hereafter the EPA  
21 FracFocus project database), the median volume of water used per well, based on

---

<sup>1</sup> [Laurenzi and Jersey \(2013\)](#) reported that hydraulic fracturing accounted for 91% of upstream water consumption, based on industry data for 29 wells in the Marcellus Shale. (91% was calculated from their paper by dividing hydraulic fracturing fresh water consumption (13.7 gal (51.9 L)/Megawatt-hour (MWh)) by total upstream fresh water consumption (15.0 gal (56.8 L)/MWh) and multiplying by 100). Similarly, [Jiang et al. \(2014\)](#) reported that 86% of water consumption occurred at the fracturing stage for the Marcellus, based on Pennsylvania Department of Environmental Protection (PA DEP) data on 500 wells. The remaining water was used in several upstream processes (e.g., well pad preparation, well drilling, road transportation to and from the wellhead, and well closure once production ended). [Clark et al. \(2013\)](#) estimated lower percentages (30%–80%) of water use at the fracturing stage for multiple formations. Although their estimates for the fraction of water used at the fracturing stage may be low due to their higher estimates for transportation and processing, the estimates by [Clark et al. \(2013\)](#) similarly illustrate the importance of the hydraulic fracturing stage in water use, particularly in terms of the upstream portion of the life cycle.

<sup>2</sup> When the full life cycle of oil and gas production and use is considered (i.e., both upstream and downstream water use), most water is used and consumed downstream. For example, in a life cycle analysis of hydraulically fractured gas used for electricity generation, [Laurenzi and Jersey \(2013\)](#) reported that only 6.7% of water consumption occurred upstream (15.0 gal (56.8 L)/MWh), while 93.3% of fresh water consumption occurred downstream for power plant cooling via evaporation (209.0 gal (791.2 L)/MWh).

1 37,796 disclosures nationally, was 1.5 million gal (5.7 million L) ([U.S. EPA, 2015b](#)).<sup>1</sup> There was  
2 substantial variability around this median, however, with 10<sup>th</sup> and 90<sup>th</sup> percentiles of 74,000 and 6  
3 million gal (280,000 and 23 million L) per well, respectively.<sup>2</sup> Even in specific basins and plays,  
4 water use per well varied widely. Water injected also can vary within a single field; [Laurenzi and](#)  
5 [Jersey \(2013\)](#) reported volumes for the Wattenberg Field of the Niobrara play ranging from 1 to 6  
6 million gal (3.8 to 23 million L) per well (10<sup>th</sup> to 90<sup>th</sup> percentile).

### 4.3.3 Factors Affecting Water Use Per Well

7 Water use varies depending on many factors, including well length, geology, and the composition of  
8 the fracturing fluid.

9 *Well length:* Well length is a principal driver of the amount of water used per well. Increases in well  
10 length affect total water volumes injected primarily by allowing a larger fracture volume to be  
11 stimulated ([Economides et al., 2013](#)). Fracture volume is the volume of the fractures in the geologic  
12 formation that fill with hydraulic fracturing fluid. The total volume of injected fluid equals fracture  
13 volume plus the volume of the wellbore itself, plus any fluid lost due to “leakoff” or other  
14 unintended losses.<sup>3</sup> Thus, as wells get longer, fracture, well, and total volumes all increase. This is  
15 particularly evident in longer horizontal wells versus vertical wells. For example, median water use  
16 in horizontal gas wells was over 35 times higher than in vertical gas wells (2.9 million gal vs. 82,000  
17 gal (11 million L vs. 310,000 L), respectively) between the years 2000 and 2010 ([USGS, 2015](#)).

18 *Geology:* Geologic characteristics also influence the amount of water used per well. There are three  
19 major formation types: shales, tight sands, and coalbeds (see Chapter 2). Reported differences in  
20 water use for shales versus tight sands are rare. However, [Nicot et al. \(2012\)](#) reported that total  
21 water use in tight sand formations is less than half of that of shale in Texas, although results were  
22 not reported per well.

23 In contrast to hydrocarbons from shales and tight sands, coalbed methane (CBM) comes from coal  
24 seams that often have a high initial water content and tend to occur at much shallower depths ([U.S.](#)  
25 [EPA, 2015i](#)). Thus, dewatering is often necessary to stimulate production of CBM. In addition,  
26 geologic pressures are lower (leading to higher permeability) and well lengths are shorter, all of  
27 which result in lower water use per well. Water use per well in CBM operations can be lower by an  
28 order of magnitude or more compared to operations in shales or tight sands. For example, [Murray](#)  
29 [\(2013\)](#) reported water use across formations in Oklahoma, and found that water use in the  
30 CBM-dominated Hartshorn Formation was much lower than in the shale gas-dominated Woodford  
31 Formation.

---

<sup>1</sup> Water use data from the EPA’s FracFocus project database were obtained from disclosures made to FracFocus 1.0. Although disclosures were made on a per well basis, a small proportion of the wells were associated with more than one disclosure (i.e., 876 out of 37,114, based on unique API numbers) ([U.S. EPA, 2015b](#)). For the purposes of this chapter, we discuss water use per disclosure in terms of water use per well.

<sup>2</sup> Although the EPA FracFocus report shows 5<sup>th</sup> and 95<sup>th</sup> percentiles, we report 10<sup>th</sup> and 90<sup>th</sup> percentiles throughout this chapter to further reduce the influence of outliers.

<sup>3</sup> Leakoff is the fraction of the injected fluid that infiltrates into the formation (e.g., through an existing natural fissure) and is not recovered during production. See Chapter 6 for more information about leakoff.

1 *Fracturing Fluid Type:* The majority of wells use fracturing fluids that consist mostly of water ([U.S.](#)  
2 [EPA, 2015a](#); [Yang et al., 2013](#); [GWPC and ALL Consulting, 2009](#)). The EPA inferred that more than  
3 93% of reported disclosures to FracFocus used water as a base fluid ([U.S. EPA, 2015a](#)). The median  
4 reported concentration of water in the hydraulic fracturing fluid was 88% by mass, with 10<sup>th</sup> and  
5 90<sup>th</sup> percentiles of 77% and 95%, respectively. Only roughly 2% of disclosures (761 wells) reported  
6 the use of non-aqueous substances as base fluids, typically either liquid-gas mixtures of nitrogen  
7 (643 disclosures, 84% of non-aqueous formulations) or carbon dioxide (83 disclosures, 11% of  
8 non-aqueous formulations). Both of these formulations still contained substantial amounts of  
9 water, as water made up roughly 60% (median value) of fluid in them ([U.S. EPA, 2015a](#)). Other  
10 formulations were rarely reported. Non-aqueous formulations are discussed further in Chapter 5.

#### 4.4. Cumulative Water Use and Consumption

11 In this section we provide an overview of cumulative water use and consumption for hydraulic  
12 fracturing at the national, state, and county scales. We then compare these values to total water use  
13 and consumption. We discuss both use and consumption because hydraulic fracturing is both a user  
14 and consumer of water. Water use refers to water withdrawn for a specific purpose, part or all of  
15 which may be returned to the local hydrologic cycle. Water consumption refers to water that is  
16 removed from the local hydrologic cycle following its use, and is therefore unavailable to other  
17 users ([Maupin et al., 2014](#)). Hydraulic fracturing water consumption can occur through such means  
18 as evaporation from storage ponds, the retention of water in the subsurface through imbibition, or  
19 disposal in UIC Class II injection wells. In the latter two cases, the water consumed is generally  
20 completely removed from the hydrologic cycle. In this section, water consumption estimates are  
21 derived from USGS water use data, and therefore both use and consumption are presented with the  
22 published water use numbers being first.

##### 4.4.1. National and State Scale

23 Cumulatively, hydraulic fracturing uses and consumes billions of gallons of water each year in the  
24 United States, but at the national or state scale, it is a relatively small user (and consumer) of water  
25 compared to total water use and consumption. According to the EPA's FracFocus project database,  
26 hydraulic fracturing used 36 billion gal (136 billion L) of water in 2011, and 52 billion gal (197  
27 billion L) in 2012; therefore, hydraulic fracturing used an annual average of 44 billion gal (167  
28 billion L) of water in 2011 and 2012 across all 20 states in the project database ([U.S. EPA, 2015a, b](#)).  
29 Cumulative national water use for hydraulic fracturing can also be estimated by multiplying the  
30 water use per well by the number of wells hydraulically fractured. If the median water use per well  
31 (1.5 million gal) (5.7 million L) from the EPA's FracFocus project database is multiplied by 25,000  
32 to 30,000 wells fractured annually (see Chapter 2), cumulative national water use for hydraulic  
33 fracturing is estimated to range from 37.5 to 45.0 billion gal (142 to 170 billion L) annually. Other  
34 calculated estimates have ranged higher than this, including estimates of approximately 80 billion  
35 gal (300 billion L) ([Vengosh et al., 2014](#)) and 50-72 billion gal (190-273 billion L) ([U.S. EPA, 2015c](#)).  
36 These estimates are higher due to differences in the estimated water use per well and the number  
37 of wells used as multipliers. For example, ([Vengosh et al., 2014](#)) derived the estimate of  
38 approximately 80 billion gal (300 billion L) by multiplying an average of 4.0 million gal (15 million



1 L) per well (estimated for shale gas wells) by 20,000 wells (the approximate total number of  
2 fractured wells in 2012).<sup>1</sup>

3 All of these estimates of cumulative water use for hydraulic fracturing are small relative to total  
4 water use and consumption at the national scale. For example, in the combined 20 states where  
5 operators reported water use to FracFocus in 2011 and 2012 ([U.S. EPA, 2015b](#)), annual hydraulic  
6 fracturing water use and consumption averaged over those two years was less than 1% of total  
7 annual water use and consumption in 2010 (see Appendix Table B-1).<sup>2,3</sup>

8 At the state scale, hydraulic fracturing also generally uses billions of gallons of water cumulatively,  
9 but accounts for a low percentage of total water use or consumption. Of all states, operators in  
10 Texas used the most water cumulatively (47% of cumulative water use reported in the EPA  
11 FracFocus project database) ([U.S. EPA, 2015b](#)) (see Appendix Table B-1). This was due to the large  
12 number of wells in that state. Over 94% of reported cumulative water use occurred in just seven of  
13 the 20 states in the EPA FracFocus project database: Texas, Pennsylvania, Arkansas, Colorado,  
14 Oklahoma, Louisiana, and North Dakota ([U.S. EPA, 2015b](#)). Hydraulic fracturing is a small  
15 percentage when compared to total water use (<1%) and consumption (<3%) in each individual  
16 state (see Appendix Table B-1). Other studies have shown similar results, with hydraulic fracturing  
17 water use and consumption ranging from less than 1% of total use in West Virginia ([West Virginia  
18 DEP, 2013](#)), Colorado ([Colorado Division of Water Resources; Colorado Water Conservation Board;  
19 Colorado Oil and Gas Conservation Commission, 2014](#)), and Texas ([Nicot et al., 2014; Nicot and  
20 Scanlon, 2012](#)), to approximately 4% in North Dakota ([North Dakota State Water Commission,  
21 2014](#)).

#### 4.4.2. County Scale

22 Cumulative water use and consumption for hydraulic fracturing is also relatively small in most, but  
23 not all, counties in the United States (see Table 4-2, Figure 4-1, and Figure 4-2a,b). Reported

---

<sup>1</sup> This could result in an overestimation because the estimate of 20,000 wells was derived in part from FracFocus, and these wells are not necessarily specific to shale gas; they may include other types of wells that use less water (e.g., CBM). The estimate of 1.5 million gal (5.7 million L) per well based on the EPA FracFocus project database likely leads to a more robust estimate when used to calculate national cumulative water use for hydraulic fracturing because it includes wells from multiple formation types (i.e., shale, tight sand, and CBM), some of which use less water than shale gas wells on average ([U.S. EPA, 2015b](#)).

<sup>2</sup> The USGS compiles water use estimates approximately every five years in the National Water Census including the 1995 Census in [Solley et al. \(1998\)](#); 2005 Census in [Kenny et al. \(2009\)](#); and 2010 Census in [Maupin et al. \(2014\)](#). The 2010 version is the most updated version available. The Census includes uses such as public supply, irrigation, livestock, aquaculture, thermoelectric power, industrial, and mining at the national, state, and county scale. The 2010 Census included hydraulic fracturing water use in the mining category; there was no designated category for hydraulic fracturing alone.

<sup>3</sup> Percentages were calculated by averaging annual water use for hydraulic fracturing in 2011 and 2012 for a given state or county ([U.S. EPA, 2015b](#)), and then dividing by 2010 USGS total water use ([Maupin et al., 2014](#)) and multiplying by 100. Note, the annual hydraulic fracturing water use reported in FracFocus was not added to the 2010 total USGS water use value in the denominator, and is simply expressed as a percentage compared to 2010 total water use or consumption. This was done because of the difference in years between the two datasets, and because the USGS 2010 Census ([Maupin et al., 2014](#)) included hydraulic fracturing water use estimates in their mining category. This approach is consistent with that of other literature on this topic; see [Nicot and Scanlon \(2012\)](#). See footnotes for Appendix Table B-1 and Table 4-2 for description of the consumption estimate calculations.

1 fracturing water use in FracFocus in 2011 and 2012 was less than 1% compared to 2010 USGS total  
2 water use in 299 of the 401 reporting counties ([U.S. EPA, 2015b](#)) (see Figure 4-2a and Appendix  
3 Table B-2). However, hydraulic fracturing water use was 10% or more compared to total water use  
4 in 26 counties, 30% or more in nine counties, and 50% or more in four counties (see Table 4-2 and  
5 Figure 4-2a). McMullen County in Texas had the highest percentage at over 100% compared to  
6 2010 total water use.<sup>1</sup> Total consumption estimates followed the same pattern, but with more  
7 counties in the higher percentage categories (hydraulic fracturing water consumption was 10% or  
8 more compared to total water consumption in 53 counties; 30% or more in 25 counties; 50% or  
9 more in 16 counties; and over 100% in four counties) (see Table 4-2 and Figure 4-2b). Note,  
10 estimates based on the EPA's FracFocus project database may form an incomplete picture of  
11 hydraulic fracturing water use in a given state or county because the majority of states with data in  
12 the project database did not require disclosure to FracFocus during the time period analyzed ([U.S.  
13 EPA, 2015a](#)). We conclude that this likely does not substantially alter the overall patterns observed  
14 in Figure 4-2a,b (see Text Box 4-1 for further details).

15 These percentages depend both upon the absolute water use and consumption for hydraulic  
16 fracturing and the relative magnitude of other water uses and consumption in that state or county.  
17 For instance, a rural county, with a small population, might have relatively low total water use prior  
18 to hydraulic fracturing.<sup>2</sup> Also, just because water is used in certain county does not necessarily  
19 mean it originated in that county. While the cost of trucking water can be substantial ([Slutz et al.,  
20 2012](#)), and the industry tends to acquire water from nearby sources when possible (see Section  
21 4.2.1), water can also be piped in from more distant, regional supplies. Despite these caveats, it is  
22 clear that hydraulic fracturing is generally a relatively small user (or consumer) of water at the  
23 county level, with the exception of a small number of counties where water use and consumption  
24 for fracturing can be high relative to other uses and consumption.

---

<sup>1</sup> Estimates of use or consumption exceeded 100% when hydraulic fracturing water use averaged for 2011 and 2012 exceeded total water use or consumption in that county in 2010.

<sup>2</sup> For example, McMullen County, Texas mentioned above contains a small number of residents (707 people in 2010, according to the [U.S. Census Bureau \(2014\)](#)).

**Table 4-2. Annual average hydraulic fracturing water use and consumption in 2011 and 2012 compared to total annual water use and consumption in 2010, by county.**

Only counties where hydraulic fracturing water was 10% or greater compared to 2010 total water use are shown (for full table see Appendix Table B-2). Annual average hydraulic fracturing water use data in 2011 and 2012 from the EPA's FracFocus project database ([U.S. EPA, 2015b](#)). Total annual water use data in 2010 from the USGS ([Maupin et al., 2014](#)). States listed by order of appearance in the chapter.

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Texas	McMullen	657.0	745.9	113.5	350.4
	Karnes	1861.5	1055.2	56.7	120.1
	La Salle	2474.7	1288.7	52.1	93.7
	Dimmit	4073.4	1794.2	44.0	81.3
	Irion	1335.9	411.4	30.8	74.5
	Montague	3989.5	925.3	23.2	77.8
	De Witt	2394.4	546.6	22.8	48.6
	Loving	781.1	138.4	17.7	94.1
	San Augustine	1131.5	182.1	16.1	50.8
	Live Oak	1916.3	294.0	15.3	40.1
	Wheeler	6522.6	858.0	13.2	21.5
	Cooke	4533.3	454.3	10.0	29.9
Pennsylvania	Susquehanna	1617.0	751.3	46.5	123.4
	Sullivan	222.7	66.5	29.9	79.8
	Bradford	4354.5	1059.4	24.3	78.2
	Tioga	2909.1	566.3	19.5	47.3
	Lycoming	5854.6	704.6	12.0	33.8
West Virginia	Doddridge	405.2	78.5	19.4	69.4
Ohio	Carroll	1127.9	152.7	13.5	37.3

*This document is a draft for review purposes only and does not constitute Agency policy.*


State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
North Dakota	Mountrail	1248.3	449.4	36.0	98.3
	Dunn	1076.8	309.5	28.7	43.1
	Burke	394.2	63.6	16.1	40.8
	Divide	806.7	102.2	12.7	18.6
Arkansas	Van Buren	1587.8	899.6	56.7	168.8
Louisiana	Red River	1606.0	569.6	35.5	83.2
	Sabine	1522.1	395.2	26.0	76.6

<sup>a</sup> County-level data accessed from the USGS website (<http://water.usgs.gov/watuse/data/2010/>) on November 11, 2014. Total water withdrawals per day were multiplied by 365 days to estimate total water use for the year (Maupin et al., 2014).

<sup>b</sup> Average of water used for hydraulic fracturing in 2011 and 2012 as reported to FracFocus (U.S. EPA, 2015b).

<sup>c</sup> Percentages were calculated by averaging annual water use for hydraulic fracturing reported in FracFocus in 2011 and 2012 for a given state or county (U.S. EPA, 2015b), and then dividing by 2010 USGS total water use (Maupin et al., 2014) and multiplying by 100.


<sup>d</sup> Consumption values were calculated with use-specific consumption rates predominantly from the USGS, including 19.2% for public supply, 19.2% for domestic use, 60.7% for irrigation, 60.7% for livestock, 14.8% for industrial uses, 14.8% for mining (Solley et al., 1998), and 2.7% for thermoelectric power (USGS, 2014h). We used rates of 71.6% for aquaculture (from Verdegem and Bosma, 2009) (evaporation per kg fish + infiltration per kg)/total water use per kg); and 82.5% for hydraulic fracturing (consumption value calculated by taking the median value for all reported produced water/injected water percentages in Tables 7-1 and 7-2 of this assessment and then subtracting from 100%). If a range of values was given, the midpoint was used. Note, this aspect of consumption is likely a low estimate since much of this produced water (injected water returning to the surface) is not subsequently treated and reused, but rather disposed of in UIC Class II injection wells—see Chapter 8).

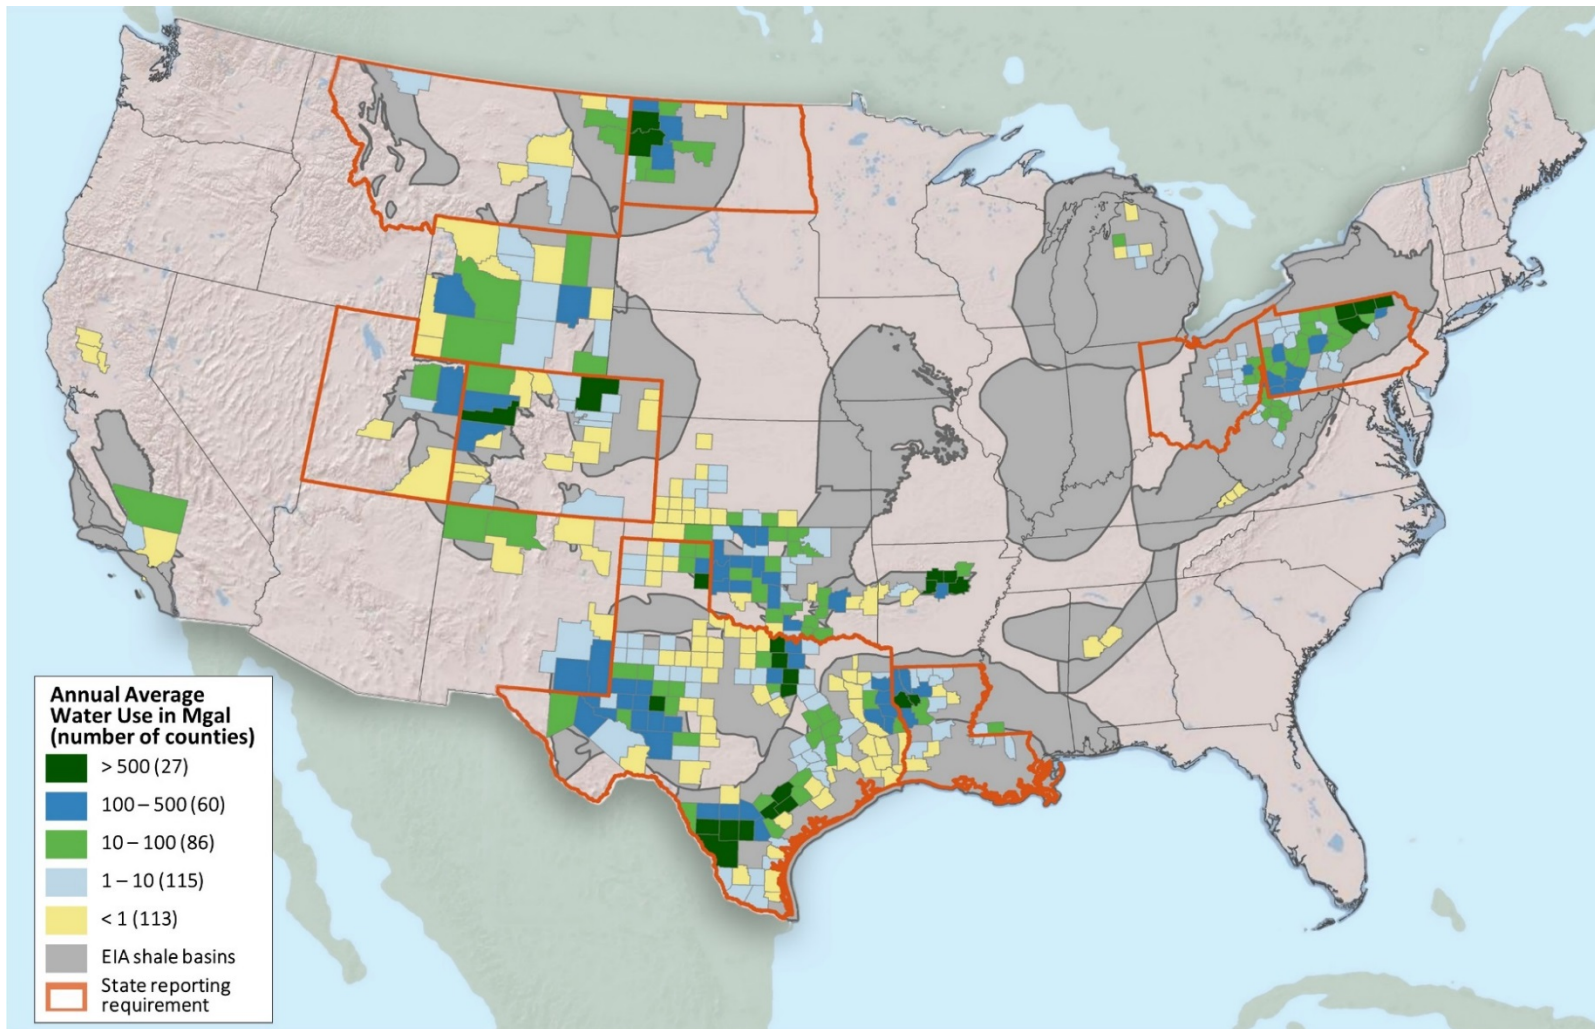


**Figure 4-1. Annual average hydraulic fracturing water use in 2011 and 2012 by county (U.S. EPA, 2015b).**

Source: (U.S. EPA, 2015b). Water use in millions of gallons (Mgal). Counties shown with respect to major U.S. Energy Information Administration (EIA) shale basins (EIA, 2015b). Orange borders identify states that required some degree of reporting to FracFocus 1.0 in 2011 and 2012.



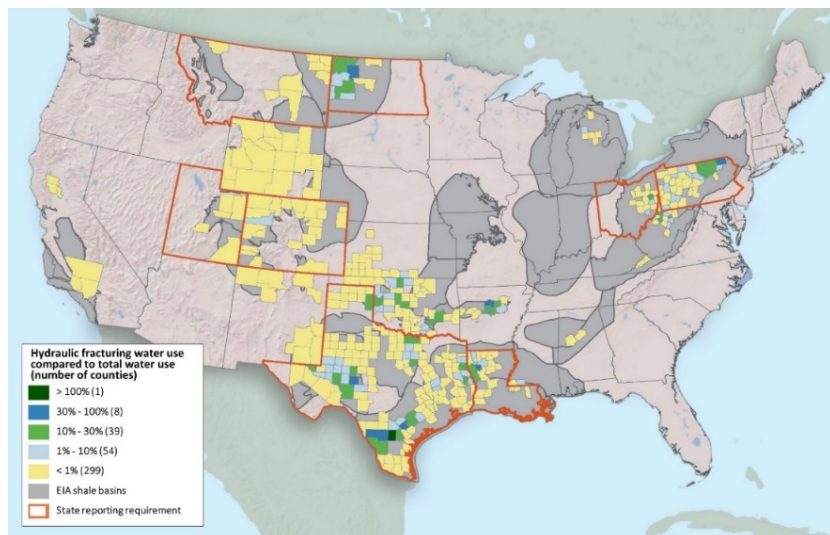

(a)

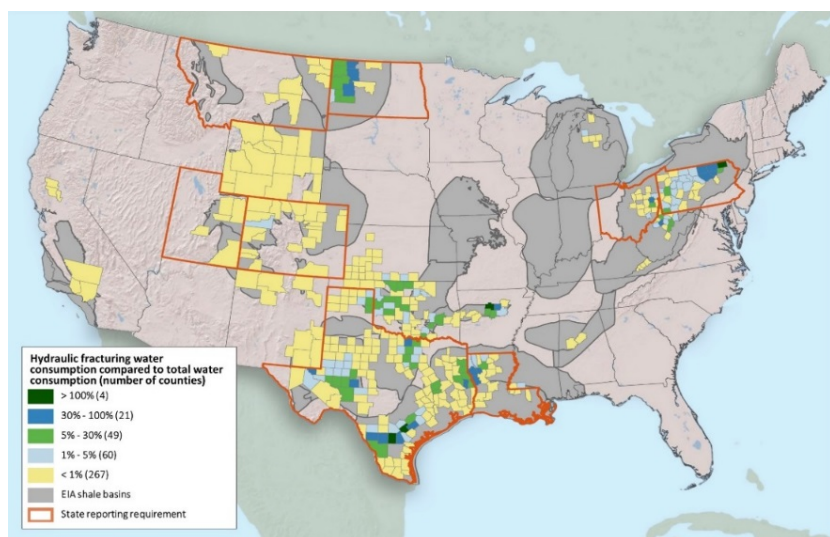

(b)

**Figure 4-2. (a) Annual average hydraulic fracturing water use in 2011 and 2012 compared to total annual water use in 2010, by county, expressed as a percentage; (b) Annual average hydraulic fracturing water consumption in 2011 and 2012 compared to total annual water consumption in 2010, by county, expressed as a percentage.**

Annual average hydraulic fracturing water use data in 2011 and 2012 from the EPA’s FracFocus project database ([U.S. EPA, 2015b](#)). Total annual water use data in 2010 from the USGS ([Maupin et al., 2014](#)). See Table 4-2 for descriptions of calculations for estimating consumption. Counties shown with respect to major U.S. EIA shale basins ([EIA, 2015b](#)). Orange borders identify states that required some degree of reporting to FracFocus 1.0 in 2011 and 2012. Note: Values over 100% denote counties where the annual average hydraulic fracturing water use or consumption in 2011 and 2012 exceeded the total annual water use or consumption in that county in 2010.



**Text Box 4-1. Using the EPA’s FracFocus Project Database to Estimate Water Use for Hydraulic Fracturing.**

1 FracFocus is a national hydraulic fracturing registry managed by the Ground Water Protection Council and the Interstate  
2 Oil and Gas Compact Commission ([GWPC, 2015](#)). The registry was established in 2011 for voluntary reporting. However,  
3 six of the 20 states discussed in this assessment required disclosure to FracFocus at various points between January 1,  
4 2011 and February 28, 2013, the time period analyzed by the EPA; another three of the 20 states offered the choice of  
5 reporting to FracFocus or the state during this same time period ([U.S. EPA, 2015a](#)). Estimates based on the EPA’s  
6 FracFocus project database likely form an incomplete picture of hydraulic fracturing water use because most states with  
7 data in the project database (14 out of 20) did not require disclosure to FracFocus during the time period analyzed ([U.S.](#)  
8 [EPA, 2015a](#)).

9 Cumulative water use for fracturing is a function of the water use per well and the total number of wells fractured. For  
10 water use per well, we found seven literature values for comparison with values from the EPA’s FracFocus project  
11 database. On average, water use estimates per well in the project database were 77% of literature values (the median was  
12 86%); Colorado’s Denver Basin was the only location where the project database estimate as a percentage of the  
13 literature estimate was low (14%) (see Appendix Table B-3). In general, water use per well estimates from the EPA’s  
14 FracFocus project database appear to provide a reasonable approximation for most areas for which we have data, with  
15 the exception of the Denver Basin of Colorado.

16 For number of wells, we compared data in the EPA’s FracFocus project database to numbers available in state databases  
17 from North Dakota, Pennsylvania, and West Virginia (see Appendix Table B-4). These were the state databases from  
18 which we could distinguish hydraulically fractured wells from total oil and gas wells. On average, we found that the EPA  
19 FracFocus project database included 67% of the wells listed in state databases for 2011 and 2012 (see Appendix Table B-  
20 4). Unlike North Dakota and Pennsylvania, West Virginia did not require operators to report fractured wells to FracFocus  
21 during this time period, possibly explaining its lower reporting rate. Multiplying the average EPA FracFocus project  
22 database values of 77% for water use per well and 67% for well counts yields 52%. Thus, the EPA FracFocus project  
23 database estimates for water use could be slightly over half of the estimates from these three state databases during this  
24 time period. These values are based on a small sample sizes (7 literature values and 3 state databases) and should be  
25 interpreted with caution. Nevertheless, these numbers at the very least suggest that estimates based on the EPA’s  
26 FracFocus project database may form an incomplete picture of hydraulic fracturing water use during this time period.

27 To assess how this might affect hydraulic fracturing water use estimates in this chapter, we doubled the water use value  
28 in the EPA’s FracFocus project database for each county, an adjustment much higher than any likely underestimation.  
29 Even with this adjustment, fracturing water use was still less than 1% of 2010 total water use in the majority of U.S.  
30 counties (299 counties without adjustment versus 280 counties with adjustment). The number of counties where  
31 hydraulic fracturing water use was 30% or more of 2010 total county water use increased from nine to 21 with the  
32 adjustment.

33 These results indicate that most counties have relatively low hydraulic fracturing water use, relative to total water use,  
34 even when accounting for likely underestimates. Since consumption estimates are derived from use, these will also follow  
35 the same pattern. Thus, potential underestimates based on the EPA’s FracFocus project database likely do not  
36 substantially alter the overall pattern shown in Figure 4-2. Rather, underestimates of hydraulic fracturing water use  
37 would mostly affect the percentages in the small number of counties where fracturing already constitutes a higher  
38 percentage of total water use and consumption.

**4.5. Potential for Water Use Impacts by State**

39 High fracturing water use or consumption alone does not necessarily result in impacts to drinking  
40 water resources. Rather, impacts most often result from the combination of water use and water  
41 availability at a given withdrawal point. Where water availability is high compared to water

1 withdrawn for hydraulic fracturing, this water use can be accommodated. However, where water  
2 availability is low compared to use, hydraulic fracturing withdrawals are more likely to impact  
3 drinking water resources. Water management, such as the type of water used or the timing or  
4 location of withdrawals, can modify this relationship. All of these factors can vary considerably by  
5 location.

6 Besides potential water quantity effects, water withdrawals for hydraulic fracturing have the  
7 potential to alter the quality of drinking water resources. This possibility is not unique to the oil and  
8 gas industry, as any large-volume water withdrawal has the potential to affect water quality.  
9 Although there is little research that specifically connects water withdrawals for hydraulic  
10 fracturing to potential water quality impacts, multiple studies have described the impact of drought  
11 or industrial withdrawals on water quality ([Georgakakos et al., 2014](#); [Whitehead et al., 2009](#);  
12 [Murdoch et al., 2000](#); [Schindler, 1997](#)). For instance, in the absence of controls, surface water  
13 withdrawals can lower water levels and alter stream flows, potentially decreasing a stream's  
14 capacity to dilute contaminants ([Mitchell et al., 2013a](#); [Entrekin et al., 2011](#); [NYSDEC, 2011](#); [van](#)  
15 [Vliet and Zwolsman, 2008](#); [IPCC, 2007](#); [Environment Canada, 2004](#); [Murdoch et al., 2000](#)).  
16 Furthermore, ground water withdrawals exceeding natural recharge rates may lower the water  
17 level in aquifers, potentially mobilizing contaminants or allowing the infiltration of lower-quality  
18 water from the land surface or adjacent formations ([USGS, 2003](#); [Jackson et al., 2001](#)).

19 In the following section, we assess the potential for water quantity and quality impacts by location,  
20 organized by state. We focus our discussion on the 15 states that account for almost all disclosures  
21 reported in the EPA FracFocus project database ([U.S. EPA, 2015b](#)): Texas (Section 4.5.1); Colorado  
22 and Wyoming (Section 4.5.2); Pennsylvania, West Virginia, and Ohio (Section 4.5.3); North Dakota  
23 and Montana (Section 4.5.4); Oklahoma and Kansas (Section 4.5.5); Arkansas and Louisiana  
24 (Section 4.5.6); and Utah, New Mexico, and California (Section 4.5.7).<sup>1</sup> Each section describes the  
25 extent of hydraulic fracturing activity in that state or group of states; the type of water used in  
26 terms of source, quality, and provisioning; and the water use per well. We then discuss cumulative  
27 estimates and the potential for impacts to drinking water resources in the context of water  
28 availability.


29 We have ordered the states by the number of hydraulically fractured wells reported, and combined  
30 states with similar geographies or activity. Most of the available data did not allow us to assess the  
31 potential for impacts at a finer resolution than the county scale. Any potential adverse impacts are  
32 most likely to be observed locally at a particular withdrawal point. Therefore, our analysis most  
33 often suggests where the potential for impacts exists, but does not indicate where impacts will  
34 occur at the local scale. Where possible, we utilize local-scale case studies in southern Texas,  
35 western Colorado, and eastern Pennsylvania to provide details at a much finer resolution, and offer  
36 insight into whether any impacts from water acquisition for hydraulic fracturing were realized in  
37 these areas.

---

<sup>1</sup> We do not highlight the remaining five states included in the EPA FracFocus project database because of low reported activity: Virginia (90 disclosures), Alabama (55), Alaska (37), Michigan (15), and Mississippi (4).


#### 4.5.1. Texas

1 Hydraulic fracturing in Texas accounts for the bulk of the activity reported nationwide, comprising  
 2 48% of the disclosures in the EPA FracFocus project database ([U.S. EPA, 2015b](#)) (see Figure 4-3 and  
 3 Appendix Table B-5). There are five major basins in Texas: the Permian, Western Gulf (includes the  
 4 Eagle Ford play), Fort Worth (includes the Barnett play), TX-LA-MS Salt (includes the Haynesville  
 5 play), and the Anadarko (see Figure 4-4); together, these five basins contain 99% of Texas' reported  
 6 wells (see Appendix Table B-5).

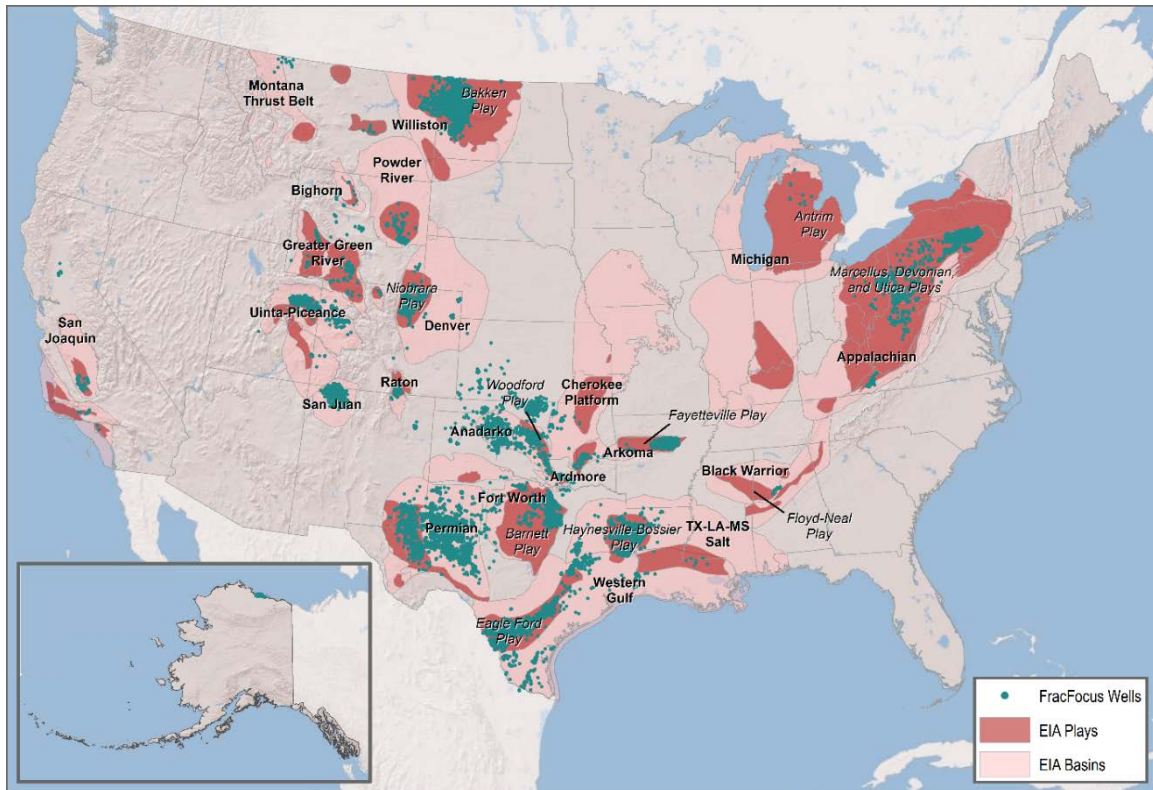

**Figure 4-3. Locations of wells in the EPA FracFocus project database, with respect to U.S. EIA shale plays and basins (EIA, 2015; US. EPA, 2015b).**

Note: Hydraulic fracturing is conducted in geologic settings other than shale; therefore, some wells on this map are not associated with any EIA shale play or basin. ([EIA, 2015b](#); [U.S. EPA, 2015b](#)).

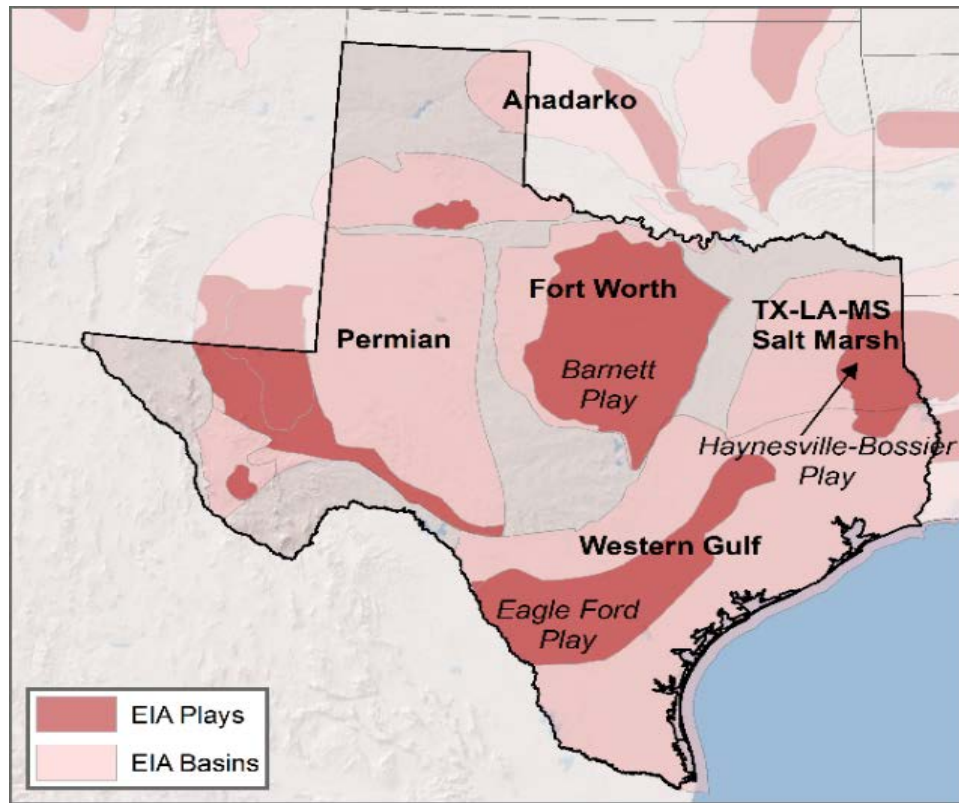

**Figure 4-4. Major U.S. EIA shale plays and basins for Texas (EIA, 2015).**

Source: ([EIA, 2015b](#))

- 1 *Types of water used:* What is known about water sources in Texas largely comes from direct surveys  
 2 and interviews with industry operators and water suppliers ([Nicot et al., 2014](#); [Nicot et al., 2012](#)).  
 3 Overall, ground water is the dominant source throughout most of the state ([Nicot et al., 2014](#); [Nicot et](#)  
 4 [al., 2012](#)) (see Table 4-3). The exception is the Barnett Shale, where both surface and ground water  
 5 are used in approximately equal proportions.
- 6 Hydraulic fracturing in Texas uses mostly fresh water ([Nicot et al., 2012](#)).<sup>1</sup> The exception is the far  
 7 western portion of the Permian Basin, where brackish water makes up an estimated 80% of total  
 8 hydraulic fracturing water use. Brackish water is used to a lesser extent in the Anadarko Basin and  
 9 the Midland portion of the Permian Basin (see Table 4-4). Reuse of wastewater as a percentage of  
 10 total water injected is generally very low (5% or less) in all major basins and plays in Texas, except  
 11 for the Anadarko Basin in the Texas Panhandle, where it is 20% ([Nicot et al., 2012](#)) (see Table 4-1).

<sup>1</sup> The EPA FracFocus report shows that “fresh” was the only source of water listed in 91% of all disclosures reporting a source of water in Texas ([U.S. EPA, 2015a](#)). However, 19% of Texas disclosures included information related to water sources ([U.S. EPA, 2015a](#)).

**Table 4-3. Estimated proportions of hydraulic fracturing source water from surface and ground water.**

States listed by order of appearance in the chapter.

Location	Surface water	Ground water
Texas—Barnett Shale	50% <sup>a</sup>	50% <sup>a</sup>
Texas—Eagle Ford Shale	10% <sup>b</sup>	90% <sup>b</sup>
Texas—TX-LA-MS Salt Basin <sup>c</sup>	30% <sup>b</sup>	70% <sup>b</sup>
Texas—Permian Basin	0% <sup>b</sup>	100% <sup>b</sup>
Texas—Anadarko Basin	20% <sup>b</sup>	80% <sup>b</sup>
Pennsylvania—Marcellus Shale, Susquehanna River Basin	78% <sup>d</sup>	22% <sup>d</sup>
West Virginia—Statewide, Marcellus Shale	91% <sup>e</sup>	9% <sup>e</sup>
Oklahoma—Statewide	63% <sup>f</sup>	37% <sup>f</sup>
Louisiana—Haynesville Shale	87% <sup>g</sup>	13% <sup>g</sup>

<sup>a</sup> [Nicot et al. \(2014\)](#).<sup>b</sup> [Nicot et al. \(2012\)](#).<sup>c</sup> [Nicot et al. \(2012\)](#) refer to this region of Texas as the East Texas Basin.<sup>d</sup> Estimated proportions are for 2011 ([U.S. EPA, 2015c](#)).<sup>e</sup> Estimated proportions are for 2012, the most recent estimate for a full calendar year available from [West Virginia DEP \(2014\)](#). Data from the West Virginia DEP show the proportion of water purchased from commercial brokers as a separate category and do not specify whether purchased water originated from surface or ground water. Therefore, we excluded purchased water in calculating the relative proportions of surface and ground water shown in Table 4-3 ([West Virginia DEP, 2014](#)).<sup>f</sup> Proportion of surface and ground water permitted in 2011 by Oklahoma's 90-day provisional temporary permits for oil and gas mining. Temporary permits make up the majority of water use permits for Oklahoma oil and gas mining ([Taylor, 2012](#)).<sup>g</sup> Data from October 1, 2009, to February 23, 2012, for 1,959 Haynesville Shale natural gas wells ([LA Ground Water Resources Commission, 2012](#)).



**Table 4-4. Brackish water use as a percentage of total hydraulic fracturing water use in Texas' main hydraulic fracturing areas, 2011.**Adapted from [Nicot et al. \(2012\)](#).<sup>a</sup>

Play	Percent
Barnett Shale	3%
Eagle Ford Shale	20%
Texas portion of the TX-LA-MS Salt Basin <sup>b</sup>	0%
Permian Basin—Far West	80%
Permian Basin—Midland	30%
Anadarko Basin	30%

<sup>a</sup> [Nicot et al. \(2012\)](#) present the estimated percentages of brackish, recycled/reused, and fresh water relative to total hydraulic fracturing water use so that the percentages of the three categories sum to 100%.

<sup>b</sup> [Nicot et al. \(2012\)](#) refer to this region of Texas as the East Texas Basin.

- 1 The majority of water used in Texas for hydraulic fracturing is self-supplied via direct ground or  
2 surface water withdrawals ([Nicot et al., 2014](#)). Less often, water is purchased from local  
3 landowners, municipalities, larger water districts, or river authorities ([Nicot et al., 2014](#)).
- 4 *Water use per well:* Water use per well varies across Texas' basins, with reported medians of  
5 3.9 million gal (14.8 million L) in the Fort Worth Basin, 3.8 million gal (14.4 million L) in the  
6 Western Gulf, 3.3 million gal (12.5 million L) in the Anadarko, 3.1 million gal (11.7 million L) in the  
7 TX-LA-MS Salt, and 840,000 gal (3.2 million L) in the Permian (see Appendix Table B-5). Relatively  
8 low water use in the Permian Basin, which contains roughly half the reported wells in the state, is  
9 due to the abundance of vertical wells, mostly for oil extraction ([Nicot et al., 2012](#)).
- 10 Water use per well is increasing in most locations in Texas. In the Barnett Shale, water use per  
11 horizontal well increased from a median of 1.25 million gal (4.73 million L) in 2001 to 4.7 million  
12 gal (17.8 million L) in 2012, as the number of wells and horizontal lengths increased ([Nicot et al.](#)  
13 [2014](#)). Similar increases in lateral length and water use per well were reported for the  
14 Texas-Haynesville, East Texas, Anadarko, and most of the Permian Basin ([Nicot et al., 2012](#); [Nicot](#)  
15 [and Scanlon, 2012](#)).<sup>1</sup>

<sup>1</sup> It should be noted that energy production also increases with lateral lengths, and therefore, water use per unit energy produced—typically referred to as water intensity—may remain the same or decline despite increases in per-well water use ([Nicot et al., 2014](#); [Laurenzi and Jersey, 2013](#)).



1 *Cumulative water use/consumption:* Cumulative water use and consumption for hydraulic fracturing  
2 can be significant in some Texas counties. Texas contains five of nine counties nationwide where  
3 operators used more than 1 billion gal (3.8 billion L) of water annually for hydraulic fracturing, and  
4 five of nine counties nationwide where fracturing water use in 2011 and 2012 was 30% or more  
5 compared to total water use in those counties in 2010 (see Table 4-2, Figure 4-2a, and Appendix  
6 Table B-2)<sup>1,2</sup>

7 According to detailed county-level projections, water use for hydraulic fracturing is expected to  
8 increase with oil and gas production in the coming decades, peaking around the year 2030 ([Nicot et](#)  
9 [al., 2012](#)). The majority of counties are expected to have relatively low cumulative water use for  
10 fracturing in the future, but cumulative hydraulic fracturing water use could equal or exceed 10%,  
11 30%, and 50% compared to 2010 total county water use in 30, nine, and three counties,  
12 respectively, by 2030 (see Appendix Table B-7). Thus, potential hydraulic fracturing water  
13 acquisition impacts in Texas may be most likely to occur over the next 15–25 years as water  
14 demand for fracturing is highest.

15 *Potential for impacts:* Of all locations surveyed in this chapter, the potential for water quantity and  
16 quality impacts due to hydraulic fracturing water use appears to be highest in western and  
17 southern Texas. This area includes the Anadarko, the Western Gulf (Eagle Ford play), and the  
18 Permian Basins. According to [Ceres \(2014\)](#), 28% and 87% of the wells fractured in the Eagle Ford  
19 play and Permian Basin, respectively, are in areas of high to extremely high water stress.<sup>3</sup> A  
20 comparison of hydraulic fracturing water use to water availability at the county scale also suggests  
21 the potential for impacts (see Text Box 4-2 and Figure 4-5). The Texas Water Development Board  
22 estimates that overall demand for water (including water for hydraulic fracturing) out to the year  
23 2060 will outstrip supply in southern and western Texas ([TWDB, 2012](#)). Moreover, the state has  
24 experienced moderate to extreme drought conditions for much of the last decade ([National Drought](#)  
25 [Mitigation Center, 2015](#)). The 2012 Texas State Water Plan emphasizes that “in serious drought  
26 conditions, Texas does not and will not have enough water to meet the needs of its people, its  
27 businesses, and its agricultural enterprises” ([TWDB, 2012](#)).

28

---

<sup>1</sup> Texas also contains 10 of the 25 counties nationwide where hydraulic fracturing water consumption was greater than or equal to 30% of 2010 total water consumption (see Table 4-2).

<sup>2</sup> [Nicot and Scanlon \(2012\)](#) found similar variation among counties when they compared hydraulic fracturing water consumption to total county water consumption for the Barnett play. Their cumulative consumption estimates ranged from 581 million gal (2.20 billion L) in Parker County to 2.7 billion gal (10.2 billion L) in Johnson County, representing 19.3% and 29.7% compared to total water consumption in those counties, respectively. Fracturing in Tarrant County, part of the Dallas-Fort Worth area, consumed 1.6 billion gal (6.1 billion L) of water, 1.4% compared to total county water consumption ([Nicot and Scanlon, 2012](#)).

<sup>3</sup> [Ceres \(2014\)](#) compared well locations to areas categorized by a water stress index, characterized as follows: extremely high (defined as annual withdrawals accounting for greater than 80% of surface flows); high (40–80% of surface flows); or medium-to-high (20–40% of surface flows).

**Text Box 4-2. Hydraulic Fracturing Water Use as a Percentage of Water Availability Estimates.**


1 Researchers at Sandia National Laboratories assessed county-level water availability across the continental  
2 United States ([Tidwell et al., 2013](#)). Assessments of water availability in the United States are generally  
3 lacking at the county scale, and this analysis—although undertaken for siting new thermoelectric power  
4 plants—can be used to assess potential impacts of hydraulic fracturing.

5 The authors generated annual availability estimates for five categories of water: unappropriated surface  
6 water, unappropriated ground water, appropriated water potentially available for purchase, brackish  
7 groundwater, and wastewater from municipal treatment plants ([Tidwell et al., 2013](#)). In the western United  
8 States, water is generally allocated by the principle of prior appropriation—that is, first in time of use is first  
9 in right. New development must use unappropriated water or purchase appropriated water from vested  
10 users. In their analysis, the authors assumed 5% of appropriated irrigated water could be purchased; they  
11 also excluded wastewater required to be returned to streams and the wastewater fraction already reused.  
12 Given regulatory restrictions, they considered no fresh water to be available in California for new  
13 thermoelectric plants.


14 Combining their estimates of unappropriated surface and ground water and appropriated water potentially  
15 available for purchase, we derived a fresh water availability estimate for each county (except for those in  
16 California) and then compared this value to reported water use for hydraulic fracturing ([U.S. EPA, 2015b](#)). We  
17 also added the estimates of brackish and wastewater to fresh water estimates to derive estimates of total  
18 water availability and did a similar comparison. Since the water availability estimates already take into  
19 account current water use for oil and gas operations, these results should be used only as indicator of areas  
20 where shortages might arise in the future.

21 Overall, hydraulic fracturing water use represented less than 1% of fresh water availability in over 300 of the  
22 395 counties analyzed (see Figure 4-5a). This result suggests that there is ample water available at the county  
23 scale to accommodate hydraulic fracturing in most locations. However, there was a small number of counties  
24 where hydraulic fracturing water use was a relatively high percentage of fresh water availability. In 17  
25 counties, fracturing water use actually exceeded the index of fresh water available; all of these counties were  
26 located in the state of Texas and were associated with the Anadarko, Barnett, Eagle Ford, and Permian  
27 basins/plays (see Figure 4-4). In Texas counties with relatively high brackish water availability, hydraulic  
28 fracturing water use represented a much smaller percentage of total water availability (fresh + brackish +  
29 wastewater) (see Figure 4-5b). This finding illustrates that potential impacts can be avoided or reduced in  
30 these counties through the use of brackish water or wastewater for hydraulic fracturing; a case study in the  
31 Eagle Ford play in southwestern Texas confirms this (see Text Box 4-3).

**Text Box 4.2 (continued): Hydraulic Fracturing Water Use as a Percentage of Water Availability Estimates.**

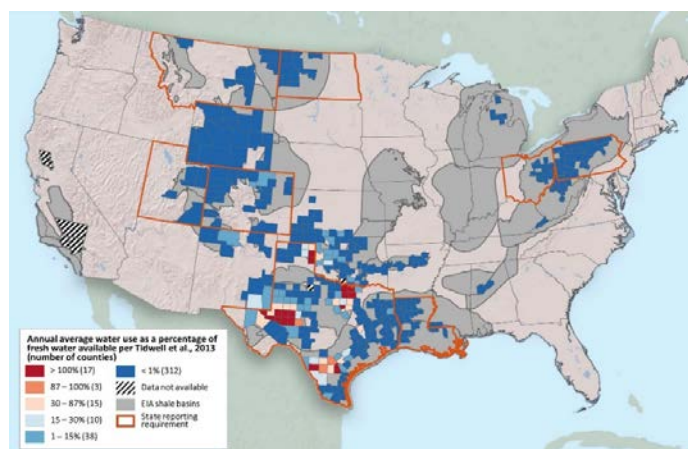

a

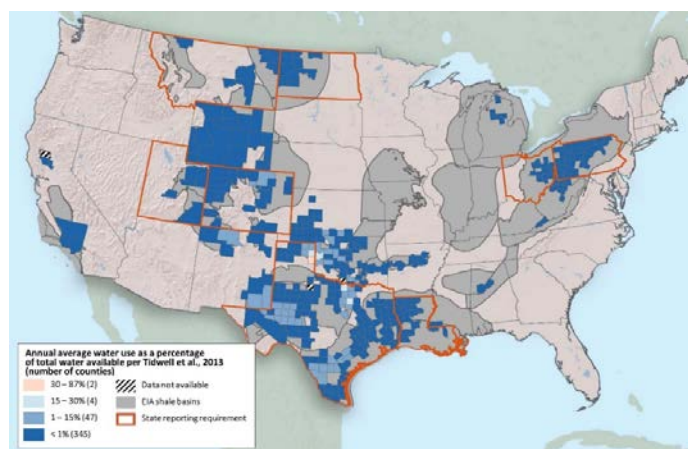

b

**Figure 4-5. Annual average hydraulic fracturing water use in 2011 and 2012 compared to (a) fresh water available and (b) total water (fresh, brackish, and wastewater) available, by county, expressed as a percentage.**


Counties shown with respect to major U.S. EIA shale basins (EIA, 2015b). Orange borders identify states that required some degree of reporting to FracFocus 1.0 in 2011 and 2012. Data from U.S. EPA (2015b) and Tidwell et al. (2013); data from Tidwell et al. (2013) supplied from the U.S. Department of Energy (DOE) National Renewable Energy Laboratory on January 28, 2014 and available upon request from the U.S. DOE Sandia National Laboratories. The analysis by Tidwell et al. (2013) was done originally for thermoelectric power generation. As such, it was assumed that no fresh water could be used in California for this purpose due to regulatory restrictions, and therefore no fresh water availability data were given for California (a). The total water available for California is the sum of brackish water plus wastewater only (b).

1 Surface water availability is generally low in western and southern Texas (Figure 4-6a), and both  
2 fracturing operations and residents rely heavily on ground water (Figure 4-6b). Similar to trends  
3 nationally, ground water aquifers in Texas have experienced substantial declines caused by  
4 withdrawals ([Konikow, 2013b](#); [TWDB, 2012](#); [George et al., 2011](#)). Ground water in the Pecos Valley,  
5 Gulf Coast, and Ogallala aquifers in southern and western Texas is estimated to have declined by  
6 roughly 5, 11, and 43 cubic miles (21, 45.5, and 182 cubic kilometers), respectively, between 1900  
7 and 2008 ([Konikow, 2013b](#)).<sup>1</sup> The Texas Water Development Board expects ground water supply in  
8 the major aquifers to decline by 30% between 2010 and 2060, mostly due to declines in the  
9 Ogallala aquifer ([TWDB, 2012](#)).<sup>2</sup> Irrigated agriculture is by far the dominant user of water from the  
10 Ogallala aquifer ([USGS, 2009](#)), but fracturing operations, along with other uses, now contribute to  
11 the aquifer's depletion.


---

<sup>1</sup> The estimate of total net volumetric groundwater depletion for the Gulf Coast aquifer is the sum of the individual depletion estimates for the north (Houston area), central, and southern (Winter Garden area) parts of the Texas Gulf Coast aquifer. Ground water depletion from the Carrizo-Wilcox aquifer is included in the estimate for the southern portion of the Gulf Coast aquifer ([Konikow, 2013b](#)).

<sup>2</sup> [TWDB \(2012\)](#) defines ground water supply as the amount of ground water that can be produced given current permits and existing infrastructure. By contrast, [TWDB \(2012\)](#) defines ground water availability as the amount of ground water that is available regardless of legal or physical availability. Total ground water availability in Texas is expected to decline by approximately 24% between 2010 and 2060 ([TWDB, 2012](#)).

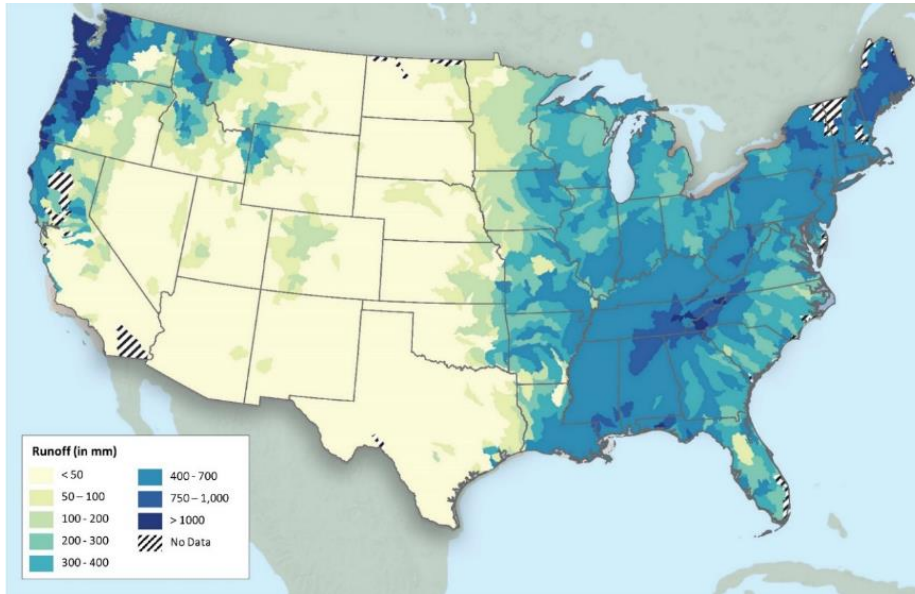

(a)

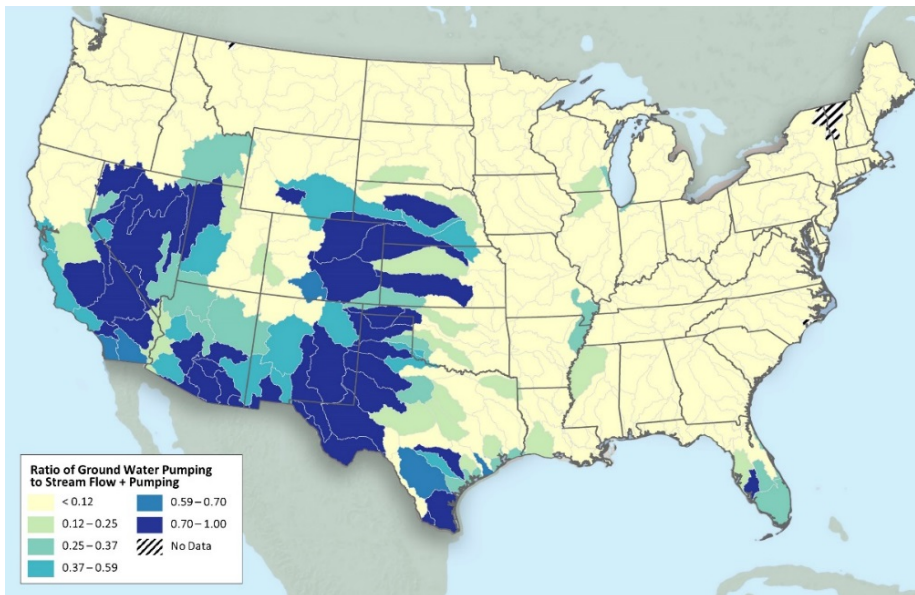

(b)

**Figure 4-6. (a) Estimated annual surface water runoff from the USGS; (b) Reliance on ground water as indicated by the ratio of ground water pumping to stream flow and pumping.**

Estimates for Figure 4-6a were calculated at the 8-digit hydrological unit code (HUC) scale by dividing annual average daily stream flow (from October 1, 2012 to September 30, 2013) by HUC area. Data accessed from the USGS ([USGS, 2014g](#)). Higher ratios (darker blues) in Figure 4-6b indicate greater reliance on ground water. Figure redrawn from [Tidwell et al. \(2012\)](#), using data provided by the U.S. Department of Energy’s Sandia National Laboratories on December 12, 2014.



1 Extensive ground water pumping can induce vertical mixing of high-quality ground water with  
2 recharge water from the land surface that has been contaminated by nitrate or pesticides, or with  
3 lower-quality ground water from underlying geologic formations ([USGS, 2009](#); [Konikow and Kendy,](#)  
4 [2005](#)). Ground water quality degradation associated with aquifer pumping is well documented in  
5 the southern portion of the Ogallala aquifer in the Texas panhandle. The quality of ground water  
6 used by many private, public supply, and irrigation wells is poorest in the aquifer's southern  
7 portion, with elevated concentrations of TDS, chloride, nitrate, fluoride, manganese, arsenic, and  
8 uranium ([Chaudhuri and Ale, 2014a](#); [USGS, 2009, 2007](#)). Elevated levels of these constituents result  
9 from both natural processes and human activities such as ground water pumping ([Chaudhuri and](#)  
10 [Ale, 2014a](#); [USGS, 2009](#)). Similar patterns of ground water quality degradation (i.e., salinization and  
11 contamination) have also been observed in other Texas aquifers.<sup>1</sup>

12 Ground water withdrawals for hydraulic fracturing, along with irrigation and other uses, may  
13 contribute to water quality degradation associated with intensive aquifer pumping in western and  
14 southern Texas. Areas with numerous high-capacity wells and large amounts of sustained ground  
15 water pumping are most likely to experience ground water quality degradation associated with  
16 withdrawals ([USGS, 2009, 2007](#)). Given that Texas is prone to drought conditions, ground water  
17 recharge is limited, making the already declining aquifers in southern and western Texas especially  
18 vulnerable to further ground water depletion and resulting potential impacts to ground water  
19 quality ([USGS, 2009](#); [Jackson et al., 2001](#)).

20 This survey of the available literature and data points to the potential for impacts in southern and  
21 western Texas, but generally does not indicate whether impacts will occur at the local scale around  
22 specific withdrawal points. An exception is a case study in the Eagle Ford play of southwestern  
23 Texas that compared water demand for hydraulic fracturing with water supplies at the scale of the  
24 play, county, and one square mile ([Scanlon et al., 2014](#)). The authors observed generally adequate  
25 water supplies for hydraulic fracturing, except in specific locations, where they found excessive  
26 drawdown of local ground water in a small proportion (~6% of the area) of the Eagle Ford play  
27 (see Text Box 4-3).

---

<sup>1</sup> Persistent salinity has also been observed in west Texas, specifically in the southern Ogallala, northwest Edwards-Trinity (plateau), and Pecos Valley aquifers, largely due to prolonged irrigational ground water pumping and ensuing alteration of hydraulic gradients leading to ground water mixing ([Chaudhuri and Ale, 2014b](#)). High levels of ground water salinization associated with prolonged aquifer depletion have also been documented in the Carrizo-Wilcox and southern Gulf Coast aquifers, underlying the Eagle Ford Shale in south Texas ([Chaudhuri and Ale, 2014b](#); [Konikow, 2013b](#); [Boghici, 2009](#)). Further, elevated levels of constituents, including nitrate, lead, fluoride, chloride, sulfate, iron, manganese, and TDS, have been reported in the Carrizo-Wilcox aquifer ([Boghici, 2009](#)).



**Text Box 4-3. Case Study: Water Profile of the Eagle Ford Play, Texas.**

1 Researchers from the University of Texas published a detailed case study of water supply and demand for  
2 hydraulic fracturing in the Eagle Ford play in southwestern Texas ([Scanlon et al., 2014](#)). This effort assembled  
3 detailed information from state and local water authorities, and proprietary industry data on hydraulic  
4 fracturing, to develop a portrait of water resources in this 16-county area.

5 [Scanlon et al. \(2014\)](#) compared water demand for hydraulic fracturing currently and over the projected play  
6 life (20 years) relative to water supply from ground water recharge, ground water storage (brackish and  
7 fresh), and stream flow. Using detailed ground water availability models developed by the Texas Water  
8 Development Board, they reported that water demand for hydraulic fracturing in 2013 was 30% of annual  
9 ground water recharge in the play area, and over the 20-year play lifespan it was projected to be 26% of  
10 groundwater recharge, 5-8% of fresh groundwater storage, and 1% of brackish ground water storage. The  
11 dominant water user in the play is irrigation (62 to 65% of water use, 53 to 55% of consumption), as  
12 compared with hydraulic fracturing (13% of water use and 16% of consumption). At the county level,  
13 projected water demand for hydraulic fracturing over the 20-year period was low relative to freshwater  
14 supply (ranging from 0.6-27% by county, with an average of 7.3%). Similarly, projected total water demand  
15 from all uses was low relative to supply, excluding two counties with high irrigation demands (Frio, Zavala),  
16 and one county with no known ground water supplies (Maverick).

17 Although supply was found to be sufficient even in this semi-arid region, there were important caveats  
18 especially at sub-county scales. The researchers found no water level declines over much of the play area  
19 assessed (69% of the play area), yet in some areas they estimated ground water drawdowns of up to 50 feet  
20 (12% of the play area), and in others of 100 feet or more (6% of the play area). This was corroborated with  
21 well monitoring data that showed a sharp decline in water levels in several ground water monitoring wells  
22 after hydraulic fracturing activity increased in 2009. The researchers concluded that any impacts in these  
23 locations could be minimized if brackish ground water were used. Projected hydraulic fracturing water use  
24 represents less than 1% of total brackish ground water storage in the play area. By contrast, they concluded  
25 there is limited potential for reuse of wastewater in this play because of small volumes available (less than or  
26 equal to 5% of hydraulic fracturing water requirements).

27 The potential for water quantity and quality effects appears to be lower in north-central and  
28 eastern Texas, in areas including the Barnett and Haynesville plays. Residents obtain water for  
29 domestic use—which includes use of water for drinking—from a mixture of ground water and  
30 surface water sources (see Appendix Table B-6). Counties encompassing Dallas and Fort Worth rely  
31 mostly on publically-supplied surface water ([TWDB, 2012](#)) (see Appendix Table B-6).

32 Although the Trinity, the major aquifer in northeast Texas, is projected to decline only slightly  
33 between 2010 and 2060 ([TWDB, 2012](#)), [Bene et al. \(2007\)](#) estimate that hydraulic fracturing  
34 ground water withdrawals will increase from 3% of total ground water use in 2005 to 7%–13% in  
35 2025, suggesting the potential for localized aquifer drawdown and potential impacts to water  
36 quality. Additionally, ground water quality degradation associated with aquifer drawdown has been  
37 documented in the Trinity and Woodbine aquifers underlying much of the Barnett play, with both  
38 aquifers showing high levels of salinization ([Chaudhuri and Ale, 2013](#)).

1 Overall, the potential for impacts appears higher in western and southern Texas, compared to the  
2 northeast part of the state. Impacts are likely to be localized drawdowns of ground water, as shown  
3 by a detailed case study of the Eagle Ford play (see Text Box 4-3). [Scanlon et al. \(2014\)](#) suggested  
4 that a shift towards brackish water use could minimize potential future impacts to fresh water  
5 resources. This finding is consistent with our county-level data (see Text Box 4-2).

#### 4.5.2. Colorado and Wyoming

6 Colorado had the second highest number of disclosures in the EPA FracFocus project database,  
7 (13% of disclosures) (see Figure 4-3 and Appendix Table B-5). We combine Colorado and Wyoming  
8 because of their shared geology of the Denver Basin (including the Niobrara play) and the Greater  
9 Green River Basin (see Figure 4-7). There are three major basins reported for Colorado: the Denver  
10 Basin; the Uinta-Piceance Basin; and the Raton Basin. Together these basins contain 99% of  
11 reported wells in the state, although the bulk of the activity in Colorado is in the Denver Basin (see  
12 Appendix Table B-5). Fewer wells (roughly 4% of disclosures) are present in Wyoming. There are  
13 two major basins reported for Wyoming (Greater Green River and Powder River) that together  
14 contain 86% of activity in the state (see Appendix Table B-5).

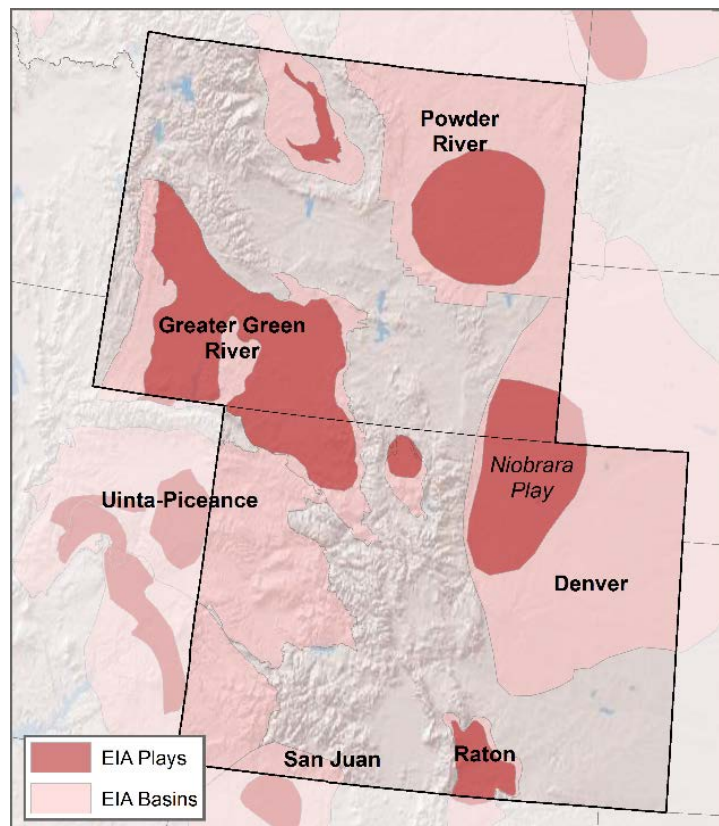


Figure 4-7. Major U.S. EIA shale plays and basins for Colorado and Wyoming (EIA, 2015).

Source: ([EIA, 2015b](#))

1 *Types of water used:* Water for hydraulic fracturing in Colorado and Wyoming comes from both  
2 ground water and surface water, as well as reused wastewater ([Colorado Division of Water](#)  
3 [Resources; Colorado Water Conservation Board; Colorado Oil and Gas Conservation Commission,](#)  
4 [2014; BLM, 2013b](#)). The only publicly available information on water sources for each state is a list  
5 of potential sources; it does not appear that either state provides more specific information on  
6 water sources for hydraulic fracturing. In the Uinta-Piceance Basin of northwestern Colorado, the  
7 EPA ([2015c](#)) reports that most of the fresh water used for fracturing comes from surface water,  
8 although fresh water sources make up a small proportion of the total water used. In the Denver  
9 Basin (Niobrara play) of southeastern Wyoming, qualitative information suggests that ground  
10 water supplies much of the water used for fracturing, although no data were available to  
11 characterize the ratio of ground water to surface water withdrawals ([AMEC, 2014; BLM, 2013b;](#)  
12 [Tyrrell, 2012](#)).

13 Non-fresh water sources (e.g., industrial and municipal wastewater, brackish ground water, and  
14 reused hydraulic fracturing wastewater) are sometimes listed as potential alternatives to fresh  
15 water for fracturing in both Colorado and Wyoming ([Colorado Division of Water Resources;](#)  
16 [Colorado Water Conservation Board; Colorado Oil and Gas Conservation Commission, 2014; BLM,](#)  
17 [2013b](#)); no data are available to show the extent to which these non-fresh water sources are used at  
18 the state or basin level. In northwest Colorado's Garfield County (Uinta-Piceance Basin), the EPA  
19 ([2015c](#)) reports that fresh water is used solely for drilling and that reused wastewater supplies  
20 nearly all the water for hydraulic fracturing (see Table 4-1). This estimate of reused wastewater as  
21 a percentage of injected volume is markedly higher than in other locations and results from the  
22 geologic characteristics of the Piceance tight sand formation, which has naturally high water  
23 content and produces large volumes of relatively high-quality wastewater ([U.S. EPA, 2015c](#)).

24 In contrast, a study by [Goodwin et al. \(2014\)](#) assumed no reuse of wastewater for hydraulic  
25 fracturing operations by Noble Energy in the Denver-Julesburg Basin of northeastern Colorado (see  
26 Table 4-1). It is unclear whether this assumption is indicative of reuse practices of other companies  
27 in the Denver-Julesburg Basin. The difference in reused wastewater rates reported by the EPA  
28 ([2015c](#)) and [Goodwin et al. \(2014\)](#) may indicate an east-west divide in Colorado (i.e., low reuse in  
29 the east versus high reuse in the west), due at least in part to differences in wastewater volumes  
30 available for reuse. However, further information is needed to adequately characterize reuse  
31 patterns in Colorado.

32 *Water Use per Well:* Water use per well varies across Colorado, with median values of 1.8 million,  
33 400,000, and 96,000 gal (6.8 million, 1.5 million, and 363,000 L) in the Uinta-Piceance, Denver, and  
34 Raton Basins, respectively according to the EPA FracFocus project database (see Appendix Table B-  
35 5). Low water volumes per well are reported in Wyoming (see Appendix Table B-5). Low volumes  
36 reported for the Raton Basin of Colorado and the Powder River Basin of Wyoming are due to the  
37 prevalence of CBM extraction in these locations ([U.S. EPA, 2015i; USGS, 2014d](#)).

38 More difficult to explain are the low volumes reported for the Denver Basin in the EPA FracFocus  
39 project database. These values are lower than any other non-CBM basin reported in Appendix Table  
40 B-5. [Goodwin et al. \(2014\)](#) report much higher water use per well in the Denver Basin, with a

1 median of 2.8 million gal (10.6 million L) (although only usage for the Wattenberg Field was  
2 reported). Indeed, the 10<sup>th</sup>–90<sup>th</sup> percentiles (2.4–3.8 million gal) (9.1 to 14.4 million L) from  
3 [Goodwin et al. \(2014\)](#) are almost completely above those from the EPA FracFocus project database  
4 for the Denver Basin (see Appendix Table B-5).<sup>1</sup> It is difficult to draw clear conclusions because of  
5 differences in scale (i.e., field in Goodwin versus basin in the project database) and operators (i.e.,  
6 Noble Energy in Goodwin versus all in the project database). However, it seems plausible that the  
7 EPA FracFocus project database may be incomplete for estimating the amount of water used per  
8 well in the Denver Basin.

9 Trends in water use per well are generally lacking for Colorado, with the exception of those  
10 reported by [Goodwin et al. \(2014\)](#). They found that water use per well is increasing with well  
11 length in the Denver Basin; however, they also observed that water intensity (gallons of water per  
12 unit energy extracted) did not change, since energy recovery increased along with water use.

13 *Cumulative water use/consumption:* Hydraulic fracturing operations in Colorado cumulatively use  
14 billions of gallons of water, but this amount is a small percentage compared to total water used or  
15 consumed at the county scale. Operators in both Garfield and Weld Counties, located in the Uinta-  
16 Piceance and Denver Basins, respectively, use more than 1 billion gal (3.8 billion L) annually.  
17 Fracturing water use and consumption in these counties exceed those in all other Colorado counties  
18 combined (see Appendix Table B-2), but the water used for hydraulic fracturing in Garfield and  
19 Weld counties is less than 2% and 3% compared to 2010 total water use and consumption,  
20 respectively. In comparison, irrigated agriculture accounts for over 90% of the water used in both  
21 counties ([Maupin et al., 2014](#); [Kenny et al., 2009](#)). Overall, hydraulic fracturing accounts for less  
22 than 2% compared to 2010 total water use in all Colorado counties represented in the EPA  
23 FracFocus project database (see Appendix Table B-2). Water use estimates based on the EPA  
24 FracFocus project database may be low relative to literature and state estimates (Text Box 4-1), but  
25 even if estimates from the project database were doubled, hydraulic fracturing water use and  
26 consumption would still be less than 4% and 5.5% compared to 2010 total water use and  
27 consumption, respectively, in each Colorado county.

28 In Wyoming, reported water use for hydraulic fracturing is small compared to Colorado (see  
29 Appendix Table B-1). Fracturing water use and consumption did not exceed 1% of 2010 total water  
30 use and consumption, respectively, in any county (see Appendix Table B-2). Unlike Colorado,  
31 Wyoming did not require disclosure to FracFocus during the time period analyzed by the EPA ([U.S.](#)  
32 [EPA, 2015a](#)) (see Appendix Table B-5).

33 The Colorado Division of Water Resources et al. ([2014](#)) project that annual water use for hydraulic  
34 fracturing in the state will increase by approximately 16% between 2012 and 2015, but demand in

---

<sup>1</sup> Different spatial extents might explain these differences, since [Goodwin et al. \(2014\)](#) focus on 200 wells in the Wattenberg Field of the Denver Basin; however, Weld County is the center of activity in the Wattenberg Field, and the EPA FracFocus project database contains 3,011 disclosures reported in Weld County, with a median water use per of 407,442 gal (1,542,340 L), similar to that for the basin as a whole.

1 later years is unclear. Even with an increase of 16% or more, hydraulic fracturing would still  
2 remain a relatively small user of water at the county scale in Colorado.

3 *Potential for impacts:* The potential for water quantity and quality impacts appears to be low at the  
4 county scale in Colorado and Wyoming, because fracturing accounts for a low percentage of total  
5 water use and consumption (see Figure 4-2a,b). This conclusion is also supported by the  
6 comparison of hydraulic fracturing water use to water availability at the county scale (see Text Box  
7 4-2 and Figure 4-5a,b). However, counties in Colorado and Wyoming may be too large to detect the  
8 potential for impacts, and local scale studies help provide details at a finer resolution. In a multi-  
9 scale case study in western Colorado, the EPA (2015c) also did not observe any impacts in the  
10 Upper Colorado River Basin. Due to the high reuse rate of wastewater, they did not identify any  
11 locations where fracturing currently contributed to locally high water use intensity. They did  
12 conclude, however, that future water use effects were possible (see Text Box 4-4).

**Text Box 4-4. Case Study: Impact of Water Acquisition for Hydraulic Fracturing on Local Water Availability in the Upper Colorado River Basin.**

13 The EPA (2015c) conducted a case study to explore the impact of hydraulic fracturing water demand on water availability  
14 at the river basin, county, and local scales in the semi-arid Upper Colorado River Basin (UCRB) of western Colorado. The  
15 study area overlies the Piceance geologic basin with natural gas in tight sands. Water withdrawal impacts were quantified  
16 using a water use intensity index (i.e., the ratio between the volume of water withdrawn at a site for hydraulic fracturing  
17 and the volume of available water). Researchers obtained detailed site-specific data on hydraulic fracturing water usage  
18 from state and regional authorities, and estimated available water supplies using observations at USGS gage stations and  
19 empirical and hydrologic modeling.

20 They found that water supplies accessed for oil and gas demand were concentrated in Garfield County, and most fresh  
21 water withdrawals were concentrated within the Parachute Creek watershed (198 mi<sup>2</sup>). However, fresh water makes up a  
22 small proportion of the total water used for fracturing due to large quantities of high-quality wastewater produced from  
23 the Piceance tight sands. Fresh water is used only for drilling, and the water used for fracturing is reported to be 100%  
24 reused wastewater (see Table 4-1). Due to the high reuse rate, The EPA (2015c) did not identify any locations in the  
25 Piceance play where fracturing contributed to locally high water use intensity.

26 Scenario analyses demonstrated a pattern of increasing potential impact with decreasing watershed size in the UCRB. The  
27 EPA (2015c) examined hydraulic fracturing water use intensity under the current rates of both directional (S-shaped) and  
28 horizontal drilling. They showed that for the more water-intensive horizontal drilling, watersheds had to be larger to  
29 meet the same index of water use intensity (0.4) as that for directional drilling (100 mi<sup>2</sup> for horizontal drilling, as  
30 compared to 30 mi<sup>2</sup> for directional drilling). To date, most wells have been drilled directionally into the Piceance tight  
31 sands, although a trend toward horizontal drilling is expected to increase annual water use per well by about 4 times.  
32 Despite this increase, total hydraulic fracturing water use is expected to remain small relative to other users. Currently,  
33 irrigated agriculture is the largest water user in the UCRB.

34 Greater water demand could occur in the future if the water-intensive oil shale extraction industry becomes economically  
35 viable in the region. Projections for oil shale water demand indicate that the industry could increase water use for energy  
36 extraction in Garfield and Rio Blanco counties.




1 East of the Rocky Mountains in the Denver Basin, sub-county effects may be possible given the  
2 combination of high hydraulic fracturing activity and low water availability, but lack of available  
3 data and literature at this scale limits our ability to assess the potential for impacts in this location.  
4 [Ceres \(2014\)](#) concludes that all fractured wells in the Denver Basin are in high or extremely high  
5 water-stressed areas. Furthermore, the development of the Niobrara Shale in southeast Wyoming  
6 occurs in areas already impacted by high agricultural water use from the Ogallala aquifer, including  
7 the state's only three ground water control areas, which were established as management districts  
8 in the southeast portion of the state in response to declining ground water levels ([AMEC, 2014](#);  
9 [Wyoming State Engineer's Office, 2014](#); [Tyrrell, 2012](#); [Bartos and Hallberg, 2011](#)). Ground water  
10 withdrawals for hydraulic fracturing may have the potential to contribute to water quality  
11 degradation particularly in these areas.

12 Overall, the potential for impacts appears low at the county scale in Colorado and Wyoming, but  
13 sub-county effects may be possible particularly east of the Rocky Mountains in the Denver Basin.  
14 Lack of available data and literature at the local scale limits our ability to assess the potential for  
15 impacts in this location.

#### 4.5.3. Pennsylvania, West Virginia, and Ohio

16 Pennsylvania had the third most disclosures in the EPA FracFocus project database (6.5% of  
17 disclosures) (see Appendix Table B-5 and Figure 4-3). We combine West Virginia and Ohio with  
18 Pennsylvania because they share similar geology overlying the Appalachian Basin (including the  
19 Marcellus, Devonian, and Utica stacked plays) (see Figure 4-8); however, much less activity is  
20 reported in these two states (see Appendix Table B-5).

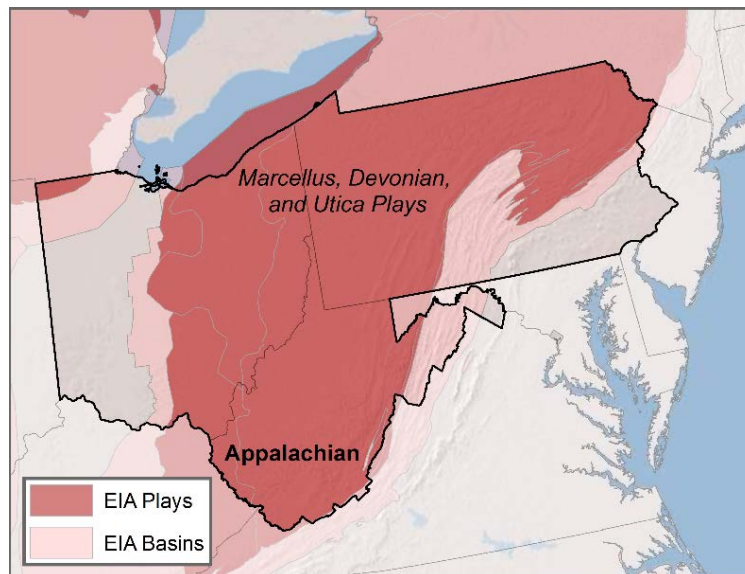

**Figure 4-8. Major U.S. EIA shale plays and basins for Pennsylvania, West Virginia, and Ohio (EIA, 2015).**

Source: ([EIA, 2015b](#)).



1 *Types of water used:* Surface water is the primary water source for hydraulic fracturing in  
2 Pennsylvania, West Virginia, and Ohio ([Mitchell et al., 2013a](#); [SRBC, 2013](#); [West Virginia DEP, 2013](#);  
3 [Ohio EPA, 2012b](#)). Available data for Pennsylvania are specific to the Susquehanna River Basin  
4 (SRB), where hydraulic fracturing water is sourced mostly from surface water ([SRBC, 2013](#)) (see  
5 Table 4-3). The industry also uses mostly surface water in West Virginia ([West Virginia DEP, 2014](#),  
6 [2013](#)) (see Table 4-3). Although specific data are not available, state reports indicate that most  
7 water for hydraulic fracturing in Ohio's Marcellus or Utica Shale formations is sourced from nearby  
8 surface water bodies ([Ohio EPA, 2012b](#); [STRONGER, 2011b](#)).

9 Given that surface water is the primary water source, the water used for hydraulic fracturing is  
10 most often fresh water in all three states. In both Pennsylvania's SRB and throughout West Virginia,  
11 most water for hydraulic fracturing is self-supplied via direct withdrawals from surface water and  
12 ground water ([U.S. EPA, 2015a](#); [West Virginia DEP, 2013](#)). Operators also purchase water from  
13 public water systems, which may include a variety of commercial water brokers ([West Virginia  
14 DEP, 2014](#); [SRBC, 2013](#); [West Virginia DEP, 2013](#)). Municipal supplies may be used as well,  
15 particularly in urban areas of Ohio ([STRONGER, 2011b](#)).

16 Reused hydraulic fracturing wastewater accounted for an estimated 18% and 15% of total water  
17 used for fracturing in 2012 in Pennsylvania's SRB and West Virginia, respectively ([West Virginia  
18 DEP, 2014](#); [Hansen et al., 2013](#); [SRBC, 2013](#)) (see Table 4-1). Available data indicate increased reuse  
19 of wastewater over time in this region likely due to the lack of nearby disposal options; from 2010-  
20 2012 reused wastewater as a percentage of injected water volume ranged from 10% to 18% and  
21 6% to 15% in Pennsylvania's SRB and West Virginia, respectively ([West Virginia DEP, 2014](#); [Hansen  
22 et al., 2013](#)). In Ohio's Marcellus and Utica Shales, reuse of wastewater is reportedly uncommon  
23 ([STRONGER, 2011b](#)), potentially due to the prevalence of disposal wells in Ohio (see Chapter 8).

24 Aside from reused hydraulic fracturing wastewater, other types of wastewaters reused for  
25 hydraulic fracturing may include wastewater treatment plant effluent, treated acid mine drainage,  
26 and rainwater collected at various well pads ([West Virginia DEP, 2014](#); [SRBC, 2013](#); [West Virginia  
27 DEP, 2013](#); [Ziemkiewicz et al., 2013](#); [Ohio EPA, 2012b](#)). No data are available on the frequency of  
28 use of these other wastewaters.

29 *Water Use per Well:* Operators in these three states reported the third, fourth, and fifth highest  
30 median water use nationally in the EPA FracFocus project database, with 5.0, 4.2, and  
31 3.9 million gal (18.9, 15.9, and 14.8 million L) per well in West Virginia, Pennsylvania, and Ohio,  
32 respectively ([U.S. EPA, 2015b](#)) (see Appendix Table B-5). [Hansen et al. \(2013\)](#) report similar water  
33 use estimates for Pennsylvania and West Virginia (see Appendix Table B-5). This correspondence is  
34 not surprising, as these estimates are also based on FracFocus data (via Skytruth). For 2011, the  
35 year overlapping with the time frame of the EPA FracFocus report ([U.S. EPA, 2015a](#)), [Mitchell et al.  
36 \(2013a\)](#) report an average of 2.3 million gal (8.7 million L) for vertical wells (62 wells) and  
37 4.6 million gal (17.4 million L) for horizontal wells (612 wells) in the Pennsylvania portion of the  
38 Ohio River Basin, based on records from PA DEP. The weighted average water use per well was  
39 4.4 million gal (16.7 million L), similar to results based on the EPA FracFocus project database  
40 listed above.

1 *Cumulative water use/consumption:* In this tri-state region, highest cumulative water use for  
2 hydraulic fracturing is in northeastern Pennsylvania counties. On average, operators in Bradford  
3 County reported over 1 billion gal (3.8 billion L) used annually in 2011 and 2012 for fracturing;  
4 operators in three other counties (Susquehanna, Lycoming, and Tioga Counties) cumulatively  
5 reported 500 million gal (1.9 billion L) or more used annually (see Table 4-2). On average,  
6 hydraulic fracturing water use is 3.2% compared to 2010 total county water use for counties with  
7 disclosures in the EPA FracFocus project database in these three states (see Table 4-2 and  
8 Appendix Table B-2). Susquehanna County in Pennsylvania has the highest percentages relative to  
9 2010 total water use (47%) and consumption (123%).

10 *Potential for impacts:* Water availability is higher in Pennsylvania, West Virginia, and Ohio than in  
11 many western states, reducing the likelihood of impacts to drinking water quantity and quality. At  
12 the county scale, water supplies appear adequate to accommodate this use ([Tidwell et al., 2013](#))  
13 (see Text Box 4-2 and Figure 4-5a,b).

14 However, impacts could still occur at specific withdrawal points. In a second, multi-scale case study,  
15 EPA researchers concluded that individual streams in this region can be vulnerable to typical  
16 hydraulic fracturing water withdrawals depending on stream size, as defined by contributing basin  
17 area ([U.S. EPA, 2015c](#)) (see Text Box 4-5). They observed infrequent (in less than 1% of  
18 withdrawals) high ratios of hydraulic fracturing water consumption to stream flow (high  
19 consumption-to-stream flow events). Passby flows can reduce the frequency of high consumption-  
20 to-stream flow events, particularly in the smallest streams ([U.S. EPA, 2015c](#)).<sup>1</sup>

---

<sup>1</sup> A passby flow is a prescribed, low stream flow threshold below which withdrawals are not allowed. The SRBC uses passby flows to protect streams in the Susquehanna River Basin, an area including much of eastern Pennsylvania ([U.S. EPA, 2015c](#)).

**Text Box 4-5. Case Study: Impact of Water Acquisition for Hydraulic Fracturing on Local Water Availability in the Susquehanna River Basin.**

1 The EPA (2015c) conducted a second case study analogous to that in the UCRB (see Text Box 4-4), to explore  
2 the impact of hydraulic fracturing water demand on water availability at the river basin, county, and local  
3 scales in the SRB in northeastern Pennsylvania. The study area overlies the Marcellus Shale gas reservoir.  
4 Water withdrawal impacts were quantified using a water use intensity index (see Text Box 4-4). Researchers  
5 obtained detailed site-specific data on hydraulic fracturing water usage from state and regional authorities,  
6 and estimated available water supplies using observations at USGS gage stations and empirical and  
7 hydrologic modeling.

8 Most water for fracturing in the SRB is self-supplied from rivers and streams with withdrawal points  
9 distributed throughout a wide geographic area. Public water systems provide a relatively small proportion of  
10 the water needed. Reuse of wastewater makes up approximately 13% to 18% of injected fluid volume on  
11 average, as reported by the EPA (2015c) for 2008 to 2011 and Hansen et al. (2013) for 2012, respectively  
12 (see Table 4-1). The Susquehanna River Basin Commission (SRBC) regulates water acquisition for hydraulic  
13 fracturing and issues permits that set limits on the volume, rate, and timing of withdrawals at individual  
14 withdrawal points; passby flow thresholds halt water withdrawals during low flows.

15 The EPA (2015c) demonstrated that streams can be vulnerable from typical hydraulic fracturing water  
16 withdrawals depending on their size, as defined by contributing basin area. Small streams have the potential  
17 for impacts (i.e., high water use intensity) for all or most of the year. The EPA (2015c) showed an increased  
18 likelihood of impacts in small watersheds (less than 10 mi<sup>2</sup>). Furthermore, they showed that in the absence of  
19 passby flows, even larger watersheds (up to 600 mi<sup>2</sup>) could be vulnerable during maximum withdrawal  
20 volumes and infrequent droughts. However, high water use intensity calculated from observed hydraulic  
21 fracturing withdrawals occurred at only a few withdrawal locations in small streams; local high water use  
22 intensity was not found at the majority of withdrawal points.

23 Without management of the rate and timing of withdrawals, surface water withdrawals for  
24 hydraulic fracturing have the potential to affect both water quantity and quality (Mitchell et al.,  
25 2013a). Potential effects are generally applicable, but are especially relevant in this region because  
26 surface water is the primary water source for hydraulic fracturing in Pennsylvania, West Virginia,  
27 and Ohio. Of greatest concern are small, unregulated streams, particularly under drought  
28 conditions or during seasonal low flows (U.S. EPA, 2015c; Vengosh et al., 2014; Mitchell et al.,  
29 2013a; Vidic et al., 2013; Rahm and Riha, 2012; Rolls et al., 2012; Kargbo et al., 2010; McKay and  
30 King, 2006). Surface water quality impacts may be of concern if a pollution discharge point (e.g.,  
31 sewage treatment plant, agricultural runoff, or chemical spill) is immediately downstream of a  
32 hydraulic fracturing withdrawal (U.S. EPA, 2015c; NYSDEC, 2011).<sup>1</sup> Water quality impacts

---

<sup>1</sup> Aside from direct surface water withdrawals, unmanaged withdrawals from public water systems can cause cross-contamination if there is a loss of pressure, allowing the backflow of pollutants from tank trucks into the distribution system. The state of Ohio has issued a fact sheet relevant to this potential concern, intended specifically for public water systems providing water to oil and gas companies (Ohio EPA, 2012a). To prevent potential cross-contamination, Ohio requires a backflow prevention device at cross-connections. For example, bulk loading stations that provide public supply water directly to tank trucks are required to have an air-gap device at the cross-connection to prevent the backflow of contaminants into the public water system (Ohio EPA, 2012a).

1 associated with reduced water levels may also include possible interference with the efficiency of  
2 drinking water treatment plant operations, as increased contaminant concentrations in drinking  
3 water sources may necessitate additional treatment and ultimately impact drinking water quality  
4 ([Water Research Foundation, 2014](#); [Benotti et al., 2010](#)).<sup>1</sup>

5 Overall, there appears to be adequate surface water for hydraulic fracturing, but there is the  
6 potential for impacts to both drinking water quantity and quality, particularly in small streams, if  
7 withdrawals are not managed ([U.S. EPA, 2015c](#)).

#### 4.5.4. North Dakota and Montana

8 North Dakota was fourth in the number of disclosures in the EPA FracFocus project database (5.9%  
9 of disclosures) (see Appendix Table B-5 and Figure 4-3). We combine Montana with North Dakota  
10 because both overlie the Williston Basin (which contains the Bakken play, shown in Figure 4-9),  
11 although many fewer wells are reported for Montana (see Appendix Table B-5). The Williston Basin  
12 is the only basin with significant activity reported for either state, though other basins are also  
13 present in Montana (e.g., the Powder River Basin).

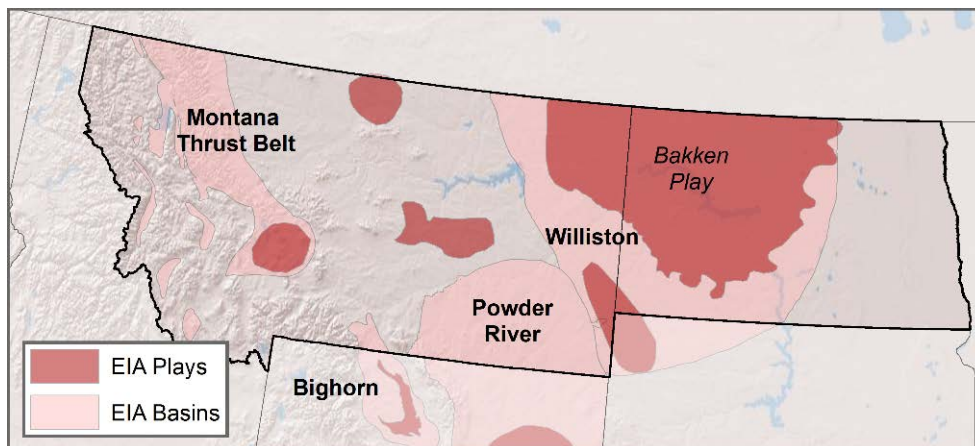


Figure 4-9. Major U.S. EIA shale plays and basins for North Dakota and Montana (EIA, 2015b).

Source: ([EIA, 2015b](#)).

---

<sup>1</sup> For instance, an increased proportion of organic matter entering a treatment plant may increase the formation of trihalomethanes, byproducts of the disinfection process formed as chlorine react with organic matter in the water being treated ([Water Research Foundation, 2014](#)).

1 *Types of water used:* Hydraulic fracturing of the Bakken play underlying much of western North  
2 Dakota and northeastern Montana depends on both ground and surface water resources. Surface  
3 water from the Missouri River system provides the largest source of fresh water in the center of  
4 Bakken oil development ([North Dakota State Water Commission, 2014](#); [EERC, 2011, 2010](#); [North  
5 Dakota State Water Commission, 2010](#)). Apart from the Missouri River system, regional surface  
6 waters (i.e., small streams) do not provide a consistent supply of water for the oil industry due to  
7 seasonal stream flow variations. Sufficient stream flows generally occur only in the spring after  
8 snowmelt ([EERC, 2011](#)). Ground water from glacial and bedrock aquifer systems has traditionally  
9 supplied much of the water needed for Bakken development, but concerns over limited ground  
10 water supplies have led to limits on the number of new ground water withdrawal permits issued  
11 ([Ceres, 2014](#); [Plummer et al., 2013](#); [EERC, 2011, 2010](#); [North Dakota State Water Commission,  
12 2010](#)).

13 The water used for Bakken development is described as mostly fresh. The EPA FracFocus report  
14 shows that “fresh” was the only source of water listed in almost all disclosures reporting a source of  
15 water in North Dakota ([U.S. EPA, 2015a](#)).<sup>1</sup> Reuse of Bakken wastewater is limited due to its quality  
16 of high TDS, which presents challenges for treatment and reuse. However, the industry is  
17 researching treatment technologies for reuse of this wastewater ([Ceres, 2014](#); [EERC, 2013, 2011](#)).

18 Water for hydraulic fracturing is commonly purchased from municipalities or other public water  
19 systems in the region. The water is often delivered to trucks at water depots or transported directly  
20 to well pads via pipelines ([EERC, 2011](#)).

21 *Water Use per Well:* Water use per well is intermediate compared with other areas, with a median  
22 of 2.0 and 1.6 million gal (7.6 and 6.1 million L) per well in the Williston Basin in North Dakota and  
23 Montana, respectively according to the EPA’s FracFocus project database (see Appendix Table B-5).  
24 The North Dakota State Water Commission reports similar volumes (2.2 million gal (8.3 million L)  
25 per well on average for North Dakota) in a summary fact sheet ([North Dakota State Water  
26 Commission, 2014](#)).<sup>2</sup>

27 A presentation by the North Dakota Department of Mineral Resources (NDDMR) suggests that  
28 Bakken wells require an average of 600 gal (2,300 L) per day of “maintenance water” in addition to  
29 the initial water for hydraulic fracturing ([North Dakota Department of Mineral Resources, 2013](#)).<sup>3</sup>  
30 This extra water is reportedly needed because of the relatively high salt content of Bakken brine,  
31 potentially leading to salt buildup, pumping problems, and restriction of oil flow. According to the  
32 NDDMR, maintenance water can contribute to large additional volumes over a typical well life span  
33 (6.6–8.8 million gal (25-33 million L) over 30–40 years). It is unclear whether this phenomenon is  
34 restricted to the Bakken play.

---

<sup>1</sup> However, 25% of North Dakota disclosures included information related to water sources ([U.S. EPA, 2015a](#)).

<sup>2</sup> The fact sheet is a stand-alone piece, and it is not accompanied by an underlying report.

<sup>3</sup> The NDDMR’s presentation that mentions the issue of maintenance water was later picked up and reported on by *National Geographic* (<http://news.nationalgeographic.com/news/energy/2013/11/131111-north-dakota-wells-maintenance-water/>) and by [Ceres \(2014\)](#). Peer-reviewed studies on the Bakken also report on maintenance water ([e.g., Scanlon et al., 2014](#)), but they refer to the same original sources.



1 *Cumulative water use/consumption:* Cumulative water use for fracturing in this region is greatest in  
2 the northwestern corner of North Dakota. In counties with 2011 and 2012 disclosures to FracFocus,  
3 fracturing water use averaged approximately 123 million gal (466 million L) per county annually in  
4 the two-state area, with use in McKenzie and Williams Counties in North Dakota exceeding  
5 500 million gal (1.9 billion L) per year (see Appendix Table B-2). There are four counties where  
6 2011 and 2012 average hydraulic fracturing water use was 10% or more of 2010 total water use.  
7 Mountrail and Dunn Counties showed the highest percentages. Outside of North Dakota’s northwest  
8 corner, the rest of the state and Montana showed little cumulative water use from hydraulic  
9 fracturing (see Table 4-2 and Appendix Table B-2).

10 *Potential for impacts:* In this region, there are concerns about over-pumping ground water  
11 resources, but the potential for impacts appears to be low provided the Missouri River is  
12 determined to be a sustainable and usable source. This finding of a low potential for impacts is also  
13 supported by the comparison of hydraulic fracturing water use to water availability at the county  
14 scale (see Text Box 4-2 and Figure 4-5a,b.) This area is primarily rural, interspersed with small  
15 towns. Residents use a mixture of surface water and ground water for domestic use depending on  
16 the county, with most water supplied by local municipalities (see Appendix Table B-6).

17 The state of North Dakota and the U.S. Army Corps of Engineers concluded that ground water  
18 resources in western North Dakota are not sufficient to meet the needs of the oil and gas industry  
19 ([U.S. Army Corps of Engineers, 2011](#); [North Dakota State Water Commission, 2010](#)). All users  
20 combined currently withdraw approximately 6.2 billion gal (23.5 billion L) of water annually in an  
21 11-county region in western North Dakota, already stressing ground water supplies ([U.S. Army](#)  
22 [Corps of Engineers, 2011](#)). By contrast, the total needs of the oil and gas industry are projected to  
23 range from approximately 2.2 and 8.8 billion gal (8.3 and 33.3 billion L) annually by the year 2020  
24 ([U.S. Army Corps of Engineers, 2011](#)).

25 Due to concerns for already stressed ground water supplies, the state of North Dakota limits  
26 industrial ground water withdrawals, particularly from the Fox Hills-Hell Creek aquifer ([Ceres,](#)  
27 [2014](#); [Plummer et al., 2013](#); [EERC, 2011, 2010](#); [North Dakota State Water Commission, 2010](#)).  
28 Currently, the oil industry is the largest industrial user of water from the Fox Hills-Hell Creek  
29 aquifer in western North Dakota ([North Dakota State Water Commission, 2010](#)). Many farms,  
30 ranches, and some communities in western North Dakota rely on flowing wells from this artesian  
31 aquifer, particularly in remote areas that lack electricity for pumping; however, low recharge rates  
32 and prolonged withdrawals throughout the last century have resulted in steady declines in the  
33 formation’s hydraulic pressure ([North Dakota State Water Commission, 2010](#)). Declines in  
34 hydraulic pressure do not appear to be associated with impacts to ground water quality; rather, the  
35 state is concerned with maintaining flows for users through conservation ([North Dakota State](#)  
36 [Water Commission, 2010](#)).

37 To reduce pressure on ground water, the state is encouraging the industry to seek surface water  
38 withdrawals from the Missouri River system, which if used, may be an adequate resource. The  
39 North Dakota State Water Commission concluded the Missouri River and its dammed reservoir,  
40 Lake Sakakawea, are the only plentiful and dependable water supplies for the oil industry in



1 western North Dakota ([North Dakota State Water Commission, 2010](#)). In 2011, North Dakota  
2 authorized the Western Area Supply Project, by which Missouri River water (via the water  
3 treatment plant in Williston, North Dakota) will be supplied to help meet water demands, including  
4 for oil and gas development, of the state’s northwest counties ([WAWSA, 2011](#)). Industrial surface  
5 water withdrawals are presently allowed in Lake Sakakawea on a temporary and controlled basis  
6 while the U.S. Army Corps of Engineers conducts a multi-year study to determine whether surplus  
7 water is available to meet the demands of regional municipal and industrial users ([U.S. Army Corps  
8 of Engineers, 2011](#)).

#### 4.5.5. Oklahoma and Kansas


9 Oklahoma had the fifth most disclosures in the EPA FracFocus project database (5.0% of  
10 disclosures) (see Appendix Table B-5, and Figure 4-3). Three major basins— the Anadarko, which  
11 includes the Woodford play; the Arkoma, which includes the Fayetteville play; and the Ardmore,  
12 which includes the Woodford play—contain 67% of the disclosures in Oklahoma (see Figure 4-9  
13 and Appendix Table B-5). Few wells were reported for Kansas (Kansas disclosures comprise 0.4%  
14 of the EPA FracFocus project database), but because of the shared geology of the Cherokee Platform  
15 across the two states, we group Kansas with Oklahoma. Oklahoma and Kansas were two of the  
16 three states where a large fraction of wells were not associated with a basin defined by the U.S. EIA  
17 ([U.S. EPA, 2015b](#)) (see Appendix Table B-5).<sup>1</sup>

18 *Types of water used:* Water for hydraulic fracturing in Oklahoma and Kansas comes from both  
19 surface and ground water ([Kansas Water Office, 2014](#); [Taylor, 2012](#)). Data on temporary water use  
20 permits in Oklahoma (which make up the majority of water use permits for Oklahoma oil and gas  
21 mining) show that, in 2011, approximately 63% and 37% of water for hydraulic fracturing came  
22 from surface and ground water, respectively ([Taylor, 2012](#)) (see Table 4-3). General water use in  
23 Oklahoma follows an east-west divide, with the eastern half dependent on surface sources and the  
24 western half relying heavily on ground water ([OWRB, 2014](#)). Water obtained for fracturing is  
25 assumed to fit this pattern as well. No data are available on the proportion of hydraulic fracturing  
26 water that is sourced from surface versus ground water resources in Kansas.

27 For both Oklahoma and Kansas, no data are available to describe the extent to which reused  
28 wastewater is used as a percentage of total injected volume. However, the quality of Oklahoma’s  
29 Woodford Shale wastewater has been described as low in TDS, and thus reuse could reduce the  
30 demand for fresh water ([Kuthnert et al., 2012](#)).

---

<sup>1</sup> Alaska was the other state in the EPA FracFocus project database where the U.S. EIA shale basins did not adequately describe well locations, with all 37 wells in Alaska not associated with a U.S. EIA basin. For all other states, U.S. EIA shale basins captured 86%–100% of the wells in the EPA FracFocus project database ([U.S. EPA, 2015b](#)).

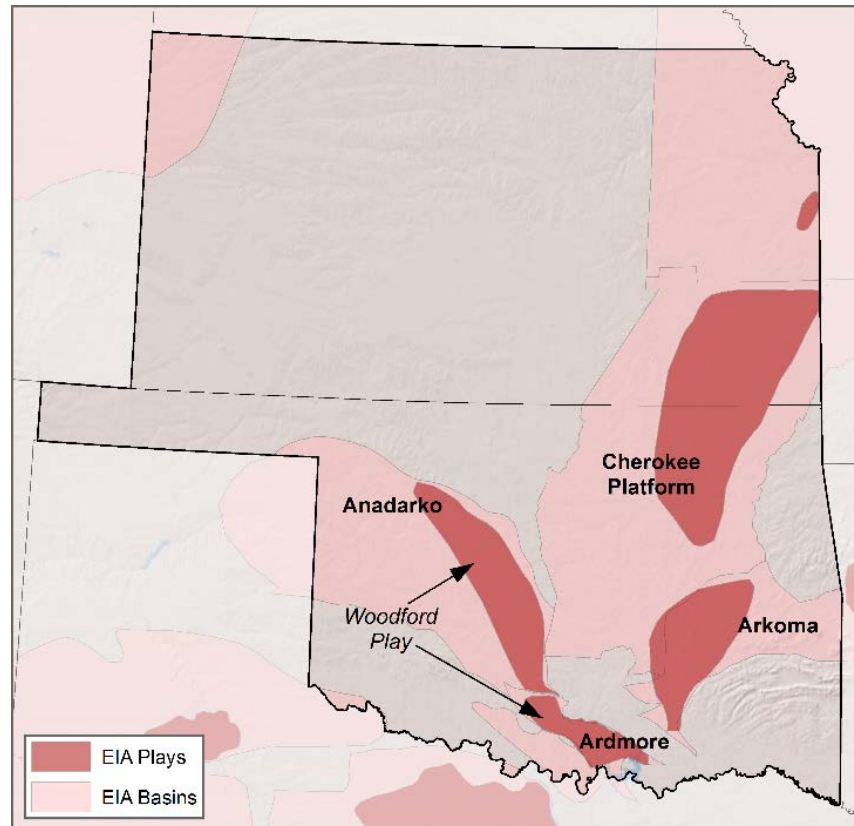

**Figure 4-10. Major U.S. EIA shale plays and basins for Oklahoma and Kansas (EIA, 2015).**

Source: ([EIA, 2015b](#))

1 *Water Use per Well:* State-level estimates of median water use per well in Oklahoma include 2.6  
 2 million gal (9.8 million L) and 3 million gal (11 million L) [[U.S. EPA \(2015b\)](#) and [Murray \(2013\)](#),  
 3 respectively]. Water use for hydraulic fracturing increased from 2000 to 2011, driven by volumes  
 4 required for fracturing horizontal wells across the state ([Murray, 2013](#)). Within the state there are  
 5 wide ranges in water use for different formations. According to the EPA FracFocus project database,  
 6 the Ardmore and Arkoma Basins of Oklahoma, had the highest median water use in the country,  
 7 with medians of 8.0 and 6.7 million gal (30.3 and 25.4 million L) per well, respectively; whereas the  
 8 Anadarko Basin had lower median water use per well and higher disclosure counts (3.3 million gal  
 9 (12.5 million L), 935 disclosures) (see Appendix Table B-5). Wells not associated with a U.S. EIA  
 10 basin had a median of 1.9 million gal (7.2 million L) per well (592 disclosures) (see Appendix Table  
 11 B-5). It is not clear why lower water volumes were reportedly used in unassociated wells, but  
 12 Oklahoma has several CBM deposits in the eastern part of the state where very low water use has  
 13 been reported ([Murray, 2013](#)). Median water use per well in Kansas was 1.5 million gal (5.7 million  
 14 L), focused mostly in a five-county area in the south-central and southwest portions of the state  
 15 (see Appendix Table B-5).

16 *Cumulative water use/consumption:* Cumulatively, operators reported using an average of  
 17 71.9 million gal (272.2 million L) of water annually in Oklahoma counties with disclosures; in

1 Kansas, this value is only 3.5 million gal (13.2 million L) (see Appendix Table B-2). Average  
2 hydraulic fracturing water use in 2011 and 2012 did not exceed 10% of 2010 total water use in any  
3 county in Oklahoma or Kansas (see Appendix Table B-2). However, there were six counties in  
4 Oklahoma (Alfalfa, Canadian, Coal, Pittsburg, Rogers Mills, and Woods) where fracturing water  
5 consumption exceeded 10% of 2010 total county water consumption.

6 *Potential for impacts:* The potential for effects on drinking water resources appears to be low in  
7 Oklahoma and Kansas, since hydraulic fracturing water use and consumption are generally low as a  
8 percentage of total water use and consumption. This finding is generally supported by the  
9 comparison of cumulative fracturing water use to water availability at the county scale (see Text  
10 Box 4-2 and Figure 4-5a,b). If impacts to water quantity or quality do occur, however, they are more  
11 likely to happen in western Oklahoma than in the eastern half of the state or Kansas. Of the six  
12 Oklahoma counties where fracturing consumption exceeded 10% of 2010 water consumption,  
13 three (Alfalfa, Canadian, and Roger Mills) are in the western half of the state where surface water  
14 availability is lowest (Figure 4-6a). Surface water is fully allocated in the Panhandle and West  
15 Central regions, encompassing much of the state's northwestern quadrant ([OWRB, 2014](#)). As a  
16 result, residents generally rely on ground water in western Oklahoma (see Appendix Table B-6),  
17 and it is likely that fracturing does as well.

18 Projecting out to 2060, Oklahoma's Water Plan concludes that aquifer storage depletions are likely  
19 in the Panhandle and West Central regions due to over-pumping, particularly for irrigation ([OWRB,](#)  
20 [2014](#)). Ground water depletions are anticipated to be small relative to storage, but will be the  
21 largest in summer months and may lead to higher pumping costs, the need for deeper wells, lower  
22 water yields, and detrimental effects on water quality ([OWRB, 2014](#)). Drought conditions are likely  
23 to exacerbate this problem, and Oklahoma's Water Plan specifically mentions the potential for  
24 climate change to affect future water supplies in the state ([OWRB, 2014](#)). In the adjacent Texas  
25 Panhandle, future irrigation needs may go unmet ([TWDB, 2012](#)), and this may be the case in  
26 western Oklahoma as well.

27 Aquifer depletions in western Oklahoma may be associated with ground water quality degradation,  
28 particularly under drought conditions. The central portion of the Ogallala aquifer underlying the  
29 Oklahoma Panhandle and western Oklahoma contains elevated levels of some constituents (e.g.,  
30 nitrate) due to over-pumping, although generally it is of better quality than the southern portion of  
31 the aquifer ([USGS, 2009](#)). Additional ground water withdrawals for hydraulic fracturing in western  
32 Oklahoma may add to these water quality issues, particularly in combination with other substantial  
33 water uses (e.g., irrigation) ([USGS, 2009](#)).

#### **4.5.6. Arkansas and Louisiana**


34 Arkansas and Louisiana were ranked seventh and tenth in the number of disclosures in the EPA  
35 FracFocus project database, respectively (see Appendix Table B-5). Hydraulic fracturing activity in  
36 Louisiana occurs primarily in the TX-LA-MS Salt Basin, which contains the Haynesville play; activity  
37 in Arkansas is dominated by the Arkoma Basin, which contains the Fayetteville play (Figure 4-11).

1 *Types of water used:* Surface water is reported as the primary source of water for hydraulic  
2 fracturing operations in both Arkansas and Louisiana ([ANRC, 2014](#); [LA Ground Water Resources](#)  
3 [Commission, 2012](#); [STRONGER, 2012](#)). Quantitative information is lacking for Arkansas on the  
4 proportion of water sourced from surface versus ground water. However, data are available for  
5 Louisiana, where an estimated 87% of water for hydraulic fracturing in the Haynesville Shale is  
6 sourced from surface water ([LA Ground Water Resources Commission, 2012](#)) (see Table 4-3). In  
7 2008, during the early stages of development, hydraulic fracturing in Louisiana relied heavily on  
8 ground water from the Carrizo-Wilcox aquifer, although concerns for the sustainability of ground  
9 water resources have more recently prompted the state to encourage surface water withdrawals  
10 ([LA Ground Water Resources Commission, 2012](#)).

11 The EPA FracFocus report suggests that significant reuse of wastewater may occur in Arkansas to  
12 offset total fresh water used for hydraulic fracturing; 70% of all disclosures reporting a water  
13 source indicated a blend of “recycled/surface,” whereas only 3% of disclosures reporting a water  
14 source noted “fresh” as the exclusive water source ([U.S. EPA, 2015a](#)).<sup>1</sup> According to [Veil \(2011\)](#),  
15 Arkansas’ Fayetteville Shale wastewater is of relatively good quality (i.e., low TDS), potentially  
16 facilitating reuse. Data are generally lacking on the extent to which hydraulic fracturing wastewater  
17 is reused to offset total fresh water use in Louisiana.

---

<sup>1</sup> 93% of Arkansas disclosures included information related to water sources ([U.S. EPA, 2015a](#)).

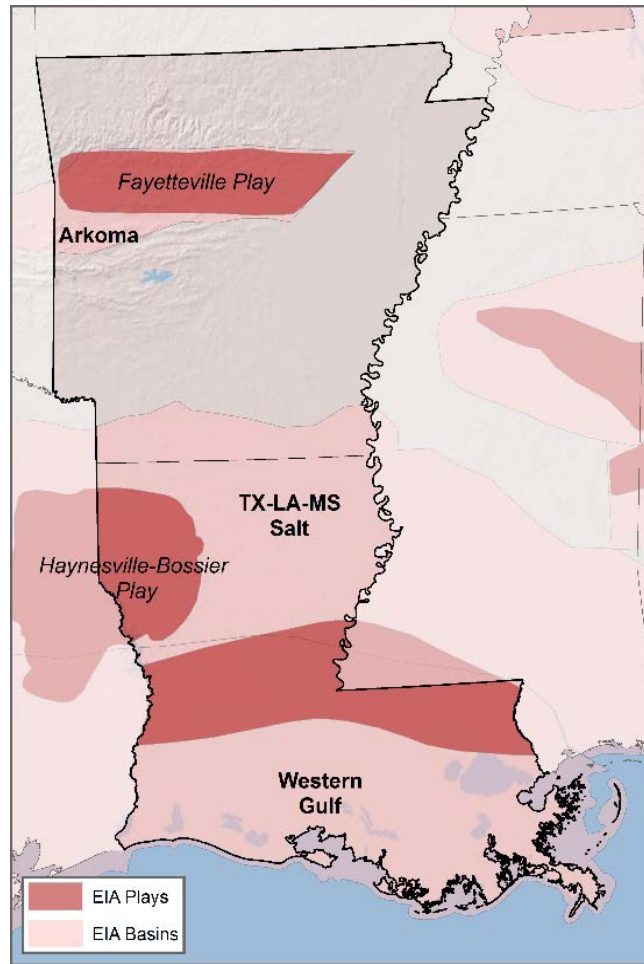

**Figure 4-11. Major U.S. EIA shale plays and basins for Arkansas and Louisiana (EIA, 2015b).**

Source: (EIA, 2015b).

1 *Water Use per Well:* Arkansas and Louisiana have the highest median water use per well in the  
 2 nation, at 5.3 million and 5.1 million gal (20.1 million and 19.3 million L), respectively based on the  
 3 EPA FracFocus project database (see Appendix Table B-5).<sup>1</sup>

4 *Cumulative water use/consumption:* On average, hydraulic fracturing operations cumulatively use  
 5 408 million gal (1.54 billion L) of water each year in Arkansas counties reporting activity, or 9.3%  
 6 of 2010 total county water use (26.9% of total county consumption) (see Appendix Table B-2). In  
 7 2011 and 2012, five counties dominated fracturing water use in Arkansas: Cleburne, Conway,  
 8 Faulkner, Van Buren, and White Counties (see Appendix Table B-2). Van Buren, which is sparsely  
 9 populated and thus has relatively low total water use and consumption, is by far the county highest

<sup>1</sup> According to STRONGER (2012) and STRONGER (2011a), both states require disclosure of information on water use per well, but this has not been synthesized into state level reports.

1 in hydraulic fracturing water use and consumption relative to 2010 total water use and  
2 consumption (56% and 168%, respectively) (see Table 4-2).

3 In Louisiana, fracturing water use is concentrated in six parishes in the far northwestern corner of  
4 the state, associated with the Haynesville play.<sup>1</sup> On average in 2011 and 2012, hydraulic fracturing  
5 used 117 million gal (443 million L) of water annually per parish, representing approximately 3.6%  
6 and 10.8% of 2010 total water use and consumption, respectively (see Appendix Table B-2).  
7 Operators in De Soto Parish used the most water (over 1 billion gal (3.8 billion L) annually).  
8 Fracturing water use and consumption was highest relative to 2010 total water use and  
9 consumption (35.5% and 83.2%, respectively) in Red River Parish (see Table 4-2). These numbers  
10 may be low estimates since Louisiana required disclosures to the state or FracFocus and Arkansas  
11 required disclosures to the state, but not FracFocus, during the time period analyzed ([U.S. EPA,  
12 2015a](#)) (see Appendix Table B-5).

13 *Potential for impacts:* Water availability is generally higher in Arkansas and Louisiana than in states  
14 farther west, reducing the potential for impacts to drinking water quantity and quality (Figure 4-6a,  
15 Text Box 4-2, and Figure 4-5). There are, however, concerns about over-pumping of ground water  
16 resources in northwestern Louisiana. Prior to 2008, most operators in the Louisiana portion of the  
17 Haynesville Shale used ground water, withdrawing from the Carrizo-Wilcox, Upland Terrace, and  
18 Red River Alluvial aquifer systems ([LA Ground Water Resources Commission, 2012](#)). To mitigate  
19 stress on ground water, the state issued a water use advisory to the oil and gas industry that  
20 recommended Haynesville Shale operators seek alternative water sources to the Carrizo-Wilcox  
21 aquifer, which is predominantly used for public supply ([LDEQ, 2008](#)). Operators then transitioned  
22 to mostly surface water, with a smaller ground water component (approximately 12% of all  
23 fracturing water used) ([LA Ground Water Resources Commission, 2012](#)). Of this ground water  
24 component, the majority (approximately 74%) still came from the Carrizo-Wilcox aquifer ([LA  
25 Ground Water Resources Commission, 2012](#)).

26 Although the potential for hydraulic fracturing withdrawals to affect water supplies and water  
27 quality in the aquifer appears greatly reduced, it is not entirely eliminated. Despite Louisiana's  
28 water use advisory, a combination of drought conditions and higher than normal withdrawals (for  
29 all uses, not solely hydraulic fracturing) from the Carrizo-Wilcox and Upland Terrace aquifers  
30 caused several water wells to go dry in July 2011. In August 2011, a ground water emergency was  
31 declared for southern Caddo Parrish ([LA Ground Water Resources Commission, 2012](#)). There are  
32 hydraulic fracturing wells in southern Caddo Parrish ([U.S. EPA, 2015b](#)), and so it is possible that  
33 fracturing withdrawals contributed to the problem of declines in ground water in this instance.

#### 4.5.7. Utah, New Mexico, and California


34 Together, Utah, New Mexico, and California accounted for approximately 9% of disclosures in the  
35 EPA FracFocus project database (3.8%, 3.1% and 1.9% of disclosures, respectively) (see Appendix  
36 Table B-5 and Figure 4-3). Almost all reported hydraulic fracturing in Utah and California were in

---

<sup>1</sup> Louisiana is divided into parishes, which are similar to counties in other states.



1 the Uinta-Piceance Basin (99%) and San Joaquin Basin (95%), respectively. Activity in New Mexico  
2 mostly occurs in the Permian and San Juan Basins, which together comprised 96% of reported  
3 disclosures in that state (see Figure 4-12).

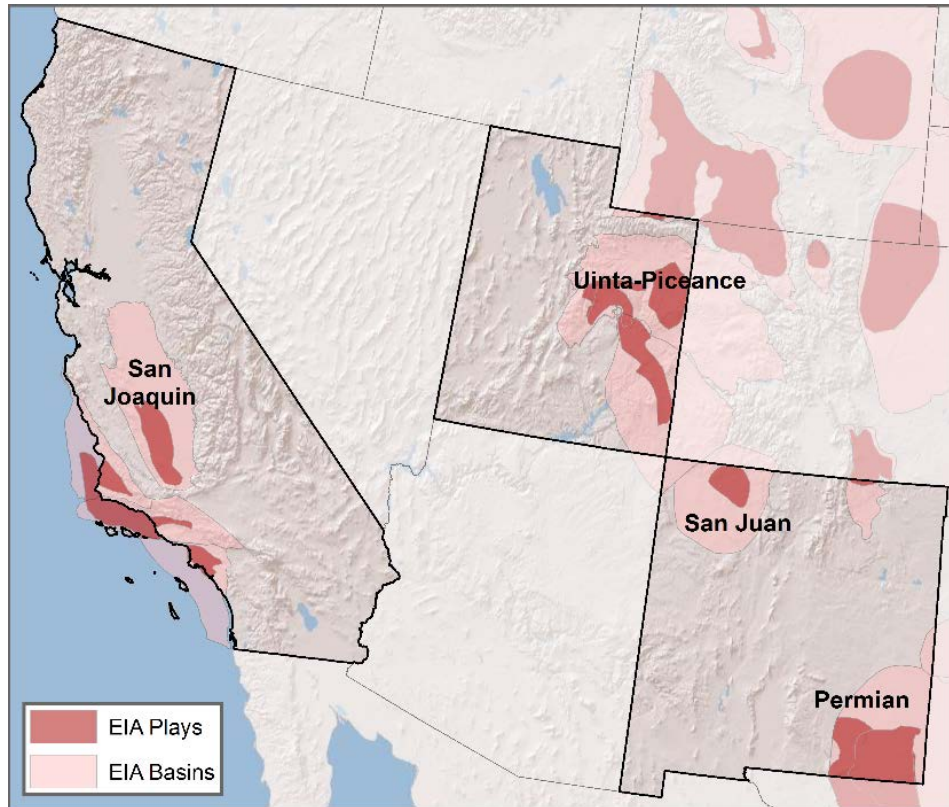

**Figure 4-12. Major U.S. EIA shale plays and basins for Utah, New Mexico, and California (EIA, 2015).**

Source: [\(EIA, 2015b\)](#).

4 *Types of water used:* Of these three states, California has the most information available on the  
5 sources of water used for hydraulic fracturing. Most current and proposed fracturing activity is  
6 focused in Kern County in the San Joaquin Basin, where well stimulation notices indicate that  
7 operators depend mainly on surface water purchased from nearby irrigation districts ([CCST, 2014](#)).  
8 California irrigation districts receive water allocated by the State Water Project, and deliveries may  
9 be restricted or eliminated during drought years ([CCST, 2014](#)).<sup>1</sup> In addition to publicly-supplied  
10 surface water, operators also may self-supply a smaller proportion of water from on-site ground  
11 water wells ([CCST, 2014](#)). Operators use primarily fresh water for hydraulic fracturing (96% of well

<sup>1</sup> The California State Water Project is water storage and distribution system maintained by the California Department of Water Resources, which provides water for urban and agricultural water suppliers in Northern California, the San Francisco Bay Area, the San Joaquin Valley, the Central Coast, and Southern California ([California Department of Water Resources, 2015](#)).

1 stimulation notices reported); reused wastewater (sometimes blended with fresh water) is used in  
2 small amounts relative to total water use (4% of well stimulation notices reported) ([CCST, 2014](#)) (see  
3 Table 4-1).

4 The source, quality, and provisioning of water used for hydraulic fracturing in Utah and New  
5 Mexico are not well characterized. The 2010 New Mexico water use report summarizes  
6 withdrawals for a variety of water use categories. In 2010, mining water use (which includes water  
7 used for oil and gas production) consisted of 26% and 74% of surface and ground water  
8 withdrawals, respectively ([NM OSE, 2013](#)). Assuming that hydraulic fracturing follows the same  
9 pattern as other mining water uses (e.g., for metals, coal, geothermal), water for hydraulic  
10 fracturing in New Mexico would be supplied primarily by ground water withdrawals. To our  
11 knowledge, no data are available to characterize the source of water for hydraulic fracturing  
12 operations in Utah. In addition, no data are available to describe the extent to which reused  
13 wastewater is used as a proportion of total water injected for either Utah or New Mexico.

14 *Water use per well:* Median water use per well in Utah, New Mexico, and California is lower than in  
15 other states in the EPA FracFocus project database: Utah ranks 13<sup>th</sup> (approximately 302,000 gal  
16 (1.14 million L)), New Mexico ranks 14<sup>th</sup> (approximately 175,000 gal (662,000 L)), and California  
17 ranks 15<sup>th</sup> (approximately 77,000 gal (291,000 L)) out of the 15 states (see Appendix Table B-5). A  
18 likely explanation for the low water use per well in Utah and New Mexico is the prevalence of CBM  
19 in the Uinta (Utah) and San Juan (New Mexico) Basins. Low water use per well in California is  
20 attributed to the prevalence of vertical wells and the use of crosslinked gels. Vertical wells  
21 dominate because the complex geology precludes long horizontal drilling and fracturing ([CCST,  
22 2014](#)).

23 For California, the California Council on Science and Technology (CCST) reports average water use  
24 per well of 130,000 gal (490,000 L), which agrees with the state average of approximately 131,700  
25 gal (498,500 L) according to the EPA FracFocus project database ([CCST, 2014](#)) (see Appendix Table  
26 B-5); this is expected because estimates from CCST are also based on data submitted to FracFocus.

27 *Cumulative water use/consumption:* Operators in Utah, New Mexico, and California report using low  
28 cumulative amounts of water compared to most other states (see Appendix Table B-1). Only four  
29 counties (Duchesne and Uintah Counties in Utah, and Eddy and Lea Counties in New Mexico)  
30 required more than 50 million gal (189 million L) annually (see Appendix Table B-2). Fracturing  
31 water use and consumption did not exceed 1% of 2010 total water use and consumption in any  
32 county.

33 *Potential for impacts:* The potential for water quantity and quality impacts from hydraulic  
34 fracturing water withdrawals in Utah, New Mexico, and California appears to be low at present (see  
35 Text Box 4-2 and Figure 4-5a,b). Hydraulic fracturing does not use or consume much water  
36 compared to other users or consumers in these states. As in other states, this does not preclude  
37 sub-county effects, and this finding of low potential for impacts could change if fracturing activities  
38 increase beyond present levels. This is particularly the case because these states generally have low  
39 surface water availability (see Figure 4-6a) and high ground water dependence (see Figure 4-6b),

1 and have experienced frequent periods of drought over the last decade ([National Drought](#)  
2 [Mitigation Center, 2015](#)).

## 4.6. Chapter Synthesis

3 In this chapter we examine the potential for water acquisition for hydraulic fracturing to affect  
4 drinking water quantity and quality. The potential for impacts largely depends on water use,  
5 consumption, and availability. Water management—in terms of the type of water used, the timing  
6 or location of water withdrawals, or other factors—also can play a role. Because all of these factors  
7 vary considerably from place-to-place, any impacts that occur will be location-specific and occur at  
8 the spatial scale of the specific drinking water resource (i.e., the particular stream, watershed, or  
9 local ground water aquifer). Therefore, it is important to consider the potential for hydraulic  
10 fracturing impacts by location.

11 We examine the potential for impacts by considering (1) the types of water used for hydraulic  
12 fracturing; (2) the amounts of water used per well; (3) cumulative estimates of water used and  
13 consumed for hydraulic fracturing; and (4) a state-by-state assessment of the potential for impacts  
14 based on water use, consumption, and availability. We often could not assess the potential for  
15 impacts at a finer resolution than the county scale due to lack of available local-scale data for most  
16 areas. Thus, our assessment suggests areas that are more likely than others to experience impacts,  
17 but does not necessarily indicate that these impacts will occur. Three case studies (southern Texas,  
18 western Colorado, and eastern Pennsylvania), provide an in-depth examination at finer scales, and  
19 we rely on those where possible (see Text Boxes 4-3, 4-4, and 4-5).

### 4.6.1. Major Findings

20 Water for hydraulic fracturing typically comes from surface water, ground water, or reused  
21 wastewater. Because trucking can be a major expense, operators often use water sources as close to  
22 well pads as possible. Operators usually self-supply surface or ground water directly, but also may  
23 obtain water secondarily through public water systems or other suppliers. Hydraulic fracturing  
24 operations in the eastern United States generally rely on surface water, whereas operations in more  
25 semi-arid to arid western states use mixed surface and ground water supplies. In areas that lack  
26 available surface water (e.g., western Texas), ground water supplies most of the water needed for  
27 fracturing unless alternative sources, such as reused wastewater, are available and utilized.

28 The vast majority of water used for hydraulic fracturing nationally comes from fresh water sources,  
29 although some operators also use lower-quality water (e.g., hydraulic fracturing wastewater,  
30 brackish ground water, or small proportions of acid mine drainage and wastewater treatment plant  
31 effluent). The use of non-fresh sources can reduce competition for current drinking water  
32 resources. Nationally, the proportion of reused wastewater is generally low as a percentage of  
33 injected volume; based on available data, the median reuse of wastewater as a percentage of  
34 injected volume is 5% nationally, but this percentage varies by location (see Table 4-1).<sup>1</sup> Available

---

<sup>1</sup> Note that reused water as a percentage of total water injected differs from the percentage of wastewater that is reused (see Section 4.2 and Chapter 8).

1 data on reuse trends indicate increasing reuse of wastewater over time in both Pennsylvania and  
2 West Virginia, likely due to the lack of nearby disposal options. Reuse as a percentage of water  
3 injected appears to be low in other areas, likely in part because of the relatively high availability of  
4 disposal wells (see Chapter 8).

5 The median amount of water used per hydraulically fractured well, based on national disclosures to  
6 FracFocus, is approximately 1.5 million gal (5.7 million L) of water ([U.S. EPA, 2015a, b](#)). This  
7 estimate represents a variety of fractured well types, including types that use much less water per  
8 well than horizontal shale gas wells. Thus, published estimates for horizontal shale gas wells are  
9 typically higher (e.g., approximately 4 million gal (15 million L) per well ([Vengosh et al., 2014](#))).  
10 There is also wide variation within and among states and basins in the median water volumes  
11 reported per disclosure, from more than 5 million gal (19 million L) in Arkansas and Louisiana to  
12 less than 1 million gal (3.8 million L) in Colorado, Wyoming, Utah, New Mexico, and California ([U.S.](#)  
13 [EPA, 2015b](#)). This variation results from several factors, including well length, formation geology,  
14 and fracturing fluid formulation (see Section 4.3.3).

15 Cumulatively, hydraulic fracturing uses billions of gallons of water every year at the national and  
16 state scales, and even in some counties. When expressed as a percentage compared to total water  
17 use or consumption at these scales, however, hydraulic fracturing water use and consumption is  
18 most often a small percentage, generally less than 1%. This percentage may be higher in specific  
19 areas. Annual hydraulic fracturing water use was 10% or more compared to 2010 total water use in  
20 6.5% of counties with FracFocus disclosures in 2011 and 2012, 30% or more in 2.2% of counties,  
21 and 50% or more in 1.0% of counties ([U.S. EPA, 2015a](#)). Consumption estimates follow the same  
22 general pattern, but with slightly higher percentages in each category. In these counties, hydraulic  
23 fracturing represents a relatively large user and consumer of water.

24 High hydraulic fracturing water use or consumption alone does not necessarily result in impacts to  
25 drinking water resources. Rather, the potential for impacts depends on both water use or  
26 consumption and water availability at a given withdrawal point. Our state-by-state assessment  
27 examines the intersection between water use or consumption and availability at the county scale.  
28 This approach suggests where the potential for impacts exists, but does not indicate where impacts  
29 will occur at the local scale. Where possible, we use local-scale case studies in Texas, Pennsylvania,  
30 and Colorado to provide details at finer spatial scales.

31 In our survey of the published literature, we did not find a case where hydraulic fracturing water  
32 use by itself caused a drinking water well or stream to run dry. This could indicate an absence of  
33 hydraulic fracturing effects on water availability; alternatively, it could reflect that these events are  
34 not typically documented in the types of literature we reviewed. Water availability is rarely  
35 impacted by just one use or factor alone. For example, drinking water wells in an area overlapping  
36 with the Haynesville Shale in northwest Louisiana ran out of water in 2011, due to higher than  
37 normal withdrawals and drought ([LA Ground Water Resources Commission, 2012](#)). Hydraulic  
38 fracturing water use in the area may have contributed to these conditions, along with other water  
39 uses and the lack of precipitation. Other impacts to drinking water quantity or quality (e.g.,

1 declining aquifer levels, decreased stream flow, increased pollutant concentrations) also may occur  
2 before wells and streams actually go dry.

3 The potential for impacts due to hydraulic fracturing water withdrawals is highest in areas with  
4 relatively high fracturing water use and low water availability. Southern and western Texas are two  
5 locations where hydraulic fracturing water use combined with low water availability, drought, and  
6 reliance on declining ground water sources has the potential to affect the quantity and quality of  
7 drinking water resources. Fracturing withdrawals combined with other intensive uses, particularly  
8 irrigation, could contribute to ground water quality degradation. Any impacts are likely to be  
9 realized locally within these areas. In a detailed case study of southern Texas, [Scanlon et al. \(2014\)](#)  
10 observed generally adequate water supplies for hydraulic fracturing, except in specific locations.  
11 They found excessive drawdown of local ground water in a small proportion (~6% of the area) of  
12 the Eagle Ford play. They suggested water management, particularly a shift towards brackish water  
13 use, could minimize potential future impacts to fresh water resources (see Text Box 4-3). County-  
14 level data confirm that high brackish water availability in Texas may help offset hydraulic  
15 fracturing water demand (see Text Box 4-2).

16 Comparatively, the potential for hydraulic fracturing water acquisition impacts to drinking water  
17 quantity and quality appears to be lower—but not entirely eliminated—in other areas of the United  
18 States. Detailed case studies in western Colorado and northeastern Pennsylvania did not show  
19 impacts, despite indicating that streams could be vulnerable to water withdrawals from hydraulic  
20 fracturing ([U.S. EPA, 2015c](#)). High wastewater reuse rates in western Colorado eliminated the need  
21 for more fresh water withdrawals. In northeast Pennsylvania, water withdrawals for hydraulic  
22 fracturing could result in high water consumption-to-stream flow events, but water management  
23 (e.g., passby flows) limited the potential for impacts, especially on small streams ([U.S. EPA, 2015c](#)).  
24 In western North Dakota, ground water is limited, but the industry may have sufficient supplies of  
25 surface water from the Missouri River system. These location-specific examples emphasize the  
26 need to focus on regional and local dynamics when considering the potential impacts of hydraulic  
27 fracturing water acquisition on drinking water resources.

#### **4.6.2. Factors Affecting Frequency or Severity of Impacts**

28 The potential for hydraulic fracturing water use to affect drinking water resource quantity or  
29 quality depends primarily on the amount of water used or consumed versus water availability at a  
30 given withdrawal point. Potential impacts to drinking water resources reflect all uses, including  
31 hydraulic fracturing demands, compared to available water. Areas with high water use, low water  
32 availability, slowly replenishing sources, and/or episodic water shortages (e.g., seasonal or longer-  
33 term droughts) are more vulnerable to potential impacts. Areas with high water availability relative  
34 to existing uses, high rainfall distributed throughout the year, or high storage capacity, are less  
35 likely to be affected.

36 Water management can alter this dynamic between water use and availability. The type of water  
37 used (e.g., fresh, brackish, reused hydraulic fracturing wastewater, other wastewaters) is a major  
38 factor that can either increase or decrease the potential for impacts. Replacing a fresh water source  
39 with another type of water can reduce the demand for fresh water and decrease potential



1 competition for drinking water. Brackish ground water use may reduce the demand for fresh water  
2 and decrease competition for drinking water currently, but this may change if desalinization for  
3 drinking water becomes more prevalent in the future (see Chapter 3).

4 The timing and location of water withdrawals can also affect the potential for impacts, particularly  
5 for surface water withdrawals. Withdrawing water from small streams is more likely to result in a  
6 high-consumption-to-stream flow event than removing water from larger streams ([U.S. EPA,  
7 2015c](#)). Withdrawals during periods of low stream flow are also more likely to result in impacts  
8 than withdrawals during high flow periods. Hydraulic fracturing operations may have the ability to  
9 withdraw water during periods of high stream flow, and store it for future use during drier periods.

#### 4.6.3. Uncertainties

10 There are several uncertainties inherent in our assessment of hydraulic fracturing water use and  
11 potential effects on drinking water quantity and quality. The largest uncertainties stem from the  
12 lack of literature and data on this subject at local scales, and the question of whether any impacts  
13 would be documented in the types of literature we reviewed.

14 We used a state-by-state approach to identify areas where potential impacts are likely, based on  
15 relatively high fracturing water use and low water availability. Typically, only data at the county-  
16 scale were available. Because impacts occur at smaller spatial scales (i.e., at water withdrawal  
17 sites), our assessment suggests the potential for impacts, but does not indicate whether impacts  
18 will occur. In only a few places could we use local case studies to determine if potential impacts  
19 were realized; these case studies show that local factors can greatly affect whether drinking water  
20 resources are impacted.

21 In our survey of the published literature, we did not find a case where hydraulic fracturing water  
22 use alone caused a drinking water well or stream to run dry. This could indicate an absence of  
23 hydraulic fracturing effects on water availability, or it could reflect that these events are not  
24 typically documented in the types of literature we reviewed. Water availability is rarely impacted  
25 by just one use or factor alone. These issues may have limited our findings.

26 Other uncertainties arise from data limitations regarding the volume and types of water used or  
27 consumed for hydraulic fracturing, future water use projections, and water availability estimates.  
28 There are no nationally consistent data sources, and therefore water use estimates must be based  
29 on multiple, individual pieces of information. For example, in their National Water Census, the USGS  
30 includes hydraulic fracturing in the broader category of “mining” water use, but hydraulic  
31 fracturing water use is not reported separately ([Maupin et al., 2014](#)). There are locations where  
32 annual average hydraulic fracturing water use in 2011 and 2012 exceeded total mining water use in  
33 2010, and one county where it exceeded all water use ([U.S. EPA, 2015b](#); [Maupin et al., 2014](#)). This  
34 could be due to a rapid increase in hydraulic fracturing water use, differences in methodology  
35 between the two databases (i.e., the USGS 2010 National Water Census and the EPA FracFocus  
36 project database), or both.



1 The EPA FracFocus project database represents the most extensive database currently available to  
2 estimate hydraulic fracturing water use. However, estimates based on the project database form an  
3 incomplete picture of hydraulic fracturing water use because most states with data in the project  
4 database did not require disclosure to FracFocus during the time period analyzed ([U.S. EPA, 2015a](#))  
5 (see Text Box 4-1). We conclude that this likely does not change the overall hydraulic fracturing  
6 water use patterns observed across the United States, but could affect our assessment of the  
7 potential impacts in specific locations.

8 Hydraulic fracturing water use data are often provided in terms of water use per well. While this is  
9 valuable information, the potential impacts of water acquisition for hydraulic fracturing could be  
10 better assessed if data were also available at the withdrawal point. If the total volume, date, and  
11 location of each water withdrawal were documented, the quality of the water used and potential  
12 effects on availability could be better estimated. For example, surface withdrawal points could be  
13 aggregated by watershed to estimate effects on downstream flow. Alternatively, if the location and  
14 depth of ground water pumping were documented, these could be aggregated to assess effects on a  
15 given aquifer. Some of this information is available in disparate forms, but the lack of nationally  
16 consistent data on water withdrawal locations, timing, and amounts—data that are publicly  
17 available, easy to access, and easy to analyze—limits our assessment of hydraulic fracturing water  
18 use.

19 Future hydraulic fracturing water use is also a source of uncertainty. Because water withdrawals  
20 and potential impacts are concentrated in certain localized areas, water use projections need to  
21 match this scale. Projections are available for Texas at the county scale, but more information at the  
22 county or sub-county scale is needed in other states with high hydraulic fracturing activity and  
23 water availability concerns (e.g., northwest North Dakota, eastern Colorado). Due to a lack of data,  
24 we generally could not assess future cumulative water use and the potential for impacts in most  
25 areas of the country, nor could we examine these in combination with other relevant factors (e.g.,  
26 climate change, population growth).

#### **4.6.4. Conclusions**

27 Water acquisition for hydraulic fracturing has the potential to impact drinking water resources by  
28 affecting drinking water quantity and quality (see Text Box 4-6). In our survey of the published  
29 literature, we did not find a case where hydraulic fracturing water use by itself caused a drinking  
30 water well or stream to run dry. However, the potential for impacts to drinking water quantity and  
31 quality exists and is highest in areas with relatively high fracturing water use and low water  
32 availability. Southern and western Texas are two locations where the potential appears highest due  
33 to the combined effects of high hydraulic fracturing activity, low water availability, drought, and  
34 reliance on declining ground water sources. Even in locations where water is generally plentiful,  
35 localized impacts can still occur in certain instances. Excessive ground water pumping can cause  
36 localized drawdowns; surface water withdrawals can affect stream flow, particularly in smaller  
37 streams or during low flow periods. These findings emphasize the need to focus on regional and  
38 local dynamics when examining potential impacts of hydraulic fracturing water acquisition on  
39 drinking water quantity and quality.

**Text Box 4-6. Research Questions Revisited.**

1 ***What are the types of water used for hydraulic fracturing?***

- 2 • Water for hydraulic fracturing typically comes from surface, ground water, or reused wastewater.  
3 Operators often use water sources as close to well pads as possible as trucking is a major expense.  
4 Operators usually self-supply surface or ground water directly, but also may obtain water secondarily  
5 through public water systems or other suppliers. Hydraulic fracturing operations in the eastern United  
6 States generally rely on surface water, whereas operations in more semi-arid to arid western states use  
7 mixed surface and ground water supplies. In areas that lack available surface water (e.g., western Texas),  
8 ground water supplies most of the water needed for fracturing unless alternative sources, such as reused  
9 wastewater, are available and utilized.
- 10 • The vast majority of water used nationally comes from fresh water sources, although some operators also  
11 use lower-quality water (e.g., hydraulic fracturing wastewater, brackish ground water, or small  
12 proportions of acid mine drainage and wastewater treatment plant effluent). The use of non-fresh  
13 sources can reduce competition for current drinking water resources. Nationally, the proportion of  
14 reused wastewater is generally low as a percentage of injected volume; based on available data, median  
15 reuse of wastewater across all basins and plays is 5% of injected volume (see Table 4-1). Available data  
16 on reuse trends indicate increasing reuse of wastewater over time in both Pennsylvania and West  
17 Virginia, likely due to the lack of nearby disposal options. Reuse as a percentage of water injected appears  
18 to be low in other areas, likely in part because of the relatively high availability of disposal wells (see  
19 Chapter 8).

20 ***How much water is used per well?***

- 21 • The median amount of water used per hydraulically fractured well, based on national disclosures to  
22 FracFocus, is approximately 1.5 million gal (5.7 million L) of water ([U.S. EPA, 2015a, b](#)). This estimate  
23 represents a variety of fractured well types. There is also wide variation within and among states and  
24 basins in the median water volumes reported per disclosure, from more than 5 million gal (19 million L)  
25 in Arkansas and Louisiana to less than 1 million gal (3.8 million L) in Colorado, Wyoming, Utah, New  
26 Mexico, and California ([U.S. EPA, 2015b](#)). This variation results from several factors, including well  
27 length, formation geology, and fracturing fluid formulation (see Section 4.3.3).
- 28 • Trends indicate that water use per well is increasing in certain locations as horizontal well lengths  
29 increase. This may not, however, increase water use per unit energy extracted.

**How might cumulative water withdrawals for hydraulic fracturing affect drinking water quantity?**

- Cumulatively, hydraulic fracturing uses billions of gallons of water every year at the national and state scales, and even in some counties. When expressed as a percentage compared to total water use or consumption at these scales, however, hydraulic fracturing water use and consumption is most often a small percentage, generally less than 1%. This percentage may be higher in specific areas. Annual hydraulic fracturing water use was 10% or more compared to 2010 total water use in 6.5% of counties with FracFocus disclosures in 2011 and 2012, 30% or more in 2.2% of counties, and 50% or more in 1.0% of counties ([U.S. EPA, 2015a](#)). Consumption estimates follow the same general pattern, but with slightly higher percentages in each category. In these counties, hydraulic fracturing represents a relatively large user and consumer of water.
- High hydraulic fracturing water use or consumption alone does not necessarily result in impacts to drinking water resources. Rather, the potential for impacts depends on both water use or consumption and water availability at a given withdrawal point. Our state-by-state assessment examines the intersection between water use or consumption and availability at the county scale. This approach suggests where the potential for impacts exists, but does not indicate where impacts will occur at the local scale. Local-scale case studies help provide details at finer spatial scales.
- In our survey of the published literature, we did not find a case where hydraulic fracturing water use by itself caused a drinking water well or stream to run dry. This could indicate an absence of hydraulic fracturing effects on water availability, or it could reflect that these events are not typically documented in the types of literature we reviewed. Water availability is rarely impacted by just one use or factor alone. For example, drinking water wells in an area overlapping with the Haynesville Shale in northwest Louisiana ran out of water in 2011, due to higher than normal withdrawals and drought ([LA Ground Water Resources Commission, 2012](#)). Hydraulic fracturing water use in the area may have contributed to these conditions, along with other water uses and the lack of precipitation. Other impacts to drinking water quantity or quality (e.g., declining aquifer levels, decreased stream flow, increased pollutant concentrations) also may occur before wells and streams actually go dry.
- The potential for impacts due to hydraulic fracturing water withdrawals is highest in areas with relatively high fracturing water use and low water availability. Southern and western Texas are two locations where hydraulic fracturing water use combined with low water availability, drought, and reliance on declining ground water sources has the potential to affect the quantity of drinking water resources. Any impacts are likely to be realized locally within these areas. In a detailed case study of southern Texas, [Scanlon et al. \(2014\)](#) observed generally adequate water supplies for hydraulic fracturing, except in specific locations. They found excessive drawdown of local ground water in a small proportion (~6% of the area) of the Eagle Ford play. They suggested water management, particularly a shift towards brackish water use, could minimize potential future impacts to fresh water resources (see Text Box 4-3). County-level data confirm that high brackish water availability in Texas may help offset hydraulic fracturing water demand (see Text Box 4-2).
- The potential for hydraulic fracturing water acquisition impacts to drinking water quantity and quality appears to be lower—but not entirely eliminated—in other areas of the United States. Detailed case studies in western Colorado and northeastern Pennsylvania did not show impacts, despite indicating that streams could be vulnerable to water withdrawals from hydraulic fracturing ([U.S. EPA, 2015c](#)). High wastewater reuse rates in western Colorado eliminated the need for more fresh water withdrawals. In northeast Pennsylvania, water withdrawals for hydraulic fracturing could result in high water consumption-to-stream flow events, but water management (e.g., passby flows) limited the potential for impacts, especially on small streams ([U.S. EPA, 2015c](#)). In western North Dakota, ground water is limited, but the industry may have sufficient supplies of surface water from the Missouri River system. These

1 location-specific examples emphasize the need to focus on regional and local dynamics when considering  
2 the potential impacts of hydraulic fracturing water acquisition on drinking water resources.

3 ***What are the possible impacts of water withdrawals for hydraulic fracturing on water quality?***

- 4 • Water withdrawals for hydraulic fracturing, similar to all water withdrawals, have the potential to alter  
5 the quality of drinking water resources. Ground water withdrawals exceeding natural recharge rates  
6 decrease water storage in aquifers, potentially mobilizing contaminants or allowing the infiltration of  
7 lower-quality water from the land surface or adjacent formations. Withdrawals could also decrease  
8 ground water discharge to streams, potentially affecting surface water quality. Areas with numerous  
9 high-capacity wells and large amounts of sustained ground water pumping are most likely to experience  
10 impacts, particularly in drought-prone regions with limited ground water recharge.
- 11 • Surface water withdrawals also have the potential to affect water quality. Withdrawals may lower water  
12 levels and alter stream flow, potentially decreasing a stream's capacity to dilute contaminants. Case  
13 studies by the EPA show that streams can be vulnerable to changes in water quality due to water  
14 withdrawals, particularly smaller streams and during periods of low flow ([U.S. EPA, 2015c](#)). Management  
15 of the rate and timing of surface water withdrawals can help mitigate potential impacts of fracturing  
16 withdrawals on water quality.
- 17 • Like water quantity effects, any effects of water withdrawals on water quality will likely occur nearest the  
18 withdrawal point, again emphasizing the need for location specific assessments.

#### 4.7. References for Chapter 4

- [AMEC, Hinckley, HDR](#). (AMEC Environment & Infrastructure, Inc, Hinckley Consulting, HDR Engineering, Inc). (2014). Hydrogeologic study of the Laramie County control area. Prepared for the Wyoming State Engineers Office. Cheyenne, WY: Wyoming State Engineer's Office. <http://seo.wyo.gov/seo-files/Final%20Draft%20Corrected%20Stamped.pdf?attredirects=0&d=1>
- [ANRC](#) (Arkansas Natural Resources Commission). (2014). Non-riparian water use certification. Available online at <http://anrc.ark.org/divisions/water-resources-management/non-riparian-water-use-certification-program/>
- [Bartos, TT; Hallberg, LL](#). (2011). Generalized potentiometric surface, estimated depth to water, and estimated saturated thickness of the high plains aquifer system, March-June 2009, Laramie County, Wyoming. Available online at <http://pubs.usgs.gov/sim/3180/>
- [Bene, PG; Harden, B; Griffin, SW; Nicot, JP](#). (2007). Northern Trinity/Woodbine aquifer groundwater availability model: Assessment of groundwater use in the Northern Trinity aquifer due to urban growth and Barnett shale development. (TWDB Contract Number: 0604830613). Austin, TX: R. W. Harden & Associates, Inc. <http://www.twdb.state.tx.us/groundwater/models/gam/trntn/TRNTN Barnett Shale Report.pdf>
- [Benotti, MJ; Stanford, BD; Snyder, SA](#). (2010). Impact of drought on wastewater contaminants in an urban water supply. *J Environ Qual* 39: 1196-1200.
- [BLM](#) (Bureau of Land Management). (2013b). Hydraulic fracturing white paper, appendix e. Casper, WY: Bureau of Land Management, Wyoming State Office. <http://www.blm.gov/pgdata/etc/medialib/blm/wy/information/NEPA/og/2014/02feb.Par.49324.File.dat/v1AppE.pdf>

- [Boghici, R.](#) (2009). Water quality in the Carrizo-Wilcox aquifer, 1990-2006. (Report 372). Austin, TX: Texas Water Development Board.  
[http://www.twdb.texas.gov/publications/reports/numbered\\_reports/doc/R372Carrizo-Wilcox.pdf](http://www.twdb.texas.gov/publications/reports/numbered_reports/doc/R372Carrizo-Wilcox.pdf)
- [California Department of Water Resources.](#) (2015). California state water project overview. Available online at <http://www.water.ca.gov/swp/> (accessed February 20, 2015).
- [CCST](#) (California Council on Science and Technology). (2014). Advanced well stimulation technologies in California: An independent review of scientific and technical information. Sacramento, CA.  
<http://ccst.us/publications/2014/2014wst.pdf>
- [Ceres](#) (Coalition for Environmentally Responsible Economies). (2014). Hydraulic fracturing & water stress: water demand by the numbers. Boston, Massachusetts. <https://www.ceres.org/issues/water/shale-energy/shale-and-water-maps/hydraulic-fracturing-water-stress-water-demand-by-the-numbers>
- [Chaudhuri, S; Ale, S.](#) (2013). Characterization of groundwater resources in the Trinity and Woodbine aquifers in Texas. *Sci Total Environ* 452: 333-348. <http://dx.doi.org/10.1016/j.scitotenv.2013.02.081>
- [Chaudhuri, S; Ale, S.](#) (2014a). Long term (1960-2010) trends in groundwater contamination and salinization in the Ogallala aquifer in Texas. *J Hydrol* 513: 376-390. <http://dx.doi.org/10.1016/j.jhydrol.2014.03.033>
- [Chaudhuri, S; Ale, S.](#) (2014b). Temporal evolution of depth-stratified groundwater salinity in municipal wells in the major aquifers in Texas, USA. *Sci Total Environ* 472: 370-380.  
<http://dx.doi.org/10.1016/j.scitotenv.2013.10.120>
- [Clark, CE; Horner, RM; Harto, CB.](#) (2013). Life Cycle Water Consumption for Shale Gas and Conventional Natural Gas. *Environ Sci Technol* 47: 11829-11836. <http://dx.doi.org/10.1021/es4013855>
- [Colorado Division of Water Resources; Colorado Water Conservation Board; Colorado Oil and Gas Conservation Commission.](#) (2014). Water sources and demand for the hydraulic fracturing of oil and gas wells in Colorado from 2010 through 2015 [Fact Sheet]. <http://cewc.colostate.edu/2012/02/water-sources-and-demand-for-the-hydraulic-fracturing-of-oil-and-gas-wells-in-colorado-from-2010-through-2015/>
- [Economides, MJ; Hill, A. d; Ehlig-Economides, C; Zhu, D.](#) (2013). Petroleum production systems. In *Petroleum production systems* (2nd ed.). Englewood Cliffs, NJ: Prentice Hall.
- [EERC](#) (Energy and Environmental Research Center, University of North Dakota). (2010). Bakken water opportunities assessment phase 1. (2010-EERC-04-03). Grand Forks, ND: Energy and Environmental Research Center. <http://www.undeerc.org/bakken/pdfs/FracWaterPhaseIreport.pdf>
- [EERC](#) (Energy and Environmental Research Center, University of North Dakota). (2011). Bakken water opportunities assessment phase 2: evaluation of brackish groundwater treatment for use in hydraulic fracturing of the Bakken Play, North Dakota. (2011-EERC-12-05). Grand Forks, ND: Energy and Environmental Research Center. <http://www.undeerc.org/Water/pdf/BakkenWaterOppPhase2.pdf>
- [EERC](#) (Energy and Environmental Research Center, University of North Dakota). (2013). BakkenSmart: water [Fact Sheet]. Grand Forks, ND: Energy and Environmental Research Center.  
<http://www.undeerc.org/bakken/pdfs/NDIC-NDPC-Water-Fact-Sheet.pdf>
- [EIA](#) (Energy Information Administration). (2015b). Lower 48 states shale plays. Available online at [http://www.eia.gov/oil\\_gas/rpd/shale\\_gas.pdf](http://www.eia.gov/oil_gas/rpd/shale_gas.pdf)
- [Entrekin, S; Evans-White, M; Johnson, B; Hagenbuch, E.](#) (2011). Rapid expansion of natural gas development poses a threat to surface waters. *Front Ecol Environ* 9: 503-511. <http://dx.doi.org/10.1890/110053>
- [Environment Canada.](#) (2004). Threats to Water Availability in Canada. <http://www.ec.gc.ca/inre-nwri/default.asp?lang=En&n=0CD66675-1>



- [Georgakakos, A; Fleming, P; Dettinger, M; Peters-Lidard, C; Richmond, TC; Reckhow, K; White, K; Yates, D.](#) (2014). Water resources. In JM Melillo; TC Richmond; GW Yohe (Eds.), Climate change impacts in the United States (pp. 69-112). Washington, D.C.: U.S. Global Change Research Program.  
<http://www.globalchange.gov/ncadac>
- [George, PG; Mace, RE; Petrossian, R.](#) (2011). Aquifers of Texas. (Report 380). Austin, TX: Texas Water Development Board.  
[http://www.twdb.state.tx.us/publications/reports/numbered\\_reports/doc/R380\\_AquifersofTexas.pdf](http://www.twdb.state.tx.us/publications/reports/numbered_reports/doc/R380_AquifersofTexas.pdf)
- [Goodwin, S; Carlson, K; Knox, K; Douglas, C; Rein, L.](#) (2014). Water intensity assessment of shale gas resources in the Wattenberg field in northeastern Colorado. Environ Sci Technol 48: 5991-5995.  
<http://dx.doi.org/10.1021/es404675h>
- [Gregory, KB; Vidic, RD; Dzombak, DA.](#) (2011). Water management challenges associated with the production of shale gas by hydraulic fracturing. Elements 7: 181-186.
- [GWPC](#) (Groundwater Protection Council). (2015). FracFocus - chemical disclosure registry. Available online at <http://fracfocus.org/>
- [GWPC and ALL Consulting](#) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory.  
<http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>
- [Hansen, E; Mulvaney, D; Betcher, M.](#) (2013). Water resource reporting and water footprint from Marcellus Shale development in West Virginia and Pennsylvania. Durango, CO: Earthworks Oil & Gas Accountability Project. [http://www.downstreamstrategies.com/documents/reports\\_publication/marcellus\\_wv\\_pa.pdf](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf)
- [IPCC](#) (Intergovernmental Panel on Climate Change). (2007). Climate change 2007: Impacts, adaptation and vulnerability. Cambridge, UK: Cambridge University Press. <http://www.ipcc.ch/ipccreports/ar4-wg2.htm>
- [Jackson, RB; Carpenter, SR; Dahm, CN; Mcknight, DM; Naiman, RJ; Postel, SL; Running, SW.](#) (2001). Water in a changing world. Ecol Appl 11: 1027-1045. [http://dx.doi.org/10.1890/1051-0761\(2001\)011\[1027:WIACW\]2.0.CO;2](http://dx.doi.org/10.1890/1051-0761(2001)011[1027:WIACW]2.0.CO;2)
- [Jiang, M; Hendrickson, CT; Vanbriesen, IM.](#) (2014). Life Cycle Water Consumption and Wastewater Generation Impacts of a Marcellus Shale Gas Well. Environ Sci Technol 48: 1911-1920.  
<http://dx.doi.org/10.1021/es4047654>
- [Kansas Water Office.](#) (2014). How is water used in oil and gas exploration in Kansas? Topeka, KA.  
[http://www.kwo.org/about\\_us/BACs/KWIF/rpt\\_Hydraulic%20Fracturing\\_KS\\_Water\\_FAQ\\_03082012\\_final\\_ki.pdf](http://www.kwo.org/about_us/BACs/KWIF/rpt_Hydraulic%20Fracturing_KS_Water_FAQ_03082012_final_ki.pdf)
- [Kargbo, DM; Wilhelm, RG; Campbell, DJ.](#) (2010). Natural gas plays in the Marcellus Shale: Challenges and potential opportunities. Environ Sci Technol 44: 5679-5684. <http://dx.doi.org/10.1021/es903811p>
- [Kenny, JF; Barber, NL; Hutson, SS; Linsey, KS; Lovelace, JK; Maupin, MA.](#) (2009). Estimated use of water in the United States in 2005. (Circular 1344). Reston, VA: U.S. Geological Survey.  
<http://pubs.usgs.gov/circ/1344/>
- [Konikow, LF.](#) (2013a). Groundwater depletion in the United States (1900-2008). (USGS Scientific Investigations Report 2013). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2013/5079>
- [Konikow, LF; Kendy, E.](#) (2005). Groundwater depletion: A global problem. Hydrogeo J 13: 317-320.  
<http://dx.doi.org/10.1007/s10040-004-0411-8>
- [Kuthnert, N; Werline, R; Nichols, K.](#) (2012). Water reuse and recycling in the oil and gas industry: Devons water management success. Presentation presented at 2nd Annual Texas Water Reuse Conference, July 20, 2012, Fort Worth, TX.



- [LA Ground Water Resources Commission](#) (Louisiana Ground Water Resources Commission). (2012). Managing Louisiana's Groundwater Resources: An interim report to the Louisiana Legislature. Baton Rouge, LA: Louisiana Department of Natural Resources. <http://dnr.louisiana.gov/index.cfm?md=pagebuilder&tmp=home&pid=907>
- [Laurenzi, JJ; Jersey, GR.](#) (2013). Life cycle greenhouse gas emissions and freshwater consumption of Marcellus shale gas. *Environ Sci Technol* 47: 4896-4903. <http://dx.doi.org/10.1021/es305162w>
- [LDEQ](#) (Louisiana Department of Environmental Quality). (2008). Ground water use advisory: Commissioner of conservation recommends wise water use planning in the Haynesville Shale. <http://dnr.louisiana.gov/index.cfm?md=newsroom&tmp=detail&aid=509>
- [Maupin, MA; Kenny, JF; Hutson, SS; Lovelace, JK; Barber, NL; Linsey, KS.](#) (2014). Estimated use of water in the United States in 2010. (USGS Circular 1405). Reston, VA: U.S. Geological Survey. <http://dx.doi.org/10.3133/cir1405>
- [McKay, SF; King, AJ.](#) (2006). Potential ecological effects of water extraction in small, unregulated streams. *River Research and Applications* 22: 1023-1037. <http://dx.doi.org/10.1002/rra.958>
- [Mitchell, AL; Small, M; Casman, EA.](#) (2013a). Surface water withdrawals for Marcellus Shale gas development: performance of alternative regulatory approaches in the Upper Ohio River Basin. *Environ Sci Technol* 47: 12669-12678. <http://dx.doi.org/10.1021/es403537z>
- [Murdoch, PS; Baron, JS; Miller, TL.](#) (2000). Potential effects of climate change on surface-water quality in North America. *J Am Water Resour Assoc* 36: 347-366.
- [Murray, KE.](#) (2013). State-scale perspective on water use and production associated with oil and gas operations, Oklahoma, U.S. *Environ Sci Technol* 47: 4918-4925. <http://dx.doi.org/10.1021/es4000593>
- [National Drought Mitigation Center.](#) (2015). U.S. drought monitor. Available online at <http://droughtmonitor.unl.edu/Home.aspx> (accessed February 27, 2015).
- [Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.](#) (2012). Oil & gas water use in Texas: Update to the 2011 mining water use report. Nicot, JP; Reedy, RC; Costley, RA; Huang, Y. [http://www.twdb.state.tx.us/publications/reports/contracted\\_reports/doc/0904830939\\_2012Update\\_MiningWaterUse.pdf](http://www.twdb.state.tx.us/publications/reports/contracted_reports/doc/0904830939_2012Update_MiningWaterUse.pdf)
- [Nicot, JP; Scanlon, BR.](#) (2012). Water use for shale-gas production in Texas, U.S. *Environ Sci Technol* 46: 3580-3586. <http://dx.doi.org/10.1021/es204602t>
- [Nicot, JP; Scanlon, BR; Reedy, RC; Costley, RA.](#) (2014). Source and fate of hydraulic fracturing water in the Barnett Shale: a historical perspective. *Environ Sci Technol* 48: 2464-2471. <http://dx.doi.org/10.1021/es404050r>
- [NM OSE](#) (New Mexico Office of the State Engineer). (2013). New Mexico water use by categories 2010. (Technical Report 54). Santa Fe, NM: New Mexico Office of the State Engineer, Water Use and Conservation Bureau. <http://www.ose.state.nm.us/Pub/TechnicalReports/TechReport%2054NM%20Water%20Use%20by%20Categories%20.pdf>
- [North Dakota Department of Mineral Resources.](#) (2013). North Dakota Department of Mineral Resources: Government Finance Interim Committee 12/12/2013. Presentation presented at Department of Mineral Resources: Update on the Status of Oil and Gas Development in the State, 12/12/2013, Bismarck, ND.
- [North Dakota State Water Commission.](#) (2010). Water appropriation requirements, current water use, & water availability for energy industries in North Dakota: a 2010 summary. Bismarck, ND. <http://www.swc.nd.gov/4dlink9/4dcgi/GetContentPDF/PB-1800/W&E%20RPT%20FinalR.pdf>
- [North Dakota State Water Commission.](#) (2014). Facts about North Dakota fracking and water use. Bismarck, ND. <http://www.swc.nd.gov/4dlink9/4dcgi/GetContentPDF/PB-2419/Fact%20Sheet.pdf>

- [NYSDEC](#) (New York State Department of Environmental Conservation). (2011). Revised draft supplemental generic environmental impact statement (SGEIS) on the oil, gas and solution mining regulatory program: Well permit issuance for horizontal drilling and high-volume hydraulic fracturing to develop the Marcellus shale and other low-permeability gas reservoirs. Albany, NY: NY SDEC. <http://www.dec.ny.gov/energy/75370.html>
- [Ohio EPA](#) (Ohio Environmental Protection Agency). (2012a). Considerations for public water systems prior to providing raw or treated water to oil and natural gas companies. <http://www.epa.state.oh.us/Portals/0/general%20pdfs/Considerations%20for%20Public%20Water%20Systems%20Prior%20to%20Providing%20Raw%20or%20Treated%20Water%20to%20Oil%20and%20Natural%20Gas%20Companies.pdf>
- [Ohio EPA](#) (Ohio Environmental Protection Agency). (2012b). Ohios regulations: a guide for operators drilling in the Marcellus and Utica Shales. Columbus, OH. <http://www.epa.state.oh.us/Portals/0/general%20pdfs/Ohio%20Regulations%20-%20A%20Guide%20for%20Operators%20Drilling%20in%20the%20Marcellus%20and%20Utica%20Shales.pdf>
- [OWRB](#) (Oklahoma Water Resources Board). (2014). The Oklahoma comprehensive water plan. Available online at <http://www.owrb.ok.gov/supply/ocwp/ocwp.php>
- [Plummer, M; Wood, T; Huang, H; Guo, L; Reiten, J; Chandler, K; Metesh, J.](#) (2013). Water needs and availability for hydraulic fracturing in the Bakken formation, eastern Montana. Presentation presented at 2013 Technical Workshop, Water Acquisition Modeling: Assessing Impacts Through Modeling and Other Means, June 4, 2013, Arlington, VA.
- [Rahm, BG; Riha, SJ.](#) (2012). Toward strategic management of shale gas development: Regional, collective impacts on water resources. *Environ Sci Pol* 17: 12-23. <http://dx.doi.org/10.1016/j.envsci.2011.12.004>
- [Rolls, RJ; Leigh, C; Sheldon, F.](#) (2012). Mechanistic effects of low-flow hydrology on riverine ecosystems: ecological principles and consequences of alteration. *Freshwater Science* 31: 1163-1186. <http://dx.doi.org/10.1899/12-002.1>
- [Roy, SB; Ricci, PF; Summers, KV; Chung, CF; Goldstein, RA.](#) (2005). Evaluation of the sustainability of water withdrawals in the United States, 1995 to 2025. *J Am Water Resour Assoc* 41: 1091-1108.
- [Scanlon, BR; Reedy, RC; Nicot, JP.](#) (2014). Will water scarcity in semiarid regions limit hydraulic fracturing of shale plays? *Environmental Research Letters* 9. <http://dx.doi.org/10.1088/1748-9326/9/12/124011>
- [Schindler, DW.](#) (1997). Widespread effects of climatic warming on freshwater ecosystems in North America. *Hydrolog Process* 11: 1043-1067.
- [Slutz, J; Anderson, J; Broderick, R; Horner, P.](#) (2012). Key shale gas water management strategies: An economic assessment tool. Paper presented at International Conference on Health, Safety and Environment in Oil and Gas Exploration and Production, September 11-13, 2012, Perth, Australia.
- [Solley, WB; Pierce, RR; Perlman, HA.](#) (1998). Estimated use of water in the United States in 1995. (USGS Circular: 1200). U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/cir1200>
- [SRBC](#) (Susquehanna River Basin Commission). (2013). Comprehensive plan for the water resources of the Susquehanna River basin. Harrisburg, PA. <http://www.srbc.net/planning/comprehensiveplan.htm>
- [STRONGER](#) (State Review of Oil and Natural Gas Environmental Regulations). (2011a). Louisiana hydraulic fracturing state review. Oklahoma City, OK. <http://www.strongerinc.org/sites/all/themes/stronger02/downloads/Final%20Louisiana%20HF%20Review%203-2011.pdf>
- [STRONGER](#) (State Review of Oil and Natural Gas Environmental Regulations). (2011b). Ohio hydraulic fracturing state review. Oklahoma City, OK. <http://www.strongerinc.org/sites/all/themes/stronger02/downloads/Final%20Report%20of%202011%20OH%20HF%20Review.pdf>

- STRONGER (State Review of Oil and Natural Gas Environmental Regulations). (2012). Arkansas hydraulic fracturing state review. Oklahoma City, OK. [http://www.aogc.state.ar.us/notices/AR\\_HFR\\_FINAL.pdf](http://www.aogc.state.ar.us/notices/AR_HFR_FINAL.pdf)
- Taylor, A. (2012). Watering the boom in Oklahoma: supplies, demands, and neighbors. Presentation presented at 2012 Kansas Water Issues Forums, February 29-March 1, 2012, Wichita and Hays, Kansas.
- Tidwell, VC; Kobos, PH; Malczynski, L, enA; Klise, G; Castillo, CR. (2012). Exploring the water-thermoelectric power nexus. *J Water Resour Plann Manag* 138: 491-501. [http://dx.doi.org/10.1061/\(ASCE\)WR.1943-5452.0000222](http://dx.doi.org/10.1061/(ASCE)WR.1943-5452.0000222)
- Tidwell, VC; Zemlick, K; Klise, G. (2013). Nationwide water availability data for energy-water modeling. Albuquerque, New Mexico: Sandia National Laboratories. <http://prod.sandia.gov/techlib/access-control.cgi/2013/139968.pdf>
- TWDB (Texas Water Development Board). (2012). Water for Texas 2012 state water plan. Austin, TX. <http://www.twdb.state.tx.us/waterplanning/swp/2012/index.asp>
- Tyrrell, P. (2012). Water needs for oil & gas well drilling and fracturing. Presentation presented at 85th Annual AWSE Fall Conference, September 23-26, 2012, Omaha, Nebraska.
- Tyrrell, P. (2013). Wyoming update: water rights for hydraulic fracturing. Presentation presented at Summer 172nd Western States Water Council Meeting, June 24-26, 2013, Casper, Wyoming.
- U.S. Army Corps of Engineers. (2011). Final Garrison Dam/Lake Sakakawea project, North Dakota surplus water report. Volume 1. Omaha, NE: The U.S. Army Corps of Engineers, Omaha District. <http://www.swc.nd.gov/4dlink9/4dcgi/GetSubContentPDF/PB-2811/Garrison%20Dam%20Lake%20Sakakawea%20Surplus%20Water%20Report.pdf>
- U.S. Census Bureau. (2014). American FactFinder. Available online at <http://factfinder.census.gov/faces/nav/jsf/pages/index.xhtml>
- U.S. EPA (U.S. Environmental Protection Agency). (2013a). Data received from oil and gas exploration and production companies, including hydraulic fracturing service companies 2011 to 2013. Non-confidential business information source documents are located in Federal Docket ID: EPA-HQ-ORD2010-0674. Available at <http://www.regulations.gov>.
- U.S. EPA (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- U.S. EPA (U.S. Environmental Protection Agency). (2015b). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Project database [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocus-1-disclosures>
- U.S. EPA (U.S. Environmental Protection Agency). (2015c). Case study analysis of the impacts of water acquisition for hydraulic fracturing on local water availability [EPA Report]. (EPA/600/R-14/179). Washington, D.C.
- U.S. EPA (U.S. Environmental Protection Agency). (2015l). Retrospective case study in the Raton Basin, Colorado: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/091). Washington, D.C.
- U.S. GAO (U.S. Government Accountability Office). (2014). Freshwater: Supply concerns continue, and uncertainties complicate planning. Report to Congressional requesters. (GAO-14-430). Washington, DC: U.S. Government Accountability Office (GAO). <http://www.gao.gov/assets/670/663343.pdf>
- USGS (U.S. Geological Survey). (2003). Ground-Water depletion across the nation. <http://pubs.usgs.gov/fs/fs-103-03/>

- [USGS](#) (U.S. Geological Survey). (2007). Water-quality assessment of the high plains aquifer, 19992004. (Professional Paper 1749). Reston, VA. <http://pubs.usgs.gov/pp/1749/downloads/pdf/P1749front.pdf>
- [USGS](#) (U.S. Geological Survey). (2009). Water quality in the high plains aquifer, Colorado, Kansas, Nebraska, New Mexico, Oklahoma, South Dakota, Texas, and Wyoming, 19992004. Reston, VA. <http://pubs.usgs.gov/circ/1337/>
- [USGS](#) (U.S. Geological Survey). (2014d). Trends in major-ion constituents and properties for selected sampling sites in the tongue and powder river watersheds, Montana and Wyoming, based on data collected during water years 19802010. (Scientific Investigations Report 20135179). Reston, VA. <http://pubs.usgs.gov/sir/2013/5179/>
- [USGS](#) (U.S. Geological Survey). (2014g). WaterWatch. Available online at <http://waterwatch.usgs.gov/>
- [USGS](#) (U.S. Geological Survey). (2014h). Withdrawal and consumption of water by thermoelectric power plants in the United States, 2010. (Scientific Investigations Report 20145184). Reston, VA. <http://dx.doi.org/10.3133/sir20145184>
- [USGS](#) (U.S. Geological Survey). (2015). Trends in hydraulic fracturing distributions and treatment fluids, additives, proppants, and water volumes applied to wells drilled in the United States from 1947 through 2010 data analysis and comparison to the literature. (U.S. Geological Survey Scientific Investigations Report 20145131). Reston, VA. <http://dx.doi.org/10.3133/sir20145131>
- [van Vliet, MTH; Zwolsman, J.G.](#) (2008). Impact of summer droughts on the water quality of the Meuse river. *J Hydrol* 353: 1-17. <http://dx.doi.org/10.1016/j.jhydrol.2008.01.001>
- [Veil, JA.](#) (2011). Water management practices used by Fayetteville shale gas producers. (ANL/EVS/R-11/5). Washington, DC: U.S. Department of Energy, National Energy Technology Laboratory. <http://www.ipd.anl.gov/anlpubs/2011/06/70192.pdf>
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A.](#) (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. *Environ Sci Technol* 48: 36-52. <http://dx.doi.org/10.1021/es405118y>
- [Verdegem, MCJ; Bosma, RH.](#) (2009). Water withdrawal for brackish and inland aquaculture, and options to produce more fish in ponds with present water use. *Water Policy* 11: 52-68. <http://dx.doi.org/10.2166/wp.2009.003>
- [Vidic, RD; Brantley, SL; Vandenbossche, JM; Yoxheimer, D; Abad, JD.](#) (2013). Impact of shale gas development on regional water quality [Review]. *Science* 340: 1235009. <http://dx.doi.org/10.1126/science.1235009>
- [Water Research Foundation.](#) (2014). Water quality impacts of extreme weather-related events. <http://www.waterrf.org/Pages/Projects.aspx?PID=4324>
- [WAWSA](#) (Western Area Water Supply Authority). (2011). Project progress report: western area water supply project: appendix N. Williston, ND. <http://www.legis.nd.gov/assembly/62-2011/docs/pdf/wr101011appendixn.pdf>
- [West Virginia DEP](#) (West Virginia Department of Environmental Protection). (2013). West Virginia water resources management plan. (Article 22-26). Charleston, WV. [http://www.dep.wv.gov/WWE/wateruse/WVWaterPlan/Documents/WV\\_WRMP.pdf](http://www.dep.wv.gov/WWE/wateruse/WVWaterPlan/Documents/WV_WRMP.pdf)
- [West Virginia DEP](#) (West Virginia Department of Environmental Protection). (2014). Personal communication: email from Jason Harmon, West Virginia DEP to Megan Fleming, U.S. EPA with attachment of WV DEP fracturing water database. Available online
- [Whitehead, PG; Wade, AJ; Butterfield, D.](#) (2009). Potential impacts of climate change on water quality and ecology in six UK rivers. *40*: 113-122. <http://dx.doi.org/10.2166/nh.2009.078>
- [Wyoming State Engineer's Office.](#) (2014). Groundwater control areas and advisory boards. Available online at <http://seo.wyo.gov/ground-water/groundwater-control-areas-advisory-boards>

[Yang, Y; Robart, CJ; Ruegamer, M.](#) (2013). Analysis of U.S. Hydraulic Fracturing Design Trends. SPE Hydraulic Fracturing Technology Conference, The Woodlands, Texas, USA.

[Ziemkiewicz, P; Donovan, J; Hause, J; Gutta, B; Fillhart, J; Mack, B; O'Neal, M.](#) (2013). Water quality literature review and field monitoring of active shale gas wells: Phase II for Assessing Environmental Impacts of Horizontal Gas Well Drilling Operations. Charleston, WV: West Virginia Department of Environmental Protection.

## Chapter 5

---


### Chemical Mixing



## 5. Chemical Mixing

### 5.1. Introduction

1 This chapter addresses the potential for on-site spills of chemicals used in the chemical mixing  
2 process to affect the quality of drinking water resources. Chemical mixing is a complex process that  
3 requires the use of specialized equipment and a range of different additives to produce the  
4 hydraulic fracturing fluid that is injected into the well. The number, type, and volume of chemicals  
5 used vary from well to well based on site- and company-specific factors. Spills may occur at any  
6 point in the hydraulic fracturing process. Chemicals may spill from on-site storage and containment  
7 units; from interconnected hoses and pipes used to transfer chemicals to and from mixing and  
8 pumping units, and tanker trucks; and from the equipment used to mix and pressurize chemical  
9 mixtures that are pumped down the well. The potential for a spill to affect the quality of a drinking  
10 water resource is governed by three overarching factors: (1) fluid characteristics (e.g., chemical  
11 composition and volume), (2) chemical management and spill characteristics, and (3) chemical fate  
12 and transport (see Figure 5-1). This chapter is organized around the three factors.

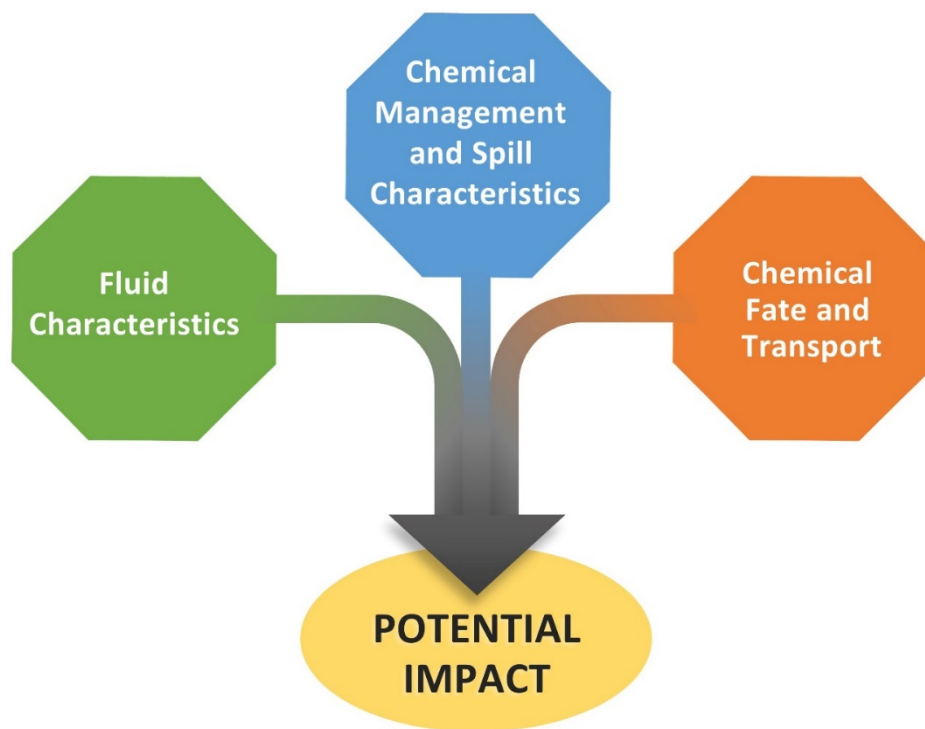

**Figure 5-1. Factors governing potential impact to drinking water resources.**

Factors include (1) fluid characteristics (e.g., chemical composition and volume), (2) chemical management and spill characteristics, and (3) chemical fate and transport.

1 Section 5.2 provides an introductory overview of the chemical mixing process. The number and  
2 volume of chemicals used and stored on-site are affected by such variables as the type, size, and  
3 goals of the operation; formation characteristics; depth of the well; the length of the horizontal leg;  
4 and the number of fracturing phases and stages.

5 Section 5.3 describes the different components of the hydraulic fracturing fluid, generally  
6 comprised of the base fluid, proppant, and additives, which may be either individual chemicals or  
7 mixtures. The composition of the hydraulic fracturing fluid is engineered to meet specific criteria.  
8 The total amount and types of additives vary according to the characteristics of the well, site  
9 geology, economics, availability, and the production goals (e.g., Maule et al., 2013). Section 5.4  
10 presents the wide range of different chemicals used and their classes, the most frequently used  
11 chemicals nationwide and from state-to-state, and volumes used.<sup>1</sup> Appendix A provides a list of  
12 chemicals that the EPA identified as being used in hydraulic fracturing fluids based on eight  
13 sources.

14 Sections 5.5 to 5.7 discuss how chemicals are managed on-site, how spills may occur, and the  
15 different approaches for addressing spills. Section 5.5 describes how the potential impact of a spill  
16 on drinking water resources depends upon chemical management practices, such as storage, on-  
17 site transfer, and equipment maintenance. Section 5.6 discusses spill prevention, containment, and  
18 mitigation. A summary analysis of reported spills and their common causes at hydraulic fracturing  
19 sites is presented in Section 5.7.

20 Section 5.8 discusses the fate and transport of spilled chemicals. Spilled chemicals may react and  
21 transform into other chemicals, travel from the site of release to a nearby surface water, or leach  
22 into the soils and reach ground water. Chemical fate and transport after a release depend on site  
23 conditions, environmental conditions, physicochemical properties of the released chemicals, and  
24 the volume of the release.

25 Section 5.9 provides an overview of on-going changes in chemical use in hydraulic fracturing, with  
26 an emphasis on efforts by industry to reduce potential impacts from surface spills by using fewer  
27 and safer chemicals. A synthesis and a discussion of limitations are presented in Section 5.10.

28 Factors affecting the frequency and severity of impacts to drinking water resources from surface  
29 spills include size and type of operation, employee training and experience, standard operating  
30 procedures, quality and maintenance of equipment, type and volume of chemical spilled,  
31 environmental conditions, proximity to drinking water resources, spill prevention practices, and  
32 spill mitigation measures. Due to the limitations of available data and the scope of this assessment,  
33 it is not possible to provide a detailed analysis of all of the factors listed above. Data limitations also  
34 preclude a quantitative analysis of the likelihood or magnitude of chemical spills or impacts. Spills  
35 that occur off-site, such as those during transportation of chemicals or storage of chemicals in  
36 staging areas, are out of scope. This chapter qualitatively characterizes the potential for impacts to

---

<sup>1</sup> Chemical classes are groupings of different chemicals based on similar features, such as chemical structure, use, or physical properties. Examples of chemical classes include hydrocarbons, pesticides, acids, and bases.

1 drinking water resources given the current understanding of overall operations and specific  
2 components of the chemical mixing process.

## 5.2. Chemical Mixing Process

3 An understanding of the chemical mixing process is necessary to understand how, why, and when  
4 spills that may affect drinking water resources might occur. This description provides a general  
5 overview of chemical mixing in the context of the overall hydraulic fracturing process ([Carter et al.,  
6 2013](#); [Knappe and Fireline, 2012](#); [Spellman, 2012](#); [Arthur et al., 2008](#)).

7 Figure 5-2 shows a hydraulic fracturing site during the chemical mixing process. The discussion  
8 focuses on the types of additives used at each phase of the process. While similar processes are  
9 used to fracture horizontal and vertical wells, a horizontal well treatment is described here because  
10 it is likely to be more complex and because horizontal hydraulic fracturing has become more  
11 prevalent over time with advances in hydraulic fracturing technology. A water-based system is  
12 described because water is the most commonly used base fluid, appearing in more than 93% of  
13 FracFocus disclosures between January 1, 2011 and February 28, 2012 ([U.S. EPA, 2015a](#)).




**Figure 5-2. Hydraulic fracturing site showing equipment used on-site during the chemical mixing process.**

Source: Industry source.

1 While the number and types of additives may widely vary, the basic chemical mixing process is  
 2 similar across sites. The on-site layout of hydraulic fracturing equipment is also similar from site to  
 3 site ([BJ Services Company, 2009](#)). Equipment used in the chemical mixing process typically consists  
 4 of chemical storage trucks, water supply tanks, proppant supply, slurry blenders, a number of high-  
 5 pressure pumps, a manifold, surface lines and hoses, and a central control unit. Detailed  
 6 descriptions of specific additives and the equipment used in the process are provided in Sections  
 7 5.3 and 5.5, respectively.

8 The chemical mixing process begins after the drilling, casing, and cementing processes are finished  
 9 and hydraulic fracturing equipment has been set up and connected to the well. The process can  
 10 generally be broken down into sequential phases with specific chemicals added at each phase to  
 11 achieve a specific purpose ([Knappe and Fireline, 2012](#); [Fink, 2003](#)). Phases may overlap. The  
 12 process for water-based hydraulic fracturing is outlined in Figure 5-3 below.

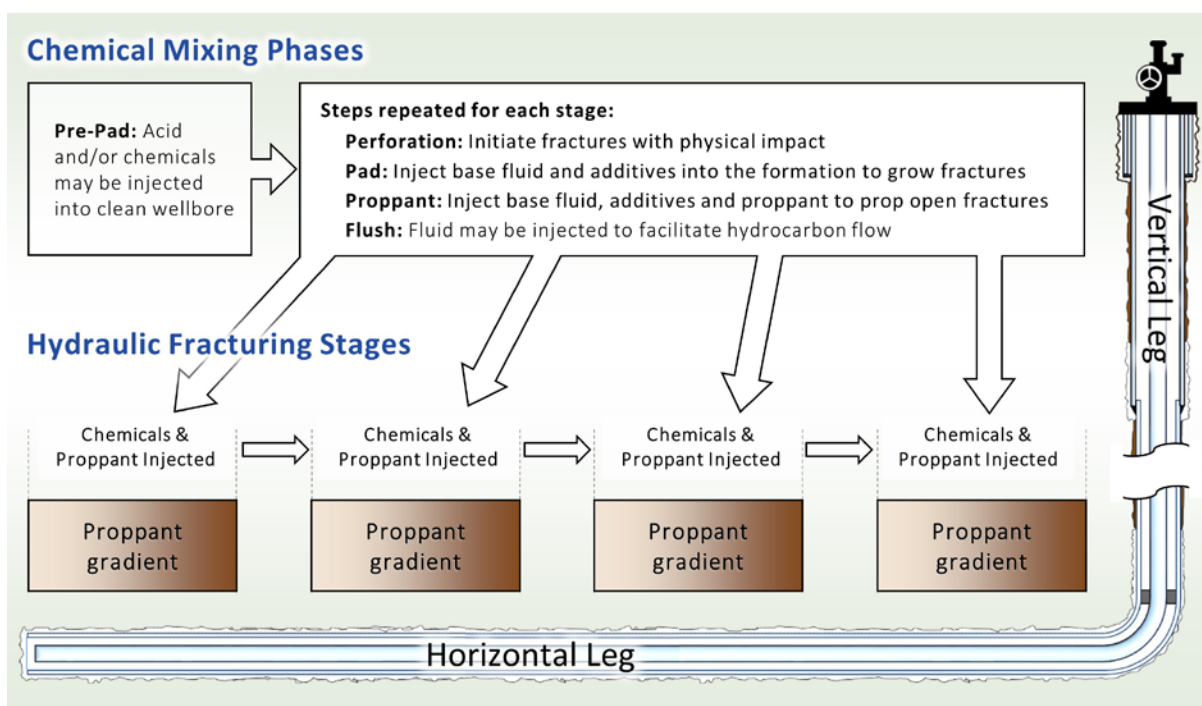

**Figure 5-3. Overview of a chemical mixing process of the hydraulic fracturing water cycle.**

This figure outlines the chemical mixing process for a generic water-based hydraulic fracture of a horizontal well. The chemical mixing phases outline the steps in the overall fracturing job, while the hydraulic fracturing stages outline how each section of the horizontal well would be fractured beginning with the toe of the well, shown on left-side. The proppant gradient represents how the proppant size may change within each stage of fracturing as the fractures are elongated. The chemical mixing process is repeated depending on the number of stages used for a particular well. The number of stages is determined in part by the length of the horizontal leg. In this figure, four stages are represented, but typically, a horizontal fracturing treatment would consist of 10 to 20 stages per well ([Lowe et al., 2013](#)). Fracturing has been reported to be done in as many as 59 stages ([Pearson et al., 2013](#)).



1 The first phase of the process consists of the cleaning and preparation of the well. The fluid used in  
2 this phase is often referred to as the pre-pad fluid or pre-pad volume. Acid is typically the first  
3 chemical introduced. Acid, with a concentration of 3%–28% (typically hydrochloric acid, HCl), is  
4 used to adjust pH, clean any cement left inside the well from cementing the casing, and dissolve any  
5 pieces of rock that may remain in the well and could block the perforations. Acid is typically  
6 pumped directly from acid storage tanks or tanker trucks, without being mixed with other  
7 additives. The first, or pre-pad, phase may also involve mixing and injection of additional chemicals  
8 to facilitate the flow of fracturing fluid introduced in the next phase of the process. These additives  
9 may include biocides, corrosion inhibitors, friction reducers, and scale inhibitors ([Carter et al.,  
10 2013](#); [King, 2012](#); [Knappe and Fireline, 2012](#); [Spellman, 2012](#); [Arthur et al., 2008](#)).

11 In the second phase, a hydraulic fracturing fluid, typically referred to as the pad or pad volume, is  
12 mixed, blended, and pumped down the wellbore to create fractures in the formation. The pad is a  
13 mixture of base fluid, typically water, and additives. The pad is designed to create, elongate, and  
14 enlarge fractures along the natural channels of the formation when injected under high pressure  
15 ([Gupta and Valkó, 2007](#)). A typical pad consists of, at minimum, a mixture of water and friction  
16 reducer. The operator may also add other additives (see [U.S. EPA \(2015a\)](#) and Table 5-1) used to  
17 facilitate flow and kill bacteria ([Carter et al., 2013](#); [King, 2012](#); [Knappe and Fireline, 2012](#);  
18 [Spellman, 2012](#); [Arthur et al., 2008](#)). The pad is pumped into the formation through perforations in  
19 the well casing (see Text Box 5-1).

#### **Text Box 5-1. Perforation.**

20 Prior to the injection of the pad, the well casing is typically perforated to provide openings through which the  
21 pad fluid can enter the formation. A perforating gun is typically used to create small holes in the section of the  
22 wellbore being fractured. The perforating gun is lowered into position in the horizontal portion of the well.  
23 An electrical current is used to set off small explosive charges in the gun, which creates holes through the well  
24 casing and out a short, controlled distance into the formation ([Gupta and Valkó, 2007](#)).

25 In the third phase, proppant, typically sand, is mixed into the hydraulic fracturing fluid. The  
26 proppant volume, as a proportion of the injected fluid, is increased gradually until the desired  
27 concentration in the fractures is achieved. Gelling agents, if used, are also mixed in with the  
28 proppant and base fluid in this phase to increase the viscosity and carry the proppant. Additional  
29 chemicals may be added to gelled fluids, initially to maintain viscosity and later to break the gel  
30 down into a more readily removable fluid. ([Carter et al., 2013](#); [King, 2012](#); [Knappe and Fireline,  
31 2012](#); [Spellman, 2012](#); [Arthur et al., 2008](#)).

32 A final flush or clean-up phase may be conducted after the stage is fractured, with the primary  
33 purpose of maximizing well productivity. The flush is a mixture of water and chemicals that work to  
34 aid the placement of the proppant, clean out the chemicals injected in previous phases, and prevent  
35 microbial growth in the fractures ([Knappe and Fireline, 2012](#); [Fink, 2003](#)).

36 The second, third, and fourth phases are repeated multiple times in a horizontal well, as the  
37 horizontal section, or leg, of the wellbore is typically fractured in multiple segments referred to as

1 stages. For each stage, the well is typically perforated and fractured beginning at the end, or toe, of  
2 the wellbore and proceeding backwards toward the vertical section. Each fractured stage is isolated  
3 before the next stage is fractured. The number of stages corresponds directly to the number of  
4 times the chemical mixing process is repeated at the site surface (see Figure 5-3). The number of  
5 stages depends upon the length of the leg ([Carter et al., 2013](#); [King, 2012](#); [Knappe and Fireline,  
6 2012](#); [Spellman, 2012](#); [Arthur et al., 2008](#)).

7 The number of stages per well can vary, with several sources suggesting between 10 and 20 is  
8 typical ([GNB, 2015](#); [Lowe et al., 2013](#)).<sup>1</sup> The full range reported in the literature is much wider, with  
9 one source documenting between 1 and 59 stages per well ([Pearson et al., 2013](#)) and others  
10 reporting values within this range ([NETL, 2013](#); [STO, 2013](#); [Allison et al., 2009](#)). It also appears that  
11 the number of stages per well has increased over time. For instance, in the Williston Basin the  
12 average number of stages per horizontal well rose from approximately 10 in 2008 to 30 in 2012  
13 ([Pearson et al., 2013](#)).

14 In each of these phases, water is the primary component of the hydraulic fracturing fluid, though  
15 the exact composition of the fluid injected into the well changes over the duration of each stage. In  
16 water-based hydraulic fracturing, water typically comprises between 90% and 94% of the  
17 hydraulic fracturing fluid, proppant comprises 5% to 9%, and additives comprise the remainder,  
18 typically 2% or less ([Carter et al., 2013](#); [Knappe and Fireline, 2012](#); [SWN, 2011](#)). The exception to  
19 this typical fluid composition may be when a concentrated acid is used in the initial cleaning phase  
20 of the fracturing process.

### 5.3. Overview of Hydraulic Fracturing Fluids

21 Hydraulic fracturing fluids are formulated to perform specific functions: create and extend the  
22 fracture, transport proppant, and place the proppant in the fractures ([Montgomery, 2013](#);  
23 [Spellman, 2012](#); [Gupta and Valkó, 2007](#)). The hydraulic fracturing fluid generally consists of three  
24 parts: (1) the base fluid, which is the largest constituent by volume, (2) the additives, which can be  
25 a single chemical or a mixture of chemicals, and (3) the proppant. Additives are chosen to serve a  
26 specific purpose in the hydraulic fracturing fluid (e.g., friction reducer, gelling agent, crosslinker,  
27 biocide) ([Spellman, 2012](#)). Throughout this chapter, “chemical” is used to refer to individual  
28 chemical compounds (e.g., methanol). Proppants are small particles, usually sand, mixed with  
29 fracturing fluid to hold fractures open so that the target hydrocarbons can flow from the formation  
30 through the fractures and up the wellbore. The combination of chemicals, and the mixing and  
31 injection process, varies based on a number of factors as discussed below. The chemical  
32 combination determines the amount and what type of equipment is required for storage and,  
33 therefore, contributes to the determination of the potential for spills and impacts of those spills.

34 The particular composition of hydraulic fracturing fluids is selected by a design engineer based on  
35 empirical experience, the formation, economics, goals of the fracturing process, availability of the

---

<sup>1</sup> The number of stages has been reported to be 6 to 9 in the Huron in 2009 ([Allison et al., 2009](#)), 25 and up in the Marcellus ([NETL, 2013](#)), and up to 40 by [STO \(2013\)](#).



1 desired chemicals, and preference of the service company or operator ([Montgomery, 2013](#); [ALL](#)  
2 [Consulting, 2012](#); [Klein et al., 2012](#); [Ely, 1989](#)). No single set of specific chemicals is used at every  
3 site. Multiple types of fracturing fluids may be appropriate for a given site and any given type of  
4 fluid may be appropriate at multiple sites. For the same type of fluid formulation, there can be  
5 differences in the additives, chemicals, and concentrations selected. There are broad criteria for  
6 hydraulic fracturing fluid selection based on the fracturing temperatures, formation permeability,  
7 fracturing pressures, and formation water sensitivity, as shown in Figure 5-4 ([Gupta and Valkó,](#)  
8 [2007](#); [Elbel and Britt, 2000](#)). One of the most important properties in designing a hydraulic  
9 fracturing fluid is the viscosity ([Montgomery, 2013](#)).<sup>1</sup>

10 Figure 5-4 provides a general overview of which fluids can be used in different situations. As an  
11 example, crosslinked fluids with 25% nitrogen foam (titanate or zirconate crosslink + 25% N<sub>2</sub>) can  
12 be used in both gas and oil wells with high temperatures with variation in water sensitivity.

---

<sup>1</sup> Viscosity is a measure of the internal friction of fluid that provides resistance to shear within the fluid, informally referred to as how “thick” a fluid is. For example, custard is thick and has a high viscosity, while water is runny with a low viscosity. Sufficient viscosity is needed to create a fracture and transport proppant ([Gupta and Valkó, 2007](#)). In lower-viscosity fluids, proppant is transported by turbulent flow and requires more hydraulic fracturing fluid. Higher-viscosity fluids allows the fluid to carry more proppant, requiring less fluid but necessitating the reduction of viscosity after the proppant is placed ([Rickman et al., 2008](#); [Gupta and Valkó, 2007](#)).

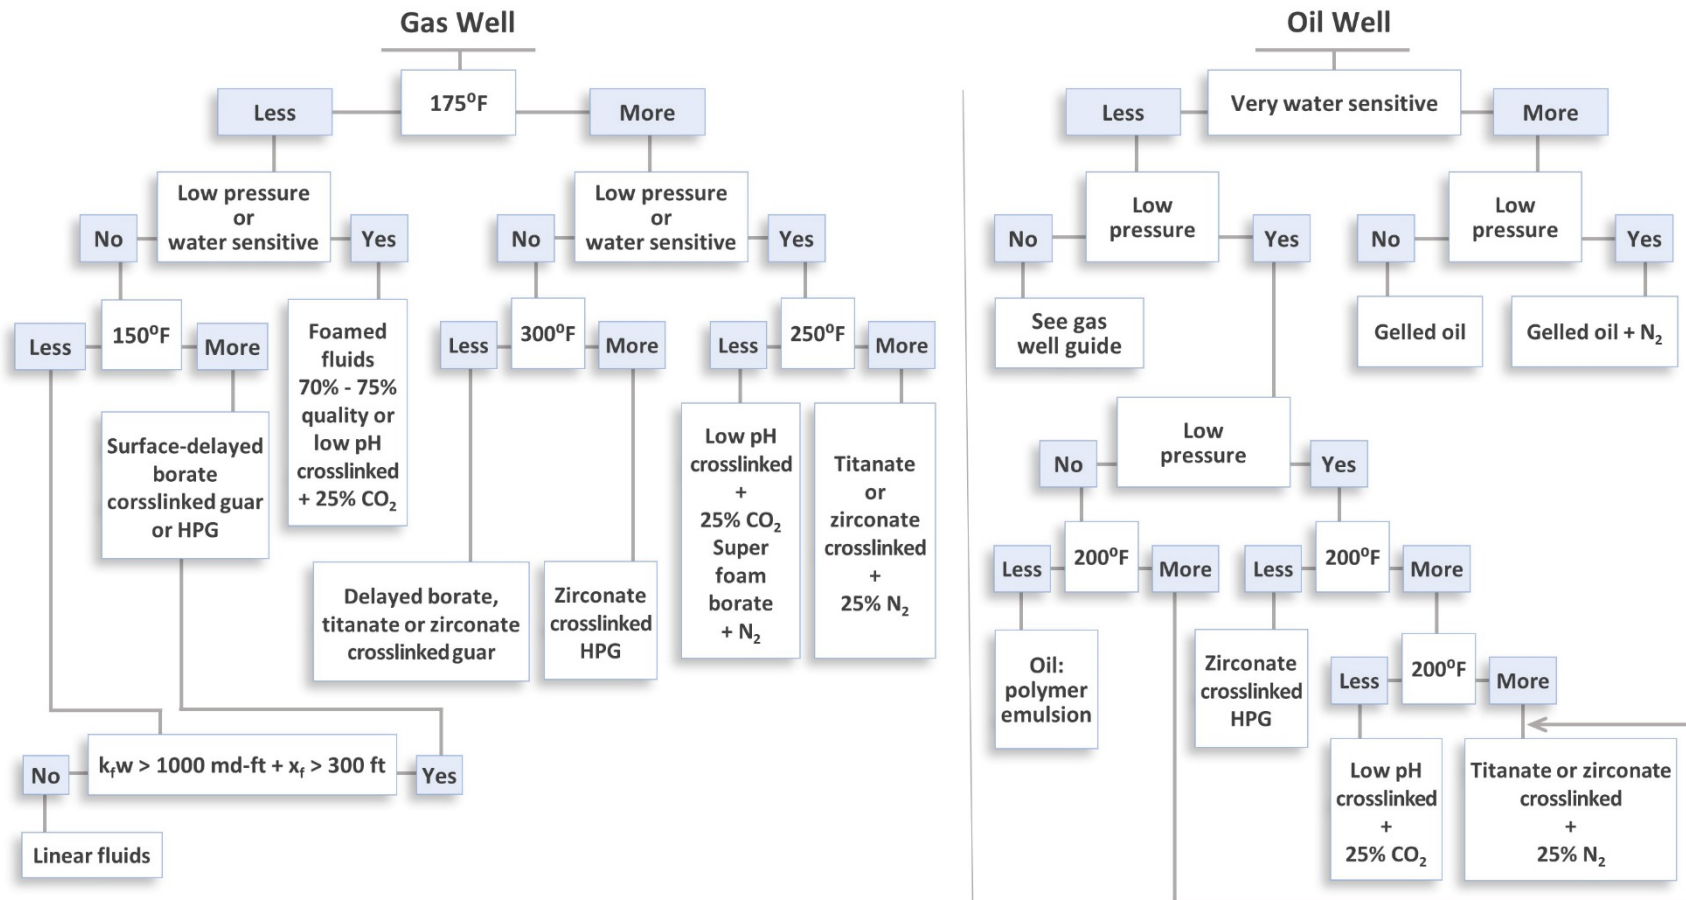


Figure 5-4. Example fracturing fluid decision tree for gas and oil wells.

Adapted from [Elbel and Britt \(2000\)](#).

1 Table 5-1 provides a list of common types of additives, their functions, and the most frequently  
 2 used chemicals for each purpose based on the EPA’s analysis of disclosures to FracFocus 1.0  
 3 (hereafter EPA FracFocus report; [U.S. EPA \(2015a\)](#)), the EPA’s project database of disclosures to  
 4 FracFocus 1.0 [hereafter EPA FracFocus database; [U.S. EPA \(2015b\)](#)], and other literature sources.  
 5 Additional information on more additives can be found in [U.S. EPA \(2015a\)](#).

**Table 5-1. Examples of common additives, their function, and the most frequently used chemicals reported to FracFocus for these additives.**

The list of examples of common additives was developed from information provided in multiple sources ([U.S. EPA, 2015a, b](#); [Stringfellow et al., 2014](#); [Montgomery, 2013](#); [Vidic et al., 2013](#); [Spellman, 2012](#); [GWPC and ALL Consulting, 2009](#); [Arthur et al., 2008](#); [Gupta and Valkó, 2007](#); [Gidley et al., 1989](#)). The additive functions are based on information the EPA received from service companies ([U.S. EPA, 2013a](#)).

<b>Additives</b>	<b>Function</b>	<b>Chemicals reported in ≥20% of FracFocus disclosures for additive<sup>a,b</sup></b>
<b>Acid</b>	Dissolves cement, minerals, and clays to reduce clogging of the pore space	Hydrochloric acid
<b>Biocide</b>	Controls or eliminates bacteria, which can be present in the base fluid and may have detrimental effects on the fracturing process	Glutaraldehyde; 2,2-dibromo-3-nitrilopropionamide
<b>Breaker</b>	Reduces the viscosity of specialized treatment fluids such as gels and foams	Peroxydisulfuric acid diammonium salt
<b>Clay control</b>	Prevents the swelling and migration of formation clays in reaction to water-based fluids	Choline chloride
<b>Corrosion inhibitor</b>	Protects the iron and steel components in the wellbore and treating equipment from corrosive fluids	Methanol; propargyl alcohol; isopropanol
<b>Crosslinker</b>	Increases the viscosity of base gel fluids by connecting polymer molecules	Ethylene glycol; potassium hydroxide; sodium hydroxide
<b>Emulsifier</b>	Facilitates the dispersion of one immiscible fluid into another by reducing the interfacial tension between the two liquids to achieve stability	2-Butoxyethanol; polyoxyethylene(10)nonylphenyl ether; methanol; nonyl phenol ethoxylate
<b>Foaming agent</b>	Generates and stabilizes foam fracturing fluids	2-Butoxyethanol; Nitrogen, liquid; isopropanol; methanol; ethanol

Additives	Function	Chemicals reported in $\geq 20\%$ of FracFocus disclosures for additive <sup>a,b</sup>
<b>Friction reducer</b>	Reduces the friction pressures experienced when pumping fluids through tools and tubulars in the wellbore	Hydrotreated light petroleum distillates
<b>Gelling agent</b>	Increases fracturing fluid viscosity allowing the fluid to carry more proppant into the fractures and to reduce fluid loss to the reservoir	Guar gum; hydrotreated light petroleum distillates
<b>Iron control agent</b>	Controls the precipitation of iron from solution	Citric acid
<b>Nonemulsifier</b>	Separates problematic emulsions generated within the formation	Methanol; isopropanol; nonyl phenol ethoxylate
<b>pH control</b>	Affects the pH of a solution by either inducing a change (pH adjuster) or stabilizing and resisting change (buffer) to achieve desired qualities and optimize performance	Carbonic acid, dipotassium salt; potassium hydroxide; sodium hydroxide; acetic acid
<b>Resin curing agents</b>	Lowers the curable resin coated proppant activation temperature when bottom hole temperatures are too low to thermally activate bonding	Methanol; nonyl phenol ethoxylate; isopropanol; alcohols, C12-14-secondary, ethoxylated
<b>Scale inhibitor</b>	Controls or prevents scale deposition in the production conduit or completion system	Ethylene glycol; methanol
<b>Solvent</b>	Controls the wettability of contact surfaces or prevents or breaks emulsions	Hydrochloric acid

<sup>a</sup> Chemicals (excluding water and quartz) listed as reported to FracFocus in more than 20% of disclosures for a given purpose when that purpose was listed as used on a disclosure. These are not necessarily the active ingredients for the purpose, but rather are listed as being commonly present for the given purpose. Chemicals may be disclosed for more than a single purpose (e.g., 2-butoxyethanol is listed as being used as an emulsifier and a foaming agent).

<sup>b</sup> Analysis considered 32,885 disclosures and 615,436 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; valid concentrations; and valid purpose. Disclosures that did not meet quality assurance criteria (5,645) or other, query-specific criteria were excluded from analysis.

1 A general description of typical hydraulic fracturing fluid formulations nationwide is difficult  
2 because fracturing fluids vary from well to well. Based on the FracFocus report, the median number  
3 of chemicals reported for each disclosure was 14, with the 5<sup>th</sup> to 95<sup>th</sup> percentile ranging from four to  
4 28. The median number of chemicals per disclosure was 16 for oil wells and 12 for gas wells ([U.S.  
5 EPA, 2015b](#)). Other sources have stated that between three and 12 additives and chemicals are  
6 used ([Schlumberger, 2015](#); [Carter et al., 2013](#); [Spellman, 2012](#); [GWPC and ALL Consulting, 2009](#)).<sup>1</sup>

7 Water, the most commonly used base fluid for hydraulic fracturing, is inferred to be used as a base  
8 fluid in more than 93% of FracFocus disclosures. Alternatives to water-based fluids, such as  
9 hydrocarbons and gases, including carbon dioxide or nitrogen-based foam, may also be used based  
10 on formation characteristics, cost, or preferences of the well operator or service company ([ALL  
11 Consulting, 2012](#); [GWPC and ALL Consulting, 2009](#)). Non-aqueous base fluid ingredients were  
12 identified in 761 (2.2%) of FracFocus 1.0 disclosures ([U.S. EPA, 2015a](#)). Gases and hydrocarbons  
13 may be used alone or blended with water; more than 96% of the disclosures identifying non-  
14 aqueous base fluids are blended ([U.S. EPA, 2015a](#)). There is no standard method to categorize the  
15 different fluid formulations ([Patel et al., 2014](#); [Montgomery, 2013](#); [Spellman, 2012](#); [Gupta and  
16 Valkó, 2007](#)). Therefore, we broadly categorize the fluids as water-based or alternative fluids.

### 5.3.1. Water-Based Fracturing Fluids

17 The advantages of water-based fracturing fluids are low cost, ease of mixing, and ability to recover  
18 and recycle the water. The disadvantages are low viscosity, the narrowness of the fractures created,  
19 and they may not provide optimal performance in water-sensitive formations (see Section 5.3.2)  
20 ([Montgomery, 2013](#); [Gupta and Valkó, 2007](#)). Water-based fluids can be as simple as water with a  
21 few additives to reduce friction, such as “slickwater,” or as complex as water with crosslinked  
22 polymers, clay control agents, biocides, and scale inhibitors ([Spellman, 2012](#)).

23 Gels may be added to water-based fluids to increase viscosity, which assists with proppant  
24 transport and results in wider fractures. Gelling agents include natural polymers, such as guar,  
25 starches, and cellulose derivatives, which requires the addition of biocide to minimize bacterial  
26 growth ([Spellman, 2012](#); [Gupta and Valkó, 2007](#)). Gels may be linear or crosslinked. Crosslinking  
27 increases viscosity without adding more gel. Gelled fluids require the addition of a breaker, which  
28 breaks down the gel after it carries in the proppant, to reduce fluid viscosity to facilitate fluid  
29 flowing back after treatment. ([Spellman, 2012](#); [Gupta and Valkó, 2007](#)). The presence of residual  
30 breakers may make it difficult to reuse recovered water ([Montgomery, 2013](#)).

### 5.3.2. Alternative Fracturing Fluids

31 Alternative hydraulic fracturing fluids can be used for water-sensitive formations (i.e., formations  
32 where permeability is reduced when water is added) or as dictated by production goals  
33 ([Halliburton, 1988](#)). Examples of alternative fracturing fluids include acid-based fluids; non-  
34 aqueous-based fluids; energized fluids, foams or emulsions; viscoelastic surfactant fluids; gels;

---

<sup>1</sup> Sources may differ based on whether they are referring to additives or chemicals.

1 methanol; and other unconventional fluids ([Montgomery, 2013](#); [Saba et al., 2012](#); [Gupta and Hlidek,](#)  
2 [2009](#); [Gupta and Valkó, 2007](#); [Halliburton, 1988](#)).

3 **Acid fracturing** removes the need for a proppant and is generally used in carbonate formations.  
4 Fractures are initiated with a viscous fracturing fluid, and the acid (gelled, foamed, or emulsified) is  
5 added to irregularly etch the wall of the fracture and prop open the formation for a higher  
6 conductivity fracture ([Spellman, 2012](#); [Gupta and Valkó, 2007](#)).

7 **Non-aqueous fluids** are used in water-sensitive formations. Non-aqueous fluids may also contain  
8 additives, such as gelling agents, to improve performance ([Gupta and Valkó, 2007](#)). The use of non-  
9 aqueous fluids has decreased due to safety concerns, and because water-based and emulsion fluid  
10 technologies have improved ([Montgomery, 2013](#); [Gupta and Valkó, 2007](#)). Methanol, for example,  
11 was previously used as a base fluid in water-sensitive reservoirs beginning in the early 1990s, but  
12 was discontinued in 2001 for safety concerns and cost ([Saba et al., 2012](#); [Gupta and Hlidek, 2009](#);  
13 [Gupta and Valkó, 2007](#)). Methanol is still used as an additive or in additive mixtures in hydraulic  
14 fracturing fluid formulations.

15 **Energized fluids, foams, and emulsions** minimize fluid leakoff, have high proppant-carrying  
16 capacity, improve fluid recovery, and are sometimes used in water-sensitive formations ([Barati and](#)  
17 [Liang, 2014](#); [Gu and Mohanty, 2014](#); [Spellman, 2012](#); [Gupta and Valkó, 2007](#); [Martin and Valko,](#)  
18 [2007](#)).<sup>1</sup> However, these treatments tend to be expensive, require high pressure, and pose potential  
19 health and safety concerns ([Montgomery, 2013](#); [Spellman, 2012](#); [Gupta and Valkó, 2007](#)).

20 **Energized fluids** are mixtures of liquid and gas ([Patel et al., 2014](#); [Montgomery, 2013](#)). Nitrogen  
21 (N<sub>2</sub>) or carbon dioxide (CO<sub>2</sub>), the gases used, make up less than 53% of the fracturing fluid volume,  
22 typically ranging from 25% to 30% by volume ([Montgomery, 2013](#); [Gupta and Valkó, 2007](#);  
23 [Mitchell, 1970](#)). **Energized foams** are liquid-gas mixtures, with N<sub>2</sub> or CO<sub>2</sub> gas comprising more than  
24 53% of the fracturing fluid volume, with a typical range of 70% to 80% by volume ([Mitchell, 1970](#)).  
25 **Emulsions** are liquid-liquid mixtures, typically a hydrocarbon (e.g., condensate or diesel) with  
26 water, with the hydrocarbon typically 70% to 80% by volume.<sup>2</sup> Both water-based fluids, including  
27 gels, and non-aqueous fluids can be energized fluids or foams.

28 Foams and emulsions break easily using gravity separation and are stabilized by using additives  
29 such as foaming agents ([Gupta and Valkó, 2007](#)). Emulsions may be used to stabilize active chemical  
30 ingredients or to delay chemical reactions, such as the use of carbon dioxide-miscible, non-aqueous  
31 fracturing fluids to reduce fluid leakoff in water-sensitive formations ([Taylor et al., 2006](#)).

32 **Other types of fluids** not addressed above include viscoelastic surfactant fluids, viscoelastic  
33 surfactant foams, crosslinked foams, liquid carbon dioxide-based fluid, and liquid carbon dioxide-  
34 based foam fluid, and hybrids of other fluids ([King, 2010](#); [Brannon et al., 2009](#); [Curtice et al., 2009](#);

---

<sup>1</sup> Leakoff is the fraction of the injected fluid that infiltrates into the formation (e.g., through an existing natural fissure) and is not recovered during production ([Economides et al., 2007](#)). See Chapter 6, Section 6.3 for more discussion on leakoff.

<sup>2</sup> Diesel is a mixture typically of C8 to C21 hydrocarbons.



1 [Tudor et al., 2009](#); [Gupta and Valkó, 2007](#); [Coulter et al., 2006](#); [Boyer et al., 2005](#); [Fredd et al., 2004](#);  
2 [MacDonald et al., 2003](#)).

3 Alternative fluids have been developed to work in tight formations, shales, and coalbeds, where  
4 production is based on desorption of the natural gas, or in formations where the fracturing fluid  
5 must displace a fluid that is already in place.

### 5.3.3. Proppants

6 Proppants are small particles carried down the well and into fractures by fracturing fluid. They hold  
7 the fractures open after hydraulic fracturing fluid has been removed ([Brannon and Pearson, 2007](#)).  
8 The propped fractures provide a path for the hydrocarbon to flow from the reservoir. Sand is most  
9 commonly used, but other proppants include man-made or specially engineered particles, such as  
10 resin-coated sand, high-strength ceramic materials, or sintered bauxite ([Schlumberger, 2014](#);  
11 [Brannon and Pearson, 2007](#)). Proppant types can be used individually or in combinations.

## 5.4. Frequency and Volume of Hydraulic Fracturing Chemical Use

12 This section highlights the different chemicals used in hydraulic fracturing and discusses the  
13 frequency and volume of use. Based on the U.S. EPA analysis of the FracFocus 1.0 database (see Text  
14 Box 5-2), we focus our analysis on individual chemicals rather than mixtures of chemicals used as  
15 additives. Chemicals are reported to FracFocus by using the chemical name and the Chemical  
16 Abstract Services Registration Number (CASRN), which is a unique number identifier for every  
17 chemical substance.<sup>1</sup> The information on specific chemicals, particularly those most commonly  
18 used, can be used to assess potential impacts to drinking water resources. The volume of chemicals  
19 stored on-site provides information on the potential volume of a chemical spill.

---

<sup>1</sup> A CASRN and chemical name combination identify a chemical substance, which can be a single chemical (e.g., hydrochloric acid, CASRN 7647-01-0) or a mixture of chemicals (e.g., hydrotreated light petroleum distillates (CASRN 64742-47-8), a complex mixtures of C9 to C16 hydrocarbons). For simplicity, we refer to both pure chemicals and chemical substances that are mixtures, which have a single CASRN, as “chemicals.”

**Text Box 5-2. The FracFocus Registry and EPA FracFocus Report.**

1 The Ground Water Protection Council (GWPC) and the Interstate Oil and Gas Compact Commission (IOGCC)  
2 developed a national hydraulic fracturing chemical registry, FracFocus ([www.fracfocus.org](http://www.fracfocus.org)). Well operators  
3 can use the registry to disclose information about chemicals they use during hydraulic fracturing. The EPA  
4 accessed data from FracFocus 1.0 from January 1, 2011 to February 28, 2013, which included more than  
5 39,000 disclosures from 20 states that had been submitted by operators prior to March 1, 2013.

6 Submission to FracFocus was initially voluntary and varied from state to state. During the timeframe of the  
7 EPA's study, six of the 20 states with data in the project database began requiring operators to disclose  
8 chemicals used in hydraulic fracturing fluids to FracFocus (Colorado, North Dakota, Oklahoma, Pennsylvania,  
9 Texas, and Utah). Three other states started requiring disclosure to either FracFocus or the state (Louisiana,  
10 Montana, and Ohio), and five states required or began requiring disclosure to the state (Arkansas, Michigan,  
11 New Mexico, West Virginia, and Wyoming). Alabama, Alaska, California, Kansas, Mississippi, and Virginia did  
12 not have reporting requirements during the period of the EPA's study.

13 Disclosures from the five states reporting the most disclosures to FracFocus (Texas, Colorado, Pennsylvania,  
14 North Dakota, and Oklahoma) comprise over 78% of the disclosures in the database; nearly half (47%) of the  
15 disclosures are from Texas. Thus, data from these states are most heavily represented in the EPA's analyses.  
16 The EPA's analysis may or may not be nationally representative.

17 The EPA summarized information on the locations of the wells in the disclosures, water volumes used, and  
18 the frequency of use and concentrations (% by mass, reported as maximum ingredient concentration) of the  
19 chemicals in the additives and the hydraulic fracturing fluid. Additional information can be found in the EPA  
20 FracFocus report ([U.S. EPA, 2015a](#)).

21 The EPA compiled a list of 1,076 chemicals known to be have been used in the hydraulic fracturing  
22 process (see a full list, methodology, and the source citations in Appendix A). The chemicals used in  
23 hydraulic fracturing fall into different chemical classes and include both organic and inorganic  
24 chemicals. The chemical classes of commonly used hydraulic fracturing chemicals include but are  
25 not limited to:

- 26 • Acids (e.g., hydrochloric acid, peroxydisulfuric acid, acetic acid, citric acid).
- 27 • Alcohols (e.g., methanol, isopropanol, ethylene glycol, propargyl alcohol, ethanol).
- 28 • Aromatic hydrocarbons (e.g., benzene, naphthalene, heavy aromatic petroleum solvent  
29 naphtha).
- 30 • Bases (e.g., sodium hydroxide, potassium hydroxide).
- 31 • Hydrocarbon mixtures (e.g., petroleum distillates).
- 32 • Polysaccharides (e.g., guar gum).
- 33 • Surfactants (e.g., poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy, 2-butoxyethanol).
- 34 • Salts (e.g., sodium chlorite, dipotassium carbonate).

1 **Text Box 5-3. Confidential Business Information (CBI)**

2 This assessment relies in large part upon information provided to the EPA or to other organizations. The  
3 submitters of that information (e.g., businesses that operate wells or perform services to hydraulically  
4 fracture the well) may view some of the information as confidential business information (CBI), and  
5 accordingly asserted CBI claims to protect such information. Information deemed to be CBI may include  
6 information such as trade secrets or other proprietary business information, entitled to confidential  
7 treatment under Exemption 4 of the Freedom of Information Act (FOIA) and other applicable laws. FOIA and  
8 the EPA's CBI regulations may allow for information claimed as CBI provided to the EPA to be withheld from  
9 the public, including in this document.

10 The EPA evaluated data from FracFocus 1.0, a national hydraulic fracturing chemical registry used and relied  
11 upon by some states, industry groups and non-governmental organizations. A company submitting a  
12 disclosure to FracFocus may choose to not report the identity of a chemical it considers CBI. As part of the  
13 EPA's analysis, more than 39,000 FracFocus 1.0 disclosures over the period January 1, 2013 to March 1, 2013  
14 were analyzed and more than 70% of disclosures contained at least one chemical designated as CBI. Of the  
15 disclosures containing CBI chemicals, there was an average of five CBI chemicals per disclosure ([U.S. EPA,  
16 2015a](#)). The prevalence of CBI claims in FracFocus 1.0 limits completeness of the data set.

17 Consistent with the hydraulic fracturing study plan, data were submitted by nine service companies to the  
18 EPA regarding chemicals used in hydraulic fracturing from 2005 to 2009. Because this submission was to the  
19 EPA, the EPA was given the actual names and CASRNs of any chemicals the company considered CBI. This  
20 included a total of 381 CBI chemicals, with a mean of 42 CBI chemicals per company and a range of 7 to 213  
21 ([U.S. EPA, 2013a](#)).

**5.4.1. National Frequency of Use of Hydraulic Fracturing Chemicals**

22 The EPA reported that 692 chemicals were reported to FracFocus 1.0 for use in hydraulic fracturing  
23 from January 1, 2011, to February 28, 2013, with a total of 35,957 disclosures ([U.S. EPA, 2015a](#)).<sup>1</sup>

24 Table 5-2 presents the 35 chemicals (5% of all chemicals identified in the EPA's study) that were  
25 reported in at least 10% of the FracFocus 1.0 disclosures for all states reporting to FracFocus  
26 during this time. This table also includes the top four additives that were reported to include the  
27 given chemical in FracFocus disclosures from January 1, 2011 to February 28, 2013.

---

<sup>1</sup> The EPA reported that 692 chemicals were reported to FracFocus 1.0 for use in hydraulic fracturing from January 1, 2011, to February 28, 2013, with a total of 35,957 disclosures. Chemicals may be pure chemicals (e.g., methanol) or chemical mixtures (e.g., hydrotreated light petroleum distillates), and they each have a single CASRN. Of these 692 chemicals, 598 had valid fluid and additive concentrations (34,675 disclosures). Sixteen chemicals were removed because they were minerals listed as being used as proppants. This left a total of 582 chemicals (34,344 disclosures).

**Table 5-2. Chemicals reported to FracFocus 1.0 from January 1, 2011 to February 28, 2013 in 10% or more disclosures, with the percent of disclosures for which each chemical is reported and the top four reported additives for the chemical.**

For chemicals with fewer than four reported additives, the table presents all additives ([U.S. EPA, 2015b](#)).

No.	Chemical name <sup>a</sup>	CASRN	Percent of disclosures <sup>b</sup>	Chemical used in these additives (four most common, FracFocus database) <sup>c</sup>
1	Methanol	67-56-1	72%	corrosion inhibitors, surfactants, non-emulsifiers, scale control
2	Hydrotreated light petroleum distillates <sup>d</sup>	64742-47-8	65%	friction reducers, gelling agents and gel stabilizers, crosslinkers and related additives, viscosifiers
3	Hydrochloric acid	7647-01-0	65%	acids, solvents, scale control, clean perforations
4	Water	7732-18-5	48%	acids, biocides, clay control, scale control
5	Isopropanol	67-63-0	47%	corrosion inhibitors, non-emulsifiers, surfactants, biocides
6	Ethylene glycol	107-21-1	46%	crosslinkers and related additives, scale control, corrosion inhibitors, friction reducers
7	Peroxydisulfuric acid, diammonium salt	7727-54-0	44%	breakers and breaker catalysts, oxidizer, stabilizers, clean perforations
8	Sodium hydroxide	1310-73-2	39%	crosslinkers and related additives, biocides, pH control, scale control
9	Guar gum	9000-30-0	37%	gelling agents and gel stabilizers, viscosifiers, clean perforations, breakers and breaker catalysts
10	Quartz <sup>e</sup>	14808-60-7	36%	breakers and breaker catalysts, gelling agents and gel stabilizers, scale control, crosslinkers and related additives
11	Glutaraldehyde	111-30-8	34%	biocides, surfactants, crosslinkers and related additives, sealers
12	Propargyl alcohol	107-19-7	33%	corrosion inhibitors, inhibitors, acid inhibitors, base fluid
13	Potassium hydroxide	1310-58-3	29%	crosslinkers and related additives, pH control, friction reducers, gelling agents and gel stabilizers
14	Ethanol	64-17-5	29%	surfactants, biocides, corrosion inhibitors, fluid foaming agents and energizers

*This document is a draft for review purposes only and does not constitute Agency policy.*

No.	Chemical name <sup>a</sup>	CASRN	Percent of disclosures <sup>b</sup>	Chemical used in these additives (four most common, FracFocus database) <sup>c</sup>
15	Acetic acid	64-19-7	24%	pH control, iron control agents, acids, gelling agents and stabilizers
16	Citric acid	77-92-9	24%	iron control agents, scale control, gelling agents and gel stabilizers, pH control
17	2-Butoxyethanol	111-76-2	21%	surfactants, corrosion inhibitors, non-emulsifiers, fluid foaming agents and energizers
18	Sodium chloride	7647-14-5	21%	breakers/breaker catalysts, friction reducers, scale control, clay control
19	Solvent naphtha, petroleum, heavy arom. <sup>f</sup>	64742-94-5	21%	surfactants, non-emulsifiers, inhibitors, corrosion inhibitors
20	Naphthalene	91-20-3	19%	surfactants, non-emulsifiers, corrosion inhibitors, inhibitors
21	2,2-Dibromo-3-nitrilopropionamide	10222-01-2	16%	biocides, clean perforations, breakers and breaker catalysts, non-emulsifiers
22	Phenolic resin	9003-35-4	14%	proppants, biocides, clean perforations, base fluid
23	Choline chloride	67-48-1	14%	clay control, clean perforations, base fluid, biocides
24	Methenamine	100-97-0	14%	proppants, crosslinkers and related additives, biocides, base fluid
25	Carbonic acid, dipotassium salt	584-08-7	13%	pH control, proppants, acids, surfactants
26	1,2,4-Trimethylbenzene	95-63-6	13%	surfactants, non-emulsifiers, corrosion inhibitors, inhibitors
27	Quaternary ammonium compounds, benzyl-C12-16-alkyldimethyl, chlorides <sup>e</sup>	68424-85-1	12%	biocides, non-emulsifiers, corrosion inhibitors, scale control
28	Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy (mixture) <sup>h</sup>	127087-87-0	12%	surfactants, friction reducers, non-emulsifiers, inhibitors
29	Formic acid	64-18-6	12%	corrosion inhibitors, acids, inhibitors, pH control
30	Sodium chlorite	7758-19-2	11%	breakers/breaker catalysts, biocides, oxidizer, proppants
31	Nonyl phenol ethoxylate	9016-45-9	11%	non-emulsifiers, resin curing agents, activators, friction reducers

*This document is a draft for review purposes only and does not constitute Agency policy.*

No.	Chemical name <sup>a</sup>	CASRN	Percent of disclosures <sup>b</sup>	Chemical used in these additives (four most common, FracFocus database) <sup>c</sup>
32	Tetrakis(hydroxymethyl)p hosphonium sulfate	55566-30-8	11%	biocides, scale control, clay control
33	Polyethylene glycol	25322-68-3	11%	biocides, non-emulsifiers, surfactants, clay control
34	Ammonium chloride	12125-02-9	10%	friction reducers, crosslinkers and related additives, scale control, clay control
35	Sodium persulfate	7775-27-1	10%	breakers and breaker catalysts, oxidizer, pH control

<sup>a</sup> Chemical refers to chemical substances with a single CASRN, these may be pure chemicals (e.g., methanol) or chemical mixtures (e.g., hydrotreated light petroleum distillates).

<sup>b</sup> Analysis considered 34,675 disclosures and 676,376 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (3,855) or other, query-specific criteria were excluded from analysis.

<sup>c</sup> Analysis considered 32,885 disclosures and 615,436 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; valid concentrations; and valid purpose. Disclosures that did not meet quality assurance criteria (5,645) or other, query-specific criteria were excluded from analysis.

<sup>d</sup> Hydrotreated light petroleum distillates (CASRN 64742-47-8) is a mixture of hydrocarbons, in the C9 to C16 range.

<sup>e</sup> Quartz (CASRN 14808-60-7) the proppant most commonly reported, was also reported as an ingredient in other additives [U.S. EPA \(2015a\)](#).

<sup>f</sup> Heavy aromatic solvent naphtha (petroleum) (CASRN 64742-94-5) is mixture of aromatic hydrocarbons, in the C9 to C16 range.

<sup>g</sup> Quaternary ammonium compounds, benzyl-C12-16-alkyldimethyl, chlorides (CASRN 68424-85-1) is a mixture of benzalkonium chloride with carbon chains between 12 and 16.

<sup>h</sup> Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy (mixture) (CASRN 127087-87-0) is mixture with varying length ethoxy links.

1 There is no single chemical used at all wells across the nation. Methanol is the most commonly used  
2 chemical, reported at 72.1% of wells in FracFocus 1.0, and is associated with 33 types of additives,  
3 including corrosion inhibitors, surfactants, non-emulsifiers, and scale control ([U.S. EPA, 2015b](#)).  
4 Table 5-2 also shows the variability in different chemicals reported to FracFocus 1.0. The  
5 percentage of disclosures reporting a given chemical suggests the likelihood of that chemical's use  
6 at a site. Only three chemicals (methanol, hydrotreated light petroleum distillates, and hydrochloric  
7 acid) were used at more than half of the sites nationwide, and only 12 were used at more than one-  
8 third.

9 In addition to providing information on frequency of use, FracFocus 1.0 data provides the  
10 maximum concentration by mass of a given chemical in an additive. For example, for the most  
11 frequently used chemical, methanol, the median maximum additive concentration reported in  
12 FracFocus disclosures is 30%, by mass, with a range of 0.44% to 100% (5<sup>th</sup> to 95<sup>th</sup> percentile). This  
13 suggests that methanol is generally used as part of a mixture of chemicals in the hydraulic  
14 fracturing fluid, and may be stored in a mixture of chemicals or as pure methanol. This wide range



1 of possible concentrations of methanol further complicates assessing the potential impact of spills,  
2 as the properties of the fluid will depend on the different chemicals present and on their  
3 concentrations. For all chemicals, spills of a highly concentrated chemical can have different  
4 potential impacts than spills of dilute mixtures.

#### 5.4.2. Nationwide Oil versus Gas

5 FracFocus 1.0 data also can elucidate the differences between the chemicals used for oil production  
6 and those used for gas production, providing a better understanding of potential spill impacts from  
7 each. Table C-1 and C-2 in Appendix C present the chemicals reported in at least 10% of all gas (34  
8 chemicals) and oil (39 chemicals) disclosures nationwide.

9 Many of the same chemicals are used for oil and gas, but some chemicals are used more frequently  
10 in oil production and others more frequently in gas.<sup>1</sup> For example, hydrochloric acid is the most  
11 commonly reported chemical for gas wells (73% of disclosures); it is the fifth most frequently  
12 reported chemical for oil wells (58% of disclosures). However, both oil and gas operators each  
13 reports using methanol in 72% of disclosures. Methanol is the most common chemical used in  
14 hydraulic fracturing fluids at oil wells and the second most common chemical in hydraulic  
15 fracturing fluids at gas wells.

#### 5.4.3. State-by-State Frequency of Use of Hydraulic Fracturing Chemicals

16 We conducted a state-by-state analysis of chemical use based on FracFocus 1.0 disclosures ([U.S.  
17 EPA, 2015b](#)). Some states reported more disclosures than other states, because they have relatively  
18 more hydraulic fracturing activity and/or greater numbers of disclosures to FracFocus 1.0.  
19 Reporting can bias national numbers towards those states with a disproportionate number of  
20 disclosures. For example, the EPA ([2015a](#)) reported that Texas had 16,405 of the 34,675  
21 disclosures with parsed ingredients and valid CASRNs and concentrations, making up almost half  
22 (47%) of all disclosures for the 20 states reporting to FracFocus 1.0. We attempt to account for the  
23 possible effect of having a large number of disclosures in Texas by looking at a compilation of the  
24 top 20 chemicals reported to FracFocus for all states.

25 Table 5-3 presents and ranks chemicals reported most frequently to FracFocus 1.0 for each state  
26 ([U.S. EPA, 2015b](#)). There are 94 unique chemicals comprising the top 20 chemicals for each state,  
27 indicating similarity in chemical usage among states.

28 Methanol is reported in 19 of the 20 (95%) states. Alaska is the only state in which methanol is not  
29 reported (based on the state's 20 disclosures to FracFocus). The percentage of disclosures  
30 reporting use of methanol ranges from 38% (Wyoming) to 100% (Alabama, Arkansas).

31 Ten chemicals (excluding water) are among the 20 most frequently reported in 14 of the 20 states.  
32 These chemicals are: methanol; hydrotreated light petroleum distillates; ethylene glycol;

---

<sup>1</sup> This separation was done solely based on whether it was an oil or gas disclosure. The analysis did not separate out reservoir factors, such as temperature, pressure, or permeability, which may be important factors for which chemicals are used.

1 isopropanol; quartz; sodium hydroxide; ethanol; guar gum; hydrochloric acid; and peroxydisulfuric  
2 acid, diammonium salt.<sup>1</sup> These 10 chemicals are also the most frequently reported chemicals  
3 nationwide.

4 By performing this analysis by state, we observed that methanol is used across the continental U.S.  
5 (not Alaska), and there are 9 other chemicals that are frequently used across the U.S. Beyond those,  
6 however, there are a number of different chemicals that are used in one state more commonly than  
7 others and many may not be used at all in other states. This suggests that there is regional  
8 variability in some chemicals and a common set of the same chemicals that are frequently used.

---

<sup>1</sup> Quartz was the most commonly reported proppant and also reported as an ingredient in other additives ([U.S. EPA, 2015a](#)).

**Table 5-3. The percentage of disclosures of the 20 most commonly reported chemical by state, where a chemical is reported in at least three states.**

The 20 most frequently reported chemicals were identified for all 20 states that reported to FracFocus 1.0 ([U.S. EPA, 2015b](http://www.epa.gov/fracfocus)). The chemicals were ranked by counting the number of states where that chemical was in the top 20. Chemicals were then ranked so that chemicals used most widely among the most states come first. Methanol is reported in 19 of 20 states, so methanol is ranked first. A chemical was only presented on the list if it were reported in at least three states, resulting in 33 chemicals. The full table of top 20 chemicals (91 chemicals) is presented in Appendix C.

Chemical name	CASRN	Percentage of disclosures per state <sup>a</sup>																			
		AL	AK	AR	CA	CO	KS	LA	MI	MS	MT	NM	ND	OH	OK	PA	TX	UT	VA	WV	WY
Methanol	67-56-1	100%		100%	39%	63%	79%	59%	93%	75%	63%	91%	53%	52%	70%	69%	78%	79%	61%	64%	38%
Distillates, petroleum, hydrotreated light	64742-47-8		45%	56%	55%	74%	90%	84%	100%	100%	60%	63%	47%	84%	70%	60%	66%	75%		82%	51%
Ethylene glycol	107-21-1	100%	100%	22%	60%		63%	34%	71%	75%	49%	45%	36%	57%	47%	34%	59%	85%	28%	59%	
Isopropanol	67-63-0	100%	65%	44%		57%	25%	51%	79%		64%	62%	37%	49%	42%	31%	48%	53%	54%	31%	43%
Quartz	14808-60-7		100%		89%	23%	23%	37%		50%	64%	68%	46%	45%	27%		43%	40%		22%	30%
Sodium hydroxide	1310-73-2		100%	21%	69%	22%	28%	53%		50%	54%	30%	52%		27%	17%	46%	37%			57%
Ethanol	64-17-5			45%		50%	80%	42%		100%		47%	27%	60%	46%	16%	21%		63%	54%	25%
Guar gum	9000-30-0		50%		93%			49%		50%	43%	63%	55%	51%	25%	23%	43%	43%		23%	69%
Hydrochloric acid	7647-01-0	100%		99%		53%	85%	57%			23%	79%		99%	76%	96%	71%	85%	86%	96%	
Peroxydisulfuric acid, diammonium salt	7727-54-0		50%		83%		22%	27%	57%		62%	75%	55%	64%	39%		54%	39%		54%	64%
Propargyl alcohol	107-19-7			61%			71%	30%	36%			68%		49%	41%	58%	39%	36%	28%	58%	
Glutaraldehyde	111-30-8			55%			75%	36%		50%		57%		72%	55%	34%	40%			71%	22%
Naphthalene	91-20-3	100%				30%	42%	29%	86%		49%		43%		25%			38%	9%		
2-Butoxyethanol	111-76-2	100%	100%						79%			37%				21%	24%	53%	89%	26%	

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Percentage of disclosures per state <sup>a</sup>																			
		AL	AK	AR	CA	CO	KS	LA	MI	MS	MT	NM	ND	OH	OK	PA	TX	UT	VA	WV	WY
Citric acid	77-92-9						46%					40%		66%	36%	29%	24%	79%	80%	41%	
Sodium chloride	7647-14-5					35%		41%		50%			25%				21%		9%	22%	23%
Solvent naphtha, petroleum, heavy aromatics	64742-94-5					33%	43%				70%		49%		31%		17%		9%		35%
Quaternary ammonium compounds, benzyl-C12-16-alkyldimethyl, chlorides	68424-85-1				28%						50%			37%	33%	16%					22%
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	100%				49%			71%		36%					34%				28%	
Potassium hydroxide	1310-58-3							34%		100%	60%		59%	73%			39%				
Acetic acid	64-19-7					21%		28%							24%		31%				31%
Choline chloride	67-48-1					27%						34%		38%				52%	57%		
Polyethylene glycol	25322-68-3	100%							50%		36%		29%			29%					
1,2,4-Trimethylbenzene	95-63-6					27%	40%						25%						9%		
Ammonium chloride	12125-02-9			21%		28%										31%				21%	
Diatomaceous earth, calcined	91053-39-3		100%		71%							38%						35%			
Didecyl dimethyl ammonium chloride	7173-51-5			24%						50%				32%						21%	
Sodium chlorite	7758-19-2							35%		100%			24%								23%
Sodium erythorbate	6381-77-7			33%			30%												13%	32%	
N,N-Dimethylformamide	68-12-2													47%	20%			33%			

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical name	CASRN	Percentage of disclosures per state <sup>a</sup>																			
		AL	AK	AR	CA	CO	KS	LA	MI	MS	MT	NM	ND	OH	OK	PA	TX	UT	VA	WV	WY
Nonyl phenol ethoxylate	9016-45-9											30%						36%	32%		
Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy (mixture)	127087-87-0					25%	40%												9%		
Sodium persulfate	7775-27-1									100%						16%					26%
Tetramethylammonium chloride	75-57-0										44%		29%								26%

<sup>a</sup> Analysis considered 34,675 disclosures and 676,376 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (3,855) or other, query-specific criteria were excluded from analysis.

#### 5.4.4. Volumes of Chemicals Used

1 Understanding the volume of chemicals used at each hydraulic fracturing site is important for  
 2 understanding potential impacts of chemicals to drinking water resources, because the chemical  
 3 volume governs how much will be stored on-site, the types of containers required, and the total  
 4 amount that could spill. While the on-site operator has precise knowledge of the composition and  
 5 volume of chemicals stored on-site, this information is generally not publicly available. We  
 6 conducted a comprehensive review of publicly available sources and found two sources ([OSHA,  
 7 2014a, b](#); [Sjolander et al., 2011](#)) that identify specific chemicals used at a hydraulic fracturing site  
 8 and provide information on volumes. These are presented in Table 5-4. The volume of chemicals  
 9 totaled 7,500 gal (28,000 L) and 14,700 gal (56,000 L) for the two sources, with a mean volume for  
 10 an individual chemical of 1,900 gal (7,000 L) and 1,225 gal (4,600 L), respectively. The range of  
 11 volumes for each chemical used is 30 to 3,690 gal (114 to 14,000 L).

**Table 5-4. Example list of chemicals and volumes used in hydraulic fracturing.**

Volumes are for wells with and unknown number of stages and at least one perforation zone. Every well and fluid formation is unique. Volumes may be larger for longer horizontal laterals and with a greater number of stages.

Ingredient	Examples	Sjolander et al. (2011) <sup>a</sup>		Occupational Safety and Health Administration (OSHA, 2014a, b) <sup>b</sup>	
		Volume (gal) or mass (lbs)	Percent overall <sup>c</sup>	Volume (gal)	Percent by volume
Water		4,000,000 gal	94.62	2,700,000	90
Proppant	Sand	~ 1,500,000 lbs <sup>d</sup>	5.17	285,300	9.51
Acid	Hydrochloric acid or muriatic acid	1,338 gal	0.03	3,690	0.123
Friction reducer	Polyacrylamide, mineral oil	2,040 gal	0.05	2,640	0.088
Surfactant	Isopropanol			2,550	0.085
Potassium chloride				1,800	0.06
Gelling agent	Guar gum or hydroxymethyl cellulose	- <sup>e</sup>	- <sup>e</sup>	1,680	0.056
Scale inhibitor	Ethylene glycol, alcohol, and sodium hydroxide			1,290	0.043



Ingredient	Examples	Sjolander et al. (2011) <sup>a</sup>		Occupational Safety and Health Administration (OSHA, 2014a, b) <sup>b</sup>	
		Volume (gal) or mass (lbs)	Percent overall <sup>c</sup>	Volume (gal)	Percent by volume
pH buffer	Carbonate			330	0.011
Preservative	Ammonium persulfate			300	0.01
Crosslinker	Borate salts	- <sup>e</sup>	- <sup>e</sup>	210	0.007
Iron control	Citric acid	- <sup>e</sup>	- <sup>e</sup>	120	0.004
Corrosion inhibitor	n,n-Dimethyl formamide	- <sup>e</sup>	- <sup>e</sup>	60	0.002
Biocide / antimicrobial agent	Glutaraldehyde, ethanol, methanol	2,040 gal	0.05	30	0.001
Gel-breaker	Ammonium persulfate	- <sup>e</sup>	- <sup>e</sup>		
All chemicals		7,458 gal	0.21	14,700	0.49
Chemical Volume: Mean (full range)		1,864.5 gal (1,338 – 2,040 gal)		1,225 (30 – 3,690)	

<sup>a</sup> Adapted from Penn State “Water Facts” publication entitled “Introduction to Hydrofracturing” (Sjolander et al., 2011). Composite from two companies: Range Resources, LLC, and Chesapeake Energy, which released in July 2010 the chemistry and volume of materials typically used in their well completions and stimulations.

<sup>b</sup> Adapted from a table generated by the OSHA for use in a training module (OSHA, 2014a, b).

<sup>c</sup> As presented in Sjolander et al. (2011); does not explicitly state percent by mass or by volume.

<sup>d</sup> The Penn State publication presented proppant in pounds instead of gallons.

<sup>e</sup> Listed as an ingredient, but no information on volume or percentage.

1 Because of the limited information on chemical volumes publicly available, we estimated chemical  
2 volumes used across the nation based on the information provided in the FracFocus database.  
3 Figure 5-5 plots median estimated chemical volumes, ranked from high to low, with the range of 5<sup>th</sup>  
4 to 95<sup>th</sup> percentiles.<sup>1</sup> Volumes used are presented for the 74 chemicals that were reported to  
5 FracFocus in at least 100 disclosures and for which density data were available.<sup>2</sup> The estimated  
6 median volumes vary widely among the different chemicals, covering a range of near zero to 27,000  
7 gal (98,000 L). The mean of the estimated median volumes was 650 gal (2,500 L).<sup>3</sup>

8 With the median chemical volume, we can estimate total chemical volume for all chemicals used.  
9 Based on the above mean of median chemical volumes of 650 gal (2,500 L) per chemical, and given  
10 that the median number of chemicals used at a site is 14 ([U.S. EPA, 2015a](#)), an estimated 9,100 gal

---

<sup>1</sup> Volumes were estimated using FracFocus disclosures. The total hydraulic fracturing fluid volume reported was used to calculate the total fluid mass by assuming the fluid has a density of 1 g/mL. This is a simplifying assumption based on the fact that more than 93% of disclosures are inferred to use water as a base fluid. Water had a median concentration of 88% by mass in the fracturing fluid. Some disclosures reported using brine, which has a density between 1.0 and 1.1 g/mL. This would introduce at most an error of 10% for the fluid calculation (the difference of a chemical being present at 10 versus 9 gal, 1,000 versus 900 gal). We also assume that the mass of chemicals present in calculating the total fluid mass is negligible. Given that  $\leq 2\%$  of the fluid volume is non-water chemicals, and assuming the density of which is 3 mg/L, the error introduced is approximately 6%. For reference, for the chemicals we are calculating volumes, chlorine dioxide is the densest at 2.757 mg/L. Chemical with densities less than 1 mg/L introduce approximately  $<1\%$  error.

Next, the mass of each chemical per disclosure was calculated. Each chemical is reported to FracFocus 1.0 as a maximum concentration by mass in the hydraulic fracturing fluid. This introduces error, as we only know that it is equal to or less than this mass fraction. In the [U.S. EPA \(2015a\)](#) EPA's analysis of the FracFocus 1.0 database, an additive is comprised of three chemicals with maximum ingredient concentration of 60% in the additive and a maximum concentration of 0.22% in the hydraulic fracturing fluid. Each of the three chemicals cannot be present at 60%. We have no way to know the actual proportions of each chemical in the additive and thus must calculate chemical mass based on the given information. Therefore, our calculations likely overestimate actual volumes. However, in some cases, the concentration in the additive that is given is less than 100% and only one chemical is listed in the additive. In these cases, it appears that the disclosure is reporting the concentration of that chemical in water. Hydrogen chloride is listed as the sole ingredient in the acid additive, and the maximum concentration is 40% by mass. In this case, the HCl is diluted down to 40%, so the total volume would be underestimated.

After all the chemical masses are calculated, the volume is calculated by dividing chemical mass by density. Given the limited information available, due to the limits of the FracFocus database and general lack of publicly available data, and despite the errors associated with these calculations, these calculations provide context for the general magnitude of volumes for each of the chemicals used on-site. These calculations are used to calculate median volumes for each chemical. These volume calculations are for the chemicals themselves, not the additives.


Analysis considered 34,495 disclosures and 672,358 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; criteria for water volumes; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (4,035) or other, query-specific criteria were excluded from analysis.

<sup>2</sup> Density data were gathered from Reaxys® and other sources as noted. Reaxys® (<http://www.elsevier.com/online-tools/reaxys>) is an online database of chemistry literature and data. Direct density source, as provided by Reaxys®, is provided in Table C-7 in Appendix C.

<sup>3</sup> Reporting records to FracFocus 1.0 was required in six of the 20 states between January 1, 2011 and February 28, 2013. An additional three states required disclosure to either FracFocus or the state, and five states required reporting to the state. Reporting to FracFocus 1.0 was optional in other states. Some states changed their reporting requirements during the course of the study. The FracFocus 1.0 database therefore does not encompass all data on chemicals used in hydraulic fracturing. As stated in Text Box 4-2, this mix of voluntary versus mandatory disclosure requirements limits the completeness of data extracted from FracFocus 1.0 for estimating hydraulic fracturing fluid. According to a comparison between FracFocus reported fluid volumes and literature values, water use per well was reported to be about 86% of the actual used (median of estimated values. See Chapter 4, Text Box 4-1). If the fluid volume is underreported, then estimated chemical volumes based on fluid volume would be similarly underestimated. Using the underreporting of 86%, then the estimated median chemical volume would be 760 gal.

1 (34,000 L) of chemicals may be used per well. Given that the number of chemicals per well ranges  
 2 from 4 to 28 (U.S. EPA, 2015a), the total volume of chemicals per well may range from 2,600 to  
 3 18,000 gal (9,800 to 69,000 L).

4 Another way to estimate total volume of chemicals per well is to use the estimated median volume  
 5 of 1.5 million gal (5.7 million L) of fluid used to fracture a well (see Chapter 4) (U.S. EPA, 2015a)  
 6 and assume that up to 2% of that volume are chemicals added to base fluid (Carter et al., 2013;  
 7 Knappe and Fireline, 2012), resulting in up to 30,000 gal (114,000 L) of chemicals used per well.

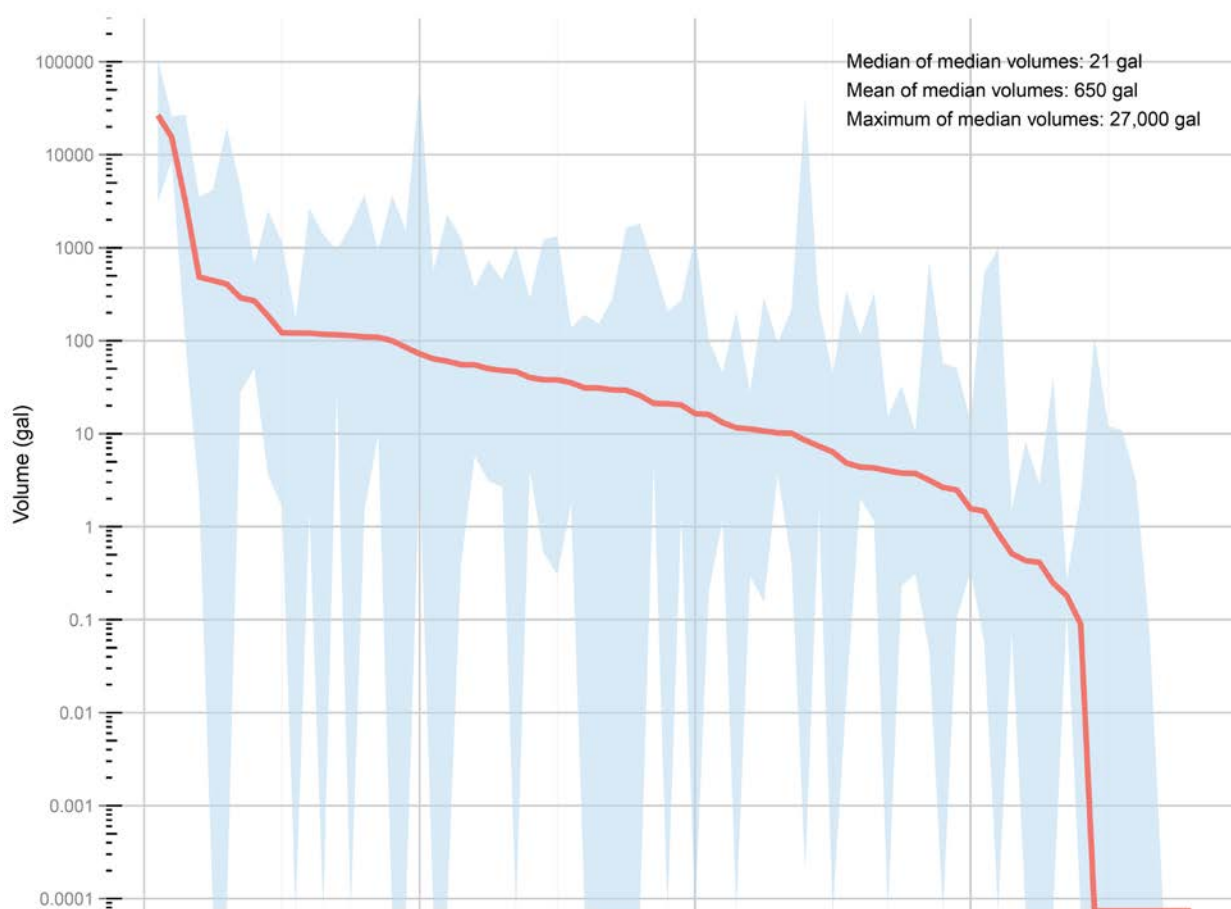

**Figure 5-5. Estimated median volumes for chemicals reported in at least 100 FracFocus disclosures by February 28, 2013 for use in hydraulic fracturing from January 1, 2011 to February 28, 2013.**

Shaded area represents the zone of 5% and 95% confidence limits. Derived from (U.S. EPA, 2015b).

8 Using the mean of the median chemical volumes from disclosures in FracFocus 1.0, we can also  
 9 estimate volume per additive and extrapolate to estimate on-site chemical storage. If we assume  
 10 three to five chemicals per additive, then total volume per additive stored on-site would  
 11 approximate 1,900 to 3,200 gal (7,400 to 12,000 L). On-site containers generally store 20% to

1 100% more additive volume than needed ([Houston et al., 2009](#); [Malone and Ely, 2007](#)). This would  
2 suggest that 2,300 to 6,500 gal (8,800 to 25,000 L) per additive are stored on-site.

3 The volume that may be released during a spill depends on where in the chemical mixing process  
4 the spill occurs. Spills from chemical or additive containers may result in higher volume spills than  
5 the estimated volumes in Figure 5-5 suggest. However, if the spill is of the hydraulic fracturing fluid  
6 downstream of the blender, then the total volume of chemical spilled may be less than the  
7 estimated total volumes held on site.

## 5.5. Chemical Management and Spill Potential

8 This section provides a description of the primary equipment used in the chemical mixing and well  
9 injection processes, along with a discussion of the spill vulnerabilities specific to each piece of  
10 equipment. Equipment breakdown or failure can trigger a spill itself, and it can also lead to a  
11 suspension of activity and the disconnection and reconnection of various pipes, hoses, and  
12 containers. Each manipulation of equipment poses additional potential for a spill. The EPA found  
13 that approximately one-third of chemical spills on or near the well pad related to hydraulic  
14 fracturing resulted from equipment failure ([U.S. EPA, 2015n](#)). When possible, we describe  
15 documented spills associated with or attributed to specific pieces of equipment, in text boxes in the  
16 relevant subsections.


17 Hydraulic fracturing operations are mobile and must be assembled at each well site, and each  
18 assembly and disassembly presents a potential for spills. Equipment used in the chemical mixing  
19 and well injection processes typically consists of chemical storage trucks, oil storage tanks/tanker  
20 trucks; a slurry blender; one or more high-pressure, high-volume fracturing pumps; the main  
21 manifold; surface lines and hoses; and a central control unit. There are many potential sources for  
22 leaks and spills in this interconnected system.

23 Equipment varies in age and technological advancement depending upon service company  
24 standards and costs associated with purchase and maintenance. Older equipment may have  
25 experienced wear and tear, which may be a factor in spills caused by equipment failure. New  
26 equipment may be more automated, reducing opportunities for human error. Information detailing  
27 the extent of technological and age differences in fracturing equipment across sites and operators is  
28 limited. Table 5-5 provides a description of typical hydraulic fracturing equipment.

**Table 5-5. Examples of typical hydraulic fracturing equipment and their functions.**

Equipment	Function
Acid transport truck	Transports acids to job sites, the truck has separate compartments for multiple acids or additives.
Chemical storage truck	Transport chemicals to the site in separate containment units or totes. Chemicals are typically stored on and pumped from the chemical storage truck.
Base fluid tanks	Store the required volume of base fluid to be used in the hydraulic fracturing process.
Proppant storage units	Hold proppant and feed it to the blender via a large conveyor belt.
Blender	Takes fluid (e.g., water) from the fracturing tanks and proppant (e.g., sand) from the proppant storage unit and combines them with additives before transferring the mixture to the fracturing pumps
High-pressure fracturing pumps	Pressurize mixed fluids received from the blender and injected into the well.
Manifold trailer with hoses and pipes	A transfer station for all fluids. Includes a trailer with a system of hoses and pipes connecting the blender, the high-pressure pumps, and the fracturing wellhead.
Fracturing wellhead or frac head	A wellhead connection that allows fracture equipment to be attached to the well.

- 1 While the primary equipment and layout is generally the same across well sites, the type, size, and  
 2 number of pieces of equipment may vary depending on a number of factors ([Malone and Ely, 2007](#)):
- 3 • The size and type of the fracture treatment;
  - 4 • The number of wells drilled per well pad;
  - 5 • The location, depth, and length of the fractures;
  - 6 • The volumes and types of additives, proppants, and fluids used; and
  - 7 • The operating procedures of the well operator and service company (e.g., some companies  
 8 require backup systems in case of mechanical failure, while others do not).
- 9 Figure 5-6 provides a schematic diagram of a typical layout of hydraulic fracturing equipment.

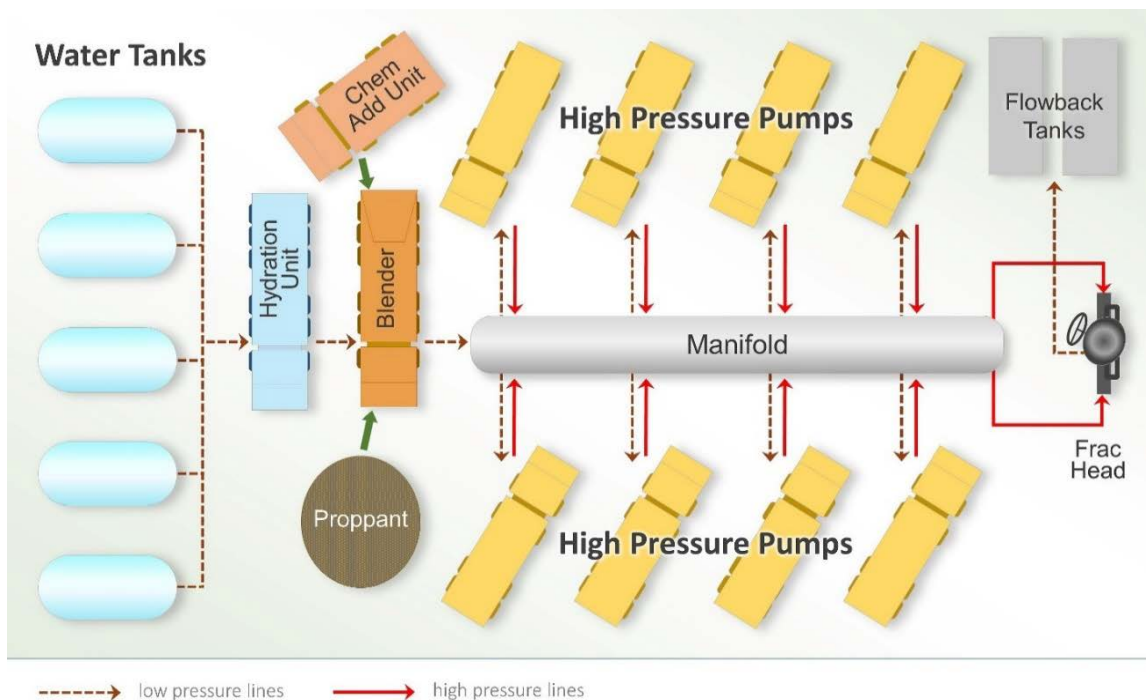

**Figure 5-6. Typical hydraulic fracturing equipment layout.**

This illustration shows how the various components of a typical hydraulic fracturing site fit together. Numbers of pumps and tanks vary from site to site. Some sites do not use a hydration unit as the gel is batch mixed prior to the treatment ([Olson, 2011](#); [BJ Services Company, 2009](#)).

### 5.5.1. Storage

- 1 This section provides an overview of publicly available information on storage and containment of
- 2 chemicals used in the hydraulic fracturing process. Most public sources provide general
- 3 information on the types and sizes of containment units. While operators maintain a precise
- 4 inventory of volumes of chemicals stored and used for each site, this information is typically not
- 5 made public.
  
- 6 The volumes of each chemical used are based on the size and site-specific characteristics of each
- 7 fracture treatment. Sites often store an excess of the design volume of chemicals for contingency
- 8 purposes. [Malone and Ely \(2007\)](#) indicate that companies typically store an excess of 20% of the
- 9 required chemical inventories on location. [Houston et al. \(2009\)](#) recommends maintaining an on-
- 10 site chemical reserve of 100% extra beyond what is necessary for the fracturing treatment
- 11 ([Houston et al., 2009](#)). See Text Box 5-4 for documented spills from storage units.



**Text Box 5-4. Spills from Storage Units.**

1 Of the 151 spills of chemicals, additives, or fracturing fluid discussed and evaluated in ([U.S. EPA, 2015n](#)) (see  
2 Text Box 5-13 for more information), 54 spills were from storage units. Storage units include smaller totes or  
3 tanks used for storing individual chemicals or additives, and larger tanks containing fracturing fluid. These  
4 spills resulted from equipment failure, failure of storage integrity, or human error. Sixteen of these spills were  
5 due to failure of container integrity, which includes holes and cracks in containers, demonstrating the need  
6 for properly constructed and maintained storage units. The remaining spills from storage containers resulted  
7 from human error or equipment malfunctions, or had an unknown cause.

**5.5.1.1. Hydraulic Fracturing Base Fluid Storage**

8 Base fluids used in hydraulic fracturing are typically stored on-site in large volume tanks. Non-  
9 water-based fluids may be stored in specialized containment units designed to prevent or minimize  
10 releases. For example, nitrogen and carbon dioxide must be stored in compressed gas or cryogenic  
11 liquid cylinders, as required by U.S. Department of Transportation (DOT) and OSHA regulations.  
12 Due to the large volume of base fluid storage tanks (about 21,000 gal (80,000 L) ([Halliburton,  
13 1988](#)), uncontrolled spills could damage other storage units and equipment, which could result in  
14 additional spills. Fresh water used as a base fluid is generally not a source of concern for spills.  
15 Reused wastewater, brine, and non-aqueous base fluids have the potential to adversely impact  
16 drinking water resources in the event of a spill. An example of a documented spill of hydraulic  
17 fracturing fluid is presented in Text Box 5-5.

**Text Box 5-5. Spills of Fracturing Fluid Documented to Impact Surface Water.**

18 In September 2009, two spills of hydraulic fracturing fluid occurred at the same site in Pennsylvania. A total  
19 of approximately 7,350 gal (28,000 L) of fluid comprised of a mixture of water, gel, and friction reducer  
20 leaked and migrated to Stevens Creek. While the causes of the spills are not clear, it appears that a  
21 pressurized line may have broken and a seal may have failed ([U.S. EPA, 2015n, Appendix B Line 307;  
22 Lustgarten, 2009](#)).

**5.5.1.2. Chemical Additive Storage**

23 Additives are typically stored on-site in the containers in which they were transported and  
24 delivered. The chemical additive trailer typically consists of a flatbed truck or van enclosure that  
25 holds a number of chemical totes, described below, and is equipped with metering pumps that feed  
26 chemicals to the blender. Depending on the size and type of the fracturing operation, there may be  
27 one or more chemical additive trailers per site ([ALL Consulting, 2012; NYSDEC, 2011](#)). Additives  
28 constitute a relatively small portion of fluids used in a hydraulic fracturing fluid, although they can  
29 still be used in volumes ranging from the tens to tens of thousands of gallons.

30 The storage totes generally remain on the transportation trailers, but they also may be unloaded  
31 from the trailers and transferred to alternative storage areas before use. Our investigation did not  
32 find much information on how often, when, or why these transfers occur. Additional transfers and

1 movement can increase the likelihood of a spill. See Text Box 5-6 for documented spills from an  
2 additive storage unit.

**Text Box 5-6. Spill from Additive (Crosslinker) Storage Tote.**

3 During a tote transfer in Pennsylvania, a tote of crosslinker fell off a forklift, spilling approximately 15–20 gal  
4 (60–80 L) onto the well pad. The area was scraped clean with a backhoe and placed in a lined containment  
5 area ([U.S. EPA, 2015n, Line 309](#)).

6 The most commonly used chemical totes are 200–400 gal (760–1,500 L) capacity polyethylene  
7 containers that may be reinforced with steel or aluminum mesh ([NYSDEC, 2011](#)). Metal containers  
8 of the same capacity may also be used ([ALL Consulting, 2012](#); [UWS, 2008](#)). The totes are typically  
9 equipped with bottom release ports, which enable the direct feed of the additives to the blending  
10 equipment ([NYSDEC, 2011](#)). Spills may occur if lines are improperly connected to these ports or if  
11 the connection equipment is faulty.



**Figure 5-7. Metal and high-density polyethylene (HDPE) chemical additive units.**

The image on the left depicts metal totes (industry source). The image on the right depicts plastic totes ([NYSDEC, 2011](#)).

12 Certain additives require specialized containment units with added spill prevention measures. For  
13 example, additives containing methanol may be subject to federal safety standards, and industry  
14 has developed guidance on methanol’s safe storage and handling ([Methanol Institute, 2013](#)).

15 Dry additives are typically transported and stored on flatbed trucks in 50 or 55 lb (23 or 25 kg)  
16 bags, which are set on pallets containing 40 bags each ([NYSDEC, 2011](#); [UWS, 2008](#); [Halliburton,  
17 1988](#)). Proppants are stored on-site in large tanks or bins with typical capacities of 220 to 440 lb  
18 (100 to 200 kg) ([ALL Consulting, 2012](#); [BJ Services Company, 2009](#); [Halliburton, 1988](#)).

### 5.5.1.3. Acid Storage

1 Acids are generally stored on-site in the containment units in which they are transported and  
2 delivered. A typical acid transport truck holds 3,000 to 5,000 gal (11,400 to 19,000 L) of acid and  
3 can have multiple compartments to hold different kinds of acid ([Arthur et al., 2009b](#)). Acids such as  
4 hydrochloric acid and formic acid are corrosive and can be extremely hazardous in concentrated  
5 form. Therefore, acid transport trailers and fracture tanks must be lined with chemical-resistant  
6 coating designed to prevent leakage and must meet applicable DOT regulatory standards (pursuant  
7 to 40 CFR 173) designed to prevent or minimize spills.

8 Acid fracture treatments may use thousands of gallons (thousands of liters) of acid per treatment  
9 ([Spellman, 2012](#)). Given the large volumes used, failure of containment vessels during storage or  
10 failure of connections and hoses during pumping could result in high-volume acid spills. Eight spills  
11 (out of 105 spills from state data sources) of acid or fracturing fluid containing acid were reported  
12 to state data sources examined by the EPA ([2015n](#)). The median volume of these acid spills was  
13 approximately 1,600 gal (6,000 L) (Lines 240, 241, 248, 258, 264, 272, 278, and 281 in Appendix B  
14 of [U.S. EPA \(2015n\)](#)).

15 Details of a documented acid spill are presented in Text Box 5-7.

#### **Text Box 5-7. Spill of Acid from Storage Container.**

16 In July 2014, over 20,000 gal (76,000 L) of hydrochloric acid spilled from a storage container when a flange  
17 malfunctioned. The acid spilled into a nearby alfalfa field, where it was contained with an emergency berm  
18 ([Phillips, 2014](#); [Wertz, 2014](#)). There is no information on how much leached into soils or if the spill reached  
19 drinking water resources.

### 5.5.1.4. Gel Storage

20 Gels can be added to hydraulic fracturing fluid using either batch or continuous (also called “on-the-  
21 fly”) mixing systems. Gelling agents and gel slurries are stored differently on-site and may pose  
22 different potential spill scenarios depending on whether the site is using batch or continuous  
23 mixing processes ([BJ Services Company, 2009](#)).

### 5.5.1.5. Batch Mixing

24 In a typical batch mixing process, powdered gelling agents and related additives (e.g., buffers,  
25 surfactants, biocides) are mixed on-site with base fluid water in large tanks (typically 20,000 gal or  
26 76,000 L) ([BJ Services Company, 2009](#); [Halliburton, 1988](#)).

27 The number of gel slurry tanks used varies based on site-specific conditions and the size of the  
28 fracture job. These tanks may be subject to leaks or overflow during the batch mixing process and  
29 during storage prior to injection. One of the disadvantages of batch mixing is the need for multiple  
30 suction hoses to draw pre-gelled fluids from storage tanks into the blender, which may increase the  
31 potential for spills. [Yeager and Bailey \(2013\)](#) state that a drawback of batch mixing is the “fluid  
32 spillage and location mess encountered when pre-mixing tanks,” suggesting that small spills are not

1 uncommon during batch mixing. Details of a documented gel slurry spill are presented in Text Box  
2 5-8.

**Text Box 5-8. Spill of Gel during Mixing.**

3 On April 9, 2010, a company was mixing a gel slurry for an upcoming fracture job. The tank had developed a  
4 crack, which allowed approximately 10,000 gal (38,000 L) of water mixed with 60 gal (230 L) of gel to leak  
5 out. The mixture did not reach a water receptor, and absorbents were used to clean up the gel ([U.S. EPA,](#)  
6 [2015n, Appendix B Line 220](#)).

**5.5.1.6. Continuous Mixing (On-the-Fly)**

7 In continuous mixing operations, powdered gels are typically replaced with liquid gel concentrates  
8 ([Allen, 2013](#); [BJ Services Company, 2009](#)). Operators prepare dilute gelling agents as needed using  
9 specialized hydration units ([BJ Services Company, 2009](#)). Liquid gel concentrates may be stored on-  
10 site in single-purpose tanker trucks ([Harms and Yeager, 1987](#)), but are more often stored in  
11 specialized mixing and hydration units ([Ayala et al., 2006](#)). Continuous mixing requires less  
12 preparation than batch mixing but typically requires more equipment ([BJ Services Company, 2009](#);  
13 [Browne and BD, 1999](#)), which may increase the possibility for spills resulting from equipment  
14 malfunctions or human error.

**5.5.2. Hoses and Lines**

15 High- and low-pressure hoses and lines are used to transfer hydraulic fracturing fluids from storage  
16 units to specialized mixing and pumping equipment and ultimately to the wellhead. A discussion of  
17 the different types of hoses and lines and possible points of failure is provided below. The following  
18 photograph shows an example of hoses and lines at a hydraulic fracturing site.





**Figure 5-8. A worker adjusts hoses at a hydraulic fracturing site near Mead, Colorado.**

Source: AP Photo/Brennan Linsley.

1 Suction pumps and hoses move large volumes of base fluid to the blender. Incomplete or damaged  
2 seals in inlet or outlet connections can cause fluid leaks at the connection points. Improperly fitted  
3 seals also severely limit or eliminate suction lift, which may impair the suction pump and increase  
4 spill potential. Suction hoses themselves are susceptible to leaks due to wear and tear. Equipment  
5 providers recommend hoses be closely inspected to ensure they are in good operating condition  
6 prior to use ([Upstream Pumping, 2015](#); [BJ Services Company, 2009](#); [Malone and Ely, 2007](#)).

7 Discharge hoses transfer additives from containment vessels or totes to the blender. Given the  
8 potential for concentrated chemicals to spill during transfer from storage totes to the blender, it is  
9 particularly important that these hoses are in good condition and that connector seals or washers  
10 fit properly and are undamaged. Discharge hoses are also used to carry fracturing fluid pumped  
11 from the blender via the low-pressure manifold to the high-pressure pumps. Proppant-heavy fluids  
12 are pumped through discharge hoses at relatively low rates. If a sufficient flow rate is not  
13 maintained, proppant may settle out, damaging pumps and creating potential for spills or leaks  
14 ([Upstream Pumping, 2015](#); [BJ Services Company, 2009](#); [Malone and Ely, 2007](#)).

15 High-pressure flow lines convey pressurized fluids from the high-pressure pumps into the high-  
16 pressure manifold, and from the manifold into the wellbore. High-pressure flow lines are subject to  
17 erosion caused by the high-velocity movement of abrasive, proppant-laden fluid. Curved sections of  
18 flow lines (e.g., swivel joints) where abrasive fluids are forced to turn corners are particularly  
19 subject to erosion and are more likely to develop stress cracks or other defects that may result in a  
20 leak or spill. Safety restraints are typically used to prevent movement of flow lines in the event of

1 failure and to help control spills. High-pressure flow lines are pressure-tested to detect fatigue or  
2 stress cracks prior to the fracturing treatment ([OSHA, 2015](#); [BJ Services Company, 2009](#); [Arthur et  
3 al., 2008](#); [Malone and Ely, 2007](#); [Halliburton, 1988](#)).

4 Nineteen spills of chemicals or fracturing fluids associated with leaks from hoses or lines had a total  
5 spill volume of 12,756 gal (48,300 L), with a median volume of 420 gal (1,600 L) ([U.S. EPA, 2015n](#)).

### 5.5.3. Blender

6 The blender is the central piece of equipment used to create the fracturing fluid for injection. It  
7 moves, meters, and mixes precise amounts of the base fluid, additives, and proppant and pumps the  
8 mixed slurry to high-pressure pumping equipment ([BJ Services Company, 2009](#); [Malone and Ely,  
9 2007](#); [Halliburton, 1988](#)). A typical blender consists of a centrifugal suction pump for pulling base  
10 fluid, one or more chemical metering pumps to apportion the additives, one or more proportioners  
11 to measure and feed proppant, and a central agitator tank where fluid components are mixed  
12 together.

13 The blending process is monitored to ensure that a uniform mixture is maintained regardless of  
14 injection rates and volumes. Excessive or reduced rates of flow during treatment can cause the  
15 blender to malfunction or to shut down, which may result in spills. ([Malone and Ely, 2007](#);  
16 [Halliburton, 1988](#)). For aqueous hydraulic fracturing fluid blends, spills that occur downstream of  
17 the blender will be a dilute mixture comprised primarily of water with a low concentration (less  
18 than or equal to 2%) of chemicals. Details of a spill from a blender are presented in Text Box 5-9.

#### **Text Box 5-9. Spill of Hydraulic Fracturing Fluid from Blender.**

19 In May 2006, a blender malfunctioned during a fracture job in Oklahoma. Approximately 294 gal (1,100 L) of  
20 fluid spilled into a nearby wheat field. The fluid consisted of hydrochloric acid, clay stabilizer, diesel, and  
21 friction reducer. Contaminated soil was removed by the operator ([U.S. EPA, 2015n, Appendix B Line 249](#)).

### 5.5.4. Manifold

22 A trailer-mounted manifold and pump system functions as a central transfer station for all fluids  
23 used to fracture the well. The manifold is a collection of low- and high-pressure pipes equipped  
24 with multiple fittings for connector hoses. Fluids are pumped from the blender through the low-  
25 pressure manifold hoses, which distribute it to high-pressure pump trucks. Pressurized slurry is  
26 sent from the pump trucks through high-pressure manifold lines and into additional high pressure  
27 lines that lead to the wellhead ([Malone and Ely, 2007](#)).





**Figure 5-9. Manifold (pointed to by the white arrow).**

Source: Halliburton.

1 Manifold and pump system components require varying amounts of manual assembly and undergo  
2 varying amounts of pre-testing ([Malone and Ely, 2007](#)). Improperly tested parts may be more likely  
3 to break or lose functionality, leading to a spill. In manifolds requiring more manual assembly, there  
4 may be more opportunities for human error. The EPA ([U.S. EPA, 2015n](#)) identified seven spills  
5 sourced from manifolds. Three of these spills, out of the 105 chemical or hydraulic fracturing fluid  
6 spills reported to state data sources, were fracturing fluid that resulted from either human error of  
7 equipment failure. These three spills were responsible for approximately 5,000 gal (19,000 L) of  
8 spilled fluids ([U.S. EPA, 2015n, Appendix B Lines 35, 141, 160](#)).

#### **5.5.5. High-Pressure Fracturing Pumps**

9 High-pressure fracturing pumps take the fracturing fluid mixture from the blender, pressurize it,  
10 and propel it down the well. Typically, multiple high-pressure, high-volume fracturing pumps are  
11 needed for hydraulic fracturing ([Upstream Pumping, 2015](#)). Such pumps come in a variety of sizes.  
12 Bigger pumps move greater volumes of fluid at higher pressures; therefore, spills from these pumps  
13 may be larger. Smaller pumps may require more operators and more maintenance ([BJ Services  
14 Company, 2009](#)), and therefore may result in more frequent spills.



**Figure 5-10. High-pressure pumps on either side of the manifold.**

Source: [http://drillingahead.com/roger-payne/gallery/14826/20000-psi-frac-near-caldwelltexas-2005#gallery\\_img](http://drillingahead.com/roger-payne/gallery/14826/20000-psi-frac-near-caldwelltexas-2005#gallery_img).

- 1 The “fluid ends” of hydraulic fracturing pumps are the pump components through which fluids are  
2 moved and pressurized. Pump fluid ends must withstand enormous pressure and move a large  
3 volume of abrasive fluid high in solids content. They have multiple parts (e.g., seals, valves, seats  
4 and plungers, stay rods, studs) that can wear out under the stress of high-pressure  
5 pumping ([Upstream Pumping, 2015](#)). Given the sustained pressures involved, careful maintenance  
6 of fluid ends is necessary to prevent equipment failure ([Upstream Pumping, 2015](#); [API, 2011](#)).  
7 Details of a documented spill from a fracture pump are presented in Text Box 5-10.

**Text Box 5-10. Spill of Fluid from Fracture Pump.**

- 8 In December 2011, a fluid end on a fracture pump developed a leak, spilling approximately 840 gal (3,200 L)  
9 of fracturing fluid. A vacuum truck was used to recover the spilled fluid, and all affected soils were scheduled  
10 to be neutralized and taken to a landfill at the end of the job, after removal of the equipment ([U.S. EPA, 2015n](#),  
11 [Appendix B Line 14](#)).



### 5.5.6. Surface Wellhead for Fracture Stimulation

1 A wellhead assembly, often referred to as a frac head or frac stack, is temporarily installed on the  
2 wellhead during the fracture treatment. The frac head assembly allows high volumes of high-  
3 pressure proppant-laden fluid to be injected into the formation ([OSHA, 2015](#); [Halliburton, 2014](#);  
4 [Stinger Wellhead Protection, 2010](#)). The temporary frac head is equipped with specialized isolation  
5 tools so that the wellhead is protected from the effects of pressure and abrasion.

---



**Figure 5-11. Multiple fracture heads.**

Source: DOE/NETL.

6 As with all components of hydraulic fracturing operations, repeated and prolonged stress from  
7 highly pressurized, abrasive fluids may lead to equipment damage. The presence of minute holes or  
8 cracks in the frac head may result in leaks when pressurized fluids are pumped. In addition, surface  
9 blowouts or uncontrolled fluid releases may occur at the frac head because of valve failure or  
10 failure of other components of the assembly. Details of a documented frac head failure are  
11 presented in Text Box 5-11. Details on the Killdeer, ND, blowout and associated spill are presented  
12 in Text Box 5-12.

**Text Box 5-11. Spill from Frac Head Failure.**

1 On March 2, 2011, a frac head failed during fracturing operations in Colorado. Approximately 8,400 gal  
2 (32,000 L) of slickwater fracturing fluid leaked. The majority of the spill was contained on-site, though a small  
3 amount ran off into a nearby cornrow. Some of the fluid was recovered, and saturated soils were scraped and  
4 stockpiled on the well pad ([U.S. EPA, 2015n, Appendix B Line 75](#)).

**Text Box 5-12. The Killdeer Case Study.**

5 In September 2010, a blowout occurred in the Franchuk 44-20 SWH well, in Dunn County near Killdeer, ND.  
6 Hydraulic fracturing fluids, oil, and flowback water spilled onto the land and possibly entered the Killdeer  
7 aquifer, which is a source of drinking water. The EPA investigated a reported blowout event at the Killdeer  
8 site as part of a retrospective case study. The study area is comprised of historical oil and gas production and  
9 current hydraulic fracturing. The discussion below was taken from the EPA Killdeer case study ([U.S. EPA,  
10 2015j](#)).

11 **Methods**

12 Water quality samples were collected from three domestic wells, nine monitoring wells (installed by  
13 Terracon), two supply wells, one municipal well, and one state well during three rounds in July 2011, October  
14 2011, and October 2012. The geochemistry of water samples was investigated by analyzing major ions, trace  
15 metals, methane/ethane gas concentrations, volatile organic compounds, semivolatile organic compounds,  
16 glycol ethers, diesel- and gasoline-range organics, low-molecular-weight acids, and selected stable isotopes.  
17 Data collected from this study were statistically compared with historical water quality data retrieved from  
18 the literature and national water quality databases. To help determine whether hydraulic fracturing  
19 processes were a cause of alleged impacts on water quality, detailed environmental record searches were  
20 conducted to help identify other potential contaminant sources.

21 **Results**

22 Three study wells, NDGW09, NDGW08, and NDGW07, were excluded from the comparisons with historical  
23 data. NDGW09 was excluded since it was screened in the Sentinel Butte aquifer so a comparison with  
24 historical Killdeer aquifer water quality data was not appropriate. NDGW08 and NDGW07 had significant  
25 differences in water quality compared to the remaining study wells. These two wells showed differences in  
26 ion concentrations (e.g., chloride, calcium, magnesium, sodium, strontium) as well as tert-butyl alcohol (TBA).  
27 The remaining study wells were then compared with historical data to determine if these wells represented  
28 background water quality of the Killdeer aquifer. This comparison between the remaining study wells and  
29 Killdeer aquifer historical water quality data indicated that these remaining study wells were in general  
30 consistent with the historical background data and then used for the data analysis as background wells. There  
31 were limited detections of other organic compounds in the study wells. In most cases, with the exception  
32 of TBA, the detected organic compounds could not be directly linked to the blowout or hydraulic fracturing,  
33 as these chemicals could have originated from other sources including vehicular traffic, generators used to  
34 power well pumps, flaring of methane from the pad production wells, and cement used to repair a well the  
35 day prior to sampling.

1 Comparisons of TBA between the study data and historical data could not be made since no historical data for  
2 TBA were found for the Killdeer aquifer. TBA data were compared with the background study wells and were  
3 found to be different. Based on the analysis of other potential sources of contamination, the EPA determined  
4 that the only other potential sources of TBA were gasoline spills, leaky underground storage tanks, and  
5 hydraulic fracturing fluids. The data from this study suggest the TBA resulted from the degradation of tert-  
6 butyl hydroperoxide used during the hydraulic fracturing of the Franchuk well since MTBE and other  
7 signature compounds associated with gasoline or fuels were not present in NDGW08 and NDGW07.

## 8 **Conclusion**

9 The analysis of data from NDGW008 and NDGW07 indicated that the main impact on water quality was from  
10 briny water and TBA mixing with Killdeer aquifer water in these wells. In all cases, the fingerprinting  
11 techniques used indicated that the impacts on NDGW07 and NDGW08 were consistent with deep formation  
12 brines underlying the Killdeer study location. Based on the data analysis performed for the Killdeer case  
13 study, the observed impacts on NDGW07 and NDGW08 were likely caused by the blowout that occurred at  
14 the Franchuk 44-20. This evidence, along with the absence of another plausible candidate cause, strongly  
15 suggests impact on a drinking water resource from the blowout during the hydraulic fracturing of the  
16 Franchuk 44-20 SWH well.

## 5.6. Spill Prevention, Containment, and Mitigation

17 Several factors influence spill prevention, containment, and mitigation, including Federal, State, and  
18 local regulations and company practices. State regulations governing spill prevention, containment,  
19 and mitigation at hydraulic fracturing facilities vary in scope and stringency ([Powell, 2013](#); [GWPC,  
20 2009](#)). Employee training and equipment maintenance are also factors in effective spill prevention,  
21 containment, and mitigation. Analysis of these factors was outside the scope of this assessment.

22 Hydraulic fracturing operating companies themselves may develop and implement spill prevention  
23 and containment procedures. The American Petroleum Institute has a guidance document *Practices  
24 for Mitigating Surface Impacts Associated with Hydraulic Fracturing* ([API, 2011](#)). The document  
25 describes practices currently used in the oil and natural gas industry to minimize potential surface  
26 environmental impacts. As another example, the province of New Brunswick, Canada, released  
27 rules for industry on responsible environmental management of oil and natural gas activities ([GNB,  
28 2013](#)). It was beyond the scope of this assessment to evaluate the efficacy of the practices in these  
29 documents or the extent to which they are implemented.

30 Spill containment systems include primary, secondary, and emergency containment systems.  
31 Primary containment systems are the storage units, such as tanks or totes, in which fluids are  
32 intentionally kept. Secondary containment systems, such as liners and berms installed during site  
33 set-up, are intended to contain spilled fluids until they can be cleaned up. Emergency containment  
34 systems, such as berms, dikes, and booms, can be implemented temporarily in response to a spill.

35 The EPA investigated spill containment and mitigation measures in an analysis of spills related to  
36 hydraulic fracturing activities ([U.S. EPA, 2015n](#)). Of the approximately 25% of reports that included  
37 information on containment, the most common types of containment systems referenced in the  
38 hydraulic fracturing-related spill records included berms, booms, dikes, liners, and pits, though

1 many of the spill reports did not indicate specific containment measures. Some spills were reported  
2 to breach the secondary containment systems. Breaches of berms and dikes were most commonly  
3 reported.

4 In cases where secondary containment systems were not present or were inadequate, operators  
5 sometimes built emergency containment systems. The most common were berms, dikes, and  
6 booms, but there were also instances where ditches, pits, or absorbent materials were used to  
7 contain the spilled fluid. Absorbent materials were generally used when small volumes (10–200 gal  
8 or 40–800 L) of additives or chemicals were spilled ([U.S. EPA, 2015n](#)). There was not enough  
9 information to detail the regularity of emergency containment systems or their effectiveness.

10 Remediation is the action taken to clean up a spill and its affected environmental media. The most  
11 commonly reported remediation activity, mentioned in approximately half of the hydraulic  
12 fracturing-related spill records evaluated by the EPA, was removal of spilled fluid and/or affected  
13 media, typically soil ([U.S. EPA, 2015n](#)). Other remediation methods reported by the EPA ([U.S. EPA,](#)  
14 [2015n](#)) included the use of absorbent material, vacuum trucks, flushing the affected area with  
15 water, and neutralizing the spilled material.

## 5.7. Overview of Chemical Spills Data

16 Spills of hydraulic fracturing fluids have occurred across the country and have affected the quality  
17 of drinking water resources ([U.S. EPA, 2015n](#); [Brantley et al., 2014](#); [COGCC, 2014](#); [Gradient, 2013](#)).  
18 Spills may infiltrate drinking water resources by reaching surface water, or by leaching into the  
19 ground water. Potential impacts depend upon a variety of factors including the chemical spilled,  
20 environmental conditions, and actions taken in response to the spill. However, due to a lack of  
21 available data, little is known about the prevalence and severity of actual drinking water impacts.

### 5.7.1. EPA Analysis of Spills Associated with Hydraulic Fracturing

22 The EPA ([2015n](#)) (see Text Box 5-13 for additional information) evaluated 457 spills related to  
23 hydraulic fracturing activities on or near the well pad. Of these spills, 151 spills were of chemicals,  
24 additives, or fracturing fluids. Information in the spill reports included: spill causes (e.g., human  
25 error, equipment failure), sources (e.g., storage tank, hose or line), volumes, and environmental  
26 receptors.

#### **Text Box 5-13. EPA Review of State and Industry Spill Data: Characterization of Hydraulic Fracturing-Related Spills.**

27 The EPA ([2015n](#)) used data gathered from select state and industry sources to characterize hydraulic  
28 fracturing-related spills with respect to volumes spilled, materials spilled, sources, causes, environmental  
29 receptors, containment, and responses. For the purposes of the study, hydraulic fracturing-related spills were  
30 defined as those occurring on or near the well pad before or during the injection of hydraulic fracturing fluids  
31 or during the post-injection recovery of fluids. Because the main focus of this study is to identify hydraulic  
32 fracturing-related spills on the well pad that may reach surface or ground water resources, the following  
33 topics were not included in the scope of this project: transportation-related spills, drilling mud spills, and  
34 spills associated with disposal through underground injection control wells.




1 Data on spills that occurred between January 2006 and April 2012 were obtained from nine states with  
2 online spill databases or other data sources, nine hydraulic fracturing service companies, and nine oil and gas  
3 production well operators. The data sources used in this study contained over 36,000 spills. The EPA  
4 searched each spill report for keywords related to hydraulic fracturing (e.g., frac, glycol, flowback). Spill  
5 records from approximately 12,000 spills (33 percent of the total number of spills reviewed) contained  
6 insufficient information to determine whether the event was related to hydraulic fracturing. Of the spills with  
7 sufficient information, the EPA identified approximately 24,000 spills (66%) as not related to hydraulic  
8 fracturing on or near the well pad. The remaining 457 spills (approximately 1%) occurred on or near the well  
9 pad and were definitively related to hydraulic fracturing. These 457 spills occurred in 11 different states over  
10 six years (January 2006 and April 2012).

11 The EPA categorized spills according to the following causes: equipment failure, human error,  
12 failure of container integrity, other (e.g., well communication, weather, vandalism), and unknown.  
13 Figure 5-12 presents the percent distribution of chemical or fracturing fluid spills associated with  
14 each cause. Over half of the spills were collectively caused by equipment failure (34%) and human  
15 error (25%). Approximately one-quarter of the spill causes were unknown or not reported. A  
16 report analyzing spills in Colorado is generally consistent with the EPA's findings ([COGCC, 2014](#)).<sup>1</sup>  
17 Colorado found that equipment failure was the dominant spill cause, accounting for over 60% of  
18 spills between 2010 and 2013, followed by human error accounting for 20%–25% of spills.

---


<sup>1</sup> The COGCC report included all materials related to oil and gas production and were therefore not specific to chemical and fracturing fluid spills.

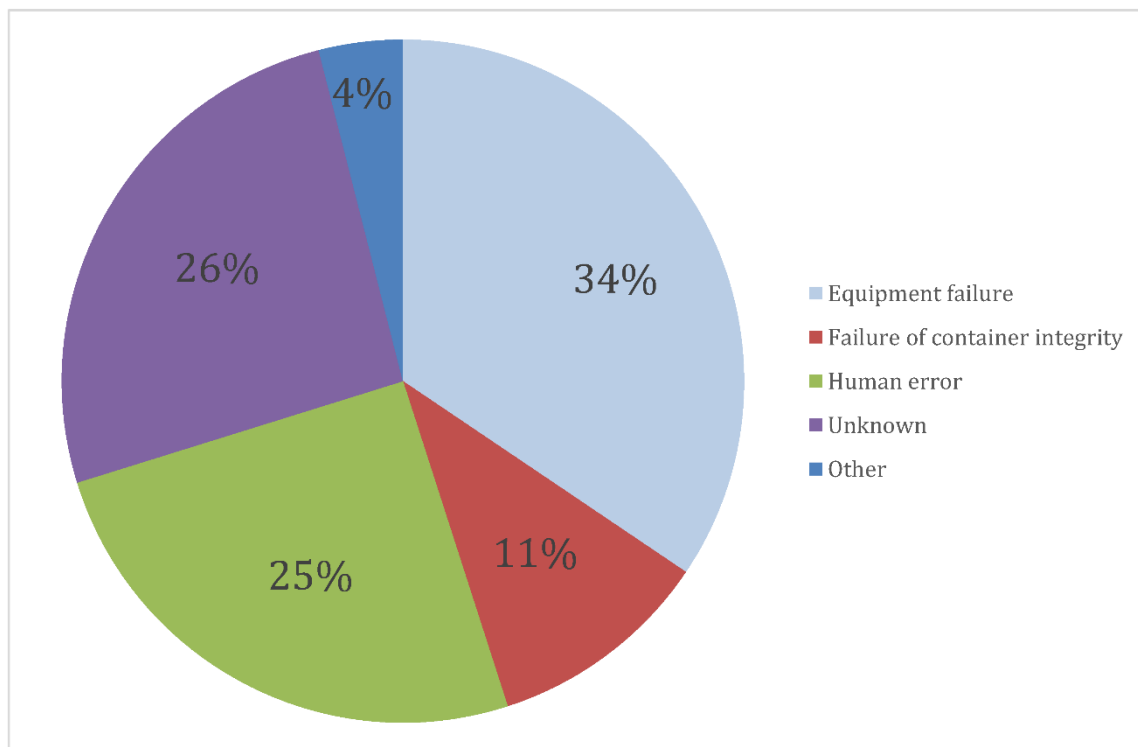

**Figure 5-12. Distribution of the causes of 151 hydraulic fracturing-related spills of chemicals and fracturing fluid.**

Data from [U.S. EPA \(2015n\)](#).


- 1 Spills in the EPA Spills Report were also categorized by the following sources: storage, equipment,
- 2 well or wellhead, hose or line, and unknown. Figure 5-13 presents the percent distribution for the
- 3 chemical or fracturing fluid spills associated with each source. Storage units (e.g., chemical totes,
- 4 fracturing fluid tanks) were the predominant source of spills, accounting for 36% (54 spills) of spill
- 5 sources. Spills from storage units were predominantly caused by human error (39%), followed by
- 6 failure of container integrity (30%). Spills from equipment were the next most common known
- 7 source (18%), followed by spills from hoses or lines (13%). Twenty-eight percent of spills had an
- 8 unknown source.

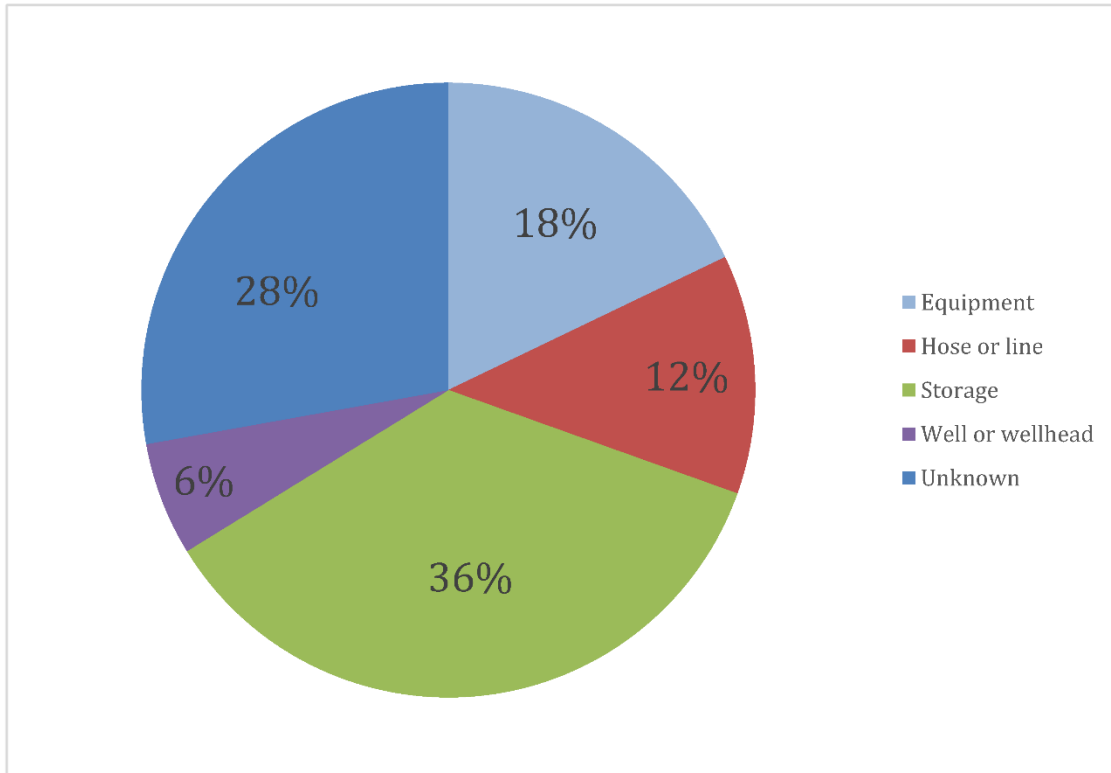

**Figure 5-13. Percent distribution of sources of 151 hydraulic fracturing-related spills of chemicals or fracturing fluid.**

Data from [U.S. EPA \(2015n\)](#).


1 The reported total volume of 125 of 151 chemical or hydraulic fracturing fluid spills was  
2 approximately 184,000 gal (697,000 L). The volume was unknown for 26 of these spills. The spills  
3 ranged in volume from 5 to more than 19,000 gal (19 to 72,000 L), with a median volume of 420 gal  
4 (1,600 L). The largest source of spills was storage containers, which released approximately 83,000  
5 gal (314,000 L) of spilled fluid. Spills from wells or wellheads are often associated with high spill  
6 volumes. Nine instances of spills at the well or wellhead were associated with approximately  
7 46,000 gal (174,000 L) of spilled fluid (see Figure 5-14). The high pressure associated with frac  
8 head blowouts has led to large, high-volume spills (see Text Box 5-11).

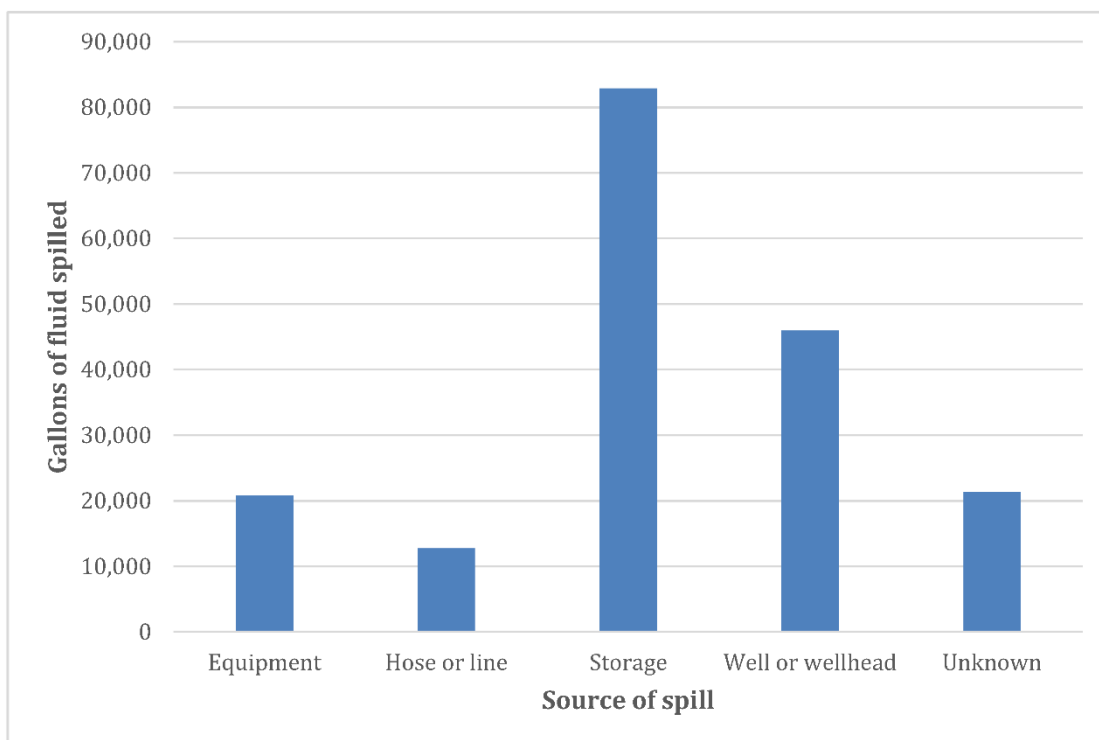

**Figure 5-14. Total volume of fluids spilled for 151 hydraulic fracturing-related spills of chemicals and fracturing fluid, by spill source.**

Data from [U.S. EPA \(2015n\)](#).

1 Figure 5-15 presents the number of chemical or fracturing fluid spills that reached environmental  
 2 receptors, by receptor type. Environmental receptors (i.e., surface water, ground water, soil) were  
 3 identified for 101 of the 151 spills, or 67% of the spills in the EPA’s analysis ([U.S. EPA, 2015n](#)). Soil  
 4 was by far the dominant environmental receptor, with 97 spills reaching soil. Thirteen spill reports  
 5 indicated that the spilled fluid had reached surface water. Nine spill reports identified both soil and  
 6 surface water as a receptor. No spill report identified ground water as a receptor. The data contain  
 7 few post-spill analyses, so ground water contamination may have occurred but have not been  
 8 identified. Additionally, several years may be required for a spilled fluid to leach into the ground  
 9 water and therefore impact on a ground water receptor may not be immediately apparent. Storage  
 10 units were the predominant sources of spills reaching an environmental receptor.

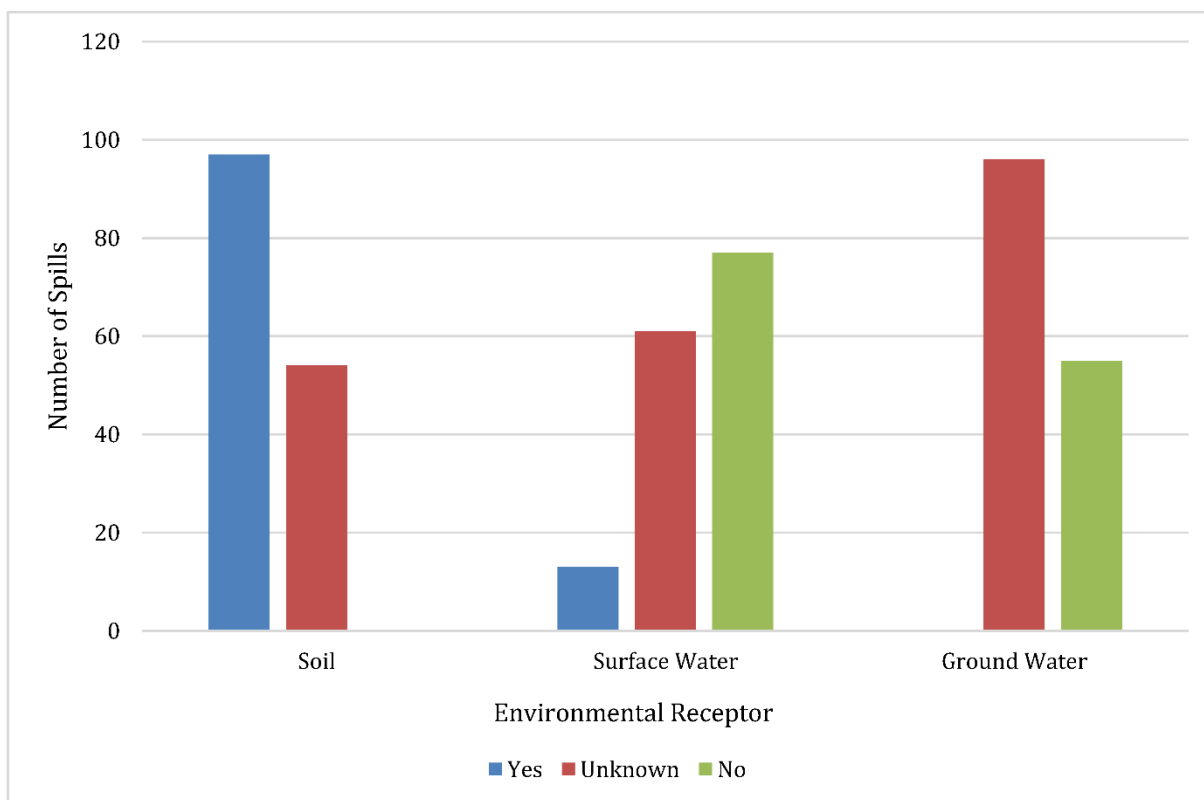

**Figure 5-15. Number of hydraulic fracturing-related spills of chemicals or fracturing fluid that reported whether an environmental receptor was reached.**

“Unknown” refers to hydraulic fracturing related spill events for which environmental receptors were specified as unknown or not identified (positively or negatively).

Data from [U.S. EPA \(2015n\)](#).

1 Six spills from storage containers reached a surface water receptor. Thirty-eight of the spills from  
 2 storage units reached a soil receptor. If a spill was confined to a lined well pad, for example, it might  
 3 not have reached the soil, but most incident reports did not include whether the well pad was lined  
 4 or unlined. Regarding spills of hydraulic fluids and chemicals from storage containers, 16 spills  
 5 were due to failure of container integrity, which includes holes and cracks in containers, and  
 6 overflowing containers as a result of human error or equipment malfunctions.

7 The EPA analysis demonstrates that spills of chemicals, additives, and fracturing fluids do occur at  
 8 well sites and reach both soil and surface water receptors.

### 5.7.2. Other Spill Reports

9 Surface spills related to hydraulic fracturing activities are not well documented in the scientific  
 10 literature, though some evidence of spills and impacts to environmental media exists (e.g., [U.S. EPA](#),

1 [2015j](#); [Brantley et al., 2014](#); [Gross et al., 2013](#); [Papoulias and Velasco, 2013](#)). For example,  
2 [Papoulias and Velasco \(2013\)](#) demonstrated that fracturing fluid spilled into surface water likely  
3 contributed to the distress and deaths of the threatened blackside dace fish in Kentucky. A variety  
4 of chemicals entered the creek and significantly reduced the stream's pH and increased stream  
5 conductivity. Using data from post-spill sampling reports in Colorado, [Gross et al. \(2013\)](#) identified  
6 concentrations of benzene, toluene, ethylbenzene, and xylene in ground water samples, which the  
7 authors attributed to numerous hydraulic fracturing-related spills. The [COGCC \(2014\)](#) published a  
8 report analyzing all spills reported to the state of Colorado between 2010 and 2013, and found that  
9 approximately 8% of them were related to hydraulic fracturing. Based on the EPA's analyses ([U.S.  
10 EPA, 2015n](#)) and available scientific data, we estimate spill rates of chemicals and hydraulic  
11 fracturing fluid range from 0.4 and 12.2 spills for every 100 wells. (See Text Box 5-14 for additional  
12 information.)

#### **Text Box 5-14. Spill Rates.**

13 Several studies have estimated the frequency of hydraulic fracturing-related spills. Three studies ([Rahm et al.,  
14 2015](#); [Brantley et al., 2014](#); [Gradient, 2013](#)) calculated a spill rate for the Marcellus Shale in Pennsylvania  
15 using reports from the Pennsylvania Department of Environmental Protection (PA DEP) Oil and Gas  
16 Compliance Report Database, and here we estimate an on-site spill rate for Colorado. The PA DEP database  
17 provides a searchable format based on Notices of Violations from routine inspections or investigations of spill  
18 reports or complaints. Each study had different criteria for inclusion, presented in Table 5-6, resulting in a  
19 range of rates even when using the same data source. Spills of hydraulic fracturing fluids, flowback/produced  
20 water are estimated to occur at a rate of 0.4 per 100 wells fractured. Spills related to hydraulic fracturing  
21 activity are estimated to occur at a rate between 3.3 to 12.2 spills per 100 wells installed (PA DEP data) (see  
22 Table 5-6).

23 In its study of spills related to hydraulic fracturing, the EPA determined that spill reports from the Colorado  
24 Oil and Gas Conservation Commission (COGCC) Information System were the most detailed spill reports from  
25 among the nine state data sources investigated and generally provided more of the information needed to  
26 determine whether a spill was related to hydraulic fracturing ([U.S. EPA, 2015n](#)). Here, we estimate the spill  
27 rate in Colorado by dividing the number of hydraulic fracturing-related spills identified by the EPA ([U.S. EPA,  
28 2015n, Appendix B](#)) (Appendix B in U.S. EPA, 2015b) by the number of wells hydraulically fractured in  
29 Colorado for specific time periods between January 2006 and April 2012. We used three data sources to  
30 estimate the number of wells: (1) there were 172 reported spills in Colorado for the 15,000 wells fractured  
31 from January 2006 to April 2012 ([DrillingInfo, 2012](#)), (2) there were 50 reported spills in Colorado for the  
32 3,559 wells fractured from January 2011 to April 2012 ([U.S. EPA, 2015b](#)), and (3) there were 41 reported  
33 spills in Colorado for the 3,000 wells fractured from September 2009 to October 2010 ([U.S. EPA, 2013a](#)).  
34 From these data we estimate an average of 1.3 reported spills on or near the well pad for every 100  
35 hydraulically fractured wells.

36



**Table 5-6. Estimations of spill rates.**

Spill rates from four different sources. Each source used different criteria to identify and include spills in their analysis.

Spill rate <sup>a</sup>	Data source	Time period	Inclusion criteria	Information source
0.4	PA DEP <sup>b</sup> Media	2008–2013	Volume spilled > 400 gal; Spill reported to reach water body.	<a href="#">Brantley et al. (2014)</a> <sup>d</sup>
3.3	PA DEP <sup>b</sup>	2009-2012	“Unconventional” well; Spills with unknown volumes not included, Includes any spill during HF activities	<a href="#">Gradient (2013)</a> <sup>e</sup>
12.2	PA DEP <sup>b</sup>	2007-July 2013	“Unconventional” well based on environmental violation rates.	<a href="#">Rahm et al. (2015)</a> <sup>e</sup>
1.3	COGCC <sup>c</sup>	Jan 2006 – May 2012	Specifically related to hydraulic fracturing on or near well pad	<a href="#">U.S. EPA (2013a)</a> <sup>d</sup>

<sup>a</sup>Spill rate is the number of reported spills per 100 wells.

<sup>b</sup>PA DEP ([http://www.depreportingservices.state.pa.us/ReportServer/Pages/ReportViewer.aspx?/Oil\\_Gas/OG\\_Compliance](http://www.depreportingservices.state.pa.us/ReportServer/Pages/ReportViewer.aspx?/Oil_Gas/OG_Compliance))

<sup>c</sup>COGCC (<https://cogcc.state.co.us/cogis/IncidentSearch.asp>)

<sup>d</sup>Spill rate is calculated as the number of spills per 100 wells fractured.

<sup>e</sup>Spill rate is calculated as the number of spills per 100 wells installed.

**Text Box 5-14 (Spill Rates), continued:**

1 The spill rates presented in Table 5-6 are based on spill reports found in two state data sources and are  
2 limited by both the spills reported in the state data sources and the inclusion criteria defined by each of the  
3 studies. Spills identified from state data sources are likely a subset of the total number of spills that occurred  
4 within a state for a specified time period. Some spills may not be recorded in state data sources because they  
5 do not meet the spill reporting requirements in place at the time of the spill. Additionally, the PA DEP Notices  
6 of Violation may include spills not specifically related to hydraulic fracturing, such as spills of drilling fluids.

7 The inclusion criteria used by each of the studies affects which spills are used to calculate a spill rate. More  
8 restrictive criteria, such as only counting spills that were greater than 400 gallons, results in a lower number  
9 of spills being used for estimating spill rates, while less restrictive criteria, such as all spills from wells  
10 marked unconventional in the PA DEP database, results in a greater number of spills being used for  
11 estimating spill rates. Rahm et al. applied the least restrictive criteria of the four studies (i.e., spills from  
12 unconventional wells) when identifying spills, while Brantley et al. applied more restrictive criteria (i.e., spills  
13 of >400 gallons in which spilled fluids reached a surface water body). This may account for the different spill  
14 rates calculated by these two studies.


15 Based on previous studies and the analysis here, hydraulic fracturing-related spills rates in Pennsylvania and  
16 Colorado range from 0.4 and 12.2 per 100 wells. These numbers may not be representative of national spill  
17 rates or rates in other regions. If this range is applied nationally however, assuming between 25,000 and  
18 30,000 wells are fractured each year, we would expect between approximately 100 and 3,700 spills annually  
19 from hydraulic fracturing.

## 5.8. Fate and Transport of Chemicals

20 This section provides an overview of fate and transport of the range of chemicals used in hydraulic  
21 fracturing fluid, including the physicochemical properties of these chemicals, and an overview of  
22 the potential for a spilled chemical to affect drinking water resources. A general overview of the  
23 processes governing the fate and transport of a chemical spill is shown in Figure 5-16. A chemical  
24 spill has the potential to migrate to and have an impact on drinking water resources. Once spilled,  
25 there are different paths that chemicals can travel and different processes they may undergo.

26 Chemicals may react and transform into other chemicals, volatilize, travel to surface water, leach  
27 into and partition to soils, and/or reach ground water. The potential path and the severity of the  
28 impact of a spill depend on different factors, including the site conditions; environmental  
29 conditions; climate; weather; and chemical properties, concentration, and volume of the release.

30 The point in the chemical mixing process where the spill occurs affects potential impact. If the spill  
31 occurs before chemicals are mixed into the base fluid, the chemicals will spill in their most  
32 concentrated form. If the hydraulic fracturing fluid spills, then the chemicals will be more diluted,  
33 and there may be effects on persistence and mobility due to interactions among chemicals present.

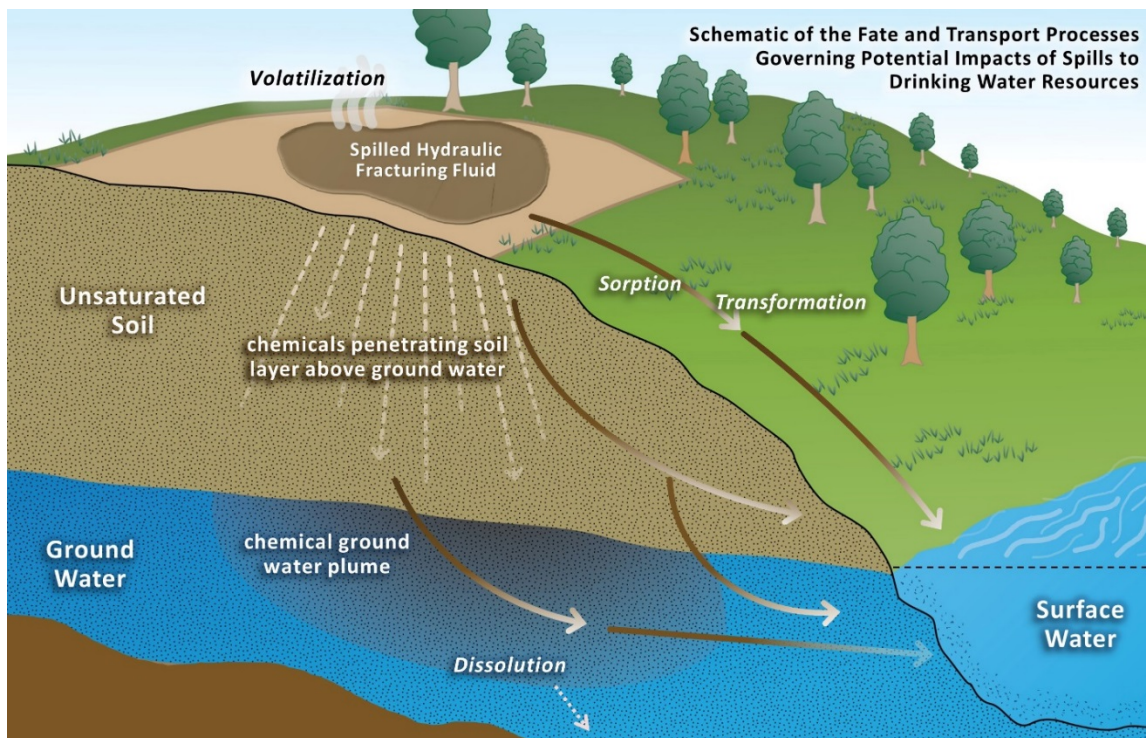

**Figure 5-16. Fate and transport schematic for a spilled hydraulic fracturing fluid.**

Schematic shows the potential paths and governing processes that spilled chemicals, which may lead to potential impacts to drinking water resources.

- 1 For inorganic chemicals, the properties and processes governing fate and transport depend on pH,  
 2 oxidation state, presence of iron oxides, soil organic matter, cation exchange capacity, and major ion  
 3 chemistry ([U.S. EPA, 1996](#)).<sup>1</sup> Transport of these chemicals into ground water depends on the nature  
 4 of ground water flow and flow through the unsaturated zone above the water table. Potential  
 5 transformations of inorganic chemicals differ from those of organic chemicals.<sup>2</sup> Some inorganic  
 6 anions (i.e., nitrate, chloride, and bromide) move with their carrier liquid and are affected mostly by  
 7 physical transport mechanisms. For many inorganic chemicals, transport is driven by the physical  
 8 flow processes (advection and dispersion), sorption, and precipitation. The relative role of each of  
 9 these depends on both chemical and environmental characteristics.<sup>3,4</sup>
- 10 Determining the fate and transport of organic chemicals and mixtures is a complex problem,  
 11 because of the many processes and different environmental media (air, soil, water) that can have an

<sup>1</sup> Cation exchange capacity is the total amount of cations (positively charged ions) that a soil can hold. For example, when metal ions like  $\text{Ca}^{2+}$  and  $\text{Na}^+$  pass through the soil, they adhere and remain attached to the soil.

<sup>2</sup> The unsaturated zone is also referred to as the vadose zone. Meaning “dry,” the vadose zone is the soil zone above the water table that is only partially filled by water, hence “unsaturated zone.”

<sup>3</sup> Advection is a mechanism for moving chemicals in flowing water, where a chemical moves along with the flow of the water itself.

<sup>4</sup> Sorption is the general term used to describe the partitioning of a chemical between soil and water and depends on the nature of the solids and the properties of the chemical.

1 impact. Unlike inorganic chemicals, organic chemicals degrade, which may affect their movement  
2 and potential impact. [Schwarzenbach et al. \(2002\)](#) formalized a general framework for organic  
3 chemical transport, where transport and transformation depend on both the nature of the chemical  
4 and the properties of the environment. The fate and transport of organic compounds in soils has  
5 been presented in the literature (e.g., [Bouchard et al., 2011](#); [Rivett et al., 2011](#); [Abriola and Pinder,](#)  
6 [1985a, b](#)) and in textbooks (e.g., [Domenico and Schwartz, 1997](#); [Schnoor, 1996](#); [Freeze and Cherry,](#)  
7 [1979](#)).

### 5.8.1. Potential Paths

8 Chemicals, additives, and hydraulic fracturing fluids that are released into the environment travel  
9 along different potential paths, as detailed in Figure 5-16. Liquids may flow overland to nearby  
10 surface water or infiltrate the subsurface, where they may eventually reach the underlying ground  
11 water or travel laterally to reach surface water. Movement can occur quickly or be delayed and  
12 have a later or longer-term impact. Surface water and ground water gain or lose flow to each other,  
13 and may transport chemicals in the process.

14 A dry chemical (e.g., gelling agents, biocides, friction reducers) released to the environment will  
15 generally remain where it is spilled. Any spill that is not removed could act as a long-term source of  
16 contamination. Wind could cause the chemical to disperse, or rain could dissolve a soluble chemical.  
17 Dissolved chemicals may infiltrate into soil or flow overland. Insoluble chemicals and those sorbed  
18 to soil particles could be mobilized by rain events via runoff and erosion.

#### 5.8.1.1. Movement across the Land Surface

19 In low permeability soils, there may be little infiltration and greater overland flow. Higher  
20 permeability soils will allow fluid to penetrate into the soil layer. In either case, some of the  
21 chemicals in the fluid may sorb to the soil particles and the vegetation, and then these chemicals  
22 may be mobilized during rainfall, runoff, or erosion. As rainwater percolates through the soil, it may  
23 dissolve stored chemicals, which can then migrate toward ground water.

24 The type of release is also important. If the spill is a slow leak, then the liquid may pond and the  
25 affected area will expand slowly. If a more rapid release occurs, like a blowout or tank failure, then  
26 momentum may result in greater overland movement and less soil infiltration during the event.

#### 5.8.1.2. Movement through the Subsurface

27 The unsaturated and saturated zones are the two zones of soils below the ground surface.  
28 Movement through the unsaturated zone is driven by the depth of ponding of the spilled fluid,  
29 gravity, and capillary properties of the subsurface.<sup>1</sup> In fractured rock or highly permeable soils,  
30 fluids may move quickly through the subsurface. In low permeability soil, the movement of the fluid  
31 is slower. As chemicals pass through the subsurface, some may sorb to soil or remain in the open  
32 spaces between soil particles, effectively slowing their movement. Chemicals may again be

---

<sup>1</sup> Capillarity occurs because of the forces of attraction of water molecules to themselves (cohesion) and to other solid substances such as soils (adhesion).

1 mobilized during future precipitation events, resulting in infiltration towards ground water or  
2 movement through the unsaturated zone towards surface water.

3 Fluids that move through the subsurface into the saturated zone will move in the direction of the  
4 flowing ground water. Generally, fluids travel further in systems with high ground water flow rates  
5 and high recharge (e.g., sandy aquifers in humid climates) than in systems with low flow and low  
6 recharge. Chemicals may sorb to suspended soil particles or complex with naturally occurring  
7 chemicals (e.g., dissolved organic carbon) and be transported with the flowing water.<sup>1</sup> These  
8 mechanisms can mobilize sparingly soluble chemicals that would otherwise be immobile.

### 5.8.2. Physicochemical Properties

9 Three physicochemical properties are useful to describe the movement of chemicals in the  
10 environment: (1)  $K_{ow}$ , the octanol-water partition coefficient, (2) the aqueous solubility, and (3) the  
11 Henry's law constant.<sup>2</sup> These properties describe whether a chemical will sorb to soil and organic  
12 matter or stay in water ( $K_{ow}$ ), how much of a chemical may dissolve in water (aqueous solubility),  
13 and whether a chemical will tend to remain in the water or volatilize (Henry's law constant).<sup>3</sup>

14 The  $K_{ow}$  measures the relative hydrophobicity (chemical prefers to be in oil,  $\log K_{ow} > 0$ ) and  
15 hydrophilicity (chemical prefers to be in water,  $\log K_{ow} < 0$ ) of a chemical. Aqueous solubility is the  
16 maximum amount of a chemical that will dissolve in water in the presence of a pure chemical;  
17 solubility generally serves as an upper bound on possible concentrations. The Henry's law constant  
18 is the ratio of the concentration of a chemical in air (or vapor pressure) to the concentration of that  
19 chemical in water.

20 Estimates and measured values for physicochemical properties were obtained by using the  
21 Estimation Program Interface Suite 4.1 (see Appendix C).<sup>4</sup> Of the 1,076 chemicals the EPA listed as  
22 used in hydraulic fracturing (see Appendix A), EPI Suite™ has estimated properties for 453 (42%).  
23 EPI Suite™ does not have data available for the remaining 58% of the chemicals. The 453 chemicals  
24 with physicochemical property data were chemicals with structures that are considered suitably  
25 representative of the substance to compute properties within the constraints of EPI Suite™  
26 software. Only unique defined organic desalted structures were submitted for property calculation.  
27 Figure 5-17 presents histograms of all 453 of the chemicals, sorted by four physicochemical  
28 parameters: measured  $\log K_{ow}$  ( $n = 247$ , 23%), estimated  $\log K_{ow}$  ( $n=453$ , 42%) estimated log of the

---


<sup>1</sup> Complexation is a reaction between two chemicals that form a new complex, either through covalent bonding or ionic forces. This often results in one chemical solubilizing the other.

<sup>2</sup> The octanol-water partition coefficient ( $K_{ow}$ ) represents the ratio of the solubility of a compound in octanol (a nonpolar solvent) to its solubility in water (a polar solvent) in a mixture of the two. The higher the  $K_{ow}$ , the more nonpolar the compound.

<sup>3</sup> We present the physicochemical parameter values using  $\log_{10}$  because of the wide range of values that these parameters cover.

<sup>4</sup> EPI Suite™, version 4.1, <http://www.epa.gov/opptintr/exposure/pubs/episuite.htm> (U.S. EPA, 2012b). The EPI (Estimation Programs Interface) Suite™ is a Windows®-based suite of physicochemical property and environmental fate estimation programs developed by the EPA Office of Pollution Prevention and Toxics and Syracuse Research Corporation. EPI Suite™ provides estimates of physicochemical properties for organic chemicals and has a database of measured values for physicochemical properties when available. EPI Suite™ cannot estimate parameters for inorganic chemicals.

1 aqueous solubility ( $n = 453$ , 42%), and estimated log of Henry’s law constant (at 25°C,  $n = 453$ ,  
 2 42%).

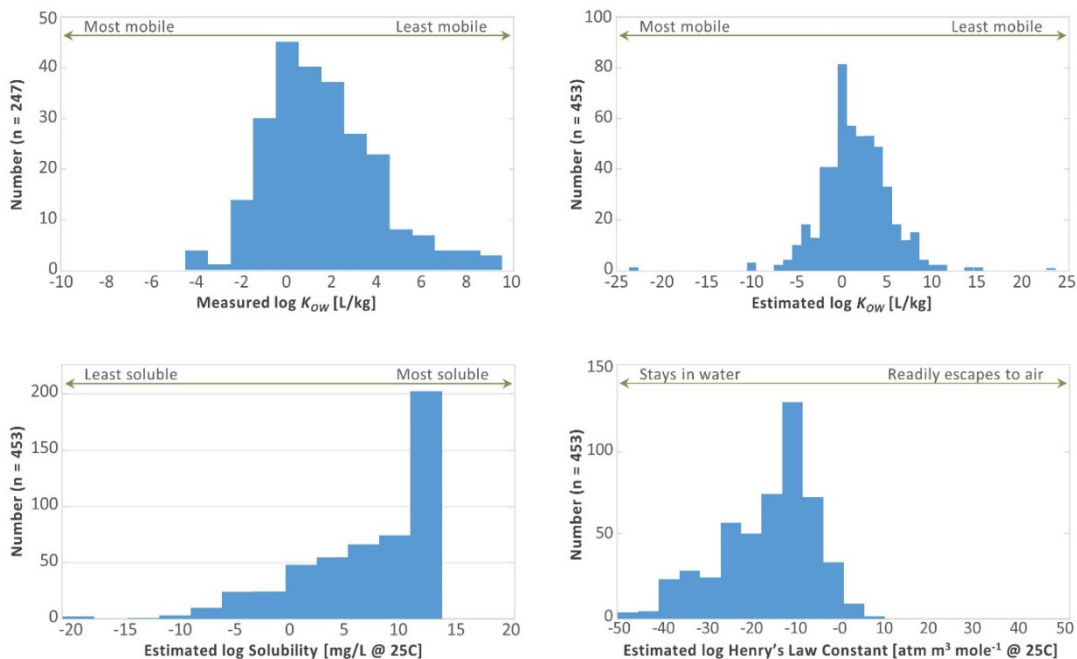


**Figure 5-17. Histograms of physicochemical properties of chemicals used in the hydraulic fracturing process.**

Measured values of  $\log K_{ow}$  (upper left). Estimated physicochemical properties for  $\log K_{ow}$  (upper right),  $\log$  Solubility (lower left), and  $\log$  Henry’s law constant (lower right) for all chemicals. Physicochemical properties ( $\log K_{ow}$ , solubility, and Henry’s Law constant) estimated by EPI Suite™.

3 The EPA also used EPI Suite™ to determine the physicochemical properties for 19 chemicals  
 4 provided to the EPA as confidential business information (CBI) (See Text Box 5-3 for discussion on  
 5 CBI).<sup>1</sup> The CBI chemical physicochemical properties are plotted as histograms in Figure 5-18. The  
 6 values of the physicochemical properties of known and CBI chemicals are similar, covering similar  
 7 ranges centered on similar values, suggesting that even though these chemicals are not publicly  
 8 known, their physicochemical properties are not appreciably different from the known chemicals.  
 9 This means that their fate and transport would not be appreciably different than the chemicals that  
 10 are publicly known.

<sup>1</sup> Well operators may specify certain ingredients as confidential business information (CBI) and not disclose the chemicals used to FracFocus. The CASRNs of a range of CBI chemicals were provided to USEPA by 9 service companies.



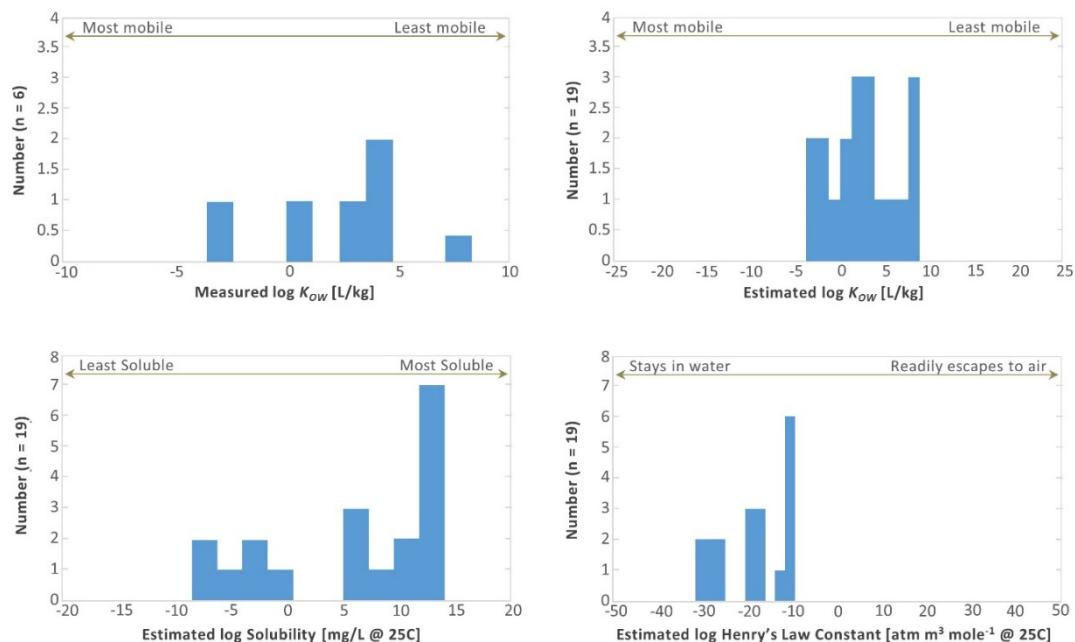

**Figure 5-18. Histograms of physicochemical properties of confidential chemicals used in the hydraulic fracturing process.**

Source: ([U.S. EPA, 2013a](#))

Measured values of  $\log K_{ow}$  (upper left). Estimated physicochemical properties for  $\log K_{ow}$  (upper right),  $\log$  solubility (lower left), and  $\log$  Henry's law constant (lower right) for all chemicals.

Physicochemical properties ( $\log K_{ow}$ , solubility, and Henry's Law constant) estimated by EPI Suite™.

### 5.8.3. Mobility of Chemicals

1 Figure 5-17 shows the distribution of the three properties. The  $\log K_{ow}$  distribution demonstrates  
 2 that the chemicals cover a wide range from the more mobile to the less mobile. The more  
 3 hydrophilic chemicals are more mobile (i.e., they move with water). The more hydrophobic  
 4 chemicals tend to associate with organic matter and soil particles and to be less mobile in the  
 5 environment, and they may serve as long-term sources of contamination. A large number of the  
 6 chemicals fall near  $\log K_{ow} = 0$ , which indicates that these chemicals are likely to associate roughly  
 7 equally with organic or aqueous phases. However, overall the  $\log K_{ow}$  values are skewed positively,  
 8 indicating less mobile chemicals, which may result in their being later-term or long-term sources of  
 9 impact to drinking water. The  $\log S$  values span a wide range from fully miscible to sparingly  
 10 soluble. Many of the chemicals have high aqueous solubilities, with a large number being fully  
 11 miscible. Most of the chemicals have  $\log$  Henry's law constants less than 0, indicating that most are  
 12 not volatile. Once these chemicals dissolve into water they will tend to stay there rather than  
 13 volatilize. Therefore, volatilization does not generally serve as a loss process for most hydraulic  
 14 fracturing chemicals.

15 Table 5-7 and Table 5-8 present the 20 most mobile and least mobile chemicals, known to be used  
 16 in hydraulic fracturing fluids, respectively, as ranked by  $\log K_{ow}$ . These were taken from the list of

1 515 chemicals with estimated values for physicochemical properties. These tables also include  
 2 values for aqueous solubility and Henry's law constant, as well as frequency of use, based on  
 3 FracFocus disclosures ([U.S. EPA, 2015a](#)).

4 Table 5-7 shows the chemicals that have the *lowest* log  $K_{ow}$  and are, thus, the *most* mobile. These  
 5 chemicals are fully miscible (i.e., they will mix completely with water), which means they may move  
 6 through the environment at high concentrations, leading to greater severity of impact. These  
 7 chemicals generally have low volatility, based on their negative log Henry's law constants (i.e., will  
 8 remain in water and will not be lost to the air). These chemicals will dissolve in water and move  
 9 rapidly through the environment (e.g., via infiltration into the subsurface or via overland flow to  
 10 surface waters). Chemicals exhibiting this combination of properties have greater potential to cause  
 11 immediate impacts to drinking water resources. Most of the chemicals in the table were  
 12 infrequently reported ( $\leq 2\%$  of wells) in FracFocus ([U.S. EPA, 2015a](#)). However, choline chloride  
 13 (14% of wells), used for clay control, and tetrakis(hydroxymethyl)phosphonium sulfate (11% of  
 14 wells), a biocide, were more commonly reported.

**Table 5-7. Ranking of the 20 most mobile organic chemicals, as determined by the largest log  $K_{ow}$ , with CASRN, percent of wells where the chemical is reported from January 1, 2011 to February 28, 2013 (U.S. EPA, 2015b), and physicochemical properties (log  $K_{ow}$ , solubility, and Henry's Law constant) as estimated by EPI Suite™.**

([U.S. EPA, 2015b](#))

For organic salts, parameters are estimated using the desalted form.

Rank	Chemical Name	CASRN	Percent of wells ( <a href="#">U.S. EPA, 2015b</a> ) <sup>a</sup>	Estimated Log $K_{ow}$ (unitless) <sup>b</sup>	Estimated Water Solubility (mg/L @ 25°C) <sup>c</sup>	Estimated Henry's Law Constant (atm m <sup>3</sup> /mole @ 25°C) <sup>d</sup>
1	1,2-Ethanediaminium, N,N'-bis[2-bis(2-hydroxyethyl)methylammonio]ethyl)-N,N'-bis(2-hydroxyethyl)-N,N'-dimethyl-, tetrachloride	138879-94-4	2%	-23.19	$1.00 \times 10^6$	$2.33 \times 10^{-35}$
2	Phosphonic acid, [[[phosphonomethyl)imino]bis[2,1-ethanediylnitrilobis(methylene)]]]tetrakis-	15827-60-8	0.2%	-9.72	$1.00 \times 10^6$	NA
3	Phosphonic acid, [[[phosphonomethyl)imino]bis[2,1-ethanediylnitrilobis(methylene)]]]tetrakis-, sodium salt	22042-96-2	0.07%	-9.72	$1.00 \times 10^6$	NA

*This document is a draft for review purposes only and does not constitute Agency policy.*

Rank	Chemical Name	CASRN	Percent of wells (U.S. EPA, 2015b) <sup>a</sup>	Estimated Log $K_{ow}$ (unitless) <sup>b</sup>	Estimated Water Solubility (mg/L @ 25°C) <sup>c</sup>	Estimated Henry's Law Constant (atm m <sup>3</sup> /mole @ 25°C) <sup>d</sup>
4	Phosphonic acid, [[[phosphonomethyl]imino]bis[2,1-ethanediylnitrilobis(methylene)]]tetrakis-, ammonium salt (1:x)	70714-66-8	NA	-9.72	$1.00 \times 10^6$	NA
5	Phosphonic acid, (((2-[(2-hydroxyethyl)(phosphonomethyl)amino]ethyl)imino]bis(methylene))bis-, compd. with 2-aminoethanol	129828-36-0	NA	-6.73	$1.00 \times 10^6$	$5.29 \times 10^{-42}$
6	2-Hydroxy-N,N-bis(2-hydroxyethyl)-N-methylethanaminium chloride	7006-59-9	NA	-6.7	$1.00 \times 10^6$	$4.78 \times 10^{-19}$
7	N-(3-Chloroallyl)hexaminium chloride	4080-31-3	0.02%	-5.92	$1.00 \times 10^6$	$1.76 \times 10^{-8}$
8	3,5,7-Triazatricyclo(3.3.1.1 (superscript 3,7))decane, 1-(3-chloro-2-propenyl)-, chloride, (Z)-	51229-78-8	NA	-5.92	$1.00 \times 10^6$	$1.76 \times 10^{-8}$
9	(2,3-dihydroxypropyl) trimethylammonium chloride	34004-36-9	NA	-5.8	$1.00 \times 10^6$	$9.84 \times 10^{-18}$
10	Phosphonic acid, [[[phosphonomethyl]imino]bis[6,1-hexanediylnitrilobis(methylene)]]tetrakis-	34690-00-1	0.006%	-5.79	$1.00 \times 10^6$	NA
11	[Nitrilotris(methylene)]tris-phosphonic acid pentasodium salt	2235-43-0	0.5%	-5.45	$1.00 \times 10^6$	$1.65 \times 10^{-34}$
12	Aminotrimethylene phosphonic acid	6419-19-8	2%	-5.45	$1.00 \times 10^6$	$1.65 \times 10^{-34}$
13	Choline chloride	67-48-1	14%	-5.16	$1.00 \times 10^6$	$2.03 \times 10^{-16}$
14	Choline bicarbonate	78-73-9	0.2%	-5.16	$1.00 \times 10^6$	$2.03 \times 10^{-16}$
15	alpha-Lactose monohydrate	5989-81-1	NA	-5.12	$1.00 \times 10^6$	$4.47 \times 10^{-22}$
16	Lactose	63-42-3	NA	-5.12	$1.00 \times 10^6$	$4.47 \times 10^{-22}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Rank	Chemical Name	CASRN	Percent of wells (U.S. EPA, 2015b) <sup>a</sup>	Estimated Log $K_{ow}$ (unitless) <sup>b</sup>	Estimated Water Solubility (mg/L @ 25°C) <sup>c</sup>	Estimated Henry's Law Constant (atm m <sup>3</sup> /mole @ 25°C) <sup>d</sup>
17	Tetrakis(hydroxymethyl)phosphonium sulfate	55566-30-8	11%	-5.03	$1.00 \times 10^6$	$9.17 \times 10^{-13}$
18	Disodium ethylenediaminediacetate	38011-25-5	0.6%	-4.79	$1.00 \times 10^6$	$1.10 \times 10^{-16}$
19	Nitrilotriacetamide	4862-18-4	NA	-4.75	$1.00 \times 10^6$	$1.61 \times 10^{-18}$
20	1,3,5-Triazine-1,3,5(2H,4H,6H)-triethanol	4719-04-4	0.2%	-4.67	$1.00 \times 10^6$	$1.08 \times 10^{-11}$

<sup>a</sup> Some of the chemicals in these tables have NA (not available) listed as the number of wells, which means that these chemicals have been used in hydraulic fracturing, but they were not reported to FracFocus program for the time period of the study (January 1, 2011, to February 28, 2013) (U.S. EPA, 2015b). Analysis considered 34,675 disclosures and 676,376 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (3,855) or other, query-specific criteria were excluded from analysis.

<sup>b</sup> Log  $K_{ow}$  is estimated using the KOWWIN™ model, which uses an atom/fragment contribution method.

<sup>c</sup> Water solubility is estimated using the WSKOWWIN™ model, which estimates a chemical's solubility from  $K_{ow}$  and any applicable correction factors.

<sup>d</sup> Henry's Law constant is estimated using the HENRYWIN™ model using the bond contribution method.

1 Table 5-8 shows the chemicals that have the *highest* log  $K_{ow}$  and are, thus, the *least* mobile. The  
2 estimated aqueous solubilities for some of these chemicals are extremely low, with highest  
3 solubilities of <10 µg/L. Therefore, the concentration of these chemicals dissolved in water will be  
4 low. The estimated Henry's law constants are more variable for these low-mobility chemicals.  
5 Chemicals with high log  $K_{ow}$  values (>0) and high Henry's law constants will sorb strongly to organic  
6 phases and solids and may volatilize. However, their strong preference for the organic or solid  
7 phase may slow or reduce volatilization. The chemicals with low Henry's law constants will readily  
8 sorb to organic phases and solids. Less mobile chemicals will move slowly through the soil and have  
9 potentially delayed and longer-term impacts to drinking water resources. Seven of the chemicals in  
10 Table 5-8 were reported to FracFocus (U.S. EPA, 2015b). Five were reported infrequently (<1% of  
11 wells). Tri-n-butyltetradecylphosphonium chloride (6% of wells), used as a biocide, and  
12 C>10-alpha-alkenes (8% of wells), a mixture of alpha-olefins with carbon numbers greater than 10  
13 used as a corrosion inhibitor, were more commonly reported. The least mobile organic chemical is

- 1 sorbitan, tri-(9Z)-9-octadecenoate, a mineral oil co-emulsifier (0.05% of wells), with an estimated  
 2 log  $K_{ow}$  of 22.56.<sup>1</sup>

**Table 5-8. Ranking of the 20 least mobile organic chemicals, as determined by the largest log  $K_{ow}$ , with CASRN, percent of wells where the chemical is reported from January 1, 2011 to February 28, 2013 (U.S. EPA, 2015b), and physicochemical properties (log  $K_{ow}$ , solubility, and Henry's Law constant) as estimated by EPI Suite™.**

Source: (U.S. EPA, 2015b)

For organic salts, parameters are estimated using the desalted form.

Rank	Chemical Name	CASRN	Percent of wells (U.S. EPA, 2015b) <sup>a</sup>	Estimated Log $K_{ow}$ (unitless) <sup>b</sup>	Estimated Water Solubility (mg/L @ 25°C) <sup>c</sup>	Estimated Henry's Law Constant (atm m <sup>3</sup> /mole @ 25°C) <sup>d</sup>
1	Sorbitan, tri-(9Z)-9 octadecenoate	26266-58-0	0.05%	22.56	$1.12 \times 10^{-19}$	$4.02 \times 10^{-11}$
2	Fatty acids, C18-unsatd., dimers	61788-89-4	NA	14.6	$2.31 \times 10^{-10}$	$4.12 \times 10^{-08}$
3	Sorbitan sesquioleate	8007-43-0	0.02%	14.32	$2.31 \times 10^{-11}$	$7.55 \times 10^{-12}$
4	Tri-n-butyltetradecyl-phosphonium chloride	81741-28-8	6%	11.22	$7.90 \times 10^{-7}$	$2.61 \times 10^{-1}$
5	Sodium bis(tridecyl) sulfobutanedioate	2673-22-5	NA	11.15	$7.46 \times 10^{-9}$	$8.51 \times 10^{-11}$
6	1-Eicosene	3452-07-1	NA	10.03	$1.26 \times 10^{-5}$	$1.89 \times 10^1$
7	D&C Red 28	18472-87-2	NA	9.62	$1.64 \times 10^{-8}$	$6.37 \times 10^{-21}$
8	C.I. Solvent Red 26	4477-79-6	NA	9.27	$5.68 \times 10^{-5}$	$5.48 \times 10^{-13}$
9	1-Octadecene	112-88-9	NA	9.04	$1.256 \times 10^{-4}$	$1.07 \times 10^1$
10	Alkenes, C>10 alpha-	64743-02-8	8%	8.55	$3.941 \times 10^{-4}$	$8.09 \times 10^0$
11	Diocetyl phthalate	117-84-0	NA	8.54	$4.236 \times 10^{-4}$	$1.18 \times 10^{-5}$
12	Benzene, C10-16-alkyl derivs.	68648-87-3	0.5%	8.43	$2.099 \times 10^{-4}$	$1.78 \times 10^{-1}$

<sup>1</sup> Sorbitan, tri-(9Z)-9-octadecenoate, CASRN 26266-58-0, is soluble in hydrocarbons and insoluble in water, listed as an effective coupling agent and co-emulsifier for mineral oil (Santa Cruz Biotechnology, 2015; ChemicalBook, 2010).

Rank	Chemical Name	CASRN	Percent of wells (U.S. EPA, 2015b) <sup>a</sup>	Estimated Log $K_{ow}$ (unitless) <sup>b</sup>	Estimated Water Solubility (mg/L @ 25°C) <sup>c</sup>	Estimated Henry's Law Constant (atm m <sup>3</sup> /mole @ 25°C) <sup>d</sup>
13	Di(2-ethylhexyl) phthalate	117-81-7	NA	8.39	$1.132 \times 10^{-3}$	$1.18 \times 10^{-5}$
14	1-Octadecanamine, N,N-dimethyl-	124-28-7	NA	8.39	$8.882 \times 10^{-3}$	$4.51 \times 10^{-3}$
15	N,N-dimethyloctadecylamine hydrochloride	1613-17-8	NA	8.39	$8.882 \times 10^{-3}$	$4.51 \times 10^{-3}$
16	Butyryl trihexyl citrate	82469-79-2	0.03%	8.21	$5.56 \times 10^{-5}$	$3.65 \times 10^{-9}$
17	1-Hexadecene	629-73-2	NA	8.06	$1.232 \times 10^{-3}$	$6.10 \times 10^0$
18	Benzo(g,h,i)perylene	191-24-2	NA	7.98	$7.321 \times 10^{-4}$	$1.26 \times 10^{-2}$
19	Dodecylbenzene	123-01-3	NA	7.94	$1.015 \times 10^{-3}$	$1.34 \times 10^{-1}$
20	Isopropanolamine dodecylbenzene	42504-46-1	0.02%	7.94	$1.015 \times 10^{-3}$	$1.34 \times 10^{-1}$

<sup>a</sup> Some of the chemicals in these tables have NA (not available) listed as the number of wells, which means that these chemicals have been used in hydraulic fracturing, but they were not reported to FracFocus program for the time period of the study (January 1, 2011, to February 28, 2013) (U.S. EPA, 2015b). Analysis considered 34,675 disclosures and 676,376 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (3,855) or other, query-specific criteria were excluded from analysis.

<sup>b</sup> Log  $K_{ow}$  is estimated using the KOWWIN™ model, which uses an atom/fragment contribution method.

<sup>c</sup> Water solubility is estimated using the WSKOWWIN™ model, which estimates a chemical's solubility from  $K_{ow}$  and any applicable correction factors.

<sup>d</sup> Henry's Law constant is estimated using the HENRYWIN™ model using the bond contribution method.

1 Table 5-9 shows the EPI Suite™ estimated physicochemical property values of the 20 chemicals  
2 most frequently reported to FracFocus nationwide, with estimated mean and median volumes  
3 based on FracFocus data. Most have log  $K_{ow} < 1$ , meaning that they are generally hydrophilic and  
4 will associate with water. These chemicals also have very high solubilities, so they will be mobile in  
5 the environment and go where the water goes. These chemicals have the potential for immediate  
6 impacts to drinking water resources. Naphthalene has a measured log  $K_{ow} = 3.3$  with an estimated  
7 solubility of 142.1 mg/L, which means it will be less mobile in the environment. Naphthalene will  
8 sorb to particles and move slowly through the environment, and have the potential to act as long-



- 1 term sources of contamination.<sup>1</sup> All of these chemicals have low Henry's law constants, so they tend
- 2 not to volatilize.

---

<sup>1</sup> Chemicals may have the potential to be long-term sources of contamination because they move slowly through the environment. In this discussion, we are not accounting for biodegradation or other transformation processes, which may reduce the persistence of certain chemicals in the environment. Under the right conditions, for example, naphthalene is biodegradable, which may reduce or remove it from the environment, and thus may not be a long-term source of contamination.

**Table 5-9. The 20 chemicals reported most frequently nationwide for hydraulic fracturing based on reported FracFocus 1.0 disclosures (U.S. EPA, 2015b), with EPI Suite™ physicochemical parameters where available, and estimated mean and median volumes of those chemicals, where density was available.**

Source: (U.S. EPA, 2015b)

Excludes water, sodium chloride, and quartz. NA means that the physicochemical parameter is not provided by EPI Suite™. For organic salts, parameters are estimated using the desalted form.

Rank	Chemical Name	CASRN	Number Of Wells Using Chemical (% of wells)	Log $K_{ow}$ (unitless)		Water Solubility Estimate From Log $K_{ow}$ (mg/L @ 25°C)	Henry's Law Constant (atm m <sup>3</sup> /mole @ 25°C)			Estimated Volume, per disclosure (gal)	
				Estimated	Measured		Estimated, Bond Method	Estimated, Group Method 25	Measured	Mean	Median
1	Methanol	67-56-1	24,753 (72%)	-0.63	-0.77	$1.00 \times 10^6$	$4.27 \times 10^{-6}$	$3.62 \times 10^{-6}$	$4.55 \times 10^{-6}$	1,218	110
2	Distillates, petroleum, hydrotreated light	64742-47-8	22,463 (65%)	NA	NA	NA	NA	NA	NA	NA	NA
3	Hydrochloric acid	7647-01-0	22,380 (65%)	NA	NA	NA	NA	NA	NA	28,320	3,110
4	Isopropanol	67-63-0	16,039 (47%)	0.28	0.05	$4.024 \times 10^5$	$7.52 \times 10^{-6}$	$1.14 \times 10^{-5}$	$8.10 \times 10^{-6}$	2,095	55
5	Ethylene glycol	107-21-1	15,800 (46%)	-1.2	-1.36	$1.00 \times 10^6$	$1.31 \times 10^{-7}$	$5.60 \times 10^{-11}$	$6.00 \times 10^{-8}$	614	184
6	Peroxydisulfuric acid, diammonium salt	7727-54-0	14,968 (44%)	NA	NA	NA	NA	NA	NA	NA	NA
7	Sodium hydroxide	1310-73-2	13,265 (39%)	NA	NA	NA	NA	NA	NA	551	38
8	Guar gum	9000-30-0	12,696 (37%)	NA	NA	NA	NA	NA	NA	NA	NA
9	Glutaraldehyde	111-30-8	11,562 (34%)	-0.18	NA	$1.672 \times 10^5$	$1.10 \times 10^{-7}$	$2.39 \times 10^{-8}$	NA	1,313	122
10	Propargyl alcohol	107-19-7	11,410 (33%)	-0.42	-0.38	$9.355 \times 10^5$	$5.88 \times 10^{-7}$	NA	$1.15 \times 10^{-6}$	183	2
11	Potassium hydroxide	1310-58-3	10,049 (29%)	NA	NA	NA	NA	NA	NA	NA	NA

*This document is a draft for review purposes only and does not constitute Agency policy.*

Rank	Chemical Name	CASRN	Number Of Wells Using Chemical (% of wells)	Log $K_{ow}$ (unitless)		Water Solubility Estimate From Log $K_{ow}$ (mg/L @ 25°C)	Henry's Law Constant (atm m <sup>3</sup> /mole @ 25°C)			Estimated Volume, per disclosure (gal)	
				Estimated	Measured		Estimated, Bond Method	Estimated, Group Method 25	Measured	Mean	Median
12	Ethanol	64-17-5	9,861 (29%)	-0.14	-0.31	$7.921 \times 10^5$	$5.67 \times 10^{-6}$	$4.88 \times 10^{-6}$	5.00E-06	831	121
13	Acetic acid	64-19-7	8,186 (24%)	0.09	-0.17	$4.759 \times 10^5$	$5.48 \times 10^{-7}$	$2.94 \times 10^{-7}$	$1.00 \times 10^{-7}$	646	47
14	Citric acid	77-92-9	8,142 (24%)	-1.67	-1.64	$1.00 \times 10^6$	$8.33 \times 10^{-18}$	NA	$4.33 \times 10^{-14}$	163	20
15	2-Butoxyethanol	111-76-2	7,347 (21%)	0.57	0.83	$6.447 \times 10^4$	$9.79 \times 10^{-8}$	$2.08 \times 10^{-8}$	$1.60 \times 10^{-6}$	385	26
16	Solvent naphtha, petroleum, heavy arom.	64742-94-5	7,108 (21%)	NA	NA	NA	NA	NA	NA	NA	NA
17	Naphthalene	91-20-3	6,354 (19%)	3.17	3.3	$1.421 \times 10^2$	$5.26 \times 10^{-4}$	$3.7 \times 10^{-4}$	$4.4 \times 10^{-4}$	72	12
18	2,2-Dibromo-3-nitrilopropionamide	10222-01-2	5,656 (16%)	1.01	0.82	$2.841 \times 10^3$	$6.16 \times 10^{-14}$	NA	$1.91 \times 10^{-8}$	183	5
19	Phenolic resin	9003-35-4	4,961 (14%)	NA	NA	NA	NA	NA	NA	NA	NA
20	Choline chloride	67-48-1	4,741 (14%)	-5.16	NA	$1.00 \times 10^6$	$2.03 \times 10^{-16}$	NA	NA	2,131	290

Note: Analysis considered 34,675 disclosures and 676,376 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (3,855) or other, query-specific criteria were excluded from analysis.

*This document is a draft for review purposes only and does not constitute Agency policy.*

#### 5.8.4. Transformation Processes

1 It is important to understand the processes governing transformation of chemicals in the  
2 environment. The transformation of a chemical reduces its concentration over time. Chemicals may  
3 completely degrade before reaching a drinking water resource. Transformation processes may be  
4 biotic or abiotic. The transformation process may transform a chemical into a less or more harmful  
5 chemical.

6 Biodegradation is a biotic process where microorganisms transform a chemical from its original  
7 form into another chemical. For example, the biodegradation pathway of methanol is  
8  $\text{CH}_3\text{OH} \rightarrow \text{CH}_2\text{O} \rightarrow \text{CHOOH} \rightarrow \text{CO}_2$ , or methanol  $\rightarrow$  formaldehyde  $\rightarrow$  formic acid  $\rightarrow$  carbon dioxide.  
9 This pathway shows how the original chemical transforms through a series of steps until it becomes  
10 the final product, carbon dioxide. Some chemicals are readily biodegraded, while others break  
11 down slowly over time. Biodegradation is a highly site-specific process, requiring nutrients, a  
12 carbon source, water, and an energy source. A highly biodegradable chemical could be persistent if  
13 the conditions for biodegradability are not met. Conversely, a highly biodegradable chemical could  
14 biodegrade quickly under the right conditions, before it can impact a water resource. The  
15 relationship between mobility and biodegradability is complex, and therefore a variety of factors  
16 can influence a particular compound's movement through the environment.

17 Abiotic processes, such as oxidation, reduction, photochemical reaction, and hydrolysis, can  
18 transform or break apart chemicals. In hydrolysis, for example, a water molecule substitutes for a  
19 group of atoms. The typical results are products that are more polar than the original, and thus  
20 have different physicochemical properties than the original compounds ([Schwarzenbach et al.,  
21 2002](#)).<sup>1</sup>

#### 5.8.5. Fate and Transport of Chemical Mixtures

22 Chemicals at hydraulic fracturing sites are often present as mixtures, which may act differently in  
23 the environment than individual chemicals do. Individual chemicals can affect the fate and  
24 transport of other chemicals in a mixture primarily by changing their solubility and biodegradation  
25 rates.

26 Mixtures of chemicals may be more mobile than individual chemicals due to cosolvency, which  
27 increases solubility in the aqueous phase. Methanol and ethanol are examples of cosolvent alcohols  
28 used frequently in hydraulic fracturing fluids ([U.S. EPA, 2015a](#)). The presence of either greatly  
29 increases BTEX solubility ([Rasa et al., 2013](#); [Corseuil et al., 2011](#); [Heermann and Powers, 1998](#)).<sup>2</sup> By  
30 increasing solubility, ethanol can affect the fate and transport of other compounds. For example,

---

<sup>1</sup> A polar molecule is a molecule with a slightly positive charge at one part of the molecule and a slightly negative charge on another. The water molecule,  $\text{H}_2\text{O}$ , is an example of a polar molecule, where the molecule is slightly positive around the hydrogen atoms and negative around the oxygen atom.

<sup>2</sup> BTEX is an acronym for benzene, toluene, ethylbenzene, and xylenes. These chemicals are a group of single ringed aromatic hydrocarbons based on the benzene structure. These compounds are found in petroleum and are of specific importance because of their potential health effects.

1 BTEX has been observed to travel farther in the subsurface in the presence of ethanol ([Rasa et al.,](#)  
2 [2013](#); [Corseuil et al., 2011](#); [Corseuil et al., 2004](#); [Powers et al., 2001](#); [Heermann and Powers, 1998](#)).

3 The presence of surfactants lowers fluid surface tension and increases solubility of organic  
4 compounds, and can mobilize less soluble/less mobile organic compounds. Two common  
5 surfactants reported to FracFocus 1.0 from January 1, 2011 to February 2013 were 2-  
6 butoxyethanol (CASRN 111-76-2, 21% of disclosures) and poly(oxy-1,2-ethanediyl)-nonylphenyl-  
7 hydroxy (mixture) (CASRN 127087-87-0, 20% of disclosures). Additionally, surfactants can  
8 mobilize bacteria in the subsurface, which can increase the impact of pathogens on drinking water  
9 resources ([Brown and Jaffé, 2001](#)).

10 When chemicals are present as mixtures, one chemical may decrease or enhance the  
11 biodegradability of another through inhibition or co-metabolism. The process of inhibition can  
12 occur when multiple chemicals compete for the same enzyme, so only one chemical is degraded at a  
13 time, which can ultimately slow biodegradation of each of the chemicals present. For example, the  
14 biodegradation of ethanol and methanol may inhibit the biodegradation of BTEX or other organic  
15 compounds present ([Rasa et al., 2013](#); [Powers et al., 2001](#)). Co-metabolism may increase the  
16 biodegradation rate of other compounds. For example, when methane or propane is present with  
17 tetrachloroethylene, the enzyme produced by bacteria to degrade methane also degrades  
18 tetrachloroethylene (e.g., [Alvarez-Cohen and Speitel, 2001 and references therein](#)). For the  
19 purposes of chemicals used in hydraulic fracturing, the presence of other chemicals in additives and  
20 hydraulic fracturing fluids could result in increased or decreased biodegradation if the chemicals  
21 are spilled. A chemical that may have otherwise been biodegradable may be inhibited and act as a  
22 long-term source.

#### 5.8.6. Site and Environmental Conditions

23 Environmental conditions at and around the spill site affect the movement and transformation of  
24 the chemical. We discuss the following: site conditions (e.g., proximity, land cover, and slope), soil  
25 conditions (e.g., permeability and porosity), and weather and climate.

26 The proximity of a spill to a drinking water resource, either laterally in the case of a surface water  
27 body or downward for an aquifer, affects the potential for impact. Land cover will affect how  
28 readily a fluid moves over land. For example, more rugged land cover such as forest will impede  
29 flow, and an asphalt road will facilitate flow. A spill that occurs on or near a sloped site may move  
30 overland faster, making it more likely to reach a nearby surface water body. Flatter surfaces would  
31 result in a greater chance for infiltration to the subsurface, which could increase the potential for a  
32 ground water impact.

33 Soil characteristics that affect the transport and transformation of spill chemicals include soil  
34 texture (e.g., clay, silt, sand), permeability, porosity, and organic content.<sup>1,1</sup> Fluids will move more

---

<sup>1</sup> Permeability of a soil describes how easily a fluid can move through the soil. Under a constant pressure, a fluid will move faster in a high permeability soil than the same fluid in a low permeability soil.

1 quickly through permeable soil (e.g., sand) than through less permeable soil (e.g., clay). A soil with a  
2 high porosity provides more volume to hold water and spilled chemicals. Another important factor  
3 for a site is the organic content, of which there are two competing types: soil organic carbon and  
4 dissolved organic carbon. Each type of carbon acts as a strong substance for chemicals to adhere to.  
5 Soil organic carbon present in a solid phase, such as dead and decaying leaves and roots, is not  
6 mobile and slows the movement of chemicals through the soil. Dissolved organic carbon (DOC)  
7 moves with the water and can act as a shuttling mechanism to move insoluble chemicals across the  
8 surface and through the subsurface. Chemicals may also associate with particulates and colloids,  
9 which may act as an important transport mechanism.

10 Weather and climate conditions also affect the fate and transport of a spilled chemical. After a  
11 spilled chemical stops moving, rainfall may remobilize the chemical. The amount, frequency, and  
12 intensity of precipitation will impact volume, distance, and speed of chemical movement.  
13 Precipitation may carry chemicals downward or overland, and it can cause erosion, which may  
14 move sorbed chemicals overland.

#### 5.8.7. Peer-Reviewed Literature on the Fate and Transport of Hydraulic Fracturing Fluid Spills

15 There has been limited peer-reviewed research investigating the fate and transport of chemicals  
16 spilled at hydraulic fracturing sites. [Aminto and Olson \(2012\)](#) modeled a hypothetical spill of  
17 1,000 gal (3,800 L) of hydraulic fracturing fluid using equilibrium partitioning. The authors  
18 evaluated how 12 chemicals typically used for hydraulic fracturing in the Marcellus Shale would  
19 partition amongst different phases: air, water, soil, and biota.<sup>2</sup> They presented a ranking of  
20 concentrations for each phase. In water, they showed that sodium hydroxide (a pH buffer), 4,4-  
21 dimethyl oxazolidine (a biocide), hydrochloric acid (a perforation clean-up additive), and 3,4,4-  
22 trimethyl oxazolidine (a biocide) had the highest simulated water concentrations; however, these  
23 concentrations depended on the chemicals included in the simulated mixture and the  
24 concentrations of each. Their analysis also suggested that after a spill, a large fraction would enter  
25 the air and leave the soil; however, some constituents would be left behind in the water, soil, and  
26 biota compartments, which could effectively act as long-term contamination sources. [Aminto and  
27 Olson \(2012\)](#) only studied this one scenario. Other scenarios could be constructed with different  
28 chemicals in different concentrations. These scenarios may result in different outcomes with  
29 greater impacts.

#### 5.8.8. Potential and Documented Fate and Transport of Documented Spills

30 There is limited information on the fate and transport of hydraulic fracturing fluids and chemicals.  
31 In this section, we highlight the potential and documented impacts for three documented spills ([U.S.  
32 EPA, 2015n](#)). In each case, we provide the documented and potential paths (surface, subsurface, or  
33 combination) and the associated fate and transport governing processes by which a spill has been

---


<sup>1</sup> Porosity of a soil describes the amount of empty space for a given volume of soil. The porosity describes how much air, water, or hydraulic fluid a given volume of soil can hold.

<sup>2</sup> The chemicals they investigated included: sodium hydroxide, ethylene glycol, 4,4-dimethyl oxazolidine, 3,4,4-trimethyl oxazolidine, 2-amino-2-methyl-1-propanol, formamide, glutaraldehyde, benzalkonium chloride, ethanol, hydrochloric acid, methanol, and propargyl alcohol.



1 documented to or has the potential to have an impact on drinking water resources. The three cases  
 2 involve a tank overflow with a surface water impact, a human error blender spill with a soil impact,  
 3 and an equipment failure that had no impact. These three spills were chosen to highlight cases  
 4 where there was a documented impact, a potential impact, and no impact.

5 In the first documented spill, shown in Figure 5-19, a tank overflowed twice, releasing a total of  
 6 7,350 gal (980 ft<sup>3</sup> or 28 m<sup>3</sup>).<sup>1</sup> The spilled fluid was documented as containing a friction reducer and  
 7 gel. The spill traveled across the land surface, crossed a road, and then continued to a nearby  
 8 stream. The spill affected wetlands and a stream, where fish were killed. The fish kill indicates that  
 9 the chemicals present were in high enough concentrations to have an adverse impact.

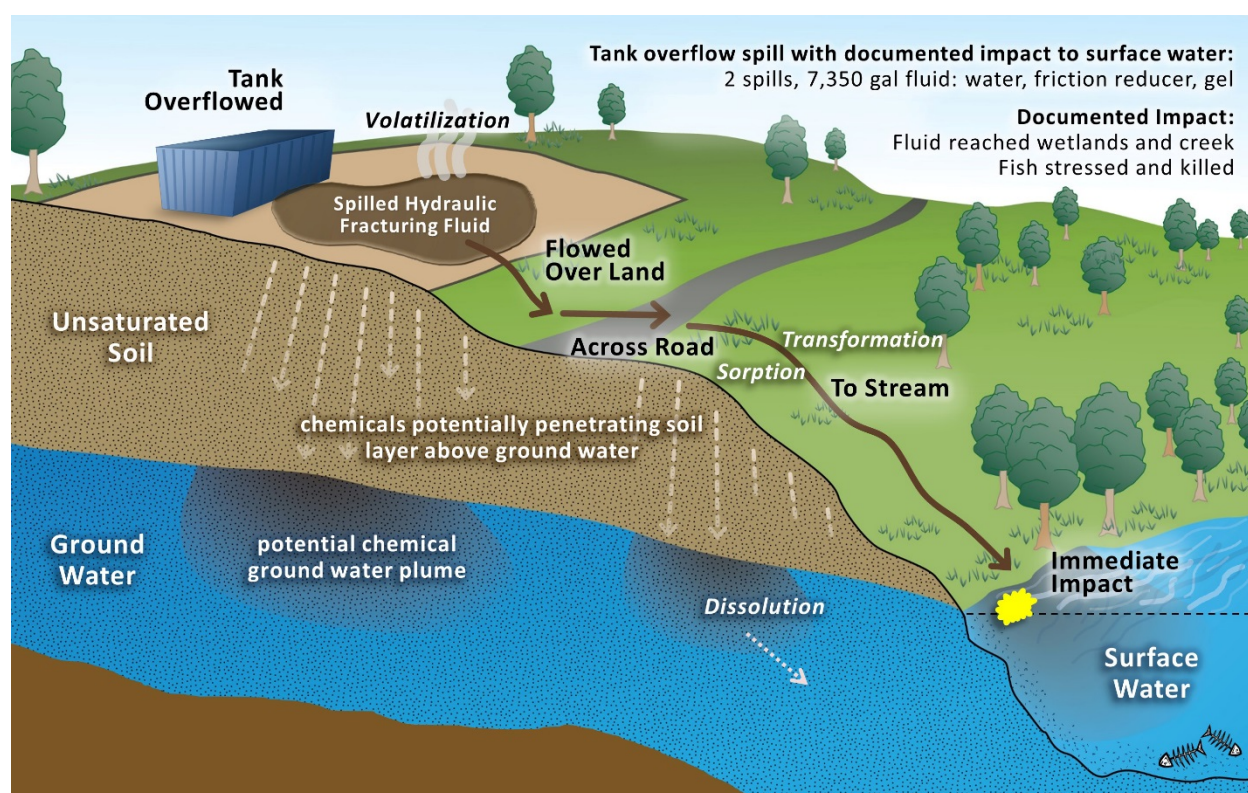

**Figure 5-19. Fate and Transport Spill Example: Case 1.**


Spills information from [U.S. EPA \(2015n\)](#).

10 For this first spill, the documented path was overland flow from the tank to the stream with a  
 11 documented, immediate impact. In addition to this documented path, there are potential paths for  
 12 potential impacts to drinking water resources. The spilled chemicals may have penetrated into the  
 13 soils or sorbed to soils and vegetation as the fluid moved across the ground towards the stream.

<sup>1</sup> We provide the total volume of the spill in gallons as well as cubic length (cubic feet and cubic meters), because it may be a little harder to visualize how far a volume of 7,300 gal might travel.

1 Chemicals could be mobilized during later rainfall, runoff, or erosion events. Chemicals that  
2 infiltrated the subsurface could serve as long-term sources, as well as travel laterally across the  
3 unsaturated zone, or continue downwards to the ground water. Additionally, some chemicals could  
4 be lost to transformation processes. The lack of reported soil or ground water sampling data  
5 prevents the ability to know if these potential paths occurred or not.

6 The second documented spill ([U.S. EPA, 2015n, line 144](#)), shown in Figure 5-20, occurred when a  
7 cap was left off the blender, and 504 gal (70 ft<sup>3</sup> or 2 m<sup>3</sup>) of biocide and hydraulic fracturing fluid  
8 were released; 294 gal (39 ft<sup>3</sup> or 1.1 m<sup>3</sup>) were retained by a dike with a lined secondary  
9 containment measure, demonstrating the partial effectiveness of this containment mechanism.  
10 However, 210 gal (28 ft<sup>3</sup> or 0.8 m<sup>3</sup>) did run off-site and were vacuumed up. There was no  
11 documented impact to surface or ground water.

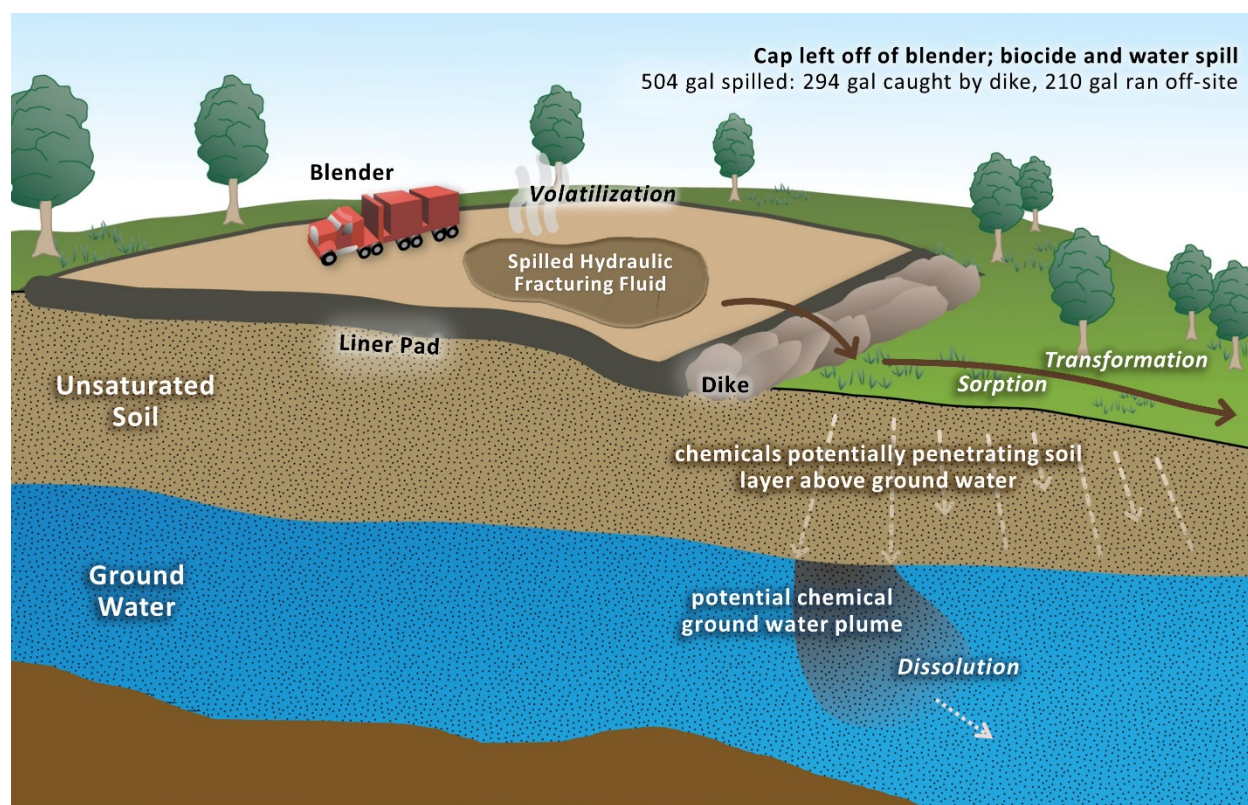

**Figure 5-20. Fate and Transport Spill Example: Case 2.**


Spills information from [U.S. EPA \(2015n\)](#).

12 In this second case, the uncontained 210 gal could have infiltrated the subsurface, creating a  
13 potential path to ground water. There is no documented information on the composition of the  
14 spilled fluid. Highly mobile chemicals would have penetrated the soil more quickly than less mobile  
15 chemicals, which would have sorbed to soil particles. As the chemicals penetrated into the soil,  
16 some could have moved laterally in the unsaturated zone, or traveled downward to the water table



1 and moved with the ground water. These chemicals could have served as a long-term source. These  
2 chemicals could have transformed into other chemicals with different physicochemical properties,  
3 and any volatile chemicals could have moved to the air as a loss process. As in the first case, there  
4 was no reported sampling of soil or groundwater, so there is no way to demonstrate whether  
5 chemicals did or did not follow this path.

6 In the third documented spill ([U.S. EPA, 2015n, line 188](#)), shown in Figure 5-21, 630 gal (84 ft<sup>3</sup> or  
7 2.4 m<sup>3</sup>) of crosslinker spilled onto the well pad when a hose wore off at the cuff. The spill was  
8 contained in the berm and an on-site vacuum truck was used to clean up the spill. No impact to soil  
9 or water was reported.

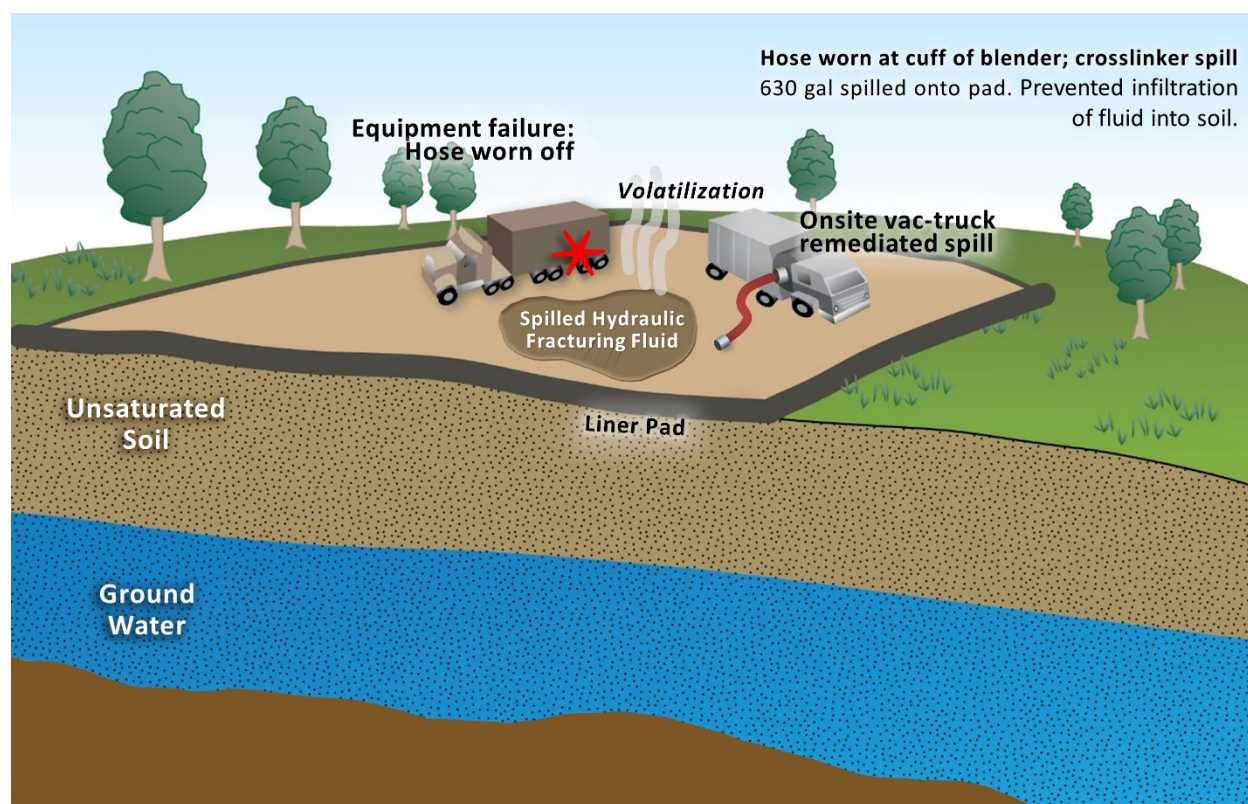

**Figure 5-21. Fate and Transport Spill Example: Case 3.**

Spills information from [U.S. EPA \(2015n\)](#).

10 For this third case, we do not have any information on whether the well pad was lined or not. If the  
11 site had a liner, the spill could have been fully contained, not infiltrated the subsurface, and been  
12 fully cleaned up. Without a liner or if the liner was not completely successful (e.g., had a tear), the  
13 potential paths would have been similar to those above in the second case, where the chemicals  
14 may sorb to the soils and penetrate into the subsurface. There was no reported sampling of soil or  
15 ground water to determine whether or not chemicals migrated into the soil.

## 5.9. Trends in Chemicals Use in Hydraulic Fracturing

1 This section provides an overview of ongoing changes in chemical use in hydraulic fracturing, with  
2 an emphasis on efforts to reduce potential impacts from surface spills by using fewer and safer  
3 chemicals.

4 Representatives from oil and gas companies, chemical companies, and non-profits are working on  
5 strategies to reduce the number and volume of chemicals used and to identify safer chemicals  
6 ([Waldron, 2014](#)). Southwestern Energy Company, for example, is developing an internal chemical  
7 ranking tool ([SWN, 2014](#)), and Baker Hughes is working on a hazard ranking system designed for  
8 wide-scale external use ([Baker Hughes, 2014a](#); [Brannon et al., 2012](#); [Daulton et al., 2012](#); [Brannon  
9 et al., 2011](#)). Environmental groups, such as the Environmental Defense Fund, are also developing  
10 hazard rating systems ([Penttila et al., 2013](#)). Typical criteria used to rank chemicals include  
11 mobility, persistence, biodegradation, bioaccumulation, toxicity, and hazard characteristics. In this  
12 report, toxicity and a methodology to rank chemical hazards of hydraulic fracturing chemicals is  
13 discussed in Chapter 9.

14 The EPA has not conducted a comprehensive review of efforts to develop safer hydraulic fracturing  
15 chemicals. However, the following are some specific examples of efforts that companies cite as part  
16 of their efforts toward safer chemical use:

- 17 • A renewable citrus-based replacement for conventional surfactants ([Fisher, 2012](#));
- 18 • A crosslinked gel system comprised of chemicals designated as safe food additives by the  
19 U.S. Food and Drug Administration ([Holtsclaw et al., 2011](#));
- 20 • A polymer-free gel additive ([Al-Ghazal et al., 2013](#));
- 21 • A dry, hydrocarbon-free powder to replace liquid gel concentrate ([Weinstein et al., 2009](#));
- 22 • Biodegradable polymers ([Irwin, 2013](#));
- 23 • The use of ultraviolet light to control bacteria ([Rodvelt et al., 2013](#));
- 24 • New chelating agents that reduce the use of strong acids ([LePage et al., 2013](#)), and
- 25 • The recovery and reuse of flowback and produced water as hydraulic fracturing fluids,  
26 which may reduce need to add additional chemicals ([Horn et al., 2013](#)).

27 In addition to efforts to address environmental concerns, the oil and gas industry continues to  
28 research and develop less expensive and more effective fracturing fluid additives. A review of the  
29 EPA's new chemicals program found that from 2009 to April 2015, the Agency received pre-  
30 manufacturing notices (PMN) for about 110 chemicals that have the potential for use as hydraulic  
31 fracturing fluid additives. Examples include chemicals intended for use as clay control agents,  
32 corrosion inhibitors, gel crosslinkers, emulsifiers, foaming agents, hydrate inhibitors, scale  
33 inhibitors, and surfactants. At the time of PMN submission, these chemicals were not in commercial  
34 use in the United States. As of April 2015, the EPA had received 30 notices of commencement,  
35 indicating that some of those chemicals are now used commercially.

1 The FracFocus 1.0 data extracted by the EPA cannot be used to identify temporal trends in additive  
2 usage. A data set with a much longer duration of data collection would be needed to distinguish  
3 actual temporal trends from the normal diversity of chemicals in use as a result of geologic and  
4 geographic variability. However, the current FracFocus 1.0 database provides a point of comparison  
5 for use in the future.

## 5.10.Synthesis

6 Chemical mixing is the process by which a base fluid, chemicals, and proppant are mixed prior to  
7 injection into the well. This chapter addressed the potential for on-site spills of chemicals used in  
8 the hydraulic fracturing process to affect the quality of drinking water resources, which is governed  
9 by three overarching factors: (1) fluid characteristics, (2) chemical management and spill  
10 characteristics, and (3) chemical fate and transport.

### 5.10.1. Summary of Findings

11 Documented on-site chemical spills have occurred during the chemical mixing process and reached  
12 soil and surface water receptors, with potential impacts to drinking water resources. The EPA  
13 analysis of 497 spills reports found no documented impacts to ground water from those particular  
14 chemical spills, though there was little information on post-spill testing and sampling ([U.S. EPA,  
15 2015n](#)). The EPA's case study in Killdeer, ND strongly suggests that there was impact to ground  
16 water, but it is unclear if the path was via the surface spill caused by the blowout ([U.S. EPA, 2015j](#)).  
17 The EPA found 151 spills of chemicals or fracturing fluid on or near the well pad in a six-year time  
18 period. The chemical spills were primarily caused by equipment failure (34%), closely followed by  
19 human error (25%). The remaining spills were caused by a failure of container integrity, weather,  
20 vandalism, well communication, or unknown causes. Reported spills cover a large range of volumes,  
21 from five to 19,000 gal (19 to 72,000 L), with a median of 420 gal (1,700 L).

22 If a spilled fluid reaches a drinking water resource, the potential to affect the water quality is largely  
23 governed by the fluid characteristics. A typical water-based fracturing fluid is composed of 90%–  
24 94% water, 5%–9% proppant, and less than 2% chemical additives ([Carter et al., 2013](#); [Knappe and  
25 Fireline, 2012](#)). According to the EPA's analysis of disclosures to FracFocus 1.0, approximately 93%  
26 of hydraulic fracturing fluids are inferred to use water as a base fluid ([U.S. EPA, 2015a](#)). Non-  
27 aqueous constituents, such as nitrogen, carbon dioxide, and hydrocarbons, are also used as base  
28 fluids or used in combination with water as base fluids.

29 The EPA has identified 1,076 unique chemicals used in hydraulic fracturing fluids. The chemicals  
30 include acids, aromatic hydrocarbons, bases, hydrocarbon mixtures, polysaccharides, and  
31 surfactants. Of the 1,076 chemicals, 453 have physicochemical properties in the EPI Suite™  
32 database. These chemicals range from fully miscible to insoluble, and from highly hydrophobic to  
33 highly hydrophilic. The majority of the chemicals are not volatile.

34 According to the EPA's analysis of FracFocus, a median of 14 chemicals are used per well, with a  
35 range of four to 28 (5<sup>th</sup> and 95<sup>th</sup> percentiles). The volumes used range from tens to tens of  
36 thousands of gallons (tens to tens of thousands of liters) per well; therefore, operators typically

1 store chemicals on-site in large volumes (typically 200 to 400 gal (760–1,500 L) totes), often in  
2 multiple containers. The ten most common chemicals (excluding quartz) are methanol,  
3 hydrotreated light petroleum distillates, hydrochloric acid, isopropanol, ethylene glycol,  
4 peroxydisulfuric acid diammonium salt, sodium hydroxide, guar gum, glutaraldehyde, and  
5 propargyl alcohol. These chemicals are present in multiple additives. Methanol was reported in  
6 72% of the FracFocus disclosures, and hydrotreated light petroleum distillates and hydrochloric  
7 acid were both reported in over half the disclosures ([U.S. EPA, 2015b](#)).

### 5.10.2. Factors Affecting the Frequency or Severity of Impacts

8 The potential for spills from the chemical mixing process to affect drinking water resources  
9 depends on three factors: fluid characteristics, chemical management and spill characteristics, and  
10 chemical fate and transport. Specific factors affecting the frequency and severity of impacts include  
11 size and type of spill, volume of chemicals spilled, type of chemicals and their properties,  
12 combinations of chemicals spilled, environmental conditions, proximity to drinking water  
13 resources, employee training and experience, quality and maintenance of equipment, and spill  
14 containment and mitigation.

15 The size and type of a fracturing operation, including the number of wellheads, the depth of the  
16 well, the length of the horizontal leg, and the number of stages and phases, affect the likelihood and  
17 potential impacts of spills. Larger operations may require larger volumes of chemicals, more  
18 storage containers, more equipment, and additional transfers between different pieces of  
19 equipment. Larger storage containers increase the maximum volume of a spill or leak from a  
20 storage container, and additional transfers between equipment increase the possibility of human  
21 error.

22 The type of chemical spilled governs how it will move and transform in the environment. More  
23 mobile chemicals move faster through the environment, causing a quicker impact. More mobile  
24 chemicals are also generally more soluble and may reach the drinking water resource at higher  
25 concentrations. Less mobile chemicals will move more slowly, and may have delayed and longer-  
26 term impacts, at lower concentrations. The severity of impact is also governed by how the chemical  
27 adversely impacts water quality. Water quality impacts may range from aesthetic effects (e.g., taste,  
28 smell) to adverse health effects.

29 The environmental conditions at and around the spill site affect the fate and transport of a given  
30 chemical. These conditions include soil properties, climate, weather, and terrain. Permeable soils  
31 may allow for rapid transport of the spilled fluid through the soil and into a nearby drinking water  
32 resource. Precipitation can re-mobilize trapped chemicals and move them over land or through the  
33 subsurface.

34 The proximity of a spill to drinking water resources affects the frequency and severity of impact.  
35 The closer a spill is to a drinking water resource, the higher potential to reach it. Also, as a fluid  
36 moves toward a drinking water resource, it may decrease in concentration, which will affect the  
37 severity of an impact. More concentrated chemicals have the potential to have a bigger impact on



1 water quality. The characteristics of the drinking water resource will also influence the magnitude  
2 of the impact of a spill.

3 The most successful way to prevent impacts to drinking water resources is to prevent spills from  
4 occurring in the first place and to quickly and effectively contain spills. Effective spill containment  
5 and mitigation measures can prevent or reduce the frequency and severity of impacts. Spill  
6 containment measures include well pad containment liners, diversion ditches, berms, dikes,  
7 overflow prevention devices, drip pans, and secondary containers. These may prevent a spill from  
8 reaching soil and water receptors. Spill mitigation, including removing contaminated soils,  
9 vacuuming up spilled fluids, and using sorbent materials may limit the severity of a spill.  
10 Implementation of these measures varies from site-to-site and may not always be effective.

### 5.10.3. Uncertainties

11 The lack of information regarding the composition of chemical additives and fracturing fluids,  
12 containment and mitigation measures in use, and the fate and transport of spilled fluids greatly  
13 limits our ability to assess potential impacts to drinking water resources.

14 There is no standard design for hydraulic fracturing fluids. Detailed information on the chemicals  
15 used is limited, and volumes of chemicals stored on-site are generally not publicly available. These  
16 limitations in data preclude the ability to know what volumes of chemicals may be spilled.  
17 FracFocus, which currently holds the most comprehensive information on water and chemicals  
18 used in hydraulic fracturing fluids, identifies well-specific chemicals and the concentration of those  
19 chemicals as a maximum percentage of the mass of fracturing fluid. Accuracy and completeness of  
20 original FracFocus disclosure information was not verified. In applying the EPA-standardized  
21 chemical list to the ingredient records in the FracFocus database, standardized chemical names  
22 were assigned to only 65% of the ingredient records from the more than 36,000 unique, fully  
23 parsed disclosures. The remaining ingredient records could not be assigned a standardized  
24 chemical name and were excluded from analyses ([U.S. EPA, 2015a](#)).

25 Operators may specify certain ingredients as confidential business information (CBI) and not  
26 disclose the chemical used. More than 70% of disclosures to FracFocus contained at least one CBI  
27 chemical. Of disclosures with at least one CBI chemical, the average number of CBI chemicals was  
28 five. Approximately 11% of all ingredients were reported to FracFocus as CBI ([U.S. EPA, 2015a](#)). No  
29 data are available in FracFocus for any chemical listed as CBI. Therefore, FracFocus CBI chemicals  
30 are not included in analyses of volume, physical properties, or any other analysis in this  
31 assessment, although we were able to do limited physicochemical analysis of 19 CBI chemicals.

32 Of the 1,076 hydraulic fracturing fluid chemicals identified by the EPA, 623 did not have estimated  
33 physicochemical properties reported in the EPI Suite™ database. Knowing the chemical properties  
34 of a spilled fluid is essential to predicting how and where it will travel in the environment. Although  
35 we can make some generalizations about the physicochemical properties of these chemicals and  
36 how spilled chemicals may move in the environment, the distribution of properties could change if  
37 we obtained data for all known fracturing fluid chemicals (as well as for those listed as CBI).

1 In order to determine the potential impact of a spill, the physicochemical properties, the site-  
2 specific environmental conditions, and proximity to drinking water resources must be known. This  
3 information is generally lacking.

4 There is a lack of baseline surface water and ground water quality data. This lack of data limits our  
5 ability to assess the relative change to water quality from a spill or attribute the presence of a  
6 contaminant to a specific source.

7 In addition to limited information on chemical usage, we cannot complete a thorough assessment of  
8 the potential impact of chemical spills due to limited information on actual spills. Data sources used  
9 in the EPA's spills analysis do not cover all states with hydraulic fracturing activity. The available  
10 data provide limited information on the types and volumes of chemicals spilled, spill causes,  
11 containment and mitigation measures, and sources of spills. In addition, there is little available data  
12 on impacts of spills, due to a lack of baseline data and incomplete documentation of follow-up  
13 actions and testing.

14 In general, then, we are limited in our ability to fully assess potential impacts to drinking water  
15 resources from chemical spills, based on available current information. To improve our  
16 understanding we need: more information on the chemical composition of additives and fracturing  
17 fluid; the physicochemical properties of chemicals used; baseline monitoring and field studies of  
18 spilled chemicals; drinking water resources quality conditions before and after hydraulic fracturing  
19 is performed; detailed site-specific environmental conditions; more information on the  
20 containment and mitigation measures and their effectiveness; and the types and volumes of spills.

#### **5.10.4. Conclusions**

21 The chemical mixing stage of the hydraulic fracturing process has the potential to cause impacts to  
22 drinking water resources by way of surface spills of chemicals and fracturing fluids. There are  
23 documented chemical spills at fracturing sites, but a lack of available data limits our ability to  
24 determine impacts. Potential impacts to drinking water resources are governed by the fluid  
25 characteristics, chemical management and spill characteristics, and the fate and transport of spilled  
26 chemicals through the environment.

**Text Box 5-16. Research Questions Revisited.**

1 ***What is currently known about the frequency, severity, and causes of spills of hydraulic fracturing fluids***  
2 ***and additives?***

- 3 • The frequency of on-site spills from hydraulic fracturing operations could be obtained for two states.  
4 Frequency estimates from data and literature ranged from 0.4 to 1.3 spills for every 100 wells  
5 hydraulically fractured in Pennsylvania and Colorado, respectively, and between 3.3 and 12.2 spills for  
6 every 100 wells installed in Pennsylvania ([Rahm et al., 2015](#); [U.S. EPA, 2015n](#); [Brantley et al., 2014](#);  
7 [Gradient, 2013](#)).<sup>1</sup> These estimates include spills of hydraulic fracturing chemicals and fluids, and  
8 flowback and produced water reported in state databases. It is unknown whether these spill estimates  
9 are representative of national occurrences. Estimates of the frequency of on-site spills from hydraulic  
10 fracturing operations were unavailable for other areas. If the estimates are representative, the number of  
11 spills nationally could range from 100 to 3,700 spills annually, assuming 25,000 to 30,000 new wells are  
12 fractured per year.
- 13 • In an analysis of spills, EPA characterized volumes and causes of hydraulic fracturing-related spills  
14 identified from selected state and industry data sources. The spills occurred between January 2006 and  
15 April 2012 in 11 states and included 151 cases in which fracturing fluid or additives spilled on or near a  
16 well pad ([U.S. EPA, 2015n](#)). These cases were likely a subset of all chemical and fracturing fluid spills  
17 during the study's time period. The reported volume of chemicals or fracturing fluid spilled ranged from  
18 5 gal to more than 19,000 gal (19 to 72,000 L), with a median volume of 420 gal (1,600 L) per spill. Spill  
19 causes included equipment failure, human error, failure of container integrity, and other causes (e.g.,  
20 weather and vandalism). The most common cause was equipment failure. Specific causes of equipment  
21 failure included blowout preventer failure, corrosion, and failed valves. More than 30% of the chemical or  
22 fracturing fluid spills characterized by the EPA came from fluid storage units (e.g., tanks, totes, and  
23 trailers) ([U.S. EPA, 2015n](#)).

---

<sup>1</sup> Spill frequency estimates are for a given number of wells over a given period of time. These are not annual estimates nor are they for over a lifetime of the wells.

1 **What are the identities and volumes of chemicals used in hydraulic fracturing fluids, and how might this**  
2 **composition vary at a given site and across the country?**

- 3 • In this assessment, we compiled a list of 1,076 chemicals used to formulate hydraulic fracturing fluids.  
4 These chemicals include acids, alcohols, aromatic hydrocarbons, bases, hydrocarbon mixtures,  
5 polysaccharides, and surfactants. This is a cumulative list over multiple wells and years. Operators used  
6 an median of 14 unique chemicals per well according to the EPA's analysis of disclosures to FracFocus  
7 ([U.S. EPA, 2015a](#)).
- 8 • Our analysis showed that chemical use varies and that no single chemical is used at all well sites across  
9 the country, although several chemicals are widely used. Methanol, hydrotreated light petroleum  
10 distillates, and hydrochloric acid were reported in 65% or more of FracFocus disclosures analyzed by the  
11 EPA ([U.S. EPA, 2015a](#)). The composition of hydraulic fracturing fluids varies by state, by well, and within  
12 the same service company and geologic formation. This variability likely results from several factors,  
13 including the geology of the formation, the availability and cost of different chemicals, and operator  
14 preference ([U.S. EPA, 2015a](#)).
- 15 • Estimates from the EPA's database developed from disclosures made to FracFocus suggest median  
16 volumes of individual chemicals injected per well ranged from a few gallons to thousands of gallons, with  
17 a median of 650 gal (2,500 L) per chemical per well ([U.S. EPA, 2015b](#)). If 14 unique chemicals are used  
18 per well, then an estimated 9,100 gal (34,000 L) of chemicals may be injected per well ([U.S. EPA, 2015a](#)).

19 **What are the chemical and physical properties of hydraulic fracturing chemical additives?**

- 20 • Measured or estimated physicochemical properties were obtained for 453 of the 1,076 chemicals  
21 reported in hydraulic fracturing fluids. The wide variety of chemicals results in a wide range of  
22 physicochemical properties.
- 23 • Many hydraulic fracturing chemicals fully dissolve in water, but the aqueous solubilities range from fully  
24 miscible to sparingly soluble.
- 25 • The octanol-water partition coefficient ranges from the highly hydrophilic to the highly hydrophobic.  
26 Many chemicals used in hydraulic fracturing fluid fall in the middle of this range, suggesting that they will  
27 divide equally between water and solid phase, so that they may move slower through the environment  
28 than those that associate more with water. More chemicals will associate strongly with soils and organic  
29 materials, suggesting the potential of these chemicals to be long-term contaminants if they are spilled.
- 30 • There are few hydraulic fracturing chemicals that are volatile. Most hydraulic fracturing chemicals will  
31 tend to remain in water as opposed to volatilizing to the air.

- 1 • The chemicals for which we know physicochemical properties are not necessarily the chemicals most  
2 frequently reported as used in hydraulic fracturing activities. Of the 453 chemicals for which  
3 physicochemical properties were available, 18 of the top 20 most mobile chemicals were included in 2%  
4 or less of disclosures ([U.S. EPA, 2015b](#)). However, two more common, but highly mobile chemicals,  
5 choline chloride and tetrakis (hydroxymethyl) phosphonium sulfate were reported in 14% and 11% of  
6 disclosures, respectively. These two chemicals are thus relatively more common, and, if spilled, their  
7 properties of high mobility means they would move quickly through the environment with the flow of  
8 water.

9 ***If spills occur, how might hydraulic fracturing chemical additives contaminate drinking water***  
10 ***resources?***

- 11 • When chemicals are spilled, there are several paths by which a chemical could contaminate drinking  
12 water resources. The chemical could flow overland to nearby surface water, penetrate into the soil that  
13 could travel laterally and impact surface waters, or infiltrate and contaminate the underlying ground  
14 water.
- 15 • Of the 151 spills characterized by the EPA, fluids reached surface water in 13 (9%) and soil in 97 (64%)  
16 of those cases. None of the spills reportedly reached ground water ([U.S. EPA, 2015n](#)), but it could take  
17 several years for spilled fluids to infiltrate soil and leach into ground water. Thus, it may not be  
18 immediately known whether a spill reaches ground water or not
- 19 • The timing of a potential impact varies, but it could occur quickly, be delayed, have a continual impact  
20 over time, or occur much later. Which path the spill takes depends on different conditions, such as  
21 distance to a water receptor, spill volume, soil characteristics, and the physicochemical properties of the  
22 chemical.

## 5.11. References for Chapter 5

[Abriola, LM; Pinder, GF](#) (1985a). A multiphase approach to the modeling of porous-media contamination by organic-compounds .2. Numerical-simulation. *Water Resour Res* 21: 19-26.

[Abriola, LM; Pinder, GF](#) (1985b). A multiphase approach to the modeling of porous media contamination by organic compounds: 1. Equation development. *Water Resour Res* 21: 11-18.  
<http://dx.doi.org/10.1029/WR021i001p00011>

[Al-Ghazal, M; Al-Driweesh, S; Al-Shammari, F](#) (2013). First successful application of an environment friendly fracturing fluid during on-the-fly proppant fracturing. Paper presented at International Petroleum Technology Conference, March, 26-28, 2013, Beijing, China.

[ALL Consulting](#) (ALL Consulting, LLC). (2012). *The modern practices of hydraulic fracturing: A focus on Canadian resources*. Tulsa, Oklahoma: ALL Consulting LLC.

[Allen, TE](#). (2013). Pregel blender prototype designed to reduce cost and environmental problems. (SPE-27708-MS). Allen, TE. <http://dx.doi.org/10.2118/27708-MS>

- [Allison, D; Folds, DS; Harless, DJ; Howell, M; Vargus, GW; Stipetich, A.](#) (2009). Optimizing openhole completion techniques for horizontal foam-drilled wells. Paper presented at SPE Eastern Regional Meeting, September 23-25, 2009, Charleston, WV.
- [Alvarez-Cohen, L; Speitel, GE.](#) (2001). Kinetics of aerobic cometabolism of chlorinated solvents. *Biodegradation* 12: 105-126. <http://dx.doi.org/10.1023/A:1012075322466>
- [Aminto, A; Olson, MS.](#) (2012). Four-compartment partition model of hazardous components in hydraulic fracturing fluid additives. *Journal of Natural Gas Science & Engineering* 7: 16-21. <http://dx.doi.org/DOI:10.1016/j.jngse.2012.03.006>
- [API \(American Petroleum Institute\).](#) (2011). Practices for mitigating surface impacts associated with hydraulic fracturing. Washington, DC: API Publishing Services. [http://www.shalegas.energy.gov/resources/HF3\\_e7.pdf](http://www.shalegas.energy.gov/resources/HF3_e7.pdf)
- [Arthur, JD; Bohm, B; Coughlin, BJ; Layne, M.](#) (2009b). Evaluating the environmental implications of hydraulic fracturing in shale gas reservoirs. Paper presented at SPE Americas E&P Environmental and Safety Conference, March 23-25, 2009, San Antonio, TX.
- [Arthur, JD; Bohm, B; Layne, M.](#) (2008). Hydraulic fracturing considerations for natural gas wells of the Marcellus shale. Paper presented at The Ground Water Protection Council Annual Forum, September 21-24, 2008, Cincinnati, OH.
- [Ayala, S; Barber, T; Dessinges, MN; Frey, M; Horkowitz, J; Leugemors, E; Pessin, J; Way, CH; Badry, R; Kholy, IE; Galt, A; Hjellesnet, M; Sock, D.](#) (2006). Improving oilfield service efficiency. Houston, TX: Schlumberger Limited. [http://www.slb.com/~media/Files/resources/oilfield\\_review/ors06/aut06/improving\\_oilfield\\_service\\_efficiency.pdf](http://www.slb.com/~media/Files/resources/oilfield_review/ors06/aut06/improving_oilfield_service_efficiency.pdf)
- [Baker Hughes.](#) (2014a). Baker Hughes green chemicals program overview. Available online
- [Barati, R; Liang, JT.](#) (2014). A review of fracturing fluid systems used for hydraulic fracturing of oil and gas wells. *J Appl Polymer Sci Online* pub. <http://dx.doi.org/10.1002/app.40735>
- [BJ Services Company.](#) (2009). BJ fracturing manual 2.0. service company confidential business information document (Revision No. 1 ed. ed.). Houston, TX.
- [Bouchard, D; Cornaton, F; Höhener, P; Hunkeler, D.](#) (2011). Analytical modelling of stable isotope fractionation of volatile organic compounds in the unsaturated zone. *J Contam Hydrol* 119: 44-54. <http://dx.doi.org/10.1016/j.jconhyd.2010.09.006>
- [Boyer, CM; Glenn, SA; Claypool, BR; Weida, SD; Adams, JD; Huck, DR; Stidham, JE.](#) (2005). Application of viscoelastic fracturing fluids in Appalachian Basin reservoirs (SPE 98068 ed.). Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/98068-MS>
- [Brannon, HD; Daulton, DJ; Hudson, HG; Jordan, AK.](#) (2011). Progression toward implementation of environmentally responsible fracturing processes (SPE-147534-MS ed.). Denver, CO: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/147534-MS>
- [Brannon, HD; Daulton, DJ; Post, MA; Hudson, HG; Jordan, AK.](#) (2012). The quest to exclusive use of environmentally responsible fracturing products and systems. Richardson, TX: Society of Petroleum Engineers. <http://www.onepetro.org/mslib/app/Preview.do?paperNumber=SPE-152068-MS&societyCode=SPE>
- [Brannon, HD; Kendrick, DE; Luckey, E; Stipetich, A.](#) (2009). Multistage Fracturing of Horizontal Shale Gas Wells Using >90% Foam Provides Improved Production. In 2009 SPE Eastern regional meeting: limitless potential/formidable challenges (SPE 124767 ed.). Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/124767-MS>
- [Brannon, HD; Pearson, CM.](#) (2007). Proppants and fracture conductivity. In *Modern fracturing - enhancing natural gas production* (1st ed.). Houston, TX: Energy Tribune Publishing, Inc.



- [Brantley, SL; Yoxtheimer, D; Arjmand, S; Grieve, P; Vidic, R; Pollak, J; Llewellyn, GT; Abad, J; Simon, C.](#) (2014). Water resource impacts during unconventional shale gas development: The Pennsylvania experience. *Int J Coal Geol* 126: 140-156. <http://dx.doi.org/10.1016/j.coal.2013.12.017>
- [Brown, DG; Jaffé, PR.](#) (2001). Effects of nonionic surfactants on bacterial transport through porous media. *Environ Sci Technol* 35: 3877-3883. <http://dx.doi.org/10.1021/es010577w>
- [Browne, DJ; BD, L.](#) (1999). The development of a rapid hydration on-the-fly crosslinked water fracturing fluid. Paper presented at CSPG and Petroleum Society Joint Convention, Digging Deeper, Finding a Better Bottom Line, June 14 18, 1999, Calgary, Canada.
- [Carter, KE; Hammack, RW; Hakala, JA.](#) (2013). Hydraulic Fracturing and Organic Compounds - Uses, Disposal and Challenges. SPE Eastern Regional Meeting, Pittsburgh, Pennsylvania, USA.
- [ChemicalBook](#) (ChemicalBook Inc.). (2010). Sorbitan trioleate. Available online at [http://www.chemicalbook.com/chemicalproductproperty\\_en\\_cb4677178.htm](http://www.chemicalbook.com/chemicalproductproperty_en_cb4677178.htm) (accessed April 6, 2015).
- [COGCC](#) (Colorado Oil and Gas Conservation Commission). (2014). Risk-based inspections: Strategies to address environmental risk associated with oil and gas operations. (OGCC2014PROJECT #7948). Denver, CO.
- [Corseuil, HX; Kaipper, BI; Fernandes, M.](#) (2004). Cosolvency effect in subsurface systems contaminated with petroleum hydrocarbons and ethanol. *Water Res* 38: 1449-1456. <http://dx.doi.org/10.1016/j.watres.2003.12.015>
- [Corseuil, HX; Monier, AL; Fernandes, M; Schneider, MR; Nunes, CC; Do Rosario, M; Alvarez, PJ.](#) (2011). BTEX plume dynamics following an ethanol blend release: geochemical footprint and thermodynamic constraints on natural attenuation. *Environ Sci Technol* 45: 3422-3429. <http://dx.doi.org/10.1021/es104055q>
- [Coulter, GR; Gross, BC; Benton, EG; Thomson, CL.](#) (2006). Barnett shale hybrid fracs - One operator's design, application, and results. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/102063-MS>
- [Curtice, RJ; Salas, WDJ; Paterniti, ML.](#) (2009). To gel or not to gel? In 2009 SPE annual technical conference & exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/124125-MS>
- [Daulton, D; Post, M; McMahon, J; Kuc, B; Ake, C; Hughes, B; Hill, D.](#) (2012). Global chemical evaluation process review to qualify regulatory and environmental characteristics for oilfield chemical products. Paper presented at SPE Annual Technical Conference and Exhibition, October 8-10, 2012, San Antonio, TX.
- [Domenico, PA; Schwartz, FW.](#) (1997). Physical and chemical hydrology. In *Physical and chemical hydrogeology* (2nd ed.). Hoboken, NJ: Wiley.
- [DrillingInfo, Inc.](#) (2012). DI Desktop August 2012 download [Database]. Austin, TX. Retrieved from <http://info.drillinginfo.com/>
- [Economides, MJ; Mikhailov, DN; Nikolaevskiy, VN.](#) (2007). On the problem of fluid leakoff during hydraulic fracturing. *Transport in Porous Media* 67: 487-499. <http://dx.doi.org/10.1007/s11242-006-9038-7>
- [Elbel, J; Britt, L.](#) (2000). Fracture treatment design. In MJ Economides; KG Nolte (Eds.), *Reservoir stimulation* (3rd ed.). New York, NY: John Wiley & Sons.
- [Ely, JW.](#) (1989). Chapter 7: Fracturing fluids and additives. In JL Gidley; SA Holditch; DE Nierode; RW Veatch Jr (Eds.), *Recent advances in hydraulic fracturing* (pp. 131-146). Richardson, TX: Society of Petroleum Engineers.
- [Fink, JK.](#) (2003). Oil field chemicals. In *Oil field chemicals*. Boston, MA: Gulf Professional Publishing.
- [Fisher, K.](#) (2012). Green frac fluid chemistry optimizes well productivity, environmental performance [Magazine]. *The American Oil and Gas Reporter*, March 2012, 4.

- [Fredd, CN; Olsen, TN; Brenize, G; Quintero, BW; Bui, T; Glenn, S; Boney, CL.](#) (2004). Polymer-free fracturing fluid exhibits improved cleanup for unconventional natural gas well applications. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/91433-MS>
- [Freeze, RA; Cherry, JA.](#) (1979). Groundwater. In Groundwater. Upper Saddle River, NJ: Prentice Hall.
- [Gidley, JL; Holditch, SA; Nierode, DE; Veatch Jr., RW.](#) (1989). Recent advances in hydraulic fracturing. Richardson, TX: Society of Petroleum Engineers.
- [GNB](#) (Government of New Brunswick). (2013). Responsible environmental management of oil and natural gas activities in New Brunswick - rules for industry. New Brunswick, Canada. <http://www2.gnb.ca/content/dam/gnb/Corporate/pdf/ShaleGas/en/RulesforIndustry.pdf>
- [GNB](#) (Government of New Brunswick). (2015). FAQs hydraulic fracturing (fracking). New Brunswick, Canada. [http://www2.gnb.ca/content/dam/gnb/Corporate/pdf/ShaleGas/en/FAQ\\_HydraulicFracturing.pdf](http://www2.gnb.ca/content/dam/gnb/Corporate/pdf/ShaleGas/en/FAQ_HydraulicFracturing.pdf)
- [Gradient.](#) (2013). National human health risk evaluation for hydraulic fracturing fluid additives. Gradient. [http://www.energy.senate.gov/public/index.cfm/files/serve?File\\_id=53a41a78-c06c-4695-a7be-84225aa7230f](http://www.energy.senate.gov/public/index.cfm/files/serve?File_id=53a41a78-c06c-4695-a7be-84225aa7230f)
- [Gross, SA; Avens, HJ; Banducci, AM; Sahmel, J; Panko, JM; Tvermoes, BE.](#) (2013). Analysis of BTEX groundwater concentrations from surface spills associated with hydraulic fracturing operations. J Air Waste Manag Assoc 63: 424-432. <http://dx.doi.org/10.1080/10962247.2012.759166>
- [Gu, M; Mohanty, KK.](#) (2014). Effect of foam quality on effectiveness of hydraulic fracturing in shales. International Journal of Rock Mechanics and Mining Sciences 70: 273-285. <http://dx.doi.org/10.1016/j.ijrmms.2014.05.013>
- [Gupta, DVS; Hlidek, BT.](#) (2009). Frac fluid recycling and water conservation: A case history. In 2009 Hydraulic fracturing technology conference. Woodlands, Texas: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/119478-MS>
- [Gupta, DVS; Valkó, P.](#) (2007). Fracturing fluids and formation damage. In M Economides; T Martin (Eds.), Modern fracturing: enhancing natural gas production (pp. 227-279). Houston, TX: Energy Tribune Publishing Inc.
- [GWPC](#) (Groundwater Protection Council). (2009). State oil and natural gas regulations designed to protect water resources. Morgantown, WV: U.S. Department of Energy, National Energy Technology Laboratory. [http://www.gwpc.org/sites/default/files/state oil and gas regulations designed to protect water resources 0.pdf](http://www.gwpc.org/sites/default/files/state%20oil%20and%20gas%20regulations%20designed%20to%20protect%20water%20resources%200.pdf)
- [GWPC and ALL Consulting](#) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>
- [Halliburton.](#) (1988). Primer on Hydraulic Fracturing. Provided to EPA on March 2, 2011. Available at Docket ID: EPA-HQ-ORD-2010-0674-1634. (HESI-3031). Halliburton. <http://www.regulations.gov/#!documentDetail:D=EPA-HQ-ORD-2010-0674-1634>
- [Halliburton.](#) (2014). Hydraulic fracturing 101. Available online at [http://www.halliburton.com/public/projects/pubsdata/hydraulic\\_fracturing/fracturing\\_101.html](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/fracturing_101.html)
- [Harms, WM; Yeager, R.](#) (1987). Diesel-based gel concentrate reduces stimulation costs. Oil and Gas Journal 85: 37-39.
- [Heermann, SE; Powers, SE.](#) (1998). Modeling the partitioning of BTEX in water-reformulated gasoline systems containing ethanol. J Contam Hydrol 34: 315-341. [http://dx.doi.org/10.1016/S0169-7722\(98\)00099-0](http://dx.doi.org/10.1016/S0169-7722(98)00099-0)

- [Holtsclaw, J; Loveless, D; Saini, R; Fleming, J.](#) (2011). SPE 146832: Environmentally-focused crosslinked gel system results in high retained proppant-pack conductivity. Presentation presented at Society of Petroleum Engineers Annual Conference, November 2, 2011, Denver, CO.
- [Horn, A; Hu, J; Patton, M.](#) (2013). QA/QC of water blending enhances crosslinked gel completions. Available online at <http://content.stockpr.com/hydrozonix/files/downloads/1013HEP-hydrozonix.pdf>
- [Houston, N; Blauch, M; Weaver, D; Miller, DS; O'Hara, D.](#) (2009). Fracture-stimulation in the Marcellus shale: Lessons learned in fluid selection and execution. In 2009 SPE eastern regional meeting: limitless potential/formidable challenges. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/125987-MS>
- [Irwin, C.](#) (2013). Hydraulic fracturing: A way to go greener? Available online at <http://breakingenergy.com/2013/04/23/hydraulic-fracturing-a-way-to-go-greener/>
- [King, GE.](#) (2010). Thirty years of gas shale fracturing: what have we learned? Society of Petroleum Engineers. <http://dx.doi.org/10.2118/133456-MS>
- [King, GE.](#) (2012). Hydraulic fracturing 101: What every representative, environmentalist, regulator, reporter, investor, university researcher, neighbor and engineer should know about estimating frac risk and improving frac performance in unconventional gas and oil wells. SPE Hydraulic Fracturing Technology Conference, February 6-8, 2012, The Woodlands, TX.
- [Klein, M; Kenealey, G; Makowecki, B.](#) (2012). Comparison of hydraulic fracture fluids in multi-stage fracture stimulated horizontal wells in the Pembina Cardium formation. In 2012 SPE hydrocarbon economics and evaluation symposium. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/162916-MS>
- [Knappe, D; Fireline, JL.](#) (2012). Fracking 101: Shale gas extraction using horizontal drilling and hydraulic fracturing. Presentation presented at NCAWWA-WEA Annual Conference, November 14, 2012, Raleigh, NC.
- [LePage, J; De Wolf, C; Bemelaar, J; Nasr-El-din, HA.](#) (2013). An environmentally friendly stimulation fluid for high-temperature applications. S P E Journal 16: 104-110. <http://dx.doi.org/10.2118/121709-PA>
- [Lowe, T; Potts, M; Wood, D.](#) (2013). A case history of comprehensive hydraulic fracturing monitoring in the Cana Woodford. In 2013 SPE annual technical conference and exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/166295-MS>
- [Lustgarten, A.](#) (2009). Frack fluid spill in Dimock contaminates stream, killing fish. Available online at <http://www.propublica.org/article/frack-fluid-spill-in-dimock-contaminates-stream-killing-fish-921>
- [MacDonald, RJ; Frantz, JH; Schlotterbeck, ST; Adams, B; Sikorski, D.](#) (2003). An update of recent production responses obtained from Devonian shale and Berea wells stimulated with nitrogen foam (with proppant) vs. nitrogen-only, Pike Co., KY. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/84834-MS>
- [Malone, M; Ely, JW.](#) (2007). Execution of hydraulic fracturing treatments. In M Economides; T Martin (Eds.), Modern fracturing: enhancing natural gas production (pp. 323-360). Houston, TX: ET Publishing.
- [Martin, T; Valko, P.](#) (2007). Hydraulic fracture design for production enhancement. In M Economides; T Martin (Eds.), Modern fracturing enhancing natural gas production. Houston, TX: ET Publishing.
- [Maule, AL; Makey, CM; Benson, EB; Burrows, II; Scammell, MK.](#) (2013). Disclosure of hydraulic fracturing fluid chemical additives: analysis of regulations. New Solutions: A Journal of Environmental and Occupational Health Policy 23: 167-187. <http://dx.doi.org/10.2190/NS.23.1.j>
- [Methanol Institute.](#) (2013). Methanol safe handling manual. Alexandria, VA. <http://www.methanol.org/Health-And-Safety/Safe-Handling/Methanol-Safe-Handling-Manual.aspx>
- [Mitchell, BJ.](#) (1970) Viscosity of foam. (Doctoral Dissertation). The University of Oklahoma,

- Montgomery, C. (2013). Fracturing fluid components. In A Bunder; J McLennon; R Jeffrey (Eds.), Effective and Sustainable Hydraulic Fracturing. Croatia: InTech. <http://dx.doi.org/10.5772/56422>
- NETL (National Energy Technology Laboratory). (2013). Modern shale gas development in the United States: An update. Pittsburgh, PA: U.S. Department of Energy. National Energy Technology Laboratory. <http://www.netl.doe.gov/File%20Library/Research/Oil-Gas/shale-gas-primer-update-2013.pdf>
- NYSDEC (New York State Department of Environmental Conservation). (2011). Revised draft supplemental generic environmental impact statement (SGEIS) on the oil, gas and solution mining regulatory program: Well permit issuance for horizontal drilling and high-volume hydraulic fracturing to develop the Marcellus shale and other low-permeability gas reservoirs. Albany, NY: NY SDEC. <http://www.dec.ny.gov/energy/75370.html>
- Olson, JE. (2011). Hydraulic fracturing overview. Presentation presented at Summer Institute B: Energy, Climate and Water in the 21st Century, TXESS Revolution, Texas Earth and Space Science Revolution Professional Development for Educators, June, 2011, Austin, TX.
- OSHA (Occupational Safety & Health Administration). (2014a). Personal communication: email exchanges between Tandy Zitkus, OSHA and Rebecca Daiss, U.S. EPA. Available online
- OSHA (Occupational Safety & Health Administration). (2014b). Personal communication: phone conversation between Tandy Zitkus, OSHA and Rebecca Daiss, U.S. EPA. Available online
- OSHA (Occupational Safety & Health Administration). (2015). Oil and gas well drilling and servicing etool: Well completion. Available online at [https://www.osha.gov/SLTC/etools/oilandgas/well\\_completion/well\\_completion.html](https://www.osha.gov/SLTC/etools/oilandgas/well_completion/well_completion.html)
- Papoulias, DM; Velasco, AL. (2013). Histopathological analysis of fish from Acorn Fork Creek, Kentucky, exposed to hydraulic fracturing fluid releases. *Southeastern Naturalist* 12: 92-111.
- Patel, PS; Robart, CJ; Ruegamer, M; Yang, A. (2014). Analysis of US hydraulic fracturing fluid system and proppant trends. In 2014 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168645-MS>
- Pearson, CM; Griffin, L; Wright, CA; Weijers, L. (2013). Breaking up is hard to do: creating hydraulic fracture complexity in the Bakken central basin. In 2013 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/163827-MS>
- Penttila, B; Heine, L; Craft, E. (2013). Manuscript in preparation assessing the hazard data gap for hydraulic fracturing chemicals. Penttila, B; Heine, L; Craft, E.
- Phillips, A. (2014). Frackers spill olympic pools worth of hydrochloric acid in Oklahoma. Available online at <http://thinkprogress.org/climate/2014/07/31/3466283/olympic-pool-sized-hydrochloric-acid-spill-oklahoma/>
- Powell, B. (2013). Secondary containment: regulations and best management practices in the Appalachian Basin. (AADE-13-FTCE-18). Houston, Texas: American Association of Drilling Engineers.
- Powers, SE; Hunt, CS; Heermann, SE; Corseuil, HX; Rice, D; Alvarez, PJJ. (2001). The transport and fate of ethanol BTEX in groundwater contaminated by gasohol. *Environ Sci Technol* 31: 79-123. <http://dx.doi.org/10.1080/20016491089181>
- Rahm, BG; Vedachalam, S; Bertoia, LR; Mehta, D; Vanka, VS; Riha, SJ. (2015). Shale gas operator violations in the Marcellus and what they tell us about water resource risks. *Energy Policy* 82: 1-11. <http://dx.doi.org/10.1016/j.enpol.2015.02.033>
- Rasa, E; Bekins, BA; Mackay, DM; de Sieves, NR; Wilson, JT; Feris, KP; Wood, IA; Scow, KM. (2013). Impacts of an ethanol-blended fuel release on groundwater and fate of produced methane: Simulation of field observations. *Water Resour Res* 49: 4907-4926. <http://dx.doi.org/10.1002/wrcr.20382>

- [Rickman, R; Mullen, MJ; Petre, JE; Grieser, WV; Kundert, D.](#) (2008). A practical use of shale petrophysics for stimulation design optimization: all shale plays are not clones of the Barnett shale. In 2008 SPE annual technical conference & exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/115258-MS>
- [Rivett, MO; Wealthall, GP; Dearden, RA; McAlary, TA.](#) (2011). Review of unsaturated-zone transport and attenuation of volatile organic compound (VOC) plumes leached from shallow source zones [Review]. J Contam Hydrol 123: 130-156. <http://dx.doi.org/10.1016/j.jconhyd.2010.12.013>
- [Rodvelt, GD; Yeager, VI; Hyatt, MA.](#) (2013). Case history: challenges using ultraviolet light to control bacteria in Marcellus completions. In 2011 SPE eastern regional meeting. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/149445-MS>
- [Saba, T; Mohsen, F; Garry, M; Murphy, B; Hilbert, B.](#) (2012). White paper: Methanol use in hydraulic fracturing fluids. (1103844.000 0101 0711 TS26). Maynard, MA: Exponent.
- [Santa Cruz Biotechnology.](#) (2015). Sorbitane trioleate (CAS 26266-58-0). Available online at <http://www.scbt.com/datasheet-281154-Sorbitane-Trioleate.html> (accessed April 6, 2015).
- [Schlumberger](#) (Schlumberger Limited). (2014). Schlumberger oilfield glossary. Available online at <http://www.glossary.oilfield.slb.com/>
- [Schlumberger](#) (Schlumberger Limited). (2015). Stimulation. Available online at <http://www.slb.com/services/completions/stimulation.aspx>
- [Schnoor, JL.](#) (1996). Environmental modeling: Fate and transport of pollutants in water, air, and soil. In Environmental modeling: Fate and transport of pollutants in water, air, and soil (1 ed.). Hoboken, NJ: Wiley-Interscience.
- [Schwarzenbach, RP; Gschwend, PM; Imboden, DM.](#) (2002). Environmental Organic Chemistry. In Environmental organic chemistry (2 ed.). Hoboken, NJ: John Wiley & Sons, Inc.
- [Sjolander, SA; Clark, J; Rizzo, D; Turack, J.](#) (2011). Water facts #31: Introduction to hydrofracturing. University Park, PA: Penn State College of Agricultural Sciences - Cooperative Extension. [http://www.shale-gas-information-platform.org/fileadmin/ship/dokumente/introduction\\_to\\_hydrofracturing-2.pdf](http://www.shale-gas-information-platform.org/fileadmin/ship/dokumente/introduction_to_hydrofracturing-2.pdf)
- [Spellman, FR.](#) (2012). Environmental impacts of hydraulic fracturing. In Environmental impacts of hydraulic fracturing. Boca Raton, Florida: CRC Press.
- [Stinger Wellhead Protection, I. nc.](#) (2010). Stinger Wellhead Protection. Houston, TX: Stinger Wellhead Protection, Inc. <http://etdevelopers.com/design-preview/STS/product-catalog/STS Product Catalog 2010-SWP.pdf>
- [STO](#) (Statoil). (2013). Shale facts: drilling and hydraulic fracturing, how it's done, responsibly. (Global Version, April 2013). Stavanger, Norway. [http://www.statoil.com/no/OurOperations/ExplorationProd/ShaleGas/FactSheets/Downloads/Shale\\_DrillingHydraulicFracturing.pdf](http://www.statoil.com/no/OurOperations/ExplorationProd/ShaleGas/FactSheets/Downloads/Shale_DrillingHydraulicFracturing.pdf)
- [Stringfellow, WT; Domen, JK; Camarillo, MK; Sandelin, WL; Borglin, S.](#) (2014). Physical, chemical, and biological characteristics of compounds used in hydraulic fracturing. J Hazard Mater 275: 37-54. <http://dx.doi.org/10.1016/j.jhazmat.2014.04.040>
- [SWN](#) (Southwestern Energy). (2011). Frac fluid whats in it? Houston, TX. [http://www.swn.com/operations/documents/frac\\_fluid\\_fact\\_sheet.pdf](http://www.swn.com/operations/documents/frac_fluid_fact_sheet.pdf)
- [SWN](#) (Southwestern Energy). (2014). Field Site Visit at Southwestern Energy. Available online
- [Taylor, RS; Lestz, RS; Loree, D; Funkhouser, GP; Fyten, G; Attaway, D; Watkins, H.](#) (2006). Optimized CO2 miscible hydrocarbon fracturing fluids. Calgary, Alberta, Canada: Petroleum Society of Canada. <http://dx.doi.org/10.2118/2006-168>



- [Tudor, EH; Nevison, GW; Allen, S; Pike, B.](#) (2009). Case study of a novel hydraulic fracturing method that maximizes effective hydraulic fracture length. In 2009 SPE annual technical conference & exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/124480-MS>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (1996). Soil screening guidance: technical background document, part 2 [EPA Report] (2nd ed.). (EPA/540/R-95/128). Washington, DC: U.S. Environmental Protection Agency, Office of Solid Waste and Emergency Response. [http://www.epa.gov/superfund/health/conmedia/soil/pdfs/part\\_2.pdf](http://www.epa.gov/superfund/health/conmedia/soil/pdfs/part_2.pdf)
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012b). Estimation Programs Interface Suite for Microsoft Windows (EPI Suite) [Computer Program]. Washington DC: US Environmental Protection Agency. Retrieved from <http://www.epa.gov/oppt/exposure/pubs/episuitedi.htm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013a). Data received from oil and gas exploration and production companies, including hydraulic fracturing service companies 2011 to 2013. Non-confidential business information source documents are located in Federal Docket ID: EPA-HQ-ORD2010-0674. Available at <http://www.regulations.gov>.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015b). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Project database [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocus-1-disclosures>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015j). Retrospective case study in Killdeer, North Dakota: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/103). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015n). Review of state and industry spill data: characterization of hydraulic fracturing-related spills [EPA Report]. (EPA/601/R-14/001). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [Upstream Pumping.](#) (2015). Upstream pumping: Wellhead technology and services. Available online at <http://upstreampumping.com/>
- [UWS](#) (Universal Well Services). (2008). Environmental response plan for field operations. (PATT-EPA-0001060). Meadville, PA: Universal Well Services, Inc.
- [Vidic, RD; Brantley, SL; Vandenbossche, JM; Yoxtheimer, D; Abad, JD.](#) (2013). Impact of shale gas development on regional water quality [Review]. Science 340: 1235009. <http://dx.doi.org/10.1126/science.1235009>
- [Waldron, P.](#) (2014). In search of greener fracking for natural gas. Available online at <http://www.insidescience.org/content/search-greener-fracking-natural-gas/1791>
- [Weinstein, J; Phillippi, M; Walters, HG.](#) (2009). Dry-polymer blending eliminates need for hydrocarbon carrier fluids. In 2009 SPE/EPA/DOE E&P Environmental & Safety Conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/121002-MS>
- [Wertz, J.](#) (2014). Fracking site operator faces contempt complaint after acid spill. Available online at <http://stateimpact.npr.org/oklahoma/2014/08/14/fracking-site-operator-faces-contempt-complaint-after-acid-spill/>
- [Yeager, RR; Bailey, DE.](#) (2013). Diesel-based gel concentrate improves Rocky Mountain region fracture treatments. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/17535-MS>



## **Chapter 6**

---

### **Well Injection**

## 6. Well Injection

### 6.1. Introduction

1 To conduct hydraulic fracturing, fluids (primarily water, mixed with the types of chemicals and  
2 proppant described in Chapter 5) are injected into a well under high pressure.<sup>1</sup> These fluids flow  
3 under pressure through the well (sometimes thousands of feet below the surface), then exit the  
4 well and move into the formation, where they create fractures in the rock. This process is also  
5 known as a fracture treatment or a type of stimulation.<sup>2</sup> The fractures, which typically extend  
6 hundreds of feet laterally from the well, are designed to remain within the production zone to  
7 access as much oil or gas as possible, while using no more water or chemicals than necessary to  
8 complete the operation.<sup>3</sup>

9 Production wells are sited and designed primarily to optimize production of oil or gas, which  
10 requires isolating water-bearing formations and those containing the hydrocarbons to be exploited  
11 from each other. This isolation can also protect drinking water resources. Appropriately sited,  
12 designed, constructed, and operated wells and hydraulic fracturing treatments can reduce the  
13 potential for impacts to drinking water resources. However, problems with the well's components  
14 or improperly sited, designed, or executed hydraulic fracturing operations (or combinations of  
15 these) could lead to adverse effects on drinking water resources.

16 The well and the geologic environment in which it is located are a closely linked system, often  
17 designed with multiple barriers (i.e., isolation afforded by the well's casing and cement and the  
18 presence of multiple layers of subsurface rock) to prevent fluid movement between oil/gas zones  
19 and drinking water resources. Therefore, in this chapter we discuss (1) the well (including its  
20 construction and operation) and (2) features in the subsurface geologic formations that could  
21 provide or have provided pathways for migration of fluids to drinking water resources. If present  
22 and in combination with the existence of a fluid and a physical force that moves the fluid, these  
23 pathways can lead to impacts on drinking water resources throughout the life of the well, including  
24 during and after hydraulic fracturing.<sup>4</sup>

25 Fluids can move **via pathways adjacent to or through the production well** that are created in  
26 response to the stresses exerted during hydraulic fracturing operations (see Section 6.2). While  
27 wells are designed and constructed to isolate fluids and maximize the production of oil and gas,

---

<sup>1</sup> A fluid is a substance that flows when exposed to an external pressure; fluids include both liquids and gases.

<sup>2</sup> In the oil and gas industry, "stimulation" has two meanings—it refers to (1) injecting fluids to clear the well or pore spaces near the well of drilling mud or other materials that create blockage and inhibit optimal production (i.e., matrix treatment) and (2) injecting fluid to fracture the rock to optimize the production of oil or gas. This chapter focuses on the latter.

<sup>3</sup> The "production zone" (sometimes referred to as the target zone) refers to the portion of a subsurface rock zone that contains oil or gas to be extracted (sometimes using hydraulic fracturing). "Producing formation" refers to the larger geologic unit in which the production zone occurs.

<sup>4</sup> The primary physical force that moves fluids within the subsurface is a difference in pressure. Fluids move from areas of higher pressure to areas of lower pressure when a pathway exists. Density-driven buoyancy may also serve as a driving force. See Section 6.3.

1 inadequate construction or degradation of the casing or cement can allow fluid movement that can  
2 change the quality of drinking water resources. Potential issues associated with wells may be  
3 related to the following:

- 4 • Casing (e.g., faulty, inadequate, or degraded casing or other well components, as  
5 influenced by the numbers of casings; the depths to which these casings are set;  
6 compatibility with the geochemistry of intersected formations; the age of the well;  
7 whether re-fracturing is performed; and other operational factors) and
- 8 • Cement (e.g., poor, inadequate, or degraded cement, as influenced by a lack of cement in  
9 key intervals; poor-quality cement; improper or inadequate placement of cement; or  
10 degradation of cement over time).

11 Fluid movement can also occur **via induced fractures and/or other features within subsurface**  
12 **formations** (see Section 6.3). While the hydraulic fracturing operation may be designed so that the  
13 fractures will remain within the production zone, it is possible that, in the execution of the  
14 hydraulic fracturing treatment, fractures can extend beyond their designed extent. Four scenarios  
15 associated with induced fractures may contribute to fluid migration or communication between  
16 zones:

- 17 • Flow of injected and/or displaced fluids through pore spaces in the rock formations out of  
18 the production zone due to pressure differences and buoyancy effects.
- 19 • Fractures extending out of oil/gas formations into drinking water resources or zones that  
20 are in communication with drinking water resources or fracturing into zones containing  
21 drinking water resources.
- 22 • Fractures intersecting artificial structures, including abandoned or active (producing)  
23 offset wells near the well that is being stimulated (i.e., well communication) or abandoned  
24 or active mines.<sup>1</sup>
- 25 • Fractures intersecting geologic features that can act as conduits, such as existing  
26 permeable faults and fractures.

27 In this chapter, we describe the conditions that can contribute to or cause the development of the  
28 pathways listed above, the evidence for the existence of these pathways, and potential impacts or  
29 impacts on drinking water resources associated with these pathways.

30 The interplay between the well and the subsurface features is complex, and sometimes it is not  
31 possible to identify what specific element is contributing to or is the primary cause of an impact to  
32 drinking water resources. For example, concerns have been raised regarding stray gas detected in  
33 ground water in natural gas production areas (for additional information about stray gas, see  
34 Sections 6.2.2 and 6.3.2.4).<sup>2</sup> Stray gas migration is a technically complex phenomenon, because

---

<sup>1</sup> An abandoned well refers to a well that is no longer being used or cannot be used because of its poor condition.

<sup>2</sup> Stray gas refers to the phenomenon of natural gas (primarily methane) migrating into shallow drinking water resources or to the surface.

1 there are many potential naturally occurring or artificially created routes for migration of gas into  
2 aquifers (including along production wells and via naturally existing or induced fractures), and it is  
3 challenging to determine the source of the natural gas and whether the mobilization is related to oil  
4 or gas production activities.

5 Furthermore, identifying cases where contamination of drinking water resources occurs due to oil  
6 and gas production activities—including hydraulic fracturing operations—requires extensive  
7 amounts of site and operational data, collected before and after hydraulic fracturing operations.  
8 Where such data does exist and provides evidence of contamination, we present it in the following  
9 sections. We do not attempt to predict which of these pathways is most likely to occur or to lead to  
10 a drinking water impact, or the magnitude of an impact that might occur as a result of migration via  
11 any single pathway, unless the information is available and documented based on collected data.

## 6.2. Fluid Migration Pathways Within and Along the Production Well

12 In this section, we discuss pathways for fluid movement along or through the production well used  
13 in the hydraulic fracturing operation. While these pathways can form at any time within any well,  
14 the repeated high pressure stresses exerted during hydraulic fracturing operations may make  
15 maintaining integrity of the well more difficult ([Council of Canadian Academies, 2014](#)). In Section  
16 6.2.1, we present the purpose of the various well components and typical well construction  
17 configurations. Section 6.2.2 describes the pathways for fluid movement that can potentially  
18 develop within the production well and wellbore and the conditions that lead to pathway  
19 development, either as a result of the original design of the well, degradation over time or use, or  
20 hydraulic fracturing operations.

21 While we discuss casing and cement separately, it is important to note that these are related—  
22 inadequacies in one of these components can lead to stresses on the other. For example, flaws in  
23 cement may expose the casing to corrosive fluids. Furthermore, casing and cement work together in  
24 the subsurface to form a barrier to fluid movement, and it may not be possible to distinguish  
25 whether integrity problems are related to the casing, the cement, or both. For additional  
26 information on well design and construction, see Appendix D.

### 6.2.1. Overview of Well Construction

27 Production wells are constructed to convey hydrocarbon resources from the reservoirs in which  
28 they are found to the surface and also to isolate fluid-bearing zones (containing oil, gas, or fresh  
29 water) from each other. Multiple barriers are often present, and they act together to prevent both  
30 horizontal movement (in or out of the well) and vertical movement (along the wellbore from deep  
31 formations to drinking water resources). Proper design and construction of the casing, cement, and  
32 other well components in the context of the location of drinking water resources and maintaining  
33 mechanical integrity throughout the life of a well are necessary to prevent migration of fracturing  
34 fluids, formation fluids, and hydrocarbons into drinking water resources.

1 A well is a multiple-component system that typically includes casing, cement, and a completion  
2 assembly, and it may be drilled vertically, horizontally, or in a deviated orientation.<sup>1</sup> These  
3 components work together to prevent unintended fluid movement into, out of, or along the well.  
4 Due to the presence of multiple barriers within the well and the geologic system in which it is  
5 placed, the existence of one pathway for fluid movement does not necessarily mean that an impact  
6 to a drinking water resource has occurred or will occur.

7 Casing primarily acts as a barrier to lateral movement of fluids, and cement primarily acts as a  
8 barrier to unintended vertical movement of fluids. Together, casing and cement are important in  
9 preventing fluid movement into drinking water resources, and are the focus of this section. Figure  
10 6-1 illustrates the configurations of casing and cement that may occur in oil and gas production  
11 wells, including the types of casing strings that may be present, the potential locations of cement,  
12 and other features. The figure depicts an idealized representation of the components of a  
13 production well; it is important to note that there is a wide variety in the design of hydraulically  
14 fractured oil and gas wells in the United States ([U.S. EPA, 2015o](#)), and the descriptions in the figure  
15 or in this chapter do not represent every possible well design.

#### **6.2.1.1. Casing**

16 Casing is steel pipe that is placed into the drilled wellbore to maintain the stability of the wellbore,  
17 to transport the hydrocarbons from the subsurface to the surface, and to prevent intrusion of other  
18 fluids into the well and wellbore ([Hyne, 2012](#); [Renpu, 2011](#)). A long continuous section of casing is  
19 referred to as a casing string, which is composed of individual lengths of casing (known as casing  
20 joints) that are threaded together using casing collars. In different sections of the well, multiple  
21 concentric casing strings (of different diameters) can be used, depending on the construction of the  
22 well.

23 The presence of multiple layers of casing strings can isolate and protect geologic zones containing  
24 drinking water. In addition to conductor casing, which prevents the hole from collapsing during  
25 drilling, one to three other types of casing may be also present in a well. The types of casing include  
26 (from largest to smallest diameter) surface casing, intermediate casing, and production casing  
27 ([GWPC, 2014](#); [Hyne, 2012](#); [Renpu, 2011](#)). One or more of any of these types of casing may be  
28 present in a well. Surface casing often extends from the wellhead down to the base (bottom) of the  
29 drinking water resource to be protected. Wells also may be constructed with liners, which are  
30 anchored or suspended from inside the bottom of the previous casing string, rather than extending  
31 all the way to the surface, and production tubing, which is used to transport the hydrocarbons to  
32 the surface.

---

<sup>1</sup> For the purposes of this assessment, a well's "orientation" refers to the direction in which the well is drilled, and "deviation" is used to indicate an orientation that is neither strictly vertical nor strictly horizontal. However, in industry usage, "deviation" is also used as a generic term to indicate well orientation.



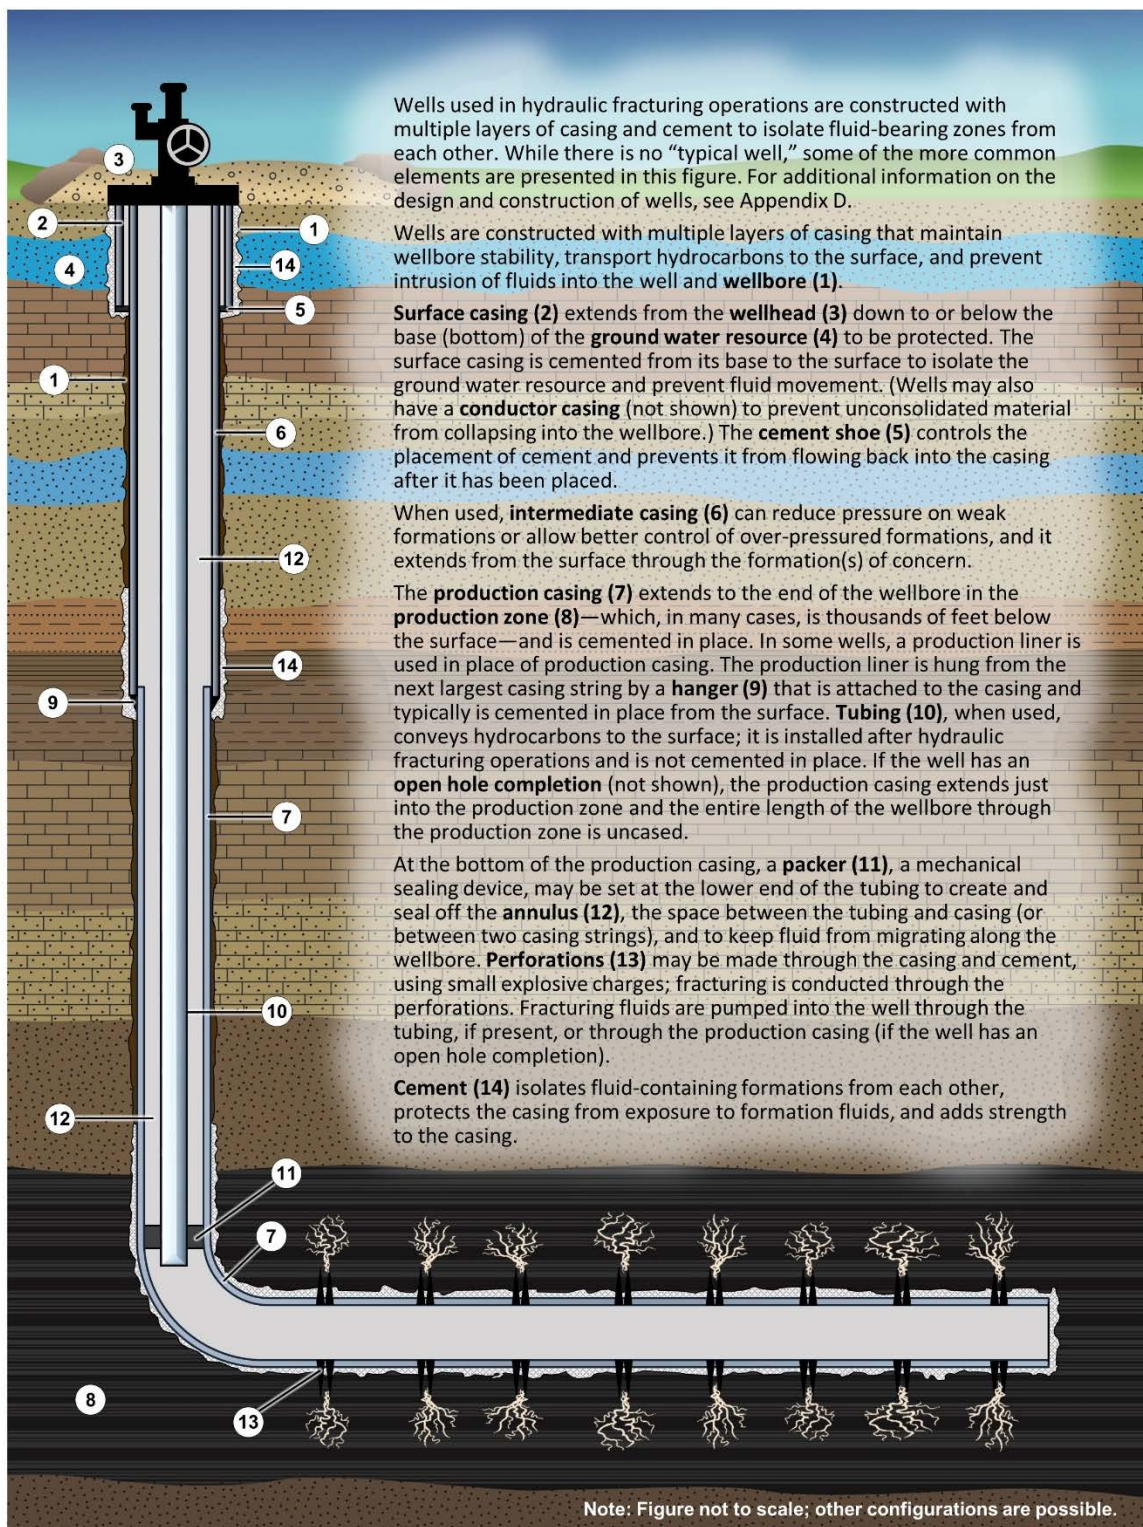


Figure 6-1. Overview of well construction.



1 Among the wells represented by the Well File Review (see Text Box 6-1), between one and three  
2 casing strings were present (the Well File Review did not evaluate conductor casings). A  
3 combination of surface and production casings was most often reported, followed by a combination  
4 of surface, intermediate, and production strings. All of the production wells used in hydraulic  
5 fracturing operations in the Well File Review had surface casing, while approximately 39% of the  
6 wells (an estimated 9,100 wells) had intermediate casing, and 94% (an estimated 21,900 wells) had  
7 production casing ([U.S. EPA, 2015o](#)).


**Text Box 6-1. The Well File Review.**

8 The EPA conducted a survey of onshore oil and gas production wells that were hydraulically fractured by nine  
9 oil and gas service companies in the continental United States between approximately September 2009 and  
10 September 2010. The *Review of Well Operator Files for Hydraulically Fractured Oil and Gas Production Wells:  
11 Well Design and Construction* ([U.S. EPA, 2015o](#)), referred to as the Well File Review, presents the results of the  
12 survey and describes, for these wells: well design and construction characteristics, the relationship of well  
13 design and construction characteristics to drinking water resources, and the number and relative location of  
14 well construction barriers (i.e., casing and cement) that can block pathways for potential subsurface fluid  
15 movement.

16 The results of the survey are based on information provided by well operators for a statistically  
17 representative sample of 323 hydraulically fractured oil and gas production wells. The EPA did not attempt to  
18 independently and systematically verify data supplied by well operators. Consequently, results from analyses  
19 based on these data are of the same quality as the supplied data.

20 Results of the survey are presented as rounded estimates of the frequency of occurrence of hydraulically  
21 fractured production well design or construction characteristics with 95% confidence intervals. The results  
22 are statistically representative of an estimated 23,200 (95% confidence interval: 21,400-25,000) onshore oil  
23 and gas production wells hydraulically fractured in 2009 and 2010 by the nine service companies.

24 Hydraulic fracturing operations impose a variety of stresses on the well components. The casing  
25 should be designed with sufficient strength to withstand the stresses it will encounter during the  
26 installation, cementing, fracturing, production, and postproduction phases of the life of the well.  
27 These stresses, illustrated in Figure 6-2, include burst pressure (the interior pipe pressure that will  
28 cause the casing to burst), collapse pressure (the pressure applied to the outside of the casing that  
29 will cause it to collapse), tensile stress (the stress related to stretching exerted by the weight of the  
30 casing or tubing being raised or lowered in the hole), compression and bending (the stresses that  
31 result from pushing along the axis of the casing or bending the casing), and cyclical stress (the  
32 stress caused by frequent or rapid changes in temperature or pressure). Casing strength can be  
33 increased by using high-strength alloys or by increasing the thickness of the casing. In addition, the  
34 casing must be resistant to corrosion from contact with the formations and any fluids that might be  
35 transported through the casing, including hydraulic fracturing fluids, brines, and oil or gas.

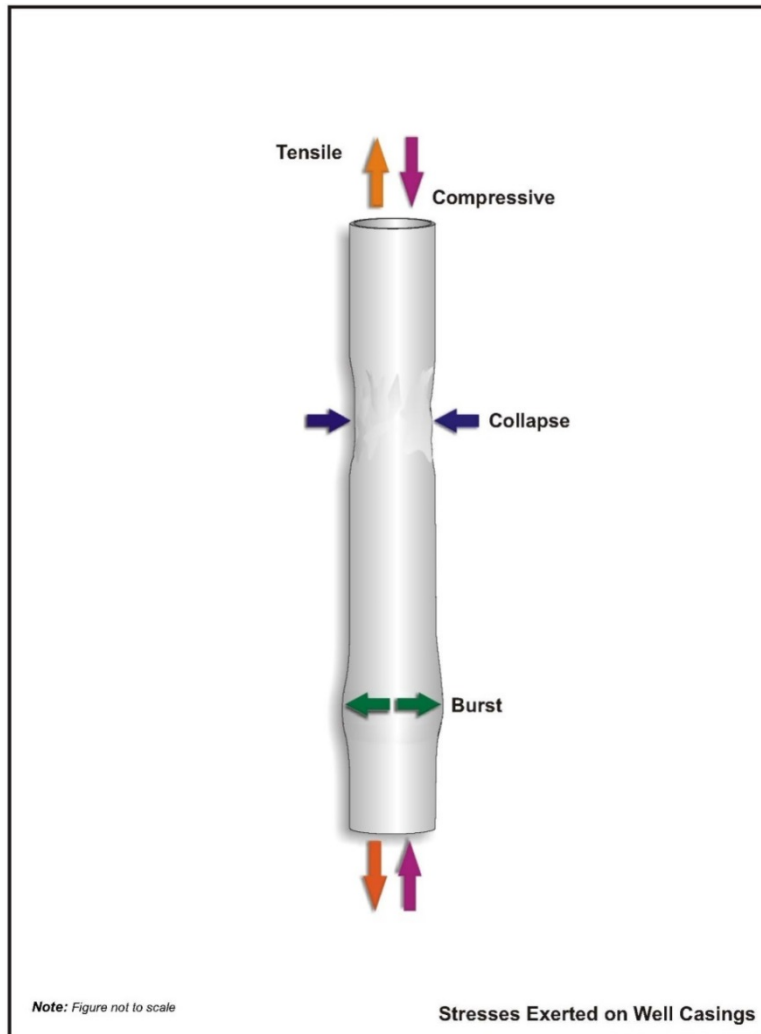

**Figure 6-2. The various stresses to which the casing will be exposed.**

In addition to the stresses illustrated, the casing will be subjected to bending and cyclical stresses.  
Source: [U.S. EPA \(2012c\)](#).

#### **6.2.1.2. Cement**

1 Cement is one of the most important components of a well for providing zonal isolation and  
2 reducing impacts on drinking water. Cement isolates fluid-containing formations from each other,  
3 protects the casing from exposure to formation fluids, and provides additional strength to the  
4 casing. The strength of the cement and its compatibility with the formations and fluids encountered  
5 are important for maintaining well integrity through the life of the well.

6 The cement does not always need to be continuous along the entire length of the well in order to  
7 protect drinking water resources; rather, protection of drinking water resources depends on a good  
8 cement seal across the appropriate subsurface zones, including all fresh water- and hydrocarbon-  
9 bearing zones. One study in the Gulf of Mexico found that there was no breakdown in isolation

1 between geologic zones with pressure differentials as high as 14,000 psi as long as there was at  
2 least 50 ft (15 m) of high-quality cement between the zones ([King and King, 2013](#)).

3 Most wells have cement behind the surface casing, which is a key barrier to contamination of  
4 drinking water resources. The surface casings in nearly all of the wells used in hydraulic fracturing  
5 operations represented in the Well File Review (93% of the wells, or an estimated 21,500 wells)  
6 were fully cemented.<sup>1</sup> None of the wells studied in the Well File Review had completely uncemented  
7 surface casings.

8 The length and location of cement behind intermediate and production casings can vary based on  
9 the presence and locations of over-pressured formations, formations containing fluids, or  
10 geologically weak formations (i.e., those that are prone to structural failure when exposed to  
11 changes in subsurface stresses). State regulations and economics also play a role; 25 out of 27 oil  
12 and gas producing states surveyed by the Ground Water Protection Council require some minimum  
13 amount of cementing on the production casing above the producing zone ([GWPC, 2014](#)). In general,  
14 the intermediate casings of the wells studied in the Well File Review were fully cemented; while  
15 among production casings, about half were partially cemented, about a third were fully cemented,  
16 and the remainder were either uncemented or their cementing status was undetermined. Among  
17 the approximately 9,100 wells represented in the Well File Review that are estimated to have  
18 intermediate casing, the intermediate casing was fully cemented in an estimated approximately  
19 7,300 wells (80%) and partially cemented in an estimated 1,700 wells (19%). Production casings  
20 were partially cemented in 47% of the wells, or approximately 10,900 wells ([U.S. EPA, 2015o](#)).

21 The Well File Review also estimated the number of wells with a continuous cement sheath along the  
22 outside of the well. An estimated 6,800 of the wells represented in the study (29%) had cement  
23 from the bottom of the well to the ground surface, and approximately 15,300 wells (66%) had one  
24 or more uncemented intervals between the bottom of the well and the ground surface. In the  
25 remaining wells, the location of the top of the cement was uncertain, so no determination could be  
26 made regarding whether the well had a continuous cement sheath along the outside of the well  
27 ([U.S. EPA, 2015o](#)).

28 A variety of methods are available for placing the cement, evaluating the adequacy of the cementing  
29 process and the resulting cement job, and repairing any identified deficiencies. Cement is most  
30 commonly emplaced by pumping the cement down the inside of the casing to the bottom of the  
31 wellbore and then up the space between the outside of the casing and the formation (or the next  
32 largest casing string). This method is referred to as the primary cement job and can be performed  
33 as a continuous event in a single stage (i.e., “continuous cementing”) or in multiple stages (i.e.,  
34 “staged cementing”). Staged cementing may be used when, for example, the estimated weight and

---

<sup>1</sup> The Well File Review defined fully cemented casings as casings that had a continuous cement sheath from the bottom of the casing to at least the next larger and overlying casing (or the ground surface, if surface casing). Partially cemented casings were defined as casings that had some portion of the casing that was cemented from the bottom of the casing to at least the next larger and overlying casing (or ground surface), but were not fully cemented. Casings with no cement anywhere along the casing, from the bottom of the casing to at least the next larger and overlying casing (or ground surface), were defined as uncemented.

1 pressure associated with standard cement placement could damage weak zones in the formation  
2 ([Crook, 2008](#)).

3 Deficiencies in the cementing process can result from poor centering or lost cement.<sup>1</sup> Poor  
4 centering of the casing within the wellbore can cause uneven cement placement around the  
5 wellbore, leading to the formation of thin weak spots that are prone to creation of uncemented  
6 channels around the casing and loss of integrity ([Kirksey, 2013](#)). If any deficiencies or defects in the  
7 primary cement job are identified, remedial cementing may be performed.

8 In over 90% of wells studied in the Well File Review, the casing strings were cemented using  
9 primary cement methods. Secondary or remedial cementing was used on an estimated  
10 4,500 casings (8%) most often on surface and production casings and less often on intermediate  
11 casings. The remedial cementing techniques employed in these wells included cement squeezes,  
12 cement baskets, and pumping cement down the annulus ([U.S. EPA, 2015o](#)). See Appendix D for  
13 more information on remedial cementing techniques.

14 A variety of logs are available to evaluate the quality of cement behind the well casing. Among wells  
15 in the Well File Review, the most common type of cement evaluation log run was a standard  
16 acoustic cement bond log ([U.S. EPA, 2015o](#)). Standard acoustic cement bond logs are used to  
17 evaluate both the extent of the cement placed along the casing and the cement bond between the  
18 cement, casing, and wellbore.<sup>2</sup> Cement bond indices calculated from standard acoustic cement bond  
19 logs on the wells in the Well File Review showed a median bond index of 0.7 just above the  
20 hydraulic fracturing zone; this value decreased to 0.4 over a measured distance of 5,000 ft (1,524  
21 m) above the hydraulic fracturing zone ([U.S. EPA, 2015o](#)). While standard acoustic cement bond  
22 logs can give an average estimate of bonding, they cannot alone indicate zonal isolation, because  
23 they may not be properly run or calibrated ([Boyd et al., 2006](#); [Smolen, 2006](#)). One study of 28 wells  
24 found that cement bond logs failed to predict communication between formations 11% of the time  
25 ([Boyd et al., 2006](#)). In addition, they cannot discriminate between full circumferential cement  
26 coverage by weaker cement and lack of circumferential coverage by stronger cement ([King and](#)  
27 [King, 2013](#); [Smolen, 2006](#)). A few studies have compared cement bond indices to zonal isolation,  
28 with varying results. For example, [Brown et al. \(1970\)](#) showed that among 16 South American wells  
29 with varying casing size and cement bond indices, a cemented 5.5 in (14 cm) diameter casing with a  
30 bond index of 0.8 along as little as five feet can act as an effective seal. The authors also suggest that  
31 an effective seal in wells having calculated bond indices differing from 0.8 are expected to have an  
32 inverse relationship between bond index and requisite length of cemented interval, with longer  
33 lengths needed along casing having a lower bond index. Another study recommends that wells  
34 undergoing hydraulic fracturing should have a given cement bond over an interval that is three  
35 times the length that would otherwise be considered adequate for zonal isolation ([Fitzgerald et al.](#)

---

<sup>1</sup> Lost cement refers to a failure of the cement or the spacer fluid used to wash the drilling fluid out of the wellbore to be circulated back to the surface, indicating that the cement has escaped into the formation.

<sup>2</sup> Cement bond logs are used to calculate a bond index, which varies between 0 and 1, with 1 representing the strongest bond and 0 representing the weakest bond.

1 [1985](#)). Conversely, [King and King \(2013\)](#) concluded that field tests from wells studied by [Flournoy](#)  
2 [and Feaster \(1963\)](#) had effective isolation when the cement bond index ranged from 0.31 to 0.75.

### 6.2.1.3. Well Orientation

3 A well can be drilled and constructed with any of several different orientations: vertical, horizontal,  
4 and deviated. The well's orientation can be important, because it affects the difficulty of drilling,  
5 constructing, and cementing the well. In particular, as described below, constructing and cementing  
6 horizontal wells present unique challenges ([Sabins, 1990](#)). In a vertical well, the wellbore is vertical  
7 throughout its entire length, from the wellhead at the surface to the production zone. Deviated  
8 wells are drilled vertically but are designed to deviate from the vertical direction at some point  
9 such that the bottom of the well is at a significant lateral distance away from the point in the  
10 subsurface directly under the wellhead. In a horizontal well, the well is drilled vertically to a point  
11 known as the kickoff point, where the well turns toward the horizontal, extending into and parallel  
12 with the approximately horizontal targeted producing formation (see Figure 6-1).

13 The use of horizontal wells, particularly in unconventional reservoirs, is increasing ([DrillingInfo,](#)  
14 [2014b](#); [Valko, 2009](#)). Among wells evaluated in the Well File Review (i.e., over the period of  
15 September 2009 to September 2010), about 66% were vertical, 11% were horizontal, and about  
16 23% were deviated wells ([U.S. EPA, 2015o](#)).<sup>1</sup> This is generally consistent with information available  
17 in industry databases—of the approximately 16,000 oil and gas wells used in hydraulic fracturing  
18 operations in 2009 (one of the years for which the data for the Well File Review were collected),  
19 39% were vertical, 33% were horizontal, and 28% were either deviated or the orientation was  
20 unknown ([DrillingInfo, 2014b](#)). Note that among natural gas wells used in hydraulic fracturing  
21 operations, 49.5% of wells in the DrillingInfo database were horizontal. The use of horizontal wells  
22 in hydraulic fracturing operations has also been steadily increasing; in 2012, 63.7% of all wells used  
23 in hydraulic fracturing operations were horizontal, compared to just 4% in 2003 ([DrillingInfo,](#)  
24 [2014b](#)). See Figure 2-16 for a map presenting the locations of horizontal wells in the United States.

### 6.2.1.4. Well Completion

25 Another important aspect of well construction is how the well is completed into the production  
26 zone, because the well's completion is part of the system of barriers and must be intact to provide a  
27 fully functioning system.<sup>2</sup> A variety of completion configurations are available. The most common  
28 configuration is for casing to extend to the end of the wellbore and be cemented in place ([U.S. EPA,](#)  
29 [2015o](#); [George et al., 2011](#); [Renpu, 2011](#)). Before hydraulic fracturing begins, perforations are made  
30 through the casing and cement into the production zone. It is through the perforated casing and  
31 cement that hydraulic fracturing is conducted. In some cases, a smaller temporary casing, known as  
32 a frac string, is inserted inside the production casing to protect it from the high pressures imposed  
33 during hydraulic fracturing operations. Another method of completion is an open hole completion,

---

<sup>1</sup> The Well File Review considered any non-horizontal well in which the well bottom was located more than 500 ft (152 m) laterally from the wellhead as being deviated.

<sup>2</sup> Completion is a term used to describe the assembly of equipment at the bottom of the well that is needed to enable production from an oil or gas well. It can also refer to the activities and methods (including hydraulic fracturing) used to prepare a well for production following drilling.

1 where the production casing extends into the production zone and the entire length of the drilled  
2 horizontal wellbore through the production zone is left uncased. With open hole completions, the  
3 entire production zone can either be fractured all at once in a single stage, or in stages using a  
4 casing string set on formation packers, which separate the annulus into stages.<sup>1</sup> A special casing  
5 with retractable sleeves is used to fracture each stage separately. Among wells represented in the  
6 Well File Review, an estimated 6% of wells (1,500 wells) had open hole completions, 6% of wells  
7 (1,500 wells) used formation packers, and the rest were cased and cemented ([U.S. EPA, 2015c](#)).

8 In some cases, wells may be recompleted after the initial construction, with re-fracturing if  
9 production has decreased ([Vincent, 2011](#)). Recompletion also may include additional perforations  
10 in the well at a different interval to produce from a new formation, lengthening the wellbore, or  
11 drilling new laterals from an existing wellbore.

### 6.2.2. Evidence of the Existence of Fluid Movement Pathways or of Fluid Movement

12 The following sections describe the pathways for fluid movement that can develop within the  
13 production well and wellbore. We also describe the conditions that lead to the development of fluid  
14 movement pathways and, where available, evidence that a pathway has allowed fluid movement to  
15 occur within the casing or cement, and—in the case of sustained casing pressure (see Section  
16 6.2.3)—a combination of factors within the casing and cement. (See Figure 6-3 for an illustration of  
17 potential fluid movement pathways related to casing and cement.) We describe available  
18 information regarding the rate at which these pathways have been identified in hydraulic fracturing  
19 wells or, where such information does not exist, present the results of research on oil and gas  
20 production wells in general or on injection wells.<sup>2</sup> Insufficient publicly accessible information exists  
21 to determine whether wells intended for hydraulic fracturing are constructed differently from  
22 production wells where no fracturing is conducted. However, given the applicability of well  
23 construction technology to address the subsurface conditions encountered in hydraulic fracturing  
24 operations and production or injection operations in general, this information is considered  
25 relevant to the research questions (see Section 6.4).

26 While new wells can be specifically designed to withstand the stresses associated with hydraulic  
27 fracturing operations, older wells, which are sometimes used in hydraulic fracturing operations,  
28 may not have been designed to the same specifications. Where older wells were not designed  
29 specifically to withstand the stresses associated with hydraulic fracturing, their reuse for this  
30 purpose could be a concern. Frac strings, which are specialized pieces of casing inserted inside the  
31 production casing, may be used to protect older casing during fracturing. However, the effect of  
32 fracturing on the cement on the production casing in older wells is unknown. One study on re-  
33 fracturing of wells noted that the mechanical integrity of the well was a key factor in determining  
34 the success or failure of the fracturing ([Vincent, 2011](#)). An estimated 6% of wells (1,400 wells)


---

<sup>1</sup> A formation packer is a specialized casing part that has the same inner diameter as the casing but whose outer diameter expands to make contact with the formation and seal the annulus between the casing and formation, preventing migration of fluids.

<sup>2</sup> An injection well is a well into which fluids are being injected (40 CFR 144.3).



- 1 represented in the Well File Review were more than 10 years old before they were fractured
- 2 between 2009 and 2010 ([U.S. EPA, 2015o](#)).

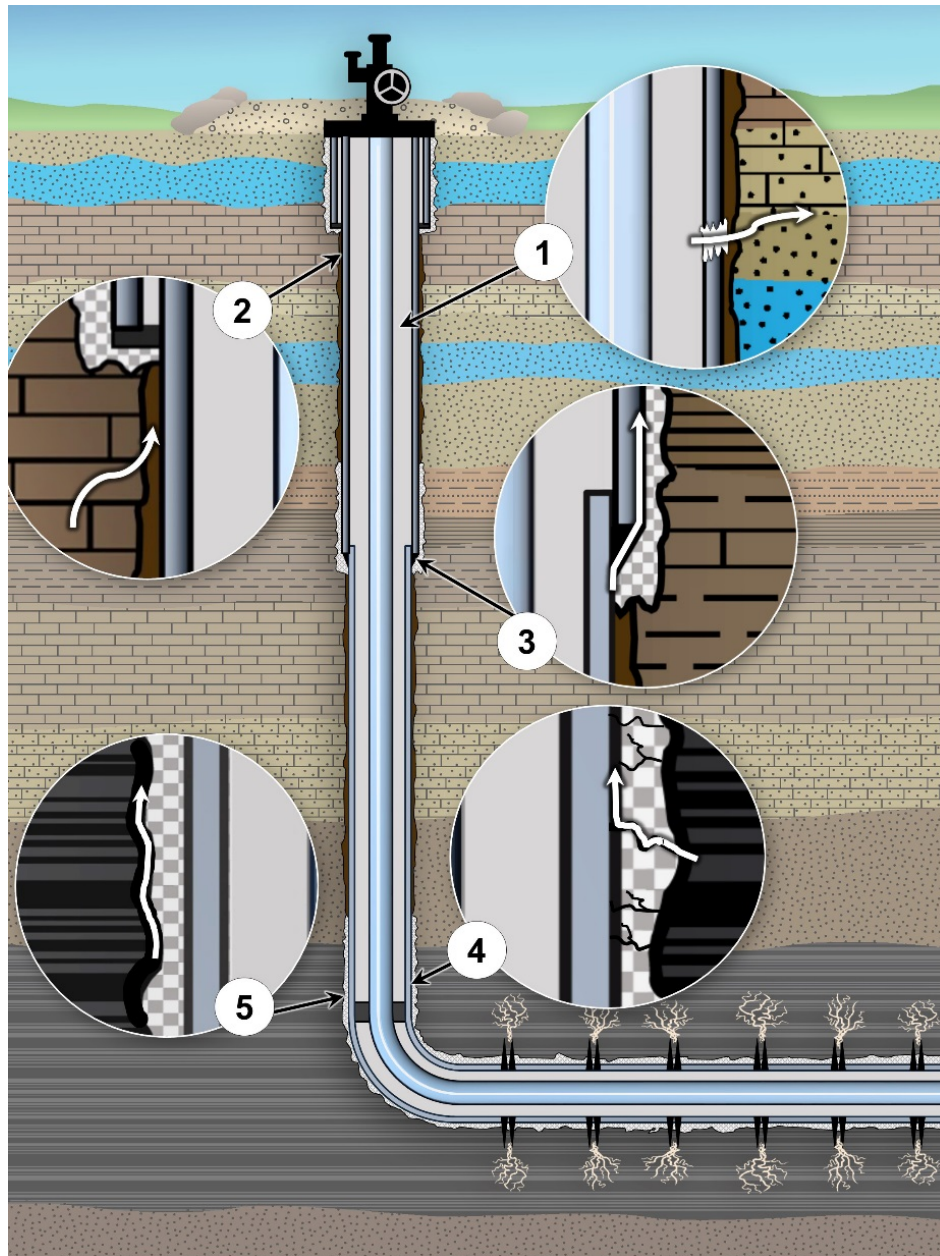

**Figure 6-3. Potential pathways for fluid movement in a cemented wellbore.**

These pathways include: (1) casing/tubing leak into a permeable formation, (2) migration along an uncemented annulus, (3) migration along microannuli between the casing and cement, (4) migration through poor cement, or (5) migration along microannuli between the cement and formation. Note: the figure is not to scale and is intended to provide a conceptual illustration of pathways that may develop within the well.

1 Note that there are also potential issues related to *where* older wells are sited. For example, some  
2 wells may be in areas with naturally occurring subsurface faults or fractures that could not be  
3 detected or fully characterized with the technologies available at the time of construction. See  
4 Section 6.3.2.

#### **6.2.2.1. Pathways Related to Well Casing**

5 High pressures associated with hydraulic fracturing operations can damage the casing and lead to  
6 fluid movement that can change the quality of drinking water resources. The casing string through  
7 which fracturing fluids are injected is subject to higher pressures during fracturing operations than  
8 during other phases in the life of a production well. To withstand the stresses created by the high  
9 pressure of hydraulic fracturing, the well and its components must have adequate strength and  
10 elasticity. If the casing is compromised or is otherwise not strong enough to withstand these  
11 stresses (see Figure 6-2), a casing failure may result. If undetected or not repaired, casing failures  
12 will serve as pathways for fracturing fluids to leak out of the casing.<sup>1</sup> Below we present indicators  
13 that pathways along the casing are present or allowing fluid movement.

14 Fracturing fluids or fluids naturally present in the subsurface could flow into other zones in the  
15 subsurface if inadequate or no cement is present and the pressure in the casing is greater than the  
16 formation pressure. As we describe below, pathways for fluid movement associated with well  
17 casing may be related to the original design or construction of the well, degradation of the casing  
18 over time, or problems that can arise through extended use as the casing succumbs to stresses.

19 Casing failure may also occur if the wellbore passes through a structurally weak geologic zone that  
20 fails and deforms the well casing. Such failures are common when drilling through zones containing  
21 salt ([Renpu, 2011](#)). This type of well damage may also be possible if hydraulic fracturing causes  
22 stress failure along a fault. Investigation of a well following a seismic event in England that was  
23 attributed to hydraulic fracturing found that the casing had been deformed by the stress from the  
24 formation ([De Pater and Baisch, 2011](#)). While it is not known if the casing deformation occurred  
25 before or after the seismic event, such damage is possible if mechanically weak formations are  
26 present. The changes in the pressure field in the portions of the formation near the wellbore during  
27 hydraulic fracturing can also cause mechanically weak formations to fail, potentially damaging the  
28 well. [Palmer et al. \(2005\)](#) demonstrated through modeling that hydraulic fracturing within coal that  
29 had a low unconfined compressive strength could cause shear failure of the coalbeds surrounding  
30 the wellbore.

31 Corrosion in uncemented zones is the most common cause of casing failure. This can occur if  
32 uncemented sections of the casing are exposed to corrosive substances such as brine or hydrogen  
33 sulfide ([Renpu, 2011](#)). Corrosion commonly occurs at the collars that connect sections of casing or

---

<sup>1</sup> Internal mechanical integrity tests (MITs), such as casing inspection logs or caliper logs, annulus pressure monitoring, and pressure testing, can provide early warning of a problem, such as a leak, within the casing. It is important to note that if a well fails an MIT, this does not mean there is a failure of the well or that drinking water resources are impacted. An MIT failure is a warning that something needs to be addressed, and a loss of integrity is an event that may result in fluid movement from the well if remediation is not performed.

1 at other places where other equipment is attached to the casing. Corrosion at collars may  
2 exacerbate problems with loose or poorly designed connections, which are another common cause  
3 of casing leaks ([King and King, 2013](#); [Brufatto et al., 2003](#)). [Watson and Bachu \(2009\)](#) found that  
4 66% of all casing corrosion occurred in uncemented well sections, as shown in Pathway 1 of Figure  
5 6-3.

6 Aging and use of the well contribute to casing degradation. Casing corrosion and degradation can  
7 occur over time and with extended use. Also, exposure to corrosive chemicals such as hydrogen  
8 sulfide, carbonic acid, and brines can accelerate corrosion. Therefore, the potential for fluid  
9 migration related to compromised casing tends to be higher in older wells. [Ajani and Kelkar \(2012\)](#)  
10 studied wells in Oklahoma and found a correlation between well age and integrity, specifically in  
11 wells spaced between 1,000 and 2,000 ft (305 and 610 m) from a well being fractured, the  
12 likelihood of impact to the well rose from approximately 20% to 60% as the well's age increased  
13 from 200 days to over 600 days. Age was also found to be a factor in well integrity problems in a  
14 study of wells in the Gulf of Mexico ([Brufatto et al., 2003](#)). The studies mentioned did not look for  
15 evidence of such fluid movement pathways, however. Because of this potential for degradation of  
16 well components in older wells and the related potential for fluid movement, reentering older wells  
17 for re-fracturing may contribute to the development of fluid movement pathways within those  
18 wells.

19 As noted above, the casing and cement work together to strengthen the well and provide zonal  
20 isolation. Uncemented casing does not necessarily lead to fluid migration. However, migration can  
21 occur if the casing in an uncemented zone fails during hydraulic fracturing operations or if the  
22 uncemented section is in contact with fluid-containing zones (including the zone being fractured).  
23 Sections of well casing that are uncemented may allow fluid migration into the annulus between the  
24 casing and formation. Fluid is free to migrate between formations in contact with the uncemented  
25 well section in any uncemented annulus without significant hole sloughing or wellbore swelling. If  
26 the uncemented section extends through a drinking water resource, fluid migration into the  
27 drinking water resource may occur.

28 Other well integrity problems have been found to vary with the well environment, particularly  
29 environments with high pressures and temperatures. Wells in high pressure/high temperature  
30 environments, wells with thermal cycling, and wells in corrosive environments can have life  
31 expectancies of less than 10 years ([King and King, 2013](#)).

32 The depth of the surface casing relative to the base of the drinking water resource to be protected is  
33 an important factor in protecting the drinking water resource. In a limited risk modeling study of  
34 selected injection wells in the Williston Basin, [Michie and Koch \(1991\)](#) found the risk of aquifer  
35 contamination from leaks from the inside of the well to the drinking water resource was 7 in  
36 1,000,000 injection wells if the surface casing was set deep enough to cover the drinking water  
37 resource, and that the risk increased to 6 in 1,000 wells if the surface casing was not set deeper  
38 than the bottom of the drinking water resource. An example where surface casing did not extend  
39 below drinking water resources comes from an investigation of 14 drinking water wells with  
40 alleged water quality problems in the Wind River and Fort Union formations in Wyoming

1 ([WYOGCC, 2014](#)). The state found that the surface casing of oil and gas wells was shallower than the  
2 depth of 3 of the 14 drinking water wells. Some of the oil and gas wells with shallow surface casing  
3 had elevated gas pressures in their annuli ([WYOGCC, 2014](#)).

4 During hydraulic fracturing operations near Killdeer, in Dunn County, North Dakota, the  
5 production, surface, and conductor casing of the Franchuk 44-20 SWH well ruptured, causing fluids  
6 to spill to the surface ([Jacob, 2011](#)). The rupture occurred during the 5<sup>th</sup> of 23 stages of hydraulic  
7 fracturing when the pressure spiked to over 8,390 psi (58 MPa). The casing failed, and ruptures  
8 were found in two locations along the production casing—one just below the surface and one at  
9 about 55 ft (17 m) below ground surface. The surface casing ruptured in three places down to a  
10 depth of 188 ft (57 m), and the conductor casing ruptured in one place. Despite a shutdown of the  
11 pumps, the pressure was still sufficient to cause fluid to travel through the ruptured casings and to  
12 bubble up at the surface. Ultimately, nearly 168,000 gallons (636 m<sup>3</sup>) of fluids and approximately  
13 2,860 tons (2,595 metric tons) of contaminated soil were removed from the site ([Jacob, 2011](#)).  
14 Sampling of two monitoring wells in the drinking water aquifer identified brine contamination that  
15 was consistent with mixing of local ground water with brine from Madison Group formations,  
16 which the well had penetrated ([U.S. EPA, 2015j](#)). Tert-butyl alcohol (TBA) was also found in the two  
17 wells with brine contamination. The TBA was consistent with degradation of tert-butyl  
18 hydroperoxide, a component of the fracturing fluid used in the Franchuk well. The rupture  
19 (blowout) was the only source consistent with findings of high brine and TBA concentrations in the  
20 two wells.<sup>1</sup> For additional information about impacts at the Killdeer site, see Text Box 5-12 in  
21 Section 5.5 and Section 6.3.2.2.

22 Inadequate casing or cement can respond poorly when blowout preventers activate. When blowout  
23 preventers are activated, they immediately stop the flow in the well, which can create a sudden  
24 pressure increase in the well. If the casing or cement are not strong enough to withstand the  
25 increased pressure when this occurs, well components can be damaged ([The Royal Society and the  
26 Royal Academy of Engineering, 2012](#)) and the potential for fluid release and migration in the  
27 subsurface increases. Blowouts can also occur during the production phase, and cause spills on the  
28 surface that can affect drinking water resources; see Section 7.7.3.2.

29 While well construction and hydraulic fracturing techniques continue to change, the pressure- and  
30 temperature-related stresses associated with hydraulic fracturing remain as factors that can affect  
31 the integrity of the well casing. Several studies have evaluated the components of a well that can  
32 affect well performance and integrity. [Ingraffea et al. \(2014\)](#) conducted a study of well integrity in  
33 Pennsylvania production wells to assess overall trends in well integrity. This study identified a  
34 significant increase in well integrity problems from 2009 to 2011 rising to 5% to 6% of all wells,  
35 followed by a decrease beginning in 2012 to about 2% of all wells, a reduction of approximately 100

---

<sup>1</sup> A well blowout is the uncontrolled flow of fluids out of a well. A blowout preventer (BOP) is casinghead equipment that prevents the uncontrolled flow of oil, gas, and mud from the well by closing around the drill pipe or sealing the hole ([Oil and Gas Mineral Services, 2010](#)). BOPs are typically a temporary component of the well, in place only during drilling and perhaps through hydraulic fracturing operations.



1 violations among 3,000 wells. The rise in well integrity problems between 2009 and 2011 coincided  
2 with an increase in the number of wells in unconventional reservoirs.

3 Emerging isotopic techniques can be used to identify the extent to which stray gas occurring in  
4 drinking water resources is linked to casing failure (see Text Box 6-2 for more information on stray  
5 gas). [Darrah et al. \(2014\)](#) used hydrocarbon and noble gas isotope data to investigate the source of  
6 gas in eight identified “contamination clusters.” Seven of these clusters were stripped of  
7 atmospheric gases ( $\text{Ar}^{36}$  and  $\text{Ne}^{20}$ ) and were enriched in crustal gases, indicating the gas migrated  
8 quickly from depth without equilibrating with intervening formations. The rapid transport was  
9 interpreted to mean that the migration did not occur along natural fractures or pathways, which  
10 would have allowed equilibration to take place. Possible explanations for the rapid migration  
11 include transport up the well and through a leaky casing (Pathway 1 in Figure 6-3) or along  
12 uncemented or poorly cemented intervals from shallower depths (Pathways 2 through 5 in Figure  
13 6-3). In four Marcellus Shale clusters, gas found in drinking water wells had isotopic signatures and  
14 ratios of ethane to methane that were consistent with those in the producing formation. The  
15 authors conclude that this suggests that gas migrated along poorly constructed wells from the  
16 producing formation, likely with improper, faulty, or failing production casings. In three clusters,  
17 the isotopic signatures and ethane to methane ratios were consistent with formations overlying the  
18 Marcellus. The authors suggest that this migration occurred from the shallower gas formations  
19 along uncemented or improperly cemented wellbores. In another Marcellus cluster in the study,  
20 deep gas migration was linked to a subsurface well, likely from a failed well packer.

### **Text Box 6-2. Stray Gas Migration.**

21 Stray gas refers to the phenomenon of natural gas (primarily methane) migrating into shallow drinking water  
22 resources, into water wells, or to the surface (e.g., cellars, streams, or springs). Stray gas in the wellhead of a  
23 production well is an indicator of an active wellbore pathway. Methane is not a regulated drinking water  
24 contaminant, but it can initiate chemical and biological reactions that release or mobilize other contaminants,  
25 and gas can accumulate to explosive levels when allowed to exsolve (degas) from ground water in closed  
26 environments. Stray gas may originate from conventional and unconventional natural gas reservoirs, as well  
27 as from coal mines, landfills, leaking gas wells, leaking gas pipelines, and buried organic matter ([Baldassare,  
28 2011](#)).

29 Detectable levels of dissolved hydrocarbons (generally methane and/or ethane) exist in most oxygen-poor  
30 aquifers, even in the absence of human activity ([Gorody, 2012](#)). Pre-drilling studies show that low levels of  
31 methane are frequently found in water wells in northern Pennsylvania and New York ([Kappel, 2013; Kappel  
32 and Nystrom, 2012](#)); one USGS study detected methane in 80% of sampled wells in Pike County, Pennsylvania  
33 ([Senior, 2014](#)). The origin of methane in ground water can be either thermogenic (produced by high  
34 temperatures and pressures in deeper formations, such as the gas found in the Marcellus Shale) or biogenic  
35 (produced in shallower formations by bacterial activity in anaerobic conditions). Occurrence of thermogenic  
36 methane in shallower formations depends upon the existence of a hydrocarbon source and pathways by  
37 which the gas can migrate. Interactions between hydrocarbon production and natural systems must also be  
38 considered. For example, [Brantley et al. \(2014\)](#) describe how northern Pennsylvania’s glacial history may  
39 help explain why stray gas is more common there than in the southern part of the state.

1 Stray gas migration can be a technically complex phenomenon, in part because there are many potential  
2 routes for migration. The lack of detailed monitoring data, including a lack of baseline measurements prior to  
3 hydrocarbon production, often further complicates stray gas research. Examining the concentrations and  
4 isotopic compositions of methane and higher molecular weight hydrocarbons such as ethane and propane  
5 can aid in determining the source of stray gas ([Tilley and Muehlenbachs, 2012](#); [Baldassare, 2011](#); [Rowe and](#)  
6 [Muehlenbachs, 1999](#)). Isotopic composition and methane-to-ethane ratios can help determine whether the  
7 gas is thermogenic or biogenic in origin and whether it is derived from shale or other formations ([Gorody,](#)  
8 [2012](#); [Muehlenbachs et al., 2012](#); [Barker and Fritz, 1981](#)). Isotopic analysis can also be used to identify the  
9 strata where the gas originated and provide evidence for migration mechanisms ([Darrah et al., 2014](#)).

10 However, determining the source of methane does not necessarily establish the migration pathway. Well  
11 casing and cementing issues may be an important source of stray gas problems ([Jackson et al., 2013b](#));  
12 however, other potential subsurface pathways are also discussed in the literature. Multiple researchers (e.g.,  
13 [Jackson et al., 2013b](#); [Molofsky et al., 2013](#); [Révész et al., 2012](#); [Osborn et al., 2011](#)) have described biogenic  
14 and/or thermogenic methane in ground water supplies in Marcellus gas production areas, although the  
15 pathways of migration are generally not apparent. The [Osborn et al. \(2011\)](#) study found that thermogenic  
16 methane concentrations in well water increased with proximity to Marcellus Shale production sites, while  
17 [Molofsky et al. \(2013\)](#) found the presence of gas to be more closely correlated with topography and elevation.  
18 Similarly, [Siegel et al. \(In Press\)](#) found no correlation between methane in ground water and proximity to  
19 production wells.

20 The EPA conducted case studies that included investigating stray gas in northeastern Pennsylvania and the  
21 Raton Basin of Colorado. In northeastern Pennsylvania, many drinking water wells within the study area  
22 were found to have elevated methane concentrations. For some of the wells, the EPA concluded that the  
23 methane (both thermogenic and biogenic) was naturally occurring background gas not attributable to gas  
24 exploration activities. In others, it appeared that non-background methane had entered the water wells  
25 following well drilling and hydraulic fracturing. In most cases, the methane in the wells likely originated from  
26 intermediate formations between the production zone and the surface; however, in some cases, the methane  
27 appears to have originated from deeper layers such as those where the Marcellus Shale is found ([U.S. EPA,](#)  
28 [2015o](#)). The Raton Basin case study examined the Little Creek Field, where potentially explosive quantities of  
29 methane were vented into a number of drinking water wells in 2007. The methane was found to be primarily  
30 thermogenic in origin, modified by biologic oxidation ([U.S. EPA, 2015l](#)). Secondary biogeochemical changes  
31 related to the migration and reaction of methane within the shallow drinking water aquifer were reflected in  
32 the characteristics of the Little Creek Field ground water ([U.S. EPA, 2015l](#)).

33 While the sources of methane in the two studies could be determined with varying degrees of certainty,  
34 attempts to definitively identify the pathways of migration have been inconclusive. In northeastern  
35 Pennsylvania, while the sources could not be definitively determined, the Marcellus Shale could not be  
36 excluded as a potential source in some wells based on isotopic signatures, methane-to-ethane ratios, and  
37 isotope reversal properties ([U.S. EPA, 2014i](#)). The Pennsylvania



1 Department of Environmental Protection (PA DEP) cited at least two operators for failure to prevent gas  
2 migration at a number of wells within the study area. Evidence cited by the state included isotopic  
3 comparison of gas samples from drinking water wells, water bodies, and gas wells; inadequate cement jobs;  
4 and sustained casing pressure (although, under Pennsylvania law, oil or gas operators can be cited if they  
5 cannot disprove the contamination was caused by their well using pre-drilling samples). A separate study  
6 ([Ingraffea et al., 2014](#)) showed that wells in this area had higher incidences of well integrity problems relative  
7 to wells in other parts of Pennsylvania. In the Raton Basin, the source of methane was identified as the  
8 Vermejo coalbeds. Based on modeling of the Raton Basin study area, the migration could be explained either  
9 by migration along natural rock features in the area or by migration caused by fracturing around the wellbore  
10 ([U.S. EPA, 2015](#)). Because the gas production wells were shut in shortly after the incident began, the wells  
11 could not be inspected to determine whether an integrity failure in the wellbore was a likely cause of the  
12 migration.<sup>1</sup>

13 These two case studies illustrate the considerations involved with understanding stray gas migration and the  
14 difficulty in determining sources and migration pathways. In order to more conclusively determine sources  
15 and migration pathways, studies in which data are collected on well integrity and ground water methane  
16 concentrations both before and after hydraulic fracturing operations, in addition to the kinds of data  
17 summarized above, would be needed.

#### **6.2.2.2. Pathways Related to Cement**

18 Fluid movement may result from inadequate well design or construction (e.g., cement loss or other  
19 problems that arise in cementing of unconventional wells) or degradation of the cement over time  
20 (e.g., corrosion or the formation of microannuli), which may, if undetected and not repaired, cause  
21 the cement to succumb to the stresses exerted during hydraulic fracturing.<sup>2,3</sup> The well cement must  
22 be able to withstand the subsurface conditions and the stresses encountered during hydraulic  
23 fracturing operations. In this section, we present indicators that pathways within the cement are  
24 present or allowing fluid movement.

25 Uncemented zones can allow fluids or brines to move into drinking water resources. An improper  
26 cement job can fail to maintain zonal isolation in several ways. The first is by poor cement  
27 placement. If a fluid-containing zone is left uncemented, the open annulus between the formation  
28 and casing can act as a pathway for migration of that fluid. Fluids can enter the wellbore along any  
29 uncemented section of the wellbore if a sufficient pressure gradient is present. Once the fluids have  
30 entered the wellbore, they can travel along the entire uncemented length of the wellbore, unless the  
31 wellbore sloughs in around the casing.

32 Because of its low density, gas will migrate up the wellbore if an uncemented wellbore is exposed to  
33 a gas-containing formation. Gas may then be able to enter other formations (including drinking

---

<sup>1</sup> Shutting in a well refers to sealing off a well by either closing the valves at the wellhead, a downhole safety valve, or a blowout preventer.

<sup>2</sup> External MITs, such as temperature logs, noise logs, oxygen activation logs, and radioactive tracer logs, can indicate improper cementing or degradation of the cement.

<sup>3</sup> Microannuli are very small channels that form in the cement and that may serve as pathways for fluid migration to drinking water resources.

1 water resources) if the wellbore is uncemented and the pressure in the annulus is sufficient to force  
2 fluid into the surrounding formation ([Watson and Bachu, 2009](#)). The rate at which the gas can move  
3 will depend on the difference in pressure between the annulus and the formation ([Wojtanowicz,  
4 2008](#)). [Harrison \(1985\)](#) also demonstrated that such uncemented annuli could result in the  
5 migration of gas into overlying formations open to the annulus.

6 In several cases, poor or failed cement has been linked to stray gas migration (see Text Box 6-2). A  
7 Canadian study found that uncemented portions of casing were the most significant contributors to  
8 gas migration ([Watson and Bachu, 2009](#)). The same study also found that 57% of all casing leaks  
9 occurred in uncemented segments. In the study by [Darrah et al. \(2014\)](#) (see Section 6.2.2.1) using  
10 isotopic data, four clusters of gas contamination were linked to cement issues. In three clusters in  
11 the Marcellus and one in the Barnett, gas found in drinking water wells had isotopic signatures  
12 consistent with intermediate formations overlying the producing zone. This suggests that gas  
13 migrated from the intermediate units along the well annulus, along uncemented portions of the  
14 wellbore or through channels or microannuli. In a study in Utah, [Heilweil et al. \(2013\)](#) used a  
15 stream-based methane monitoring method to identify a case of potential gas migration near a well  
16 with defective casing or cement.

17 Cementing of the surface casing is the primary aspect of well construction that protects drinking  
18 water resources. Most states require the surface casing to be set and cemented from the level of the  
19 lowermost drinking water resource to the surface ([GWPC, 2014](#)). Most wells—including those used  
20 in hydraulic fracturing operations—have such cementing in place. Among the wells represented in  
21 the Well File Review, surface casing, which was found to be fully cemented in 93% of wells,  
22 extended below the base (i.e., the bottom, deepest, or lowermost part) of the protected ground  
23 water resource reported by well operators in an estimated 55% of wells (12,600 wells).<sup>1</sup> In an  
24 additional 28% of wells (6,400 wells), the operator-reported protected ground water resources  
25 were fully covered by the next cemented casing string. A portion of the annular space between  
26 casing and the operator-reported protected ground water resources was uncemented in at least 3%  
27 of wells (600 wells) ([U.S. EPA, 2015o](#)).<sup>2</sup> Improper placement of cement can lead to cement integrity  
28 problems. For example, an improper cement job can be the result of loss of cement during  
29 placement into a formation with high porosity or fractures, causing a lack of adequate cement  
30 across a water- or brine-bearing zone. Additionally, failure to use cement that is compatible with  
31 the anticipated subsurface conditions, failure to remove drilling fluids from the wellbore, and  
32 improper centralization of the casing in the wellbore can all lead to the formation of channels (i.e.,  
33 small connected voids) in the cement during the cementing process ([McDaniel et al., 2014](#); [Sabins,  
34 1990](#)). If the channels are small and isolated, they may not lead to fluid migration. However, if they

---

<sup>1</sup> In the in the Well File Review, protected ground water resources were reported by well operators. For most wells represented in the Well File Review, protected ground water resources were identified by the well operators from state or federal authorization documents. Other data sources used by well operators included aquifer maps, data from offset production wells, open hole log interpretations done by operators, operator experience, online databases, and references to a general requirement by the oil and gas agency.

<sup>2</sup> The well files representing an estimated 8% of wells in the Well File Review did not have sufficient data to determine whether the operator-reported protected ground water resource was uncemented or cemented. In these cases, there was ambiguity either in the depth of the base or the top of the operator-reported protected ground water resource.

1 are long and connected, extending across multiple formations or connecting to other existing  
2 channels or fractures, they can present a pathway for fluid migration. Figure 6-3 shows a variety of  
3 pathways for fluid migration that are possible from failed cement jobs.

4 One example of how cement problems associated with hydraulic fracturing contributed to a  
5 contamination incident occurred in Bainbridge, Ohio. This incident was particularly well studied by  
6 the Ohio Department of Natural Resources ([ODNR, 2008](#)) and by an expert panel ([Bair et al., 2010](#)).  
7 The level of detail available for this case is not typically found in studies of such events but was  
8 collected because of the severity of the impacts and the resulting legal action. The English #1 well  
9 was drilled to a depth of 3,900 ft (1,189 m) below ground surface (bgs) with the producing  
10 formation located between 3,600 and 3,900 ft (1,097 and 1,189 m) bgs. Overlying the producing  
11 formation were several uneconomic formations that contained over-pressured gas (i.e., gas at  
12 pressures higher than the hydrostatic pressure exerted by the fluids within the well).<sup>1</sup> The original  
13 cement design required the cement to be placed 700–800 ft (213–244 m) above the producing  
14 formation to seal off these areas. During cementing, however, the spacer fluid failed to return to the  
15 surface, indicating lost cement, and the cement did not reach the intended height.<sup>2</sup> Despite the lack  
16 of sufficient cement, the operator proceeded with hydraulic fracturing.

17 During the fracturing operation, about 840 gallons (3.2 m<sup>3</sup>) of fluid flowed up the annulus and out  
18 of the well. When the fluid began flowing out of the annulus, the operator immediately ceased  
19 operations. About a month later, there was an explosion in a nearby house where methane had  
20 entered from an abandoned and unplugged drinking water well that was connected to the cellar  
21 ([Bair et al., 2010](#)). In addition to the explosion, the over-pressured gas entering the aquifer resulted  
22 in the contamination of 26 private drinking water wells with methane.

23 Contamination at Bainbridge was the result of inadequate cement. The ODNR determined that  
24 failure to cement the over-pressured gas formations, proceeding with the fracturing operation  
25 without verifying there was adequate cement, and the extended period during which the well was  
26 shut in all contributed to the contamination of the aquifer with stray gas ([ODNR, 2008](#)). Cement  
27 logs found the cement top was at 3,640 ft (1,109 m) bgs, leaving the uneconomic gas-producing  
28 formations and a portion of the production zone uncemented. Hydraulic fracturing fluids flowing  
29 out of the annulus provided an indication that the fracturing had created a path from the producing  
30 formation to the well annulus. This pathway may have allowed gas from the producing formation  
31 along with gas from the uncemented formation to enter the annulus. Because the well was shut in,  
32 the pressure in the annulus could not be relieved, and the gas eventually traveled through natural  
33 fractures surrounding the wellbore into local drinking water aquifers. (During the time the well  
34 was shut in, natural gas seeped into the well annulus and pressure built up from an initial pressure  
35 of 90 psi (0.6 MPa) to 360 psi (2.5 MPa)). From the aquifer, the gas moved into drinking water wells  
36 and from one of those wells into a cellar, resulting in the explosive accumulation of gas.

---

<sup>1</sup> Hydrostatic pressure is the pressure exerted by a column of fluid at a given depth. Here, it refers to the pressure exerted by a column of drilling mud or cement on the formation at a particular depth.

<sup>2</sup> Spacer fluid is a fluid pumped before the cement to clean drilling mud out of the wellbore.

1 While limited literature is available on construction flaws in wells that have been used in hydraulic  
 2 fracturing operations, several studies have examined construction flaws in oil and gas wells in  
 3 general. One study that examined reported drinking water contamination incidents in Texas  
 4 identified 10 incidents related to drilling and construction activities among 250,000 oil and gas  
 5 wells ([Kell, 2011](#)). The study noted that many of the contamination incidents were associated with  
 6 wells that were constructed before Texas revised its regulations on cementing in 1969 (it is not  
 7 clear how old the wells were at the time the contamination occurred). Because this study relied on  
 8 reported incidents, it is possible that other wells exhibited integrity issues but did not result in  
 9 contamination of a drinking water well or were not reported. Therefore, this should be considered  
 10 a low-end estimate of the number of well integrity issues that could be tied directly to drilling and  
 11 construction activities. It is important to note that the 10 contamination incidents identified were  
 12 not associated with wells that were hydraulically fractured ([Kell, 2011](#)).

13 Several investigators have studied violations information from the PA DEP online violation  
 14 database to evaluate the rates of and possible factors contributing to well integrity problems,  
 15 including those related to cement. The results of these studies are summarized in Table 6-1. While  
 16 all of the studies shown in the table used the same database, their results vary, not only because of  
 17 the different time frames, but also because they used different definitions of what violations  
 18 constituted an integrity problem or failure. For example, [Considine et al. \(2012\)](#) considered all  
 19 events resulting in environmental damage—including effects such as erosion—and found a  
 20 relatively high violation rate. [Davies et al. \(2014\)](#) and [Ingraffea et al. \(2014\)](#) investigated violations  
 21 related to well integrity, while [Vidic et al. \(2013\)](#) looked only at well integrity violations that  
 22 resulted in fluid migration out of the wellbore; these more specific studies found relatively lower  
 23 violation rates. [Olawoyin et al. \(2013\)](#) performed a statistical analysis that weighted violations  
 24 based on risk and found that the most risky violations included those involving pits, erosion, waste  
 25 disposal, and blowout preventers.

**Table 6-1. Results of studies of PA DEP violations data that examined well failure rates.**

Study	Violations investigated	Data timeframe	Key findings <sup>a</sup>
-------	-------------------------	----------------	---------------------------

Study	Violations investigated	Data timeframe	Key findings <sup>a</sup>
<a href="#">Considine et al. (2012)</a>	Violations resulting in environmental damage (3,533 wells studied)	2008–2011	Of 845 environmental damage incidents (which resulted in 1,144 violations), approximately 10% were related to casing or cement problems. The overall violation rate dropped from 52.9% of all wells in 2008 to 20.8% of all wells in 2011.
<a href="#">Davies et al. (2014)</a>	Failure of one of the barriers preventing fluid migration (8,030 wells studied)	2005–2013	Approximately 5% of wells received this type of violation. The incident rate increased to 6.3% when failures noted on forms, but not resulting in violations, were included.
<a href="#">Ingraffea et al. (2014)</a>	Violations and inspection records indicating structural integrity loss (3,391 wells studied)	2000–2012	Wells in unconventional reservoirs experienced a rate of structural integrity loss of 6.2%, while the rate for conventional wells was 1%.
<a href="#">Vidic et al. (2013)</a>	Failure of cement/casing that allowed fluid to leak out (6,466 wells studied)	2008–2013	Approximately 3.4% of wells received this type of violation.
<a href="#">Olawoyin et al. (2013)</a>	All violations (2,001 wells studied)	2008–2010	Analysis of 2,601 violations from 65 operators based on weighted risks found that potentially risky violations increased 342% over the study period, while total violations increased 110%.

<sup>a</sup> Note: While all of these studies used the same database, their results vary because they studied different time frames and used different definitions of what violations constituted an integrity problem or failure.

1 Because a significant portion of Pennsylvania’s recent oil and gas activity is in the Marcellus Shale,  
2 many of the wells in these studies were most likely used for hydraulic fracturing. For example,  
3 [Ingraffea et al. \(2014\)](#) found that approximately 16% of the oil and gas wells drilled in the state  
4 between 2000 and 2012 were completed in unconventional reservoirs, and nearly all of these wells  
5 were used for hydraulic fracturing. Wells drilled in unconventional reservoirs experienced higher  
6 rates of structural integrity loss than conventional wells drilled during the same time period  
7 ([Ingraffea et al., 2014](#)). The authors did not compare rates of structural integrity loss in  
8 conventional wells that were and were not used for hydraulic fracturing; they assumed that  
9 unconventional wells were hydraulically fractured and conventional wells were not.

10 Violation rates resulting in environmental pollution among all wells dropped from 52.9% in 2008  
11 to 20.8% in 2011 ([Considine et al., 2012](#)), and the drop may be due to a number of factors.  
12 Violations related to failure of cement or other well components represented a minority of all well  
13 violations. Of 845 events that caused environmental contamination, including but not limited to  
14 contamination of drinking water resources, [Considine et al. \(2012\)](#) found that about 10% (85

1 events) were related to casing and cement problems. The rest of the incidents were related to site  
2 restoration and spills (the violations noted are confined to those incidents that caused  
3 environmental damage i.e., the analysis excluded construction flaws that did not have adverse  
4 environmental effects).

5 Another source of information on contamination caused by wells is positive determination letters  
6 (PDLs) issued by the PA DEP. PDLs are issued in response to a complaint when the state determines  
7 that contamination did occur in proximity to oil and gas activities. The PDLs take into account the  
8 impact, timing, well integrity, and formation permeability; however, liability is presumed for wells  
9 within a given distance if the oil and gas operator cannot refute that they caused the contamination,  
10 based on pre-drilling sampling ([Brantley et al., 2014](#)).<sup>1</sup> [Brantley et al. \(2014\)](#) examined these PDLs,  
11 and concluded that approximately 20 unconventional gas wells impacted water supplies between  
12 2008 and 2012; this equates to 0.1% to 1% of the 6,061 wells spudded between 2008 and 2012 (it  
13 is unclear exactly how many PDLs are linked to an individual well). While these oil and gas wells  
14 were linked to contamination of wells and springs, the mechanisms for the impacts (including  
15 whether fluids may have been spilled at the surface or if there was a pathway through the well or  
16 through the subsurface rock formation to the drinking water resource) were not described by  
17 [Brantley et al. \(2014\)](#). We did not perform a full and independent review of the PDLs for this  
18 assessment.

19 While the studies discussed above present possible explanations for higher violation incidences in  
20 hydraulically fractured wells, it should be noted that other explanations that are not specific to  
21 hydraulic fracturing are also possible. These could include different inspection protocols and  
22 different formation types.

23 Cementing in horizontal wells, which are commonly hydraulically fractured, presents challenges  
24 that can contribute to higher rates of integrity issues. The observation by [Ingraffea et al. \(2014\)](#) that  
25 wells drilled in unconventional reservoirs experience higher rates of structural integrity loss than  
26 conventional wells is supported by conclusions of [Sabins \(1990\)](#), who noted that horizontal wells  
27 have more cementing problems because they are more difficult to center properly and can be  
28 subject to settling of solids on the bottom of the wellbore. Cementing in horizontal wells presents  
29 challenges that can contribute to higher rates of integrity issues.

30 Thermal and cyclic stresses caused by intermittent operation also may stress cement ([King and](#)  
31 [King, 2013](#); [Ali et al., 2009](#)). Increased pressures and cyclic stresses associated with hydraulic  
32 fracturing operations can contribute to cement integrity losses and, if undetected, small integrity  
33 problems can lead to larger ones. Temperature differences between the (typically warmer)  
34 subsurface environment and the (typically cooler) injected fluids, followed by contact with the  
35 (typically warmer) flowback water, can lead to contraction of the well materials (both casing and  
36 cement), which introduces additional stresses. Similar temperature changes may occur when

---

<sup>1</sup> Under Pennsylvania's Oil and Gas Act, operators of oil or gas wells are presumed liable if water supplies within 1,000 ft (305 m) were impacted within 6 months of drilling, unless the claim is rebutted by the operator; this was expanded to 2,500 ft (762 m) and 12 months in 2012.



1 multiple fracturing stages are performed. Because the casing and cement have different mechanical  
2 properties, they may respond differently to these stress cycles and debond.

3 Several studies illustrate the effects of cyclic stresses. [Dusseault et al. \(2000\)](#) indicate that wells that  
4 have undergone several cycles of thermal or pressure changes will almost always show some  
5 debonding between cement and casing. Microannuli formed by this debonding can be conduits for  
6 gas migration, in particular because the lighter density of gas provides a larger driving force for  
7 migration through the microannuli than for heavier liquids.<sup>1</sup> One laboratory study indicated that  
8 microannuli on the order of 0.01 in (0.3 mm) could increase effective cement permeability from  
9 1 nD ( $1 \times 10^{-21} \text{ m}^2$ ) in good quality cement up to 1 mD ( $1 \times 10^{-15} \text{ m}^2$ ) ([Bachu and Bennion, 2009](#)).  
10 This six-order magnitude increase in permeability shows that even small microannuli can  
11 significantly increase the potential for flow through the cement. Typically, these microannuli form  
12 at the interface between the casing and cement or between the cement and formation. Debonding  
13 and formation of microannuli can occur through intermittent operation, pressure tests, and  
14 workover operations ([Dusseault et al., 2000](#)).<sup>2</sup> While a small area of debonding may not lead to fluid  
15 migration, the microannuli in the cement that result from the debonding can serve as initiation  
16 points for fracture propagation if re-pressurized gas enters the microannulus ([Dusseault et al.,](#)  
17 [2000](#)).

18 The [Council of Canadian Academies \(2014\)](#) found that the repetitive pressure surges that occur  
19 during the fracturing process would make maintaining an intact cement seal more of a challenge in  
20 wells that are hydraulically fractured. [Wang and Dahi Taleghani \(2014\)](#) performed a modeling  
21 study that showed that hydraulic fracturing pressures could initiate annular cracks in cement.  
22 Another study of well data indicated that cement failure rates are higher in intermediate casings  
23 compared to other casings ([McDaniel et al., 2014](#)). The failures occurred after drilling and  
24 completion of wells, and the authors surmised that the cement failures were most likely due to  
25 cyclical pressure stresses caused by drilling. Theoretically, such cyclical pressure events could also  
26 be experienced during multiple stage hydraulic fracturing. Mechanical stresses associated with well  
27 operation or workovers and pressure tests also may lead to small cracks in the cement, which may  
28 provide migration pathways for fluid.

29 Corrosion can lead to cement failure. Cement can fail to maintain integrity as a result of degradation  
30 of the cement after the cement is set. Cement degradation can result from attack by corrosive brines  
31 or chemicals such as sulfates, sulfides, and carbon dioxide that exist in formation fluids ([Renpu,](#)  
32 [2011](#)). These chemicals can alter the chemical structure of the cement, resulting in increased  
33 permeability or reduced strength and leading to loss of cement integrity over time. Additives or  
34 specialty cements that can decrease cement susceptibility to specific chemical components are  
35 available.

---

<sup>1</sup> Microannuli can also form due to an inadequate cement job, e.g., poor mud removal or improper cement placement rate.

<sup>2</sup> A workover refers to any maintenance activity performed on a well that involves ceasing operations and removing the wellhead. Depending on the purpose of the workover and the tools used, workovers may induce pressure changes in the well.

### 6.2.2.3. Sustained Casing Pressure

1 An example of how the issues related to casing and cement discussed in the preceding sections can  
2 work together and be difficult to differentiate can be seen in the case of sustained casing pressure.<sup>1</sup>  
3 Sustained casing pressure is an indicator that pathways within the well related to the well's casing,  
4 cement, or both allowed fluid movement to occur. Sustained casing pressure can result from casing  
5 leaks, uncemented intervals, microannuli, or some combination of the three, which can be an  
6 indication that a well has lost integrity. Sustained casing pressure can be observed when an annulus  
7 (either the annulus between the tubing and production casing or between any two casings) is  
8 exposed to a source of nearly continuous elevated pressure. [Goodwin and Crook \(1992\)](#) found that  
9 sudden increases in sustained casing pressure occurred in wells that were exposed to high  
10 temperatures and pressures. Subsequent logging of these wells showed that the high temperatures  
11 and pressures led to shearing of the cement/casing interface and a total loss of the cement bond.

12 Sustained casing pressure occurs more frequently in older wells and horizontal or deviated wells.  
13 One study found that sustained casing pressure becomes worse as a well ages. Sustained casing  
14 pressure was found in less than 10% of wells that were less than a year old, but was present in up  
15 to 50% of 15-year-old wells ([Brufatto et al., 2003](#)). While these wells may not have been  
16 hydraulically fractured, the study demonstrates that older wells can exhibit more integrity  
17 problems. [Watson and Bachu \(2009\)](#) found that a higher portion of deviated wells had sustained  
18 casing pressure compared to vertical wells. Increased pressures, cyclic stresses ([Syed and Cutler,  
19 2010](#)), and difficulty in cementing horizontal wells ([Sabins, 1990](#)) also may lead to increased  
20 instances of sustained casing pressure in wells where hydraulic fracturing occurs ([Muehlenbachs et  
21 al., 2012](#); [Rowe and Muehlenbachs, 1999](#)).

22 Sustained casing pressure can be a concern for several reasons. If the pressures are allowed to build  
23 up to above the burst pressure of the exterior casing or the collapse pressure of the interior casing,  
24 the casing may fail. Increased pressure can also cause gas or liquids to enter lower-pressured  
25 formations that are exposed to the annulus either through leaks or uncemented sections.  
26 Laboratory experiments by [Harrison \(1985\)](#) demonstrated that over-pressurized gas in the annulus  
27 could cause rapid movement of gas into drinking water resources if a permeable pathway exists  
28 between the annulus and the ground water. Over-pressurization of the annulus can be avoided by  
29 venting the annulus to the atmosphere.

30 In a few cases, sustained casing pressure in wells that have been hydraulically fractured may have  
31 been linked to drinking water contamination, although it is challenging to definitively determine  
32 the actual cause. In one study in northeastern Pennsylvania, hydrocarbon and isotope  
33 concentrations were used to investigate stray gas migration into domestic drinking water ([U.S. EPA,](#)

---

<sup>1</sup> Sustained casing pressure is pressure in any well annulus that is measurable at the wellhead and rebuilds after it is bled down, not caused solely by temperature fluctuations or imposed by the operator ([Skjerven et al., 2011](#)). If the pressure is relieved by venting natural gas from the annulus to the atmosphere, it will build up again once the annulus is closed (i.e., the pressure is sustained). The return of pressure indicates that there is a small leak in a casing or through uncemented or poorly cemented intervals that exposes the annulus to a pressured source of gas that is actively being used. It is possible to have pressure in more than one of the annuli.

1 [2014j](#)). While the composition of the gas in the water wells was consistent with that of the gas  
2 found in nearby gas wells with high casing pressures, other possible sources of the gas could not be  
3 ruled out. Several gas wells in the study area were cited by the PA DEP for having elevated casing  
4 annulus pressures. In another example in Alberta, Canada, 14% of wells drilled since 1971 have  
5 shown serious sustained casing flow, defined as more than 10,594 ft<sup>3</sup> (300 m<sup>3</sup>)/day at pressures  
6 higher than 0.48 psi/ft (11 kPa/m) times the surface casing depth ([Jackson and Dussealt, 2014](#)).  
7 Another study in the same area found gas in nearby drinking water wells had a composition that  
8 was consistent with biogenic methane mixing with methane from nearby coalbed methane and  
9 deeper natural gas fields ([Tilley and Muehlenbachs, 2012](#)).

10 Adequate well design, detection (i.e., through annulus pressure monitoring), and repair of sustained  
11 casing pressure reduce the potential for fluid movement. [Watson and Bachu \(2009\)](#) found that  
12 regulations that required monitoring and repair of sustained casing vent flow or sustained casing  
13 pressure had a positive effect on lowering leak rates. The authors also found that wells initially  
14 designed for injection experienced sustained casing pressure less often than those that were  
15 retrofitted ([Watson and Bachu, 2009](#)).

16 Another study in Mamm Creek, Colorado, obtained similar results. The Mamm Creek field is in an  
17 area where lost cement and shallow, gas-containing formations are common. A number of wells in  
18 the area have experienced sustained casing pressure, and methane has been found in several  
19 drinking water wells along with seeps into local creeks and ponds. In one well, four pressured gas  
20 zones were encountered during well drilling and there was a lost cement incident, which resulted  
21 in the cement top being more than 4,000 ft (1,219 m) lower than originally intended. Due to high  
22 measured bradenhead pressure (661 psi, or 4.6 MPa), cement remediation efforts were  
23 implemented ([Crescent, 2011](#); [COGCC, 2004](#)). The operator of this well was later cited by the  
24 Colorado Oil and Gas Conservation Commission (COGCC) for causing natural gas and benzene to  
25 seep into a nearby creek. The proposed route of contamination was contaminants flowing up the  
26 well annulus and then along a fault. The proposed contamination route appeared to be validated  
27 because, once remedial cementing was performed on the well, methane and benzene levels in the  
28 creek began to drop ([Science Based Solutions LLC, 2014](#)). In response to the incident, the state  
29 instituted requirements to identify and cement above the top of the highest gas-containing  
30 formation and to monitor casing pressures after cementing.

31 Not every well that shows positive pressure in the annulus poses a potential problem. Sustained  
32 pressure is only a problem when it exceeds the ability of the wellbore to contain it or when it  
33 indicates downhole communication problems ([TIPRO, 2012](#)). A variety of management options are  
34 available for managing such pressure including venting, remedial cementing, and use of kill fluids in  
35 the annulus ([TIPRO, 2012](#)).<sup>1</sup>

---

<sup>1</sup> A kill fluid is a weighted fluid with a density that is sufficient to overcome the formation pressure and prevent fluids from flowing up the wellbore.

### 6.3. Fluid Migration Associated with Induced Fractures within Subsurface Formations

1 In this section, we discuss potential pathways for fluid movement associated with induced fractures  
2 and subsurface geologic formations (outside of the well system described in Section 6.2). We  
3 examine the potential for fluid migration into drinking water resources by evaluating the  
4 development of migration pathways within subsurface formations, the flow of injected and  
5 formation fluids, and important factors that affect these processes.<sup>1</sup>

6 Fluid movement requires both a physical conduit (e.g., the permeable matrix pore volume or a  
7 fracture in the rock) and a driving force.<sup>2</sup> In subsurface rock formations, fluid movement is driven  
8 by the existence of a hydraulic gradient depending on elevation and pressure, which is also  
9 influenced by fluid density, composition, and temperature ([Pinder and Celia, 2006](#)). Pressure  
10 differentials in the reservoir and density-driven fluid buoyancy are the key forces governing fluid  
11 migration during and after hydraulic fracturing operations. Pressure differentials depend upon the  
12 initial conditions within these formations and are directly influenced by pressures that are created  
13 by injection or production regimes. Buoyancy depends on density differences among and between  
14 gases and liquids, and it causes fluid migration when and where these density differences exist  
15 along with a pathway ([Pinder and Gray, 2008](#)).

16 As hydraulic fracturing takes place, injected fluids leaving the well create fractures within the  
17 production zone and enter the formation through the newly created fractures. Unintended fluid  
18 migration may result from this fracturing process. Migration pathways to drinking water resources  
19 could develop as a result of changes in the subsurface flow or pressure regime associated with  
20 hydraulic fracturing; via fractures that extend beyond the intended formation or that intersect  
21 existing natural faults or fractures; or via fractures that intersect offset wells or other artificial  
22 structures ([Jackson et al., 2013c](#)). These subsurface pathways may facilitate the migration of fluids  
23 by themselves or in conjunction with the well-based pathways described in Section 6.2. Fluids  
24 potentially available for migration include both fluids that are injected into the well (including  
25 leakoff) and formation fluids (including brine or natural gas).<sup>3</sup>

---

<sup>1</sup> A subsurface formation (also referred to as a “formation” throughout this section) is a mappable body of rock of distinctive rock type(s), including the rock’s pore volume (i.e., the void space within a formation that fluid flow can occur, as opposed to the bulk volume which includes both pore and solid phase volume), with a unique stratigraphic position.

<sup>2</sup> Permeability (i.e., intrinsic or absolute permeability) of formations describes the ability of water to move through the formation matrix, and it depends on the rock’s grain size and the connectedness of the void spaces between the grains. Where multiple phases of fluids exist in the pore space, the flow of fluids also depends on relative permeabilities.

<sup>3</sup> Leakoff is the fraction of the injected fluid that infiltrates into the formation and is not recovered during production ([Economides et al., 2007](#)).

1 The potential for subsurface fluid migration into drinking water resources can be evaluated during  
2 two different time periods ([Kim and Moridis, 2015](#)):

- 3 1. Following the initiation of fractures within the reservoir prior to any production, when the  
4 injected fluid, pressurizing the formation, flows through the fractures and the fractures  
5 grow into the reservoir. Fluid leaks off into the formation, allowing the fractures to close  
6 except where they are held open by the proppant ([Adachi et al., 2007](#)).
- 7 2. During the production period, after fracturing is completed and pressure in the fractures is  
8 reduced, and hydrocarbons (along with produced water) flow from the reservoir into the  
9 well.

10 Note that these two time periods vary in duration. As described in Chapter 2, the first period of  
11 fracture creation and propagation (i.e., the hydraulic fracturing itself) is a relatively short-term  
12 process, typically lasting 2 to 10 days, depending on the number of stages in the fracture treatment  
13 design. On the other hand, operation of the well for production covers a substantially longer period  
14 (depending on many factors such as the amount of hydrocarbons in place and economic  
15 considerations), and can be as long as 40 or 60 years in onshore tight gas reservoirs ([Ross and King,  
16 2007](#)).

17 The following discussion of potential subsurface fluid migration into drinking water resources  
18 focuses primarily on the physical movement of fluids and the factors that affect this movement.  
19 Section 6.3.1 describes the basic principles of subsurface fracture creation, geometry, and  
20 propagation, to provide context for the discussion of potential fluid migration pathways in Section  
21 6.3.2. Geochemical and biogeochemical reactions among injected fluids, formation fluids, subsurface  
22 microbes, and rock formations are another important component of subsurface fluid migration and  
23 transport. See Chapter 7 for a discussion of the processes that affect pore fluid biogeochemistry and  
24 influence the chemical and microbial composition of flowback and produced water.


### 6.3.1. Overview of Subsurface Fracture Growth

25 Fracture initiation and growth is a highly complex process due to the heterogeneous nature of the  
26 subsurface environment. It depends on the geomechanical characteristics of rock formations, fluid  
27 properties, pore pressures, and subsurface stress fields. As shown in Figure 6-4, fracture formation  
28 is controlled by the three *in situ* principal compressive stresses: the vertical stress ( $S_v$ ), the  
29 maximum horizontal stress ( $S_H$ ), and the minimum horizontal stress ( $S_h$ ). During hydraulic  
30 fracturing, pressurized fluid injection creates high pore pressures around the well. When the  
31 pressure exceeds the local least principal stress and the tensile strength of the rock, failure results  
32 and fractures form ([Zoback, 2010](#); [Fjaer et al., 2008](#)).

33 Fractures propagate (increase in length) in the direction of the maximum principal stress, which is  
34 perpendicular to the direction of the least principal stress. Deep in the subsurface, the maximum  
35 principal stress is generally in the vertical direction because the overburden (the weight of  
36 overlying rock) is the largest single stress. Therefore, in deep formations, the local least principal  
37 stress is the minimum horizontal stress ( $S_h$ ), and the principal fracture orientation is expected to be  
38 vertical. This is the scenario illustrated in Figure 6-4. At shallower depths, where the rock is



1 subjected to less pressure from the overburden, more fracture propagation is expected to be in the  
2 horizontal direction. Using tiltmeter data from over 10,000 fractures in various North American  
3 reservoirs, [Fisher and Warpinski \(2012\)](#) found that fractures at approximately 4,000 ft (1,220 m)  
4 below the surface or deeper are primarily vertical (see below for more information on tiltmeters).  
5 Between approximately 4,000 and 2,000 ft (1,220 and 610 m), fracture complexity increases, and  
6 fractures at approximately 2,000 ft (610 m) or shallower are primarily horizontal ([Fisher and  
7 Warpinski, 2012](#)).<sup>1</sup> Horizontal fracturing can also occur in deeper settings in some less-common  
8 reservoir environments where the principal stresses have been altered by salt intrusions or similar  
9 types of geologic activity ([Jones and Britt, 2009](#)).

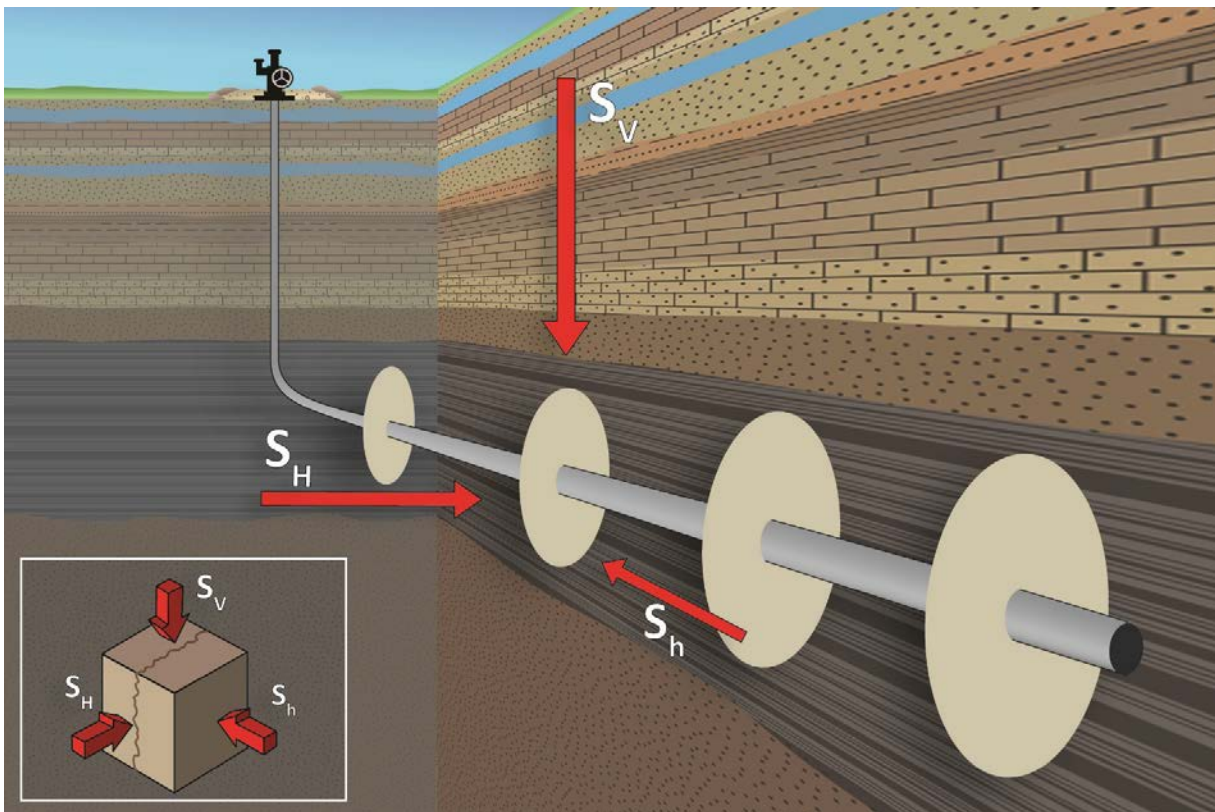

**Figure 6-4. Hydraulic fracture planes (represented as ovals), with respect to the principal subsurface compressive stresses:  $S_v$  (the vertical stress),  $S_H$  (the maximum horizontal stress), and  $S_h$  (the minimum horizontal stress).**

At depths greater than approximately 2,000 ft (610 m), the principal fracture orientation is expected to be vertical, as fractures propagate in the direction of  $S_H$ .

<sup>1</sup> Fracture complexity is the ratio of horizontal-to-vertical fracture volume distribution, as defined by [Fisher and Warpinski \(2012\)](#). Fracture complexity is higher in fractures with a larger horizontal component.



1 In addition to the principal subsurface stresses, other geomechanical and reservoir characteristics  
2 and operational factors affect fracture creation, geometry, and propagation.<sup>1</sup> These include initial  
3 reservoir pressure and saturation, injected fluid pressure or injection rate, geomechanical rock  
4 characteristics, reservoir heterogeneity, tensile strength, fluid type within fractures, and reservoir  
5 permeabilities ([Kim and Moridis, 2015](#)). Fracture creation is a complex process that involves  
6 interactions between multiple properties. For example, as described by [Daneshy \(2009\)](#), fracture  
7 height depends on a combination of parameters and processes including the material properties of  
8 geologic formations, pore pressures, stress differences in adjacent formations, shear failure  
9 (slippage) at the fracture tip, and the reorientation of the fracture as it crosses an interface between  
10 formations. Injection rates, the initial water saturation of the formation, and the type of fluid  
11 injected also have effects on fracture creation and propagation ([Kim and Moridis, 2015, 2013](#)).

12 Numerical modeling techniques have been developed to describe fracture creation and propagation  
13 and to provide a better understanding of this complex process ([Kim and Moridis, 2013](#)). Modeling  
14 hydraulic fracturing in shale or tight gas reservoirs requires integrating the physics of both flow  
15 and geomechanics to account for fluid flow, fracture propagation, and dynamic changes in pore  
16 volume and permeability. Some important flow and geomechanical parameters included in these  
17 types of advanced models are: permeability, porosity, Young's modulus, Poisson's ratio, and tensile  
18 strength, as well as heterogeneities associated with these parameters.<sup>2</sup> Some investigations using  
19 these models have indicated that the vertical propagation of fractures (due to tensile failure) may  
20 be limited by shear failure, which increases the permeability of the formation and leads to greater  
21 leakoff. These findings demonstrate that elevated pore pressure can cause shear failure, thus  
22 further affecting matrix permeability, flow regimes, and leakoff ([Daneshy, 2009](#)). Computational  
23 investigations have also indicated that slower injection rates can increase the amount of leakoff  
24 ([Kim and Moridis, 2013](#)).

25 In addition to their use in research settings, analytical and numerical modeling approaches are used  
26 by oil and gas companies to design hydraulic fracturing treatments and predict the extent of  
27 fractured areas ([Adachi et al., 2007](#)). Specifically, modeling techniques are used to assess the  
28 treatment's sensitivity to critical parameters such as injection rate, treatment volumes, fluid  
29 viscosity, and leakoff. The industry models range from simpler (typically two-dimensional)  
30 theoretical models to computationally more complicated and accurate three-dimensional models.

31 In addition to computational approaches, monitoring of hydraulic fracturing operations can provide  
32 insights into fracture development. Monitoring techniques involve both operational monitoring  
33 methods and "external" methods that are not directly related to the production operation.  
34 Operational monitoring refers to the monitoring of parameters including pressure, flow rate, fluid  
35 density, and additive concentrations using surface equipment and/or downhole sensors ([Eberhard,  
36 2011](#)). This monitoring is conducted to ensure that the operation is proceeding as planned and to

---

<sup>1</sup> Fracture geometry refers to characteristics of the fracture such as height and aperture (width).

<sup>2</sup> Young's modulus, a ratio of stress to strain, is a measure of the rigidity of a material. Poisson's ratio is a ratio of transverse-to-axial (or latitudinal-to-longitudinal) strain, and it characterizes how a material is deformed under pressure. See [Zoback \(2010\)](#) for more information on the geomechanical properties of reservoir rocks.

1 determine if operational parameters need to be adjusted. Interpretation of pressure data can be  
2 used to better understand fracture behavior (e.g., [Kim and Wang, 2014](#)). Anomalies in operational  
3 monitoring data can also indicate whether an unexpected event has occurred, such as  
4 communication with another well (see Section 6.3.2.3).

5 The volume of fluid injected is typically monitored to provide information on the volume and extent  
6 of fractures created ([Flewelling et al., 2013](#)). However, numerical investigations have found that  
7 reservoir gas flows into the fractures immediately after they open from hydraulic fracturing, and  
8 injection pressurizes both gas and water within the fracture to induce further fracture propagation  
9 ([Kim and Moridis, 2015](#)). Therefore, the fracture volume can be larger than the injected fluid  
10 volume. As a result, simple estimation of fracture volume based on the amount of injected fluid may  
11 underestimate the growth of the vertical fractures, and additional information is needed to  
12 accurately predict the extent of fracture growth.

13 External monitoring technologies can also be used to collect data on fracture characteristics and  
14 extent during hydraulic fracturing and/or production. These monitoring methods can be divided  
15 into near-wellbore and far-field techniques. Near-wellbore techniques include the use of tracers,  
16 temperature logs, video logs, or caliper logs ([Holditch, 2007](#)). However, near-wellbore techniques  
17 and logs only provide information for, at most, a distance of two to three wellbore diameters from  
18 the well and are, therefore, not suited for tracking fractures for their entire length ([Holditch, 2007](#)).  
19 Far-field methods, such as microseismic monitoring or tiltmeters, are used if the intent is to  
20 estimate fracture growth and height across the entire fractured reservoir area. Microseismic  
21 monitoring involves placing one or more geophones in a position to detect the very small amounts  
22 of seismic energy generated during subsurface fracturing ([Warpinski, 2009](#)).<sup>1</sup> Monitoring these  
23 microseismic events gives an idea of the location and size of the fracture network, as well as the  
24 orientation and complexity of fracturing ([Fisher and Warpinski, 2012](#)). Tiltmeters, which measure  
25 extremely small deformations in the earth, can be used to determine the direction and volume of  
26 the fractures and, within certain distances from the well, to estimate their dimensions ([Lecampion  
27 et al., 2005](#)).

### 6.3.2. Migration of Fluids through Pathways Related to Fractures/Formations

28 As noted above, subsurface migration of fluids requires a pathway, induced or natural, with enough  
29 permeability to allow fluids to flow, as well as a hydraulic gradient physically driving the fluid  
30 movement. The following subsections describe and evaluate potential pathways for the migration  
31 of fracturing fluids, hydrocarbons, or other formation fluids from producing formations to drinking  
32 water resources. They also present cases where the existence of these pathways has been  
33 documented. As described above, potential subsurface migration pathways for fluid flow out of the  
34 production formation are categorized as follows: (1) flow of fluids into the production zone via  
35 induced fractures and out of the production zone via flow through the formation, (2) fracture  
36 overgrowth out of the production zone, (3) migration via fractures intersecting offset wells and

---

<sup>1</sup> Typical microseismic events associated with hydraulic fracturing have a magnitude on the order of -2.5 (negative two and half) ([Warpinski, 2009](#)).

1 other artificial structures, and (4) migration via fractures intersecting other geologic features.  
2 Although these four potential pathways are discussed separately here, they may act in combination  
3 with each other or in combination with pathways along the well (as discussed in Section 6.2) to  
4 affect drinking water resources.

5 In many cases (depending on fracture depth, height, and direction), the distance between the  
6 producing formation and the drinking water resource is one of the most important factors affecting  
7 the possibility of fluid migration between these formations ([Reagan et al., 2015](#); [Jackson et al.,  
8 2013c](#)). This distance varies substantially among shale gas plays, coalbed methane plays, and other  
9 areas where hydraulic fracturing takes place in the United States (see Table 6-2). Many hydraulic  
10 fracturing operations target deep shale zones such as the Marcellus or Haynesville/Bossier, where  
11 the vertical distance between the top of the shale formation and the base of drinking water  
12 resources may be 1 mile (1.6 km) or greater. This is reflected in the Well File Review, which found  
13 that the largest proportion of wells used for hydraulic fracturing—an estimated 6,200 wells  
14 (27%)—had 5,000 to 5,999 ft (1,524 to 1,828 m) of measured distance along the wellbore between  
15 the induced fractures and the reported base of protected ground water resources ([U.S. EPA,  
16 2015o](#)).<sup>1</sup> However, as shown in Table 6-2, operations in the Antrim and the New Albany plays take  
17 place at relatively shallower depths, with distances of 100 to 1,900 ft (30 to 579 m) between the  
18 producing formation and the base of drinking water resources. The Well File Review indicated that  
19 20% of wells used for hydraulic fracturing (an estimated 4,600 wells) were located in areas with  
20 less than 2,000 ft (610 m) between the fractures and the base of protected ground water resources  
21 ([U.S. EPA, 2015o](#)). In coalbed methane plays, which are typically shallower than shale gas plays,  
22 these separation distances can be even smaller. For example, in the Raton Basin of southern  
23 Colorado and northern New Mexico, approximately 10% of coalbed methane wells have less than  
24 675 ft (206 m) of separation between the gas wells' perforated intervals and the depth of local  
25 water wells. In certain areas of the basin, this distance is less than 100 ft (30 m) ([Watts, 2006](#)).

26 Some hydraulic fracturing operations are conducted within formations that contain drinking water  
27 resources (see Table 6-2). One example of hydraulic fracturing taking place within a geologic  
28 formation that is also used as a drinking water source is in the Wind River Basin in Wyoming  
29 ([WYOGCC, 2014](#); [Wright et al., 2012](#)). Vertical gas wells in this area target the lower Eocene Wind  
30 River Formation and the underlying Paleocene Fort Union Formation, which consist of interbedded  
31 layers of sandstones, siltstones, and mudstones. The Wind River Formation also serves as the  
32 principal source of domestic, municipal, and agricultural water in this rural area. Hydraulic  
33 fracturing in rock formations that meet a state or federal definition of an underground source of  
34 drinking water is also known to take place in coalbed methane operations in the Raton Basin ([U.S.  
35 EPA, 2015l](#)), in the Powder River Basin of Montana and Wyoming (as described in Chapter 7), and  
36 in several other coalbed methane plays. In one field in Alberta, Canada, there is evidence that  
37 fracturing in the same formation as a drinking water resource (in combination with well integrity

---

<sup>1</sup> In the Well File Review, measured depth represents length along the wellbore, which may be a straight vertical distance below ground or may follow a more complicated path, if the wellbore is not straight and vertical.

- 1 problems; see Section 6.2.2.2) led to gas migration into water wells ([Tilley and Muehlenbachs,](#)  
 2 [2012](#)). However, no information is available on other specific incidents of this type.

**Table 6-2. Comparing the approximate depth and thickness of selected U.S. shale gas plays and coalbed methane basins.**

Shale data are reported in [GWPC and ALL Consulting \(2009\)](#) and [NETL \(2013\)](#); coalbed methane data are reported in [ALL Consulting \(2004\)](#) and [U.S. EPA \(2004\)](#). See Figures 2-2 and 2-4 in Chapter 2 for information on the locations of these basins, plays, and formations.

Basin/play/formation <sup>a</sup>	Approx. depth (ft [m] below surface)	Approx. net thickness (ft [m])	Distance between top of production zone and base of treatable water (ft [m])
<b>Shale plays</b>			
Antrim	600 to 2,200 [183 to 671]	70 to 120 [21 to 37]	300 to 1,900 [91 to 579]
Barnett	6,500 to 8,500 [1,981 to 2,591]	100 to 600 [30 to 183]	5,300 to 7,300 [1,615 to 2,225]
Eagle Ford	4,000 to 12,000 [1,219 to 3,658]	250 [76]	2,800 to 10,800 [853 to 3,292]
Fayetteville	1,000 to 7,000 [305 to 2,134]	20 to 200 [6 to 61]	500 to 6,500 [152 to 1,981]
Haynesville-Bossier	10,500 to 13,500 [3,200 to 4,115]	200 to 300 [61 to 91]	10,100 to 13,100 [3,078 to 3,993]
Marcellus	4,000 to 8,500 [1,219 to 2,591]	50 to 200 [15 to 61]	2,125 to 7,650 [648 to 2,332]
New Albany	500 to 2,000 [152 to 610]	50 to 100 [15 to 30]	100 to 1,600 [30 to 488]
Woodford	6,000 to 11,000 [1,829 to 3,353]	120 to 220 [37 to 67]	5,600 to 10,600 [1,707 to 3,231]
<b>Coalbed methane basins</b>			
Black Warrior (Upper Pottsville)	0 to 3,500 [0 to 1,067]	< 1 to > 70 [< 1 to > 21]	As little as zero <sup>b</sup>
Powder River (Fort Union)	450 to >6,500 [137 to 1,981]	75 [23]	As little as zero <sup>b</sup>
Raton (Vermejo and Raton)	< 500 to > 4,100 [< 152 to > 1,250]	10 to >140 [3 to >43]	As little as zero <sup>b</sup>
San Juan (Fruitland)	550 to 4,000 [168 to 1,219]	20 to 80 [6 to 24]	As little as zero <sup>b</sup>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Basin/play/formation <sup>a</sup>	Approx. depth (ft [m] below surface)	Approx. net thickness (ft [m])	Distance between top of production zone and base of treatable water (ft [m])
-----------------------------------	---	-----------------------------------	--

<sup>a</sup> For coalbed methane, values are given for the specific coal units noted in parentheses.

<sup>b</sup> Formation fluids in producing formations meet the definition of drinking water in at least some areas of the basin.

1 The overall frequency of occurrence of hydraulic fracturing in aquifers that meet the definition of  
2 drinking water resources across the United States is unknown. Some information, however, that  
3 provides insights on the occurrence and geographic distribution of this practice is available.  
4 According to the Well File Review, an estimated 0.4% of the 23,200 wells represented in that study  
5 had perforations used for hydraulic fracturing that were placed shallower than the base of the  
6 protected ground water resources reported by well operators ([U.S. EPA, 2015o](http://www.epa.gov/wfr)).<sup>1</sup> An analysis of  
7 produced water composition data maintained by the U.S. Geological Survey (USGS) provides insight  
8 into the geographic distribution of this practice. The USGS produced water database contains  
9 results from analyses of samples of produced water collected from more than 8,500 oil and gas  
10 production wells in unconventional formations (coalbed methane, shale gas, tight gas, and tight oil)  
11 within the continental United States.<sup>2</sup> Just over 5,000 of these samples, which were obtained from  
12 wells located in 37 states, reported total dissolved solids (TDS) concentrations. Because the  
13 database does not track whether samples were from wells that were hydraulically fractured, we  
14 selected samples from wells that were more likely to have been hydraulically fractured by  
15 restricting samples to those collected in 1950 or later and to those that were collected from wells  
16 producing from tight gas, tight oil, shale gas, or coalbed methane formations. This yielded 1,650  
17 samples from wells located in Alabama, Colorado, North Dakota, Utah, and Wyoming.<sup>3,4</sup> The TDS  
18 concentrations among these samples ranged from approximately 90 mg/L to 300,000 mg/L.  
19 Samples from approximately 1,200 wells in Alabama, Colorado, Utah, and Wyoming reported TDS  
20 concentrations at or below 10,000 mg/L. This analysis, in conjunction with the result from the Well  
21 File Review, suggests that, while the overall frequency of occurrence may be low, the activity may  
22 be concentrated in some areas of the country.

<sup>1</sup> The 95% confidence interval reported in the Well File Review indicates that this phenomenon could have occurred in as few as 0.1% of the wells or in as many as 3% of the wells.

<sup>2</sup> We used the USGS Produced Water Geochemical Database Version 2.1 (USGS database v 2.1) for this analysis (<http://energy.cr.usgs.gov/prov/prodwat/>). The database is comprised of produced water samples compiled by the USGS from 25 individual databases, publications, or reports.

<sup>3</sup> See Chapter 2, Text Box 2-1, which describes how commercial hydraulic fracturing began in the late 1940s.

<sup>4</sup> For this analysis, we assumed that produced water samples collected in 1950 or later from shale gas, tight oil, and tight gas wells were from wells that had been hydraulically fractured. To estimate which coal bed methane wells had been hydraulically fractured, we matched API numbers from coal bed methane wells in the USGS database v 2.1 to the same API numbers in the commercial database DrillingInfo, in which hydraulically fractured wells had been identified by EPA using the assumptions described in Section 2.3.1. Wells with seemingly inaccurate (i.e., less than 12 digit) API numbers were also excluded. Only coalbed methane wells from the USGS database v 2.1 that matched API numbers in the DrillingInfo database were retained for this analysis.

### 6.3.2.1. Flow of Fluids Out of the Production Zone

1 One potential pathway for fluid migration out of the production formation into drinking water  
2 resources is flow of injected fluids (or displacement of formation fluids due to injection) through  
3 the formation matrix during or after a hydraulic fracturing treatment. In deep, low-permeability  
4 shale and tight gas settings and where induced fractures are contained within the production zone,  
5 flow through the production formation has generally been considered an unlikely pathway for  
6 migration into drinking water resources ([Jackson et al., 2013c](#)). However, there is limited  
7 information available on the fate of injected fluids that are not recovered during production (i.e.,  
8 leakoff) or displaced formation fluids for cases where hydraulic fracturing takes place within or  
9 close to drinking water resources.

10 Leakoff into shale gas formations may be as high as 90% or more of the injected volume (see  
11 Section 7.2 and Table 7-2). The actual amount of leakoff depends on the amount of injected fluid,  
12 the hydraulic properties of the reservoir (e.g., permeability), the capillary pressure near the  
13 fracture faces, and the period of time the well is shut in following hydraulic fracturing before the  
14 start of production ([Kim et al., 2014](#); [Byrnes, 2011](#)).<sup>1,2</sup> However, despite the potentially large  
15 volume of fluid that may be lost into the formation, the flow of this fluid is generally controlled or  
16 limited by processes such as imbibition by capillary forces and adsorption onto clay minerals  
17 ([Dutta et al., 2014](#); [Dehghanpour et al., 2013](#); [Dehghanpour et al., 2012](#); [Roychaudhuri et al., 2011](#)).<sup>3</sup>  
18 It has been suggested that these processes can sequester the fluids in the producing formations  
19 permanently or for geologic time scales ([Engelder, 2012](#); [Byrnes, 2011](#)).

20 A limited number of studies in the literature have evaluated a combination of certain conditions  
21 that can facilitate migration of fluids despite these processes. [Myers \(2012b\)](#) suggests that  
22 migration of injected and/or formation fluids into the overburden may be possible in cases where  
23 there is a significant vertical hydraulic gradient, sufficient permeability, density-driven buoyancy,  
24 and the displacement of formation brines by large volumes of injected fluid. [Flewelling and Sharma  
25 \(2014\)](#) note that, for migration to occur, an upward hydraulic gradient would be necessary,  
26 particularly for brine that is denser than the ground water in the overlying formations; in the case  
27 of natural gas, though, buoyancy would provide an upward flux. A limited number of studies in the  
28 literature have evaluated a combination of certain conditions that can facilitate migration of fluids  
29 despite these processes. [Myers \(2012b\)](#) suggests that migration of injected and/or formation fluids  
30 into the overburden may be possible in cases where there is a significant vertical hydraulic  
31 gradient, sufficient permeability, density-driven buoyancy, and the displacement of formation

---

<sup>1</sup> Relative permeability is a dimensionless property allowing for the comparison of the different abilities of fluids to flow in multiphase settings. If a single fluid is present, its relative permeability is equal to 1, but the presence of multiple fluids generally inhibits flow and decreases the relative permeability ([Schlumberger, 2014](#)).

<sup>2</sup> Shutting in the well after fracturing allows fluids to move farther into the formation, resulting in a higher gas relative permeability near the fracture surface and improved gas production ([Bertoncello et al., 2014](#)).

<sup>3</sup> Imbibition is the displacement of a nonwetting fluid (i.e., gas) by a wetting fluid (typically water). The terms wetting or nonwetting refer to the preferential attraction of a fluid to the surface. In typical reservoirs, water preferentially wets the surface, and gas is nonwetting. Capillary forces arise from the differential attraction between immiscible fluids and solid surfaces; these are the forces responsible for capillary rise in small-diameter tubes and porous materials. These definitions are adapted from [Dake \(1978\)](#).



1 brines by large volumes of injected fluid. [Flewelling and Sharma \(2014\)](#) note that for migration to  
2 occur, an upward hydraulic gradient would be necessary, particularly for brine that is denser than  
3 the ground water in the overlying formations; in the case of natural gas, though, buoyancy would  
4 provide an upward flux ([Vengosh et al., 2014](#)). Some natural conditions could create this upward  
5 hydraulic gradient in the absence of any effects from hydraulic fracturing ([Flewelling and Sharma,  
6 2014](#)). However, these natural mechanisms have been found to cause very low flow rates over very  
7 long distances, yielding extremely small vertical fluxes in sedimentary basins—corresponding to  
8 some estimated travel times of 100,000 to 100,000,000 years across a 328 ft (100 m) thick layer  
9 with about 0.01 nD ( $1 \times 10^{-23} \text{ m}^2$ ) permeability ([Flewelling and Sharma, 2014](#)). Furthermore,  
10 fracturing fluid would likely be sequestered in the immediate vicinity of the fracture network due to  
11 capillary tension ([Engelder, 2012](#)).


12 Over-pressurization of producing formations due to the injection of large amounts of fluid during  
13 hydraulic fracturing may support the upward hydraulic gradient for fluid migration ([Myers,  
14 2012b](#)). Myers' modeling results suggest that significant pressure buildup that occurs at the  
15 location of fluid injection may not return to pre-hydraulic fracturing levels for up to a year.  
16 However, these findings have been disputed in the literature due to certain suggested limitations of  
17 the original study (e.g., extensive simplification of the model, lack of accurate characterization of  
18 regional flow, misrepresentation of saturation conditions in shale formations), and they have been  
19 found to be physically implausible given the hydrogeologic characteristics of actual sedimentary  
20 basins ([Cohen et al., 2013](#); [Flewelling et al., 2013](#); [Vidic et al., 2013](#); [Saiers and Barth, 2012](#)). Some  
21 researchers have also suggested that pressure perturbations due to hydraulic fracturing operations  
22 are localized to the immediate vicinity of the fractures, due to the very low permeabilities of shale  
23 formations ([Flewelling and Sharma, 2014](#)). However, there are emerging studies indicating that  
24 pressure impacts of hydraulic fracturing operations may extend farther than the immediate vicinity  
25 and may create risk of induced seismicity ([Skoumal et al., 2015](#)). Following hydraulic fracturing  
26 operations, a large-scale depressurization would be expected over the longer term due to  
27 hydrocarbon production, which may counteract any short-term localized pressure effects of  
28 hydraulic fracturing during production and cause fluids to flow primarily toward the fracture  
29 network ([Flewelling and Sharma, 2014](#)).

30 In responses to these critiques, [Myers \(2013, 2012a\)](#) states that they do not prove his original  
31 hypothesis or findings wrong, but instead highlight the need for complex three-dimensional  
32 modeling and detailed data collection for improving the understanding of the process and risks to  
33 drinking water resources. [Myers \(2013, 2012a\)](#) argues that, given the large volume of hydraulic  
34 fracturing operations in formations such as the Marcellus, these formations would have to hold  
35 very large volumes of water that would be imbibed into the shale. Furthermore, he notes that  
36 migration of these fluids into overlying formations may be facilitated by existing fractures or out-of-  
37 zone fracturing (as discussed in the following sections).

### **6.3.2.2. Fracture Overgrowth out of the Production Zone**

38 Fractures that extend out of the intended production zone into another formation or an unintended  
39 zone within the same formation could provide a potential fluid migration pathway into drinking

1 water resources ([Jackson et al., 2013c](#)). This migration could occur either through the fractures  
2 themselves or in connection with other permeable subsurface features or formations (see Figure  
3 6-5). Such “out-of-zone fracturing” is undesirable from a production standpoint and may occur as a  
4 result of inadequate reservoir characterization or fracture treatment design ([Eisner et al., 2006](#)).  
5 Some researchers have noted that fractures growing out of the targeted production zone could  
6 potentially contact other formations, such as higher conductivity sandstones or conventional  
7 hydrocarbon reservoirs, which may create an additional pathway for potential migration into a  
8 drinking water resource ([Reagan et al., 2015](#)). In addition, fractures growing out of the production  
9 zone could potentially intercept natural, preexisting fractures (discussed in Section 6.3.2.4) or  
10 active or abandoned wells near the well where hydraulic fracturing is performed (discussed in  
11 Section 6.3.2.3).

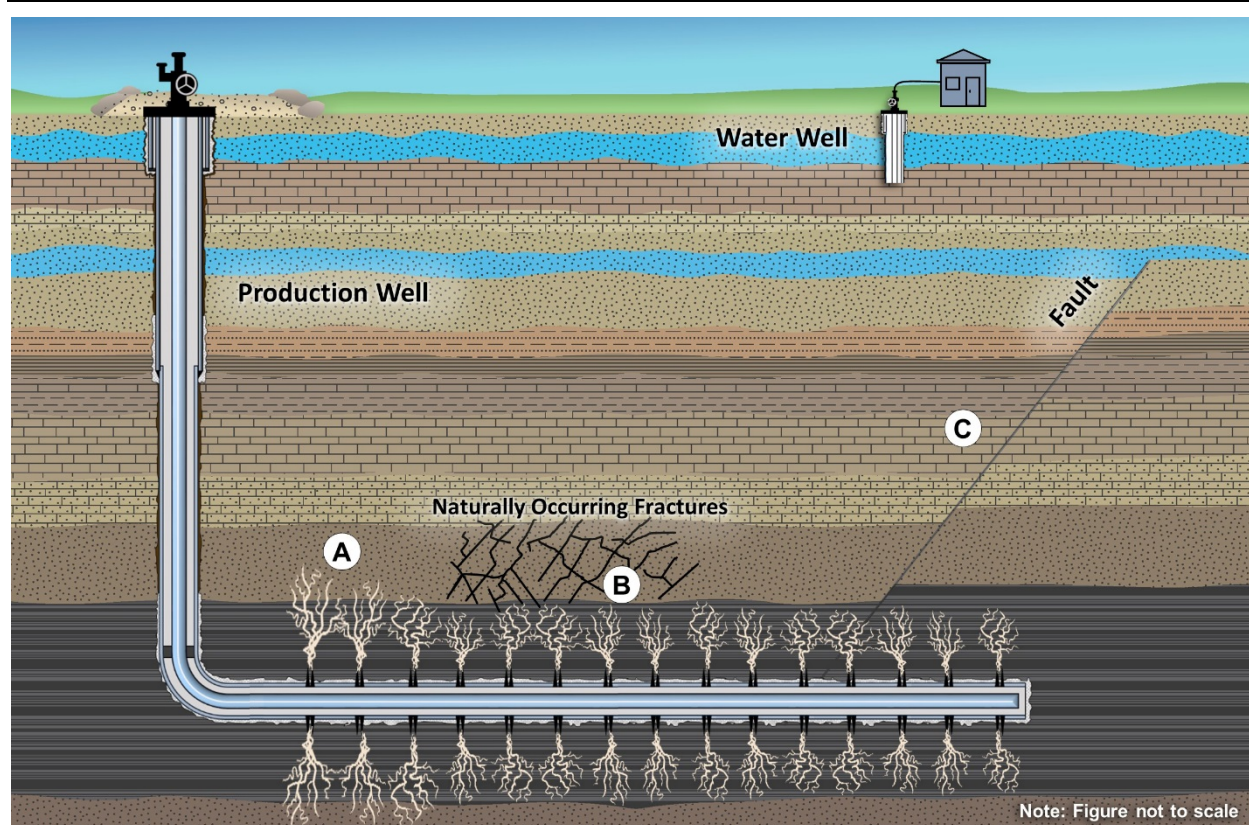

**Figure 6-5. Conceptualized depiction of potential pathways for fluid movement out of the production zone: (a) induced fracture overgrowth into over- or underlying formations; (b) induced fractures intersecting natural fractures; and (c) induced fractures intersecting a transmissive fault.**

Thickness and depth of production formation are important site specific factors for each operation.

12 The fracture’s geometry (see Section 6.3.1) affects its potential to extend beyond the intended zone  
13 and serve as a pathway to drinking water resources. Vertical heights of fractures created during

1 hydraulic fracturing operations have been measured in several U.S. shale plays, including the  
2 Barnett, Woodford, Marcellus, and Eagle Ford, using microseismic and microdeformation field  
3 monitoring techniques ([Fisher and Warpinski, 2012](#)). These data indicate typical fracture heights  
4 extending from tens to hundreds of feet. [Davies et al. \(2012\)](#) analyzed this data set and found that  
5 the maximum fracture height was 1,929 ft (588 m) and that 1% of the fractures had a height greater  
6 than 1,148 ft (350 m). This may raise some questions about fractures being contained within the  
7 producing formation, as some Marcellus fractures were found to extend for at least 1,500 ft  
8 (477 m), while the maximum thickness of the formation is generally 350 ft (107 m) or less ([MCOR,  
9 2012](#)). However, the majority of fractures were found to have heights less than 328 ft (100 m),  
10 suggesting limited possibilities for fracture overgrowth exceeding the separation between shale  
11 reservoirs and shallow aquifers ([Davies et al., 2012](#)). This is consistent with modeling results found  
12 by [Kim and Moridis \(2015\)](#) and others, as described below. Where the producing formation is not  
13 continuous horizontally, the lateral extent of fractures may also become important. For example, in  
14 the [Fisher and Warpinski \(2012\)](#) data set, fractures were found to extend to horizontal lengths  
15 greater than 1,000 ft (305 m).

16 Results of National Energy Technology Laboratory (NETL) research in Greene County,  
17 Pennsylvania, are generally consistent with those reported in the [Fisher and Warpinski \(2012\)](#) data  
18 set. Microseismic monitoring was used at six horizontal Marcellus Shale wells to identify the  
19 maximum upward extent of brittle deformation caused by hydraulic fracturing ([Hammack et al.,  
20 2014](#)). At three of the six wells, fractures extending between 1,000 and 1,900 ft (305 and 579 m)  
21 above the Marcellus Shale were identified. Overall, approximately 40% of the microseismic events  
22 occurred above the Tully Limestone, the formation overlying the Marcellus Shale that is sometimes  
23 referred to as an upper barrier to hydraulic fracture growth. However, all microseismic events were  
24 at least 5,000 ft (1,524 m) below drinking water aquifers, as the Marcellus Shale is one of the  
25 deepest target formations (see Table 6-2), and no impacts to drinking water resources or another  
26 local gas-producing interval were identified. See Text Box 6-3 for more information on the Greene  
27 County site.

28 Similarly, in Dunn County, North Dakota, there is evidence of out-of-zone fracturing in the Bakken  
29 Shale ([U.S. EPA, 2015j](#)). At the Killdeer site (see Section 6.2.2.1 and Chapter 5, Text Box 5-12),  
30 fracturing fluids and produced water were released during a rupture of the casing at the Franchuk  
31 44-20 SWH well. Water quality characteristics at two monitoring wells located immediately  
32 downgradient of the Franchuk well reflected a mixing of local Killdeer Aquifer water with deep  
33 formation brine. Ion and isotope ratios used for brine fingerprinting suggest that Madison Group  
34 formations (which directly overlie the Bakken in the Williston Basin) were the source of the brine  
35 observed in the Killdeer Aquifer, and the authors concluded that this provides evidence for out-of-  
36 zone fracturing. Industry experience also indicates that out-of-zone fracturing may be fairly  
37 common in the Bakken and that produced water from many Bakken wells has Madison Group  
38 chemical signatures ([Arkadakskiy and Rostron, 2013b, 2012b](#); [Peterman et al., 2012](#)).

**Text Box 6-3. Monitoring at the Greene County, Pennsylvania, Hydraulic Fracturing Test Site.**

1 Monitoring performed at the Marcellus Shale test site in Greene County, Pennsylvania, evaluated fracture  
2 height growth and zonal isolation during and after hydraulic fracturing operations ([Hammack et al., 2014](#)).  
3 The site has six horizontally drilled and two vertical wells that were completed into the Marcellus Shale.  
4 Pre-fracturing studies of the site included a 3D seismic survey to identify faults, pressure measurements, and  
5 baseline sampling for isotopes; drilling logs were also run. Hydraulic fracturing occurred April 24 to May 6,  
6 2012, and June 4 to 11, 2012. Monitoring at the site included the following:

- 7 • **Microseismic monitoring** was conducted during four of the six hydraulic fracturing jobs on the site,  
8 using geophones placed in the two vertical Marcellus Shale wells. These data were used to monitor  
9 fracture height growth above the six horizontal Marcellus Shale wells during hydraulic fracturing.
- 10 • **Pressure and production data** were collected from a set of vertical gas wells completed in Upper  
11 Devonian/Lower Mississippian zones 3,800 to 6,100 ft (1,158 to 1,859 m) above the Marcellus. Data were  
12 collected during and after the hydraulic fracturing jobs and used to identify any communication between  
13 the fractured areas and the Upper Devonian/Lower Mississippian rocks.
- 14 • **Chemical and isotopic analyses** were conducted on gas and water produced from the Upper  
15 Devonian/Lower Mississippian wells. Samples were analyzed for stable isotope signatures of hydrogen,  
16 carbon, and strontium and for the presence of perfluorocarbon tracers used in 10 stages of one of the  
17 hydraulic fracturing jobs to identify possible gas or fluid migration to overlying zones ([Sharma et al.](#)  
18 [2014a](#); [Sharma et al., 2014b](#)).

19 As of September 2014, no evidence was found of gas or brine migration from the Marcellus Shale ([Hammack](#)  
20 [et al., 2014](#)), although longer-term monitoring will be necessary to confirm that no impacts to overlying zones  
21 have occurred ([Zhang et al., 2014a](#)).

22 Extreme vertical fracture growth is generally considered to be limited by layered geological  
23 environments and other physical constraints ([Fisher and Warpinski, 2012](#); [Daneshy, 2009](#)). For  
24 example, differences in in situ stresses in layers above and below the production zone can restrict  
25 fracture height growth in sedimentary basins ([Fisher and Warpinski, 2012](#)). High-permeability  
26 layers near hydrocarbon-producing zones can reduce fracture growth by acting as a “thief zone”  
27 into which fluids can migrate, or by inducing a large compressive stress that acts on the fracture ([de](#)  
28 [Pater and Dong, 2009, as cited in Fisher and Warpinski, 2012](#)). Although these thief zones may  
29 prevent fractures from reaching shallower formations or growing to extreme vertical lengths, it is  
30 important to note that they do allow fluids to migrate out of the production zone into these  
31 receiving formations, which could potentially contain drinking water resources. A volumetric  
32 argument has also been used to discuss limits of vertical fracture growth; that is, the volumes of  
33 fluid needed to sustain fracture growth beyond a certain height would be unrealistic ([Fisher and](#)  
34 [Warpinski, 2012](#)). However, as described in Section 6.3.1, fracture volume can be greater than the  
35 volume of injected fluid due to the effects of pressurized water combined with the effects of gas  
36 during injection ([Kim and Moridis, 2015](#)). Nevertheless, some numerical investigations suggest  
37 that, unless unrealistically high pressures and injection rates are applied to an extremely weak and  
38 homogeneous formation that extends up to the near surface, hydraulic fracturing generally induces



1 stable and finite fracture growth in a Marcellus-type environment and the fractures are unlikely to  
2 extend into drinking water resources ([Kim and Moridis, 2015](#)).

3 Modeling studies have identified other factors that affect the containment of fractures within the  
4 producing formation. As discussed above, additional numerical analysis of fracture propagation  
5 during hydraulic fracturing has demonstrated that contrasts in the geomechanical properties of  
6 rock formations can affect fracture height containment ([Gu and Siebrits, 2008](#)) and that geological  
7 layers present within shale gas reservoirs can limit vertical fracture propagation ([Kim and Moridis,  
8 2015](#)). Modeling and monitoring studies generally agree that physical constraints on fracture  
9 propagation will prevent induced fractures from extending from deep zones directly into drinking  
10 water resources ([Kim and Moridis, 2015](#); [Flewelling et al., 2013](#); [Fisher and Warpinski, 2012](#)).

11 Using a numerical simulation, [Reagan et al. \(2015\)](#) investigated potential short-term migration of  
12 gas and water between a shale or tight gas formation and a shallower ground water unit. Migration  
13 was assessed immediately after hydraulic fracturing and for up to a 2-year time period during the  
14 production stage. The potential migration pathway was assumed to be a permeable fracture or fault  
15 connecting the producing formation to the shallower ground water unit. Such a pathway may be  
16 either entirely hydraulically induced (due to fracture overgrowth in a case where the separation  
17 distance is limited, as discussed below), or may be a smaller induced fracture connecting to a  
18 natural, permeable fault or fracture (as discussed in Section 6.3.2.4). For the purposes of this study,  
19 the pathway was assumed to be pre-existing, and [Reagan et al. \(2015\)](#) did not model the fracturing  
20 process itself.

21 The subsurface system evaluated in the modeling investigation included a horizontal well used for  
22 hydraulic fracturing and gas production, the connecting fracture or fault between the producing  
23 formation and the aquifer, and a shallow vertical water well in the aquifer (see Figure 6-5). The  
24 parameters and scenarios used in the study are shown in Table 6-3; two vertical separation  
25 distances between the producing formation and the aquifer were investigated, along with a range of  
26 production zone permeabilities and other variables used to describe four production scenarios. The  
27 horizontal well was assigned a constant bottomhole pressure of half the initial pressure of the  
28 target reservoir, not accounting for any over-pressurization from hydraulic fracturing. Over-  
29 pressurization during hydraulic fracturing may create an additional driving force for upward  
30 migration. Results of this investigation, which represents a typical production period, indicate a  
31 generally downward water flow within the connecting fracture (from the aquifer through the  
32 connecting fracture into the hydraulically induced fractures in the production zone) and some  
33 upward migration of gas ([Reagan et al., 2015](#)). In certain cases, gas breakthrough (i.e., the  
34 appearance of gas at the base of the drinking water aquifer) was also observed. The key parameter  
35 affecting migration of gas into the aquifer was the production regime, particularly whether gas  
36 production, driving the fluid migration toward the production well, was occurring in the reservoir.  
37 Simulations including a producing gas well showed only a few instances of breakthrough, while  
38 simulations without gas production tended to result in breakthrough; these breakthrough times  
39 ranged from minutes to 20 days. However, in all cases, the gas escape was limited in duration and  
40 scope, because the amount of gas available for immediate migration toward the shallow aquifer was

- 1 limited to that initially stored in the hydraulically induced fractures after the stimulation process
- 2 and prior to production. These simulations indicate that the target reservoir may not be able to
- 3 replenish the gas available for migration in hydraulically induced fractures prior to production.

**Table 6-3. Modeling parameters and scenarios investigated by Reagan et al. (2015).**

This table illustrates the range of parameters included in the [Reagan et al. \(2015\)](#) modeling study. See Figure 6-5, Figure 6-6, and Figure 6-7 for conceptualized illustrations of these scenarios.

Model parameter or variable	Values investigated in model scenarios
<b>All scenarios</b>	
Lateral distance from connecting feature to water well	328 ft (100 m)
Vertical separation distance between producing formation and drinking water aquifer	656 ft (200 m); 2,625 ft (800 m)
Producing formation permeability range	1 nD ( $1 \times 10^{-21} \text{ m}^2$ ); 100 nD ( $1 \times 10^{-19} \text{ m}^2$ ); 1 $\mu$ D ( $1 \times 10^{-18} \text{ m}^2$ )
Drinking water aquifer permeability	0.1 D ( $1 \times 10^{-13} \text{ m}^2$ ); 1 D ( $1 \times 10^{-12} \text{ m}^2$ )
Initial conditions	Hydrostatic
Production well bottom hole pressure	Half of the initial pressure of the producing formation (not accounting for over-pressurization from hydraulic fracturing)
Production regime	Production at both the water well and the gas well; Production at only the water well; Production at only the gas well; No production
<b>Fracture pathway scenarios</b>	
Connecting feature permeability	1 D ( $1 \times 10^{-12} \text{ m}^2$ ); 10 D ( $1 \times 10^{-11} \text{ m}^2$ ); 1,000 D ( $1 \times 10^{-9} \text{ m}^2$ )
<b>Offset well pathway scenarios</b>	
Lateral distance from production well to offset well	33 ft (10 m)
Cement permeability of offset well	1 $\mu$ D ( $1 \times 10^{-18} \text{ m}^2$ ); 1 mD ( $1 \times 10^{-15} \text{ m}^2$ ); 1 D ( $1 \times 10^{-12} \text{ m}^2$ ); 1,000 D ( $1 \times 10^{-9} \text{ m}^2$ )

*This document is a draft for review purposes only and does not constitute Agency policy.*




1 Based on the results of the [Reagan et al. \(2015\)](#) study, gas production from the reservoir appears  
2 likely to mitigate gas migration, both by reducing the amount of available gas and depressurizing  
3 the induced fractures (which counters the buoyancy of any gas that may escape from the  
4 production zone into the connecting fracture). Production at the gas well also creates pressure  
5 gradients that drive a downward flow of water from the aquifer via the fracture into the producing  
6 formation, increasing the amount of water produced at the gas well. Furthermore, the effective  
7 permeability of the connecting feature is reduced during water (downward) and gas (upward)  
8 counter-flow within the fracture, further retarding the upward movement of gas or allowing gas to  
9 dissolve into the downward flow. In contrast, [Reagan et al. \(2015\)](#) found an increased potential for  
10 gas release from the producing formation in cases where there is no gas production following  
11 hydraulic fracturing. The potential for gas migration during shut-in periods following hydraulic  
12 fracturing and prior to production may be more significant, especially when out-of-zone fractures  
13 are formed. Without the producing gas well, the gas may rise via buoyancy, with any downward-  
14 flowing water from the aquifer displacing the upward-flowing gas.

15 [Reagan et al. \(2015\)](#) also found that the permeability of a connecting fault or fracture may be an  
16 important factor for the potential upward migration of gas (although not as significant as the  
17 production regime). For the cases where gas escaped from the production zone, the maximum  
18 amount of migrating gas depended upon the permeability of the connecting feature: the higher the  
19 permeability, the larger the amount. The results also showed that lower permeabilities delay the  
20 downward flow of water from the aquifer, allowing the trace amount of gas that entered into the  
21 fracture early in the modeled period to reach the aquifer, which was otherwise predicted to  
22 dissolve in the water flowing downward in the feature. Similarly, the permeabilities of the target  
23 reservoir, fracture volume, and the separation distance were found to affect gas migration, because  
24 they affected the initial amount of gas stored in the hydraulically induced fractures. In contrast, the  
25 permeability of the drinking water aquifer was not found to be a significant factor in their  
26 assessment.

### **6.3.2.3. Migration via Fractures Intersecting with Offset Wells and Other Artificial Structures**


27 Another potential pathway for fluid migration is one in which injected fluids or displaced  
28 subsurface fluids move through newly created fractures into an offset well or its fracture network,  
29 resulting in well communication ([Jackson et al., 2013c](#)). This may be a concern, particularly in  
30 shallower formations where the local least principal stress is vertical (resulting in more horizontal  
31 fracture propagation) and where there are shallow drinking water wells in the same formation.

32 The offset well can be an abandoned, inactive, or active well; if the well has also been used for  
33 hydraulic fracturing, the fracture networks of the two wells might intersect. The situation where  
34 hydraulic fractures unintentionally propagate into other existing, producing hydraulic fractures is  
35 referred to as a “frac hit” and is known to occur in areas with a high density of wells ([Jackson et al.,  
36 2013a](#)). Figure 6-6 provides a schematic to illustrate fractures that intercept an offset well, and  
37 Figure 6-7 depicts how the fracture networks of two wells can intersect.

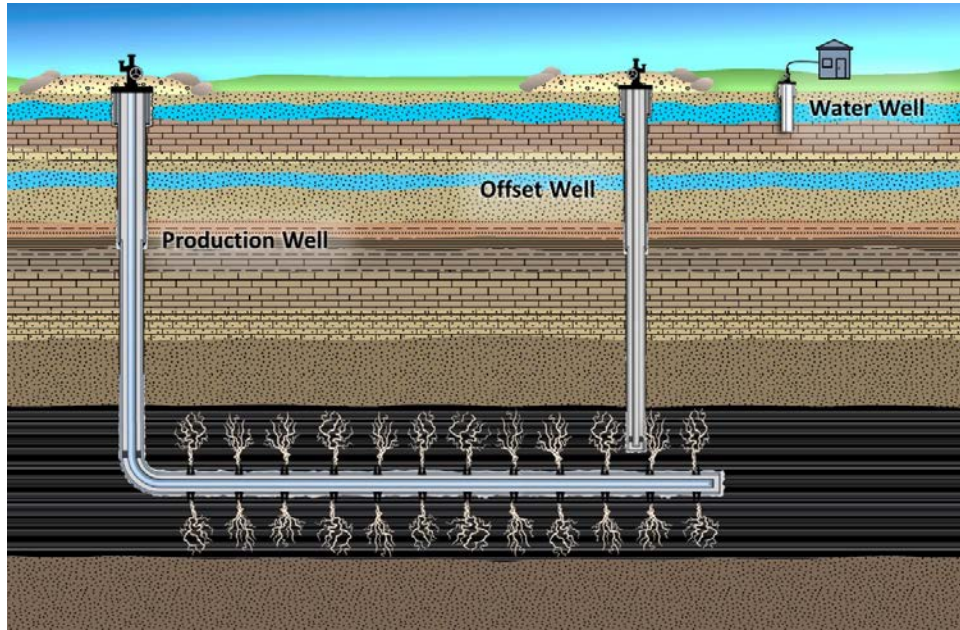

**Figure 6-6. Induced fractures intersecting an offset well (in a production zone, as shown, or in overlying formations into which fracture growth may have occurred).**

This image shows a conceptualized depiction of potential pathways for fluid movement out of the production zone (not to scale).

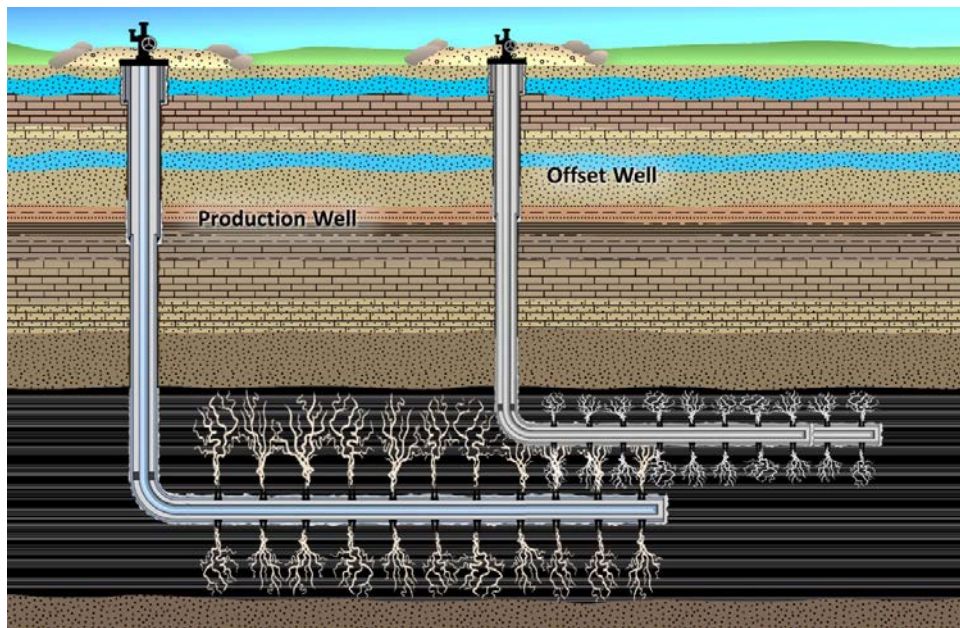

**Figure 6-7. Well communication (a frac hit) via induced fractures intersecting another well or its fracture network.**

This image shows a conceptualized depiction of potential pathways for fluid movement out of the production zone (not to scale).

1 Instances of well communication have been known to occur and are described in the oil and gas  
2 literature. For example, an analysis of operator data collected by the New Mexico Oil Conservation  
3 Division (NM OCD) in 2013–2014 identified 120 instances of well communication in the San Juan  
4 Basin ([Vaidyanathan, 2014](#)). In some cases, well communication incidents have led to documented  
5 production and/or environmental problems. A study from the Barnett Shale noted two cases of well  
6 communication, one with a well 1,100 ft (335 m) away and the other with a well 2,500 ft (762 m)  
7 away from the initiating well; ultimately, one of the offset wells had to be re-fractured because the  
8 well communication halted production ([Craig et al., 2012](#)). In some cases, the fluids that intersect  
9 the offset well flow up the wellbore and spill onto the surface. The EPA ([2015n](#)) recorded 10  
10 incidents in which fluid spills were attributed to well communication events (see Chapter 7 for  
11 more information).<sup>1</sup> The subsurface effects of frac hits have not been extensively studied, but these  
12 cases demonstrate the possibility of fluid migration via communication with other wells and/or  
13 their fracture networks. More generally, well communication events may indicate fracture behavior  
14 that was not intended by the treatment design.

15 A well communication event is usually observed at the offset well as a pressure spike, due to the  
16 elevated pressure from the originating well, or as an unexpected drop in the production rate ([Lawal  
17 et al., 2014](#); [Jackson et al., 2013a](#)). [Ajani and Kelkar \(2012\)](#) performed an analysis of frac hits in the  
18 Woodford Shale in Oklahoma, studying 179 wells over a 5-year period. The authors used fracturing  
19 records from the newly completed wells and compared them to production records from  
20 surrounding wells. The authors assumed that sudden changes in production of gas or water  
21 coinciding with fracturing at a nearby well were caused by communication between the two wells,  
22 and increased water production at the surrounding wells was assumed to be caused by fracturing  
23 fluid flowing into these offset wells. The results of the Oklahoma study showed that 24 wells had  
24 decreased gas production or increased water production within 60 days of the initial gas  
25 production at the nearby fractured well. A total of 38 wells experienced decreased gas or increased  
26 water production up to a distance of 7,920 ft (2,414 m), measured as the distance between the  
27 midpoints of the laterals; 10 wells saw increased water production from as far away as 8,422 ft  
28 (2,567 m). In addition, one well showed a slight increase in gas production rather than a decrease.<sup>2</sup>

29 Other studies of well communication events have relied on similar information. In the NM OCD  
30 operator data set, the typical means of detecting a well communication event was through pressure  
31 changes at the offset well, production lost at the offset well, or fluids found in the offset well. In  
32 some instances, well operators determined that a well was producing fluid from two different  
33 formations, while in one instance, the operator identified a potential well communication event due  
34 to an increase in production from the offset well ([Vaidyanathan, 2014](#)). In another study, [Jackson et  
35 al. \(2013a\)](#) found that the decrease in production due to well communication events was much  
36 greater in lower permeability reservoirs. The authors note an example where two wells 1,000 ft  
37 (305 m) apart communicated, reducing production in the offset well by 64%. These results indicate  
38 that the subsurface interactions of well networks or complex hydraulics driven by each well at a

---

<sup>1</sup> Line numbers 163, 236, 265, 271, 286, 287, 375, 376, 377, and 380 in Appendix B of [U.S. EPA \(2015n\)](#).

<sup>2</sup> The numbers of wells cited in the study reflect separate analyses, and the numbers cited are not additive.



1 densely populated (with respect to wells) area are important factors to consider for the design of  
2 hydraulic fracturing treatments and other aspects of oil and gas production.

3 The key factor affecting the likelihood of a well communication event and the impact of a frac hit is  
4 the location of the offset well relative to the well where hydraulic fracturing was conducted ([Ajani  
5 and Kelkar, 2012](#)). In the [Ajani and Kelkar \(2012\)](#) analysis, the likelihood of a communication event  
6 was less than 10% in wells more than 4,000 ft (1,219 m) apart, but rose to nearly 50% in wells less  
7 than 1,000 ft (305 m) apart. Well communication was also much more likely with wells drilled from  
8 the same pad. The affected wells were found to be in the direction of maximum horizontal stress in  
9 the field, which correlates with the expected direction of fracture propagation.

10 Well communication may be more likely to occur where there is less resistance to fracture growth.  
11 Such conditions may be related to existing production operations (e.g., where previous  
12 hydrocarbon extraction has reduced the pore pressure, changed stress fields, or affected existing  
13 fracture networks) or the existence of high-permeability rock units ([Jackson et al., 2013a](#)). As [Ajani  
14 and Kelkar \(2012\)](#) found in the Woodford Shale, one of the deepest major shale plays (see Table  
15 6-2), hydraulic fracturing treatments tend to enter portions of the reservoir that have already been  
16 fractured as opposed to entering previously unfractured rocks, ultimately causing interference in  
17 offset wells. [Mukherjee et al. \(2000\)](#) described this tendency for asymmetric fracture growth  
18 toward depleted areas in low-permeability gas reservoirs due to pore pressure depletion from  
19 production at offset wells. The authors note that pore pressure gradients in depleted zones would  
20 affect the subsurface stresses. Therefore, depending on the location of the new well with respect to  
21 depleted zone(s) and the orientation of the existing induced fractures, the newly created fracture  
22 may be asymmetric, with only one wing of the fracture extending into the depleted area and  
23 developing significant length and conductivity ([Mukherjee et al., 2000](#)). The extent to which the  
24 depleted area affects fracturing depends on factors such as cumulative production, pore volume,  
25 hydrocarbon saturation, effective permeability, and the original reservoir or pore pressure  
26 ([Mukherjee et al., 2000](#)). Similarly, high-permeability rock types acting as thief zones may also  
27 cause preferential fracturing due to a higher leakoff rate into these layers ([Jackson et al., 2013a](#)).

28 In addition to location, the potential for impact on a drinking water resource also depends on the  
29 condition of the offset well (see Section 6.2 for information on the integrity of well components). In  
30 their analysis, [Ajani and Kelkar \(2012\)](#) found a correlation between well communication and well  
31 age: older wells were more likely to be affected. If the cement in the annulus between the casing  
32 and the formation is intact and the well components can withstand the stress exerted by the  
33 pressure of the fluid, nothing more than an increase in pressure and extra production of fluids may  
34 occur during a well communication event. However, if the offset well is not able to withstand the  
35 pressure of the fracturing fluid, well components may fail, allowing fluid to migrate out of the well.  
36 The highest pressures most wells will face during their life spans occur during fracturing. In some  
37 cases, temporary equipment is installed in wells during fracturing to protect the well against the  
38 increased pressure. Therefore, many producing wells may not be designed to withstand pressures  
39 typical of hydraulic fracturing ([Enform, 2013](#)) and may experience problems when fracturing  
40 occurs in nearby wells. Depending on the location of the weakest point in the offset well, this could

1 result in fluid being spilled onto the surface, rupturing of cement and/or casing and hydraulic  
2 fracturing fluid leaking into subsurface formations, or fluid flowing out through existing flaws in the  
3 casing and/or cement (see Chapters 5 and 7 for additional information on how such spills can affect  
4 drinking water resources). For example, a documented well communication event near Innisfail,  
5 Alberta, Canada (see Text Box 6-4) occurred when several well components failed because they  
6 were not rated to handle the increased pressure caused by the well communication ([ERCB, 2012](#)).  
7 In addition, if the fractures were to intersect an uncemented portion of the wellbore, the fluids  
8 could potentially migrate into any formations that are uncemented along the wellbore.

**Text Box 6-4. Well Communication at a Horizontal Well near Innisfail, Alberta, Canada.**

9 In most cases, well communication during fracturing may only result in a pressure surge accompanied by a  
10 drop in gas production and additional flow of produced water or fracturing fluid at an offset well. However, if  
11 the offset well is not capable of withstanding the high pressures of fracturing, more significant damage can  
12 occur.

13 In January 2012, fracturing at a horizontal well near Innisfail in Alberta, Canada, caused a surface spill of  
14 fracturing and formation fluids at a nearby operating vertical oil well. According to the investigation report by  
15 the Alberta Energy Resources Conservation Board ([ERCB, 2012](#)), pressure began rising at the vertical well  
16 less than two hours after fracturing ended at the horizontal well.

17 Several components of the vertical well facility—including surface piping, discharge hoses, fuel gas lines, and  
18 the pressure relief valve associated with compression at the well—were not rated to handle the increased  
19 pressure and failed. Ultimately, the spill released an estimated 19,816 gallons (75 m<sup>3</sup>) of fracturing fluid,  
20 brine, gas, and oil covering an area of approximately 656 ft by 738 ft (200 m by 225 m).

21 The ERCB determined that the lateral of the horizontal well passed within 423 ft (129 m) of the vertical well  
22 at a depth of approximately 6,070 ft (1,850 m) below the surface, in the same formation. The operating  
23 company had estimated a fracture half-length of 262 to 295 ft (80 to 90 m) based on a general fracture model  
24 for the field. While there were no regulatory requirements for spacing hydraulic fracturing operations in  
25 place at the time, the 423 ft (129 m) distance was out of compliance with the company's internal policy to  
26 space fractures from adjacent wells at least 1.5 times the predicted half-length. The company also did not  
27 notify the operators of the vertical well of the fracturing operations. The incident prompted the ERCB to issue  
28 *Bulletin 2012-02—Hydraulic Fracturing: Interwellbore Communication between Energy Wells*, which outlines  
29 expectations for avoiding well communication events and preventing adverse effects on offset wells.

30 In older wells near a hydraulic fracturing operation, plugs and cement may have degraded over  
31 time; in some cases, abandoned wells may never have been plugged properly. Before the 1950s,  
32 most well plugging efforts were focused on preventing water from the surface from entering oil  
33 fields. As a result, many wells from that period were abandoned with little or no cement ([NPC,  
34 2011b](#)). This can be a significant issue in areas with legacy (i.e., historic) oil and gas exploration and  
35 when wells are re-entered and fractured (or re-fractured) to increase production in a reservoir. In  
36 one study, 18 of 29 plugged and abandoned wells in Quebec were found to show signs of leakage  
37 ([Council of Canadian Academies, 2014](#)). Similarly, a PA DEP report cited three cases where natural  
38 gas migration had been caused by well communication events with old, abandoned wells ([PA DEP,](#)

1 [2009b](#)). The Interstate Oil and Gas Compact Commission ([IOGCC, 2008](#)) estimates that over 1  
2 million wells may have been drilled in the United States prior to a formal regulatory system, and the  
3 status and location of many of these wells are unknown. Various state programs exist to plug  
4 identified orphaned wells, but they face the challenge of identifying and addressing a large number  
5 of wells.<sup>1</sup> For example, as of 2000, PA DEP's well plugging program reported that it had  
6 documented 44,700 wells that had been plugged and 8,000 that were in need of plugging, and  
7 approximately 184,000 additional wells with an unknown location and status ([PA DEP, 2000](#)). A  
8 similar evaluation from New York State found that the number of unplugged wells was growing in  
9 the state despite an active well plugging program ([Bishop, 2013](#)).

10 The [Reagan et al. \(2015\)](#) numerical modeling study included an assessment of migration via an  
11 offset well as part of its investigation of potential fluid migration from a producing formation into a  
12 shallower ground water unit (see Section 6.3.2.2). In the offset well pathway, it was assumed that  
13 the hydraulically induced fractures intercepted an older offset well with deteriorated components.  
14 (This assessment can also be applicable to cases where potential migration may occur via the  
15 production well-related pathways discussed in Section 6.2.) More specifically, this analysis was  
16 designed to assess transport through deteriorating cement between the subsurface formations and  
17 the outermost casing, through voids resulting from incomplete cement coverage, through breached  
18 tubing, or in simpler well installations without multiple casings. The highest permeability value  
19 tested for the connecting feature represented a case with an open wellbore. A key assumption for  
20 this investigation was that the offset well was already directly connected to a permeable feature in  
21 the reservoir or within the overburden. Similar to the cases for permeable faults or fractures  
22 discussed in the previous section, the study investigated the effect of multiple well- and formation-  
23 related variables on potential fluid migration (see Table 6-3).

24 Based on the simulation results, an offset well pathway may have a greater potential for gas release  
25 from the production zone into a shallower ground water unit than the fault/fracture pathway  
26 discussed in Section 6.3.2.2 ([Reagan et al., 2015](#)). This difference is primarily due to the total pore  
27 volume of the connecting pathway within the offset well; the offset well pathway may have a  
28 significantly lower pore volume compared to the fault/fracture pathway, which reduces possible  
29 gas storage in the connecting feature and increases the speed of buoyancy-dependent migration.  
30 However, as with the fault/fracture scenario, the gas available for migration in this case is still  
31 limited to the gas that is initially stored in the hydraulically induced fractures. Therefore, any  
32 incidents of gas breakthrough observed in this study were found to be limited in both duration and  
33 magnitude.

34 [Reagan et al. \(2015\)](#) found that production at the gas well (the well used for hydraulic fracturing)  
35 also affects the potential upward migration of gas and its arrival times at the drinking water  
36 formation due to its effect on the driving forces (e.g., pressure gradient). Similar to the  
37 fault/fracture cases described in Section 6.3.2.2, production in the target reservoir appears to  
38 mitigate upward gas migration, both by reducing the amount of gas that might otherwise be

---

<sup>1</sup> An orphaned well is an inactive oil or gas well with no known (or financially solvent) owner.



1 available for upward migration and creating a pressure gradient toward the production well. Only  
2 scenarios without the mitigating feature of gas production result in any upward migration into the  
3 aquifer. This assessment also found a generally downward water flow within the connecting well  
4 pathway, which is more pronounced when the gas well is operating. The producing formation and  
5 aquifer permeabilities appear not to be significant factors for upward gas migration via this  
6 pathway. In addition, [Reagan et al. \(2015\)](#) found the permeability of the connecting offset well to be  
7 one of the main factors affecting the migration of gas to the aquifer and the water well. Very low  
8 permeabilities (less than 1 mD) lead to no migration of gas into the aquifer regardless of the  
9 vertical separation distance, whereas larger permeabilities present a greater potential for gas  
10 breakthrough.

11 In the same way that fractures can propagate to intersect offset wells, they can also potentially  
12 intersect other artificial subsurface structures including mine shafts or solution mining sites. No  
13 known incidents of this type of migration have been documented. However, the Bureau of Land  
14 Management (BLM) has identified over 28,000 abandoned mines in the United States and is adding  
15 new mines to its inventory every year ([BLM, 2013a](#)). In addition, the Well File Review identified an  
16 estimated 800 cases where wells used for hydraulic fracturing were drilled through mining voids,  
17 and an additional 90 cases of drilling through gas storage zones or wastewater disposal zones ([U.S.  
18 EPA, 2015o](#)). The analysis suggests that emplacing cement within such zones may be challenging,  
19 which, in turn, could lead to a loss of zonal isolation (as described in Section 6.2) and create a  
20 pathway for fluid migration.

#### **6.3.2.4. Migration via Fractures Intersecting Geologic Features**

21 Potential fluid migration via natural fault or fracture zones in conjunction with hydraulic fracturing  
22 has been recognized as a potential contamination hazard for several decades ([Harrison, 1983](#)).  
23 While porous flow in unfractured shale or tight sand formations is assumed to be negligible due to  
24 very low formation permeabilities (as discussed in Section 6.3.2.1), the presence of natural  
25 “microfractures” within tight sand or shale formations is widely recognized, and these fractures  
26 affect fluid flow and production strategies. Naturally occurring permeable faults and larger scale  
27 fractures within or between formations may allow for more significant flow pathways for migration  
28 of fluids out of the production zone ([Jackson et al., 2013c](#); [Myers, 2012a](#)). Figure 6-4 illustrates the  
29 concept of induced fractures intersecting with natural faults or fractures extending out of the target  
30 reservoir.

31 Natural fracture systems have a strong influence on the success of a fracture treatment, and the  
32 topic has been studied extensively from the perspective of optimizing treatment design (e.g., [Weng  
33 et al., 2011](#); [Dahi Taleghani and Olson, 2009](#); [Vulgamore et al., 2007](#)). Small natural fractures,  
34 known as “microfractures,” could affect fluid flow patterns near the induced fractures by increasing  
35 the effective contact area. Conversely, the natural microfractures could act as capillary traps for the  
36 fracturing fluid during treatment (contributing to fluid leakoff) and potentially hinder hydrocarbon  
37 flow due to lower gas relative permeabilities ([Dahi Taleghani et al., 2013](#)). [Rutledge and Phillips  
38 \(2003\)](#) suggested that, for a hydraulic fracturing operation in East Texas, pressurizing existing  
39 fractures (rather than creating new hydraulic fractures) may be the primary process that controls

1 enhanced permeability and fracture network conductivity at the site. [Ciezobka and Salehi \(2013\)](#)  
2 used microseismic data to investigate the effects of natural fractures in the Marcellus Shale and  
3 concluded that fracture treatments are more efficient in areas with clusters or “swarms” of small  
4 natural fractures, while areas without these fracture swarms require more thorough stimulation.  
5 However, there is very little attention given in the literature to studying unintended fluid migration  
6 during hydraulic fracturing operations due to existing microfractures.

7 In some areas, larger-scale geologic features may affect potential fluid flow pathways. As discussed  
8 in Text Box 6-2, baseline measurements taken before shale gas development show evidence of  
9 thermogenic methane in some shallow aquifers, suggesting that natural subsurface pathways exist  
10 and allow for naturally occurring migration of gas over millions of years ([Robertson et al., 2012](#)).  
11 There is also evidence demonstrating that gas undergoes mixing in subsurface pathways  
12 ([Baldassare et al., 2014](#); [Molofsky et al., 2013](#); [Fountain and Jacobi, 2000](#)). [Warner et al. \(2012\)](#)  
13 compared recent sampling results to data published in the 1980s and found geochemical evidence  
14 for migration of fluids through natural pathways between deep underlying formations and shallow  
15 aquifers—pathways that the authors suggest could lead to contamination from hydraulic fracturing  
16 activities. In northeastern Pennsylvania, there is evidence that brine from deep saline formations  
17 has migrated into shallow aquifers over geologic time, preferentially following certain geologic  
18 structures ([Llewellyn, 2014](#)). As described in Chapter 7, karst features (created by the dissolution  
19 of soluble rock) can also serve as a potential pathway of fluid movement on a faster time scale.

20 Monitoring data show that the presence of natural faults and fractures can affect both the height  
21 and width of hydraulic fractures. When faults are present, relatively larger microseismic responses  
22 are seen and larger fracture growth can occur, as described below. Concentrated swarms of natural  
23 fractures within a shale formation can result in a fracture network with a larger width-to-height  
24 ratio (i.e., a shorter and wider network) than would be expected in a zone with a low degree of  
25 natural fracturing ([Ciezobka and Salehi, 2013](#)).

26 A few studies have used monitoring data to specifically investigate the effect of natural faults and  
27 fractures on the vertical extent of induced fractures. A statistical analysis of microseismic data by  
28 [Shapiro et al. \(2011\)](#) found that fault rupture from hydraulic fracturing is limited by the extent of  
29 the stimulated rock volume and is unlikely to extend beyond the fracture network. (However, as  
30 demonstrated by microseismic data presented by [Vulgamore et al. \(2007\)](#), in some settings the  
31 fracture network can extend laterally for thousands of feet.) In the [Fisher and Warpinski \(2012\)](#)  
32 data set (see Section 6.3.2.2), the greatest fracture heights occurred when the hydraulic fractures  
33 intersected pre-existing faults. Similarly, [Hammack et al. \(2014\)](#) reported that fracture growth seen  
34 above the Marcellus Shale is consistent with the inferred extent of pre-existing faults at the Greene  
35 County, Pennsylvania, research site (see Section 6.3.2.2 and Text Box 6-3). The authors suggested  
36 that clusters of microseismic events may have occurred where preexisting small faults or natural  
37 fractures were present above the Marcellus Shale. At a site in Ohio, [Skoumal et al. \(2015\)](#) found that  
38 hydraulic fracturing induced a rupture along a pre-existing fault approximately 0.6 miles (1 km)  
39 from the hydraulic fracturing operation. Using a new monitoring method known as tomographic  
40 fracturing imaging, [Lacazette and Geiser \(2013\)](#) also found vertical hydraulic fracturing fluid

1 movement from a production well into a natural fracture network for distances of up to 0.6 miles  
2 (1 km). However, [Davies et al. \(2013\)](#) questioned whether this technique actually measures  
3 hydraulic fracturing fluid movement.

4 Modeling studies have also investigated whether hydraulic fracturing operations are likely to  
5 reactivate faults and create a potential fluid migration pathway into shallow aquifers. [Myers](#)  
6 [\(2012a, 2012b\)](#) found that a highly conductive fault could result in rapid (<1 year) fluid migration  
7 from a deep shale zone to the surface (as described in Section 6.3.2.1). Other researchers reject the  
8 notion that open, permeable faults would coexist with hydrocarbon accumulation ([Flewelling et al.](#)  
9 [2013](#)), although it is unclear whether the existence of faults in low permeability reservoirs would  
10 affect the accumulation of hydrocarbons because, under natural conditions, the flow of gas may be  
11 limited due to capillary tension. Results from another recent modeling study suggest that, under  
12 specific circumstances, interaction with a conductive fault could result in fluid migration to the  
13 surface only on longer (ca. 1,000 year) time scales ([Gassiat et al., 2013](#)). [Rutqvist et al. \(2013\)](#) found  
14 that, while somewhat larger microseismic events are possible in the presence of faults, repeated  
15 events and aseismic slip would amount to a total rupture length of 164 ft (50 m) or less along a  
16 fault, not far enough to allow fluid migration between a deep gas reservoir and a shallow aquifer. A  
17 follow-up study using more sophisticated three-dimensional modeling techniques also found that  
18 deep hydraulic fracturing is unlikely to create a direct flow path into a shallow aquifer, even when  
19 fracturing fluid is injected directly into a fault ([Rutqvist et al., 2015](#)). Similarly, a modeling study  
20 that investigated potential fluid migration from hydraulic fracturing in Germany found potential  
21 vertical fluid migration up to 164 ft (50 m) in a scenario with high fault zone permeability, although  
22 the authors note this is likely an overestimate because their goal was to “assess an upper margin of  
23 the risk” associated with fluid transport ([Lange et al., 2013](#)). More generally, results from [Rutqvist](#)  
24 [et al. \(2013\)](#) indicate that fracturing along an initially impermeable fault (as is expected in a shale  
25 gas formation) would result in numerous small microseismic events that act to prevent larger  
26 events from occurring (and, therefore, prevent the creation of more extensive potential pathways).

27 Other conditions in addition to the physical presence of a pathway would need to exist for fluid  
28 migration to a drinking water resource to occur. The modeling study conducted by ([Reagan et al.](#)  
29 [2015](#)) discussed in Section 6.3.2.2 indicates that, if such a permeable feature exists, the transport of  
30 gas and fluid flow would strongly depend upon the production regime and, to a lesser degree, the  
31 features’ permeability and the separation between the reservoir and the aquifer. In addition, the  
32 pressure distribution within the reservoir (e.g., over-pressurized vs. hydrostatic conditions) will  
33 affect the fluid flow through fractures/faults. As a result, the presence of multiple natural and well-  
34 based factors may increase the potential for fluid migration into drinking water resources. For  
35 example, in the Mamm Creek area of Colorado (see Section 6.2.2.2), well integrity and drilling-  
36 related problems likely acted in concert with natural fracture systems to result in a gas seep into  
37 surface water and shallow ground water ([Crescent, 2011](#)).

## 6.4. Synthesis

38 In the injection stage of hydraulic fracturing, operators inject fracturing fluids into a well under  
39 high pressure. These fluids flow through the well and into the surrounding formation, where they

1 increase pore pressure and create fractures in the rock, allowing hydrocarbons to flow through the  
2 fractures and up the well.

3 The production well and the surrounding geologic features function as a system that is often  
4 designed with multiple elements that can isolate hydrocarbon-bearing zones and water-bearing  
5 zones, including drinking water resources, from each other. This physical isolation optimizes oil  
6 and gas production and can protect drinking water resources via isolation within the well (by the  
7 casing and cement) and the presence of multiple layers of subsurface rock between the target  
8 formations where hydraulic fracturing occurs and drinking water aquifers.

#### **6.4.1. Summary of Findings**

9 Potential pathways for impacts on drinking water (i.e., the movement of hydrocarbons, formation  
10 brines, or other fracturing-related fluids into drinking water resources), may be linked to one or  
11 more components of the well and/or features of the subsurface system. If present, these potential  
12 pathways can, in combination with the high pressures under which fluids are injected and pressure  
13 changes within the subsurface, have an impact on drinking water resources.

14 The potential for these pathways to exist or form has been investigated through modeling studies  
15 that simulate subsurface responses to hydraulic fracturing, and demonstrated via case studies and  
16 other monitoring efforts. In addition, the development of some of these pathways—and fluid  
17 movement along them—has been documented.

18 It is important to note that the development of one pathway within this system does not necessarily  
19 result in an impact to a drinking water resource. For example, if cracks were to form in the cement  
20 of a well, the vertical distance between the production zone and a drinking water resource (and the  
21 multiple layers of rock in between) could isolate and protect the drinking water aquifer if pressures  
22 were insufficient to allow fluid movement to the level of the drinking water resource. Conversely, if  
23 an undetected fault were present in a rock formation, intact cement within the production well  
24 could keep fluids from migrating up along the well to the fault and protect drinking water  
25 resources.

##### **6.4.1.1. Fluid Movement via the Well**

26 A production well undergoing hydraulic fracturing is subject to higher stresses during the relatively  
27 brief hydraulic fracturing phase than during any other period of activity in the life of the well. These  
28 higher stresses may contribute to the formation of potential pathways associated with the casing or  
29 cement that can result in the unintentional movement of fluids through the production wellbore if  
30 the well cannot withstand the stresses experienced during hydraulic fracturing operations (see  
31 Section 6.2).

32 Multiple barriers within the well, including casing, cement, and a completion assembly, isolate  
33 hydrocarbon-bearing formations from drinking water resources. However, inadequate  
34 construction, defects in or degradation of the casing or cement, or the absence of redundancies such  
35 as multiple layers of casing, can allow fluid movement, which can then affect the quality of drinking  
36 water resources. Ensuring proper well design and mechanical integrity—particularly proper

1 cement placement and quality—are important actions for preventing unintended fluid migration  
2 along the wellbore.

#### **6.4.1.2. Fluid Movement within Subsurface Geologic Formations**

3 Potential subsurface pathways for fluid migration include flow of fluids out of the production zone  
4 into formations above or below it, fractures extending out of the production zone or into other  
5 induced fracture networks, intersections of fractures with abandoned or active wells, and fractures  
6 intersecting with faults or natural fractures (see Section 6.3).

7 Vertical separation between the production zone where hydraulic fracturing operations occur and  
8 drinking water resources, and lateral separation between wells undergoing hydraulic fracturing  
9 and other wells can reduce the potential for fluid migration that can impact drinking water  
10 resources.

11 Well communication incidents or “frac hits” have been reported in New Mexico, Oklahoma, and  
12 other locations. While some operators design fracturing treatments to communicate with the  
13 fractures of another well and optimize production, unintended communication between two  
14 fracture systems can lead to spills in the offset well and is an indicator of hydraulic fracturing  
15 treatments extending beyond their planned design. Surface spills from well communication  
16 incidents have been documented in the literature, which provides evidence for occurrence of frac  
17 hits. Based on the available information, frac hits most commonly occur on multi-well pads and  
18 when wells are spaced less than 1,100 ft (335 m) apart, but they have been observed at wells up to  
19 8,422 ft (2,567 m) away from a well undergoing hydraulic fracturing.

#### **6.4.1.3. Impacts to Drinking Water Resources**

20 We identified an impact on drinking water resources associated with hydraulic fracturing  
21 operations in Bainbridge, Ohio. Failure to cement over-pressured formations through which the  
22 production well passed—and proceeding with the fracturing operation without adequate cement  
23 and an extended period during which the well was shut in—led to a buildup of natural gas within  
24 the well annulus and high pressures within the well. This ultimately resulted in movement of gas  
25 from the production zone into local drinking water aquifers (see Section 6.2.2.2).

26 Casings at a production well near Killdeer, North Dakota, ruptured following a pressure spike  
27 during hydraulic fracturing, allowing fluids to escape to the surface. Brine and tert-butyl alcohol  
28 were detected in two nearby water wells. Following an analysis of potential sources, the only  
29 potential source consistent with the conditions observed in the two impacted wells was the well  
30 that ruptured. There is also evidence that out-of-zone fracturing occurred at the well (see Sections  
31 6.2.2.1 and 6.3.2.2).

32 There are other cases where hydraulic fracturing could be a contributing cause to impacts on  
33 drinking water resources, or where the specific mechanism that led to an impact on a drinking  
34 water resource cannot be definitively determined. For example:

- 35 • Migration of stray gas into drinking water resources involves many potential routes for  
36 migration of natural gas, including poorly constructed casing and naturally existing or

1 induced fractures in subsurface formations. Multiple pathways for fluid movement may be  
2 working in concert in northeastern Pennsylvania (possibly due to cement issues or  
3 sustained casing pressure) and the Raton Basin in Colorado (where fluid migration may  
4 have occurred along natural rock features or faulty well seals). While the sources of  
5 methane identified in drinking water wells in each study area could be determined with  
6 varying degrees of certainty, attempts to definitively identify the pathways of migration  
7 have generally been inconclusive (see Text Box 6-2).

- 8 • At the East Mamm Creek drilling area in Colorado, inadequate placement of cement  
9 allowed the migration of methane through natural faults and fractures in the area. This  
10 case illustrates how construction issues, sustained casing pressure, and the presence of  
11 natural faults and fractures, in conjunction with elevated pressures associated with well  
12 stimulation, can work together to create a pathway for fluids to migrate toward drinking  
13 water resources (see Sections 6.2.2.2 and 6.3.2.4).

14 Additionally, some hydraulic fracturing operations involve the injection of fluids into formations  
15 where there is relatively limited vertical separation from drinking water resources. The EPA  
16 identified an estimated 4,600 wells that were located in areas with less than 2,000 ft (610 m) of  
17 vertical separation between the fractures and the base of protected ground water resources.

18 There are places in the subsurface where oil and gas reservoirs and drinking water resources co-  
19 exist in the same formation. Evidence we examined suggests that some hydraulic fracturing for oil  
20 and gas occurs within formations where the ground water has a salinity of less than 10,000 mg/L  
21 TDS. By definition, this results in the introduction of fracturing fluids into formations that meet the  
22 Safe Drinking Water Act (SDWA) salinity-based definition of a source of drinking water and the  
23 broader definition of a drinking water resource developed for this assessment. According to the  
24 data we examined, these formations are generally in the western United States.

25 The practice of injecting fracturing fluids into a formation that also contains a drinking water  
26 resource directly affects the quality of that water, since it is likely some of that fluid remains in the  
27 formation following hydraulic fracturing. Hydraulic fracturing in a drinking water resource may be  
28 of concern in the short-term (where people are currently using these zones as a drinking water  
29 supply) or the long-term (if drought or other conditions necessitate the future use of these zones  
30 for drinking water).

31 There are other cases in which production wells associated with hydraulic fracturing are alleged to  
32 have caused drinking water contamination. Data limitations in most of those cases (including the  
33 unavailability of information in litigation settlements resulting in sealed documents) make it  
34 impossible to definitively assess whether or not hydraulic fracturing was a cause of the  
35 contamination in these cases.

#### 6.4.2. Factors Affecting Frequency and Severity of Impacts

36 Proper cementing across oil-, gas-, or water-bearing zones prevents the movement of brines, gas, or  
37 hydraulic fracturing fluids along the well into drinking water resources. The likelihood of  
38 contamination is reduced when the well is fully cemented across these zones; however, this is not



1 the case in all hydraulically fractured wells, either because the cement does not extend completely  
2 through the base of the drinking water resource or the cement that is present is not of adequate  
3 quality. Fully cemented surface casing that extends through the base of drinking water resources is  
4 a key protective component of the well. Most, but not all, wells used in hydraulic fracturing  
5 operations have fully cemented surface casing.

6 Deviated and horizontal wells, which are increasingly being used in hydraulic fracturing operations,  
7 may exhibit more casing and cement problems compared to vertical wells. Sustained casing  
8 pressure—a buildup of pressure within the well annulus that can indicate the presence of small  
9 leaks—occurs more frequently in deviated and horizontal wells compared to vertical wells. Cement  
10 integrity problems can also arise as a result of challenges in placing cement in these wells, because  
11 they are more challenging than vertical wells to center properly.

12 Older wells may exhibit more integrity problems compared to newer wells, which may be an issue  
13 if older wells are hydraulically fractured or re-fractured. Degradation of the casing and cement as  
14 they age or the cumulative effects of stresses exerted on the well over time may result in changes in  
15 well integrity. Integrity problems can also be associated with the inadequate design of wells that  
16 were constructed pursuant to older, less stringent requirements. Well components that are subject  
17 to corrosive environments, high pressures, or other stressors tend to have more problems than  
18 wells without these additional stressors.

19 The extent of subsurface fluid migration within subsurface rock formations and the potential for the  
20 development of pathways that can adversely affect drinking water depend on site-specific  
21 characteristics. These include the physical separation between the production zone and drinking  
22 water resources, the geological and geomechanical characteristics of the formations, hydraulic  
23 fracturing operational parameters, and the physical characteristics of any connecting feature (e.g.,  
24 abandoned wells, faults, and natural fractures).

25 As noted above, vertical separation between the production zone and drinking water resources  
26 protects drinking water. Additionally, the proximity of wells undergoing hydraulic fracturing to  
27 other wells increases the potential for the formation of pathways for fluids to move via these wells  
28 to drinking water resources. For example, if there is a deficiency in the construction of a nearby  
29 well (or degradation of the well components), that well could serve as a pathway for movement of  
30 fracturing fluids, methane, or brines that might affect a drinking water resource. If the fractures  
31 were to intersect an uncemented portion of a nearby wellbore, the fluids could migrate along that  
32 wellbore into any uncemented formations.

33 Fractures created during hydraulic fracturing can extend out of the target production zone. Out-of-  
34 zone fracturing could be a concern for fluid migration if the hydraulic fracturing operation is not  
35 designed to address site-specific conditions, for example if the production zone is thin and fractures  
36 propagate to unintended vertical heights, or if the production zone is not horizontally continuous  
37 and fractures extend to unintended horizontal lengths. The presence of natural faults or fractures  
38 can affect the extent of hydraulic fractures. When faults are present, relatively larger microseismic  
39 responses are seen during hydraulic fracturing, and larger fracture growth can occur than in the

1 absence of natural faults or fractures. However, modeling studies indicate that fluid migration from  
2 deep production zones to shallow drinking water resources along natural faults and fractures or  
3 offset wells is unlikely. These studies indicate that, in both cases, gas available for migration is  
4 limited to the amount that existed in the fractures and pore space of connecting features following  
5 hydraulic fracturing prior to production. Following the completion of a hydraulic fracturing  
6 treatment, depressurization of the production formation surrounding the fractures due to  
7 hydrocarbon production would make upward fluid migration into drinking water resources  
8 unlikely to occur.

9 Based on the information presented in this chapter, the increased deployment of hydraulic  
10 fracturing associated with oil and gas production activities, including techniques such as horizontal  
11 drilling and multi-well pads, may increase the likelihood that these pathways could develop. This, in  
12 turn, could lead to increased opportunities for impacts on drinking water resources.

### 6.4.3. Uncertainties

13 Generally, less is known about the occurrence of (or potential for) impacts of injection-related  
14 pathways in the subsurface than for other components of the hydraulic fracturing water cycle,  
15 which can be observed and measured at the surface. Furthermore, while there is a significant  
16 amount of information available on production wells in general, there is little information that is  
17 specific to hydraulic fracturing operations and much of this data is not readily accessible, i.e., in a  
18 centralized, national database.

#### 6.4.3.1. Limited Availability of Information Specific to Hydraulic Fracturing Operations

19 There is extensive information on the design goals for hydraulically fractured oil and gas wells (i.e.,  
20 to address the stresses imposed by high-pressure, high-volume injection), including from industry-  
21 developed best practices documents. Additionally, based on the long history of oil and gas  
22 production activities, we know how production wells are constructed and have performed over  
23 time. Over the years, many studies have documented how these wells are constructed, how they  
24 perform, and the rates at which they experience problems that can lead to the formation of  
25 pathways for fluid movement. However, because we do not know which of these wells were  
26 hydraulically fractured, we cannot definitively determine whether the rates at which integrity  
27 problems arise (or other data pertaining to oil and gas wells in general) directly correspond to  
28 wells used in hydraulic fracturing operations.

29 Because wells that have been hydraulically fractured must withstand many of the same downhole  
30 stresses as other production wells, we consider studies of the pathways for impacts to drinking  
31 water resources in production wells to be relevant to identifying the potential pathways relevant to  
32 hydraulic fracturing operations. However, without specific data on the as-built construction of wells  
33 used in hydraulic fracturing operations, we cannot definitively state whether these wells are  
34 consistently constructed to meet the stresses they may encounter.

35 There is also, in general, very limited information available on the monitoring and performance of  
36 wells used in hydraulic fracturing operations. Published information is sparse regarding  
37 mechanical integrity tests (MITs) performed during and after hydraulic fracturing, including MIT

1 results, the frequency at which mechanical integrity issues arise in wells used for hydraulic  
2 fracturing, and the degree and speed with which identified issues are addressed. There is also little  
3 information available regarding MIT results for the original hydraulic fracturing in wells built for  
4 that purpose, for wells that are later re-fractured, or for existing, older wells not initially  
5 constructed for hydraulic fracturing but repurposed for that use.

6 There are also a limited number of published monitoring studies or sampling data that provide  
7 evidence to assess whether formation brines, injected fluids, or gas move in unintended ways  
8 through the subsurface during and after hydraulic fracturing. Subsurface monitoring data (i.e., data  
9 that characterize the presence, migration, or transformation of fluids in the subsurface related to  
10 hydraulic fracturing operations) are scarce relative to the tens of thousands of oil and gas wells that  
11 are estimated to be hydraulically fractured across the country each year (see Chapter 2).

12 Information on fluid movement within the subsurface and the extent of fractures that develop  
13 during hydraulic fracturing operations is also limited. For example, limited information is available  
14 in the published literature on how flow regimes or other subsurface processes change at sites  
15 where hydraulic fracturing is conducted. Instead, much of the available research, and therefore the  
16 literature, addresses how hydraulic fracturing and other production technologies perform to  
17 optimize hydrocarbon production.

18 These limitations on hydraulic fracturing-specific information make it difficult to provide definitive  
19 estimates of the rate at which wells used in hydraulic fracturing operations experience the types of  
20 integrity problems that can contribute to fluid movement.

#### **6.4.3.2. Limited Systematic, Accessible Data on Well Performance or Subsurface Movement**

21 While the oil and gas industry generates a large amount of information on well performance as part  
22 of operations, most of this is proprietary or otherwise not readily available to states or the public in  
23 a compiled or summary manner. Therefore, no national or readily accessible way exists to evaluate  
24 the design and performance of individual wells or wells in a region, particularly in the context of  
25 local geology or the presence of other wells and/or hydraulic fracturing operations. Many states  
26 have large amounts of operator-submitted data, but information about construction practices or the  
27 performance of individual wells is typically not in a searchable or aggregated form that would  
28 enable assessments of well performance under varying settings, conditions, or timeframes.  
29 Although it is collected in some cases, there is also no systematic collection, reporting, or publishing  
30 of empirical baseline (pre-drilling and/or pre-fracturing) and post-fracturing monitoring data that  
31 could indicate the presence or absence of hydraulic fracturing-related fluids in shallow zones and  
32 whether or not migration of those fluids has occurred. Ideally, data from ground water monitoring  
33 are needed to complement theories and modeling on potential pathways and fluid migration.

34 While some of the types of impacts described above may occur quickly (i.e., on the scale of days or  
35 weeks, as with integrity problems or well communication events), other impacts (e.g., in slow-  
36 moving, deep ground waters) may only occur or be able to be detected on much longer timescales.  
37 Given the surge in the number of modern high-pressure hydraulic fracturing operations dating  
38 from the early 2000s, evidence of any fracturing-related fluid migration affecting a drinking water

1 resource (as well as the information necessary to connect specific well operation practices to a  
2 drinking water impact) could take years to discover.

3 The limited amount of information hinders our ability to evaluate whether—or how frequently—  
4 drinking water impacts are occurring (or the potential for these impacts to occur) or to tie possible  
5 impacts to specific well construction, operation, or maintenance practices. This also significantly  
6 limits our ability to evaluate the aggregate potential for hydraulic fracturing operations to affect  
7 drinking water resources or to identify the potential cause of drinking water contamination or  
8 suspected contamination in areas where hydraulic fracturing occurs.

#### 6.4.4. Conclusions

9 Fluids can migrate from the wellbore and surrounding subsurface formations due to inadequate  
10 casing or cement, and via natural and man-made faults, fractures, and offset wells or mines (see  
11 Text Box 6-5). To prevent fluid migration through the wellbore or through subsurface pathways,  
12 wells must have adequate casing and cement, and induced fractures must not intersect existing  
13 fractures or permeable zones that lead to drinking water resources. Evidence shows that the quality  
14 of drinking water resources may have been affected by hydraulic fracturing fluids escaping the  
15 wellbore and surrounding formation in certain areas, although conclusive evidence is currently  
16 limited.

#### **Text Box 6-5. Research Questions Revisited.**

17 ***How effective are current well construction practices at containing fluids—both liquids and gases—***  
18 ***before, during, and after fracturing?***

- 19 • Wells that were designed with uncemented intervals of casing across porous or permeable zones, wells in  
20 which cementing does not resist formation or operational stresses, and wells in which cementing does  
21 not meet design specifications have the potential to promote unintended subsurface fluid movement.  
22 Even in optimally designed wells, metal casings and cement can degrade over time, either as a result of  
23 aging or of exposure to stresses exerted over years of operations. See Section 6.2.2.2.
- 24 • We have limited information on the degree to which wells are designed and constructed with the  
25 multiple layers of casing that can withstand hydraulic fracturing pressures and contact with injected and  
26 produced fluids. We also are lacking information about whether wells have suitable cements that can  
27 prevent fluid movement outside the wellbore and between the production zone and drinking water  
28 resources. We also do not have information on the degree to which mechanical integrity is verified before  
29 or after hydraulic fracturing operations. See Section 6.2.2.1.

30 ***Can subsurface migration of fluids—both liquids and gases—to drinking water resources occur and***  
31 ***what local geologic or artificial features might allow this?***

- 32 • The presence of artificial penetrations, especially poorly constructed offset wells or undetected  
33 abandoned wells, mines, or other subsurface structures, provides pathways that, in the presence of a  
34 driving force, could allow for fluid movement to shallow geologic zones such as drinking water resources.  
35 See Section 6.3.2.3.

- 1 • Intersections of induced fractures with transmissive faults or naturally occurring fractures or  
2 porous/permeable rock zones can allow fluids to move out of the targeted fracture areas. However,  
3 modeling studies indicate that fluid migration from production zones to drinking water resources along  
4 natural faults and fractures is unlikely. See Section 6.3.2.4.
- 5 • Some hydraulic fracturing operations involve the injection of fluids into formations where there is  
6 relatively limited vertical separation from drinking water resources. Other hydraulic fracturing is  
7 performed within formations that meet the SDWA or state salinity-based definition of a source of  
8 drinking water, in addition to the broader definition of a drinking water resource developed for this  
9 assessment. See Section 6.3.2.

## 6.5. References for Chapter 6

- [Adachi, J; Siebrits, E; Peirce, A; Desroches, J.](#) (2007). Computer simulation of hydraulic fractures. International Journal of Rock Mechanics and Mining Sciences 44: 739-757.  
<http://dx.doi.org/10.1016/j.ijrmms.2006.11.006>
- [Ajani, A; Kelkar, M.](#) (2012). Interference study in shale plays. Paper presented at SPE Hydraulic Fracturing Technology Conference, February 6-8, 2012, The Woodlands, TX.
- [Ali, M; Taoutaou, S; Shafqat, AU; Salehapour, A; Noor, S.](#) (2009). The use of self healing cement to ensure long term zonal isolation for HPHT wells subject to hydraulic fracturing operations in Pakistan. Paper presented at International Petroleum Technology Conference, December 7-9, 2009, Doha, Qatar.
- [ALL Consulting](#) (ALL Consulting, LLC). (2004). Coal bed methane primer: New source of natural gas and environmental implications. Tulsa, OK: U.S. Department of Energy, National Petroleum Technology Center.  
<http://bogc.dnrc.mt.gov/PDF/Web%20Version.pdf>
- [Arkadaskiy, S; Rostron, B.](#) (2012a). Stable isotope geochemistry helps in reducing out-of-zone hydraulic fracturing and unwanted brine production from the Bakken Reservoir. Available online at  
<http://isobrine.com/resources/>
- [Arkadaskiy, S; Rostron, B.](#) (2013a). Tracking out-of-zone hydraulic fracturing in the Bakken with naturally occurring tracers. Paper presented at GeoConvention 2013: Integration, May 6-10, 2013, Calgary, Alberta.
- [Bachu, S; Bennion, DB.](#) (2009). Experimental assessment of brine and/or CO2 leakage through well cements at reservoir conditions. Int J Greenhouse Gas Control 3: 494-501.  
<http://dx.doi.org/10.1016/j.ijggc.2008.11.002>
- [Bair, ES; Freeman, DC; Senko, JM.](#) (2010). Subsurface gas invasion Bainbridge Township, Geauga County, Ohio. (Expert Panel Technical Report). Columbus, OH: Ohio Department of Natural Resources.  
<http://oilandgas.ohiodnr.gov/resources/investigations-reports-violations-reforms#THR>
- [Baldassare, F.](#) (2011). The origin of some natural gases in Permian through Devonian Age systems in the Appalachian Basin and the relationship to incidents of stray gas migration. Presentation presented at Technical workshop for hydraulic fracturing study, chemical and analytical methods, February 24-25, 2011, Arlington, VA.
- [Baldassare, FJ; McCaffrey, MA; Harper, JA.](#) (2014). A geochemical context for stray gas investigations in the northern Appalachian Basin: Implications of analyses of natural gases from Neogene-through Devonian-age strata. AAPG Bulletin 98: 341-372. <http://dx.doi.org/10.1306/06111312178>

- [Barker, JF; Fritz, P.](#) (1981). Carbon isotope fractionation during microbial methane oxidation. *Nature* 293: 289-291. <http://dx.doi.org/10.1038/293289a0>
- [Bertoncello, A; Wallace, J; Honarpour, MM; Kabir, C; Blyton, CA.](#) (2014). Imbibition and water blockage in unconventional reservoirs: Well management implications during flowback and early production. *SPE Journal* 17.
- [Bishop, RE.](#) (2013). Historical analysis of oil and gas well plugging in New York: Is the regulatory system working? *New Solutions: A Journal of Environmental and Occupational Health Policy* 23: 103-116. <http://dx.doi.org/10.2190/NS.23.1.g>
- [BLM](#) (Bureau of Land Management). (2013a). Abandoned mine lands: A new legacy. Washington, DC: U.S. Department of the Interior, Bureau of Land Management. [http://www.blm.gov/pgdata/etc/medialib/blm/wo/MINERALS\\_REALTY\\_AND\\_RESOURCE\\_PROTECTION\\_aml/aml\\_documents.Par.81686.File.dat/AML\\_NewLegacy.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/wo/MINERALS_REALTY_AND_RESOURCE_PROTECTION_aml/aml_documents.Par.81686.File.dat/AML_NewLegacy.pdf)
- [Boyd, D; Al-Kubti, S; Khedr, OH; Khan, N; Al-Nayadi, K; Degouy, D; Elkadi, A; Kindi, ZA.](#) (2006). Reliability of cement bond log interpretations compared to physical communication tests between formations. Paper presented at Abu Dhabi International Petroleum Exhibition and Conference, November 5-8, 2006, Abu Dhabi, UAE.
- [Brantley, SL; Yoxtheimer, D; Arjmand, S; Grieve, P; Vidic, R; Pollak, J; Llewellyn, GT; Abad, J; Simon, C.](#) (2014). Water resource impacts during unconventional shale gas development: The Pennsylvania experience. *Int J Coal Geol* 126: 140-156. <http://dx.doi.org/10.1016/j.coal.2013.12.017>
- [Brown, HD; Grijalva, VE; Raymer, LL.](#) (1970). New developments in sonic wave train display and analysis in cased holes. (SPWLA-1970-F). Brown, HD; Grijalva, VE; Raymer, LL. <https://www.onepetro.org/conference-paper/SPWLA-1970-F>
- [Brufatto, C; Cochran, J; Conn, L; El-Zeghaty, SZA, A; Fraboulet, B; Griffin, T; James, S; Munk, T; Justus, F; Levine, JR; Montgomery, C; Murphy, D; Pfeiffer, J; Pornpoch, T; Rishmani, L.](#) (2003). From mud to cement - Building gas wells. *Oilfield Rev* 15: 62-76.
- [Byrnes, AP.](#) (2011). Role of induced and natural imbibition in frac fluid transport and fate in gas shales. Presentation presented at Technical Workshops for Hydraulic Fracturing Study: Fate & Transport, March 28-29, 2011, Arlington, VA.
- [Ciezobka, J; Salehi, I.](#) (2013). Controlled hydraulic fracturing of naturally fractured shales: A case study in the Marcellus Shale examining how to identify and exploit natural fractures. (SPE-164524-MS). Ciezobka, J; Salehi, I. <http://dx.doi.org/10.2118/164524-MS>
- [COGCC. Colorado Oil and Gas Conservation Commission Order No. 1V-276.](#) (2004). <https://cogcc.state.co.us/orders/orders/1v/276.html>
- [Cohen, HA; Parratt, T; Andrews, CB.](#) (2013). Comments on 'Potential contaminant pathways from hydraulically fractured shale to aquifers' [Comment]. *Ground Water* 51: 317-319; discussion 319-321. <http://dx.doi.org/10.1111/gwat.12015>
- [Considine, T; Watson, R; Considine, N; and Martin, J.](#) (2012). Environmental impacts during Marcellus shale gas drilling: Causes, impacts, and remedies. (Report 2012-1). Buffalo, NY: Shale Resources and Society Institute. <http://cce.cornell.edu/EnergyClimateChange/NaturalGasDev/Documents/UBSRSI-Environmental%20Impact%20Report%202012.pdf>
- [Council of Canadian Academies.](#) (2014). Environmental impacts of shale gas extraction in Canada. Ottawa, Ontario. [http://www.scienceadvice.ca/uploads/eng/assessments%20and%20publications%20and%20news%20releases/Shale%20gas/ShaleGas\\_fullreportEN.pdf](http://www.scienceadvice.ca/uploads/eng/assessments%20and%20publications%20and%20news%20releases/Shale%20gas/ShaleGas_fullreportEN.pdf)
- [Craig, MS; Wendte, SS; Buchwalter, JL.](#) (2012). Barnett shale horizontal restimulations: A case study of 13 wells. SPE Americas unconventional resources conference, June 5-7, 2012, Pittsburgh, PA.



- [Crescent](#) (Crescent Consulting, LLC). (2011). East Mamm creek project drilling and cementing study. Oklahoma City, OK. <http://cogcc.state.co.us/Library/PiceanceBasin/EastMammCreek/ReportFinal.pdf>
- [Crook, R.](#) (2008). Cementing: Cementing horizontal wells. Halliburton.
- [Dahi Taleghani, A; Ahmadi, M; Olson, JE.](#) (2013). Secondary fractures and their potential impacts on hydraulic fractures efficiency. In AP In Bunger; J McLennan; R Jeffrey (Eds.), Effective and sustainable hydraulic fracturing. Croatia: InTech. <http://dx.doi.org/10.5772/56360>
- [Dahi Taleghani, A; Olson, JE.](#) (2009). Numerical modeling of multi-stranded hydraulic fracture propagation: Accounting for the interaction between induced and natural fractures. In 2009 SPE Annual Technical Conference and Exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/124884-MS>
- [Dake, LP.](#) (1978). Fundamentals of reservoir engineering. Boston, MA: Elsevier. <http://www.ing.unp.edu.ar/asignaturas/reservorios/Fundamentals%20of%20Reservoir%20Engineering%20%28L.P.%20Dake%29.pdf>
- [Daneshy, AA.](#) (2009). Factors controlling the vertical growth of hydraulic fractures. (SPE-118789-MS). Daneshy, AA. <http://dx.doi.org/10.2118/118789-MS>
- [Darrah, TH; Vengosh, A; Jackson, RB; Warner, NR; Poreda, RJ.](#) (2014). Noble gases identify the mechanisms of fugitive gas contamination in drinking-water wells overlying the Marcellus and Barnett Shales. PNAS 111: 14076-14081. <http://dx.doi.org/10.1073/pnas.1322107111>
- [Davies, RJ; Almond, S; Ward, RS; Jackson, RB; Adams, C; Worrall, F; Herringshaw, LG; Gluyas, IG; Whitehead, MA.](#) (2014). Oil and gas wells and their integrity: Implications for shale and unconventional resource exploitation. Marine and Petroleum Geology 56: 239-254. <http://dx.doi.org/10.1016/j.marpetgeo.2014.03.001>
- [Davies, RJ; Foulger, GR; Mathias, S; Moss, J; Hustoft, S; Newport, L.](#) (2013). Reply: Davies et al. (2012), Hydraulic fractures: How far can they go? Marine and Petroleum Geology 43: 519-521. <http://dx.doi.org/10.1016/j.marpetgeo.2013.02.001>
- [Davies, RJ; Mathias, SA; Moss, J; Hustoft, S; Newport, L.](#) (2012). Hydraulic fractures: How far can they go? Marine and Petroleum Geology 37: 1-6. <http://dx.doi.org/10.1016/j.marpetgeo.2012.04.001>
- [De Pater, CJ; Baisch, S.](#) (2011). Geomechanical study of the Bowland shale seismicity: Synthesis report. Nottingham, England: British Geological Survey. <https://www.bucknell.edu/script/environmentalcenter/marcellus/default.aspx?articleid=MF08SXMW82CV1MQAXK7ZINIPP>
- [Dehghanpour, H; Lan, Q; Saeed, Y; Fei, H; Qi, Z.](#) (2013). Spontaneous imbibition of brine and oil in gas shales: Effect of water adsorption and resulting microfractures. Energy Fuels 27: 3039-3049. <http://dx.doi.org/10.1021/ef4002814>
- [Dehghanpour, H; Zubair, HA; Chhabra, A; Ullah, A.](#) (2012). Liquid intake of organic shales. Energy Fuels 26: 5750-5758. <http://dx.doi.org/10.1021/ef3009794>
- [DrillingInfo, Inc.](#) (2014b). DrillingInfo Inc. DI Desktop raw data feed [Database].
- [Dusseault, MB; Gray, MN; Nawrocki, PA.](#) (2000). Why oilwells leak: Cement behavior and long-term consequences. Paper presented at SPE International Oil and Gas Conference and Exhibition in China, November 7-10, 2000, Beijing, China.
- [Dutta, R; Lee, C. -H; Odumabo, S; Ye, P; Walker, SC; Karpyn, ZT; Ayala, LF.](#) (2014). Experimental investigation of fracturing-fluid migration caused by spontaneous imbibition in fractured low-permeability sands. SPE Reserv Eval Engin 17: 74-81.

- [Eberhard, M.](#) (2011). Fracture design and stimulation - monitoring. Presentation presented at Technical Workshops for the Hydraulic Fracturing Study: Well Construction & Operations, March 10-11, 2011, Arlington, VA.
- [Economides, MJ; Mikhailov, DN; Nikolaevskiy, VN.](#) (2007). On the problem of fluid leakoff during hydraulic fracturing. *Transport in Porous Media* 67: 487-499. <http://dx.doi.org/10.1007/s11242-006-9038-7>
- [Eisner, L; Fischer, T; Le Calvez, JH.](#) (2006). Detection of repeated hydraulic fracturing (out-of-zone growth) by microseismic monitoring. *The Leading Edge (Tulsa)* 25: 548-554. <http://dx.doi.org/10.1190/1.2202655>
- [Enform.](#) (2013). Interim industry recommended practice 24: fracture stimulation: Interwellbore communication 3/27/2013 (1.0 ed.). (IRP 24). Calgary, Alberta: Enform Canada. [http://www.enform.ca/safety\\_resources/publications/PublicationDetails.aspx?a=29&type=irp](http://www.enform.ca/safety_resources/publications/PublicationDetails.aspx?a=29&type=irp)
- [Engelder, T.](#) (2012). Capillary tension and imbibition sequester frack fluid in Marcellus gas shale [Letter]. *PNAS* 109: E3625; author reply E3626. <http://dx.doi.org/10.1073/pnas.1216133110>
- [ERCB \(Energy Resource Conservation Board\).](#) (2012). Midway Energy Ltd. hydraulic Fracturing incident: Interwellbore communication January 13, 2012. (ERCB Investigation Report, Red Deer Field Centre). Calgary, Alberta: Energy Resources Conservation Board.
- [Fisher, M; Warpinski, N.](#) (2012). Hydraulic fracture height growth: Real data. *S P E Prod Oper* 27: 8-19. <http://dx.doi.org/10.2118/145949-PA>
- [Fitzgerald, DD; McGhee, BF; McGuire, JA.](#) (1985). Guidelines for 90 % accuracy in zone-isolation decisions. *J Pet Tech* 37: 2013-2022. <http://dx.doi.org/10.2118/12141-PA>
- [Fjaer, E; Holt, RM; Horsrud, P; Raaen, AM; Risnes, R.](#) (2008). *Petroleum related rock mechanics* (2nd edition ed.). Amsterdam, The Netherlands: Elsevier.
- [Flewelling, SA; Sharma, M.](#) (2014). Constraints on upward migration of hydraulic fracturing fluid and brine. *Ground Water* 52: 9-19. <http://dx.doi.org/10.1111/gwat.12095>
- [Flewelling, SA; Tymchak, MP; Warpinski, N.](#) (2013). Hydraulic fracture height limits and fault interactions in tight oil and gas formations. *Geophys Res Lett* 40: 3602-3606. <http://dx.doi.org/10.1002/grl.50707>
- [Flournoy, RM; Feaster, JH.](#) (1963). *Field observations on the use of the cement bond log and its application to the evaluation of cementing problems*. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/632-MS>
- [Fountain, JC; Jacobi, RD.](#) (2000). Detection of buried faults and fractures using soil gas analysis. *Environmental and Engineering Geoscience* 6: 201-208. <http://dx.doi.org/10.2113/gseegeosci.6.3.201>
- [Gassiat, C; Gleeson, T; Lefebvre, R; Mckenzie, J.](#) (2013). Numerical simulation of potential contamination of shallow aquifers over long time scales. *Water Resour Res* 49: 8310-8327. <http://dx.doi.org/10.1002/2013WR014287>
- [George, PG; Mace, RE; Petrossian, R.](#) (2011). *Aquifers of Texas. (Report 380)*. Austin, TX: Texas Water Development Board. [http://www.twdb.state.tx.us/publications/reports/numbered\\_reports/doc/R380\\_AquifersofTexas.pdf](http://www.twdb.state.tx.us/publications/reports/numbered_reports/doc/R380_AquifersofTexas.pdf)
- [Goodwin, KJ; Crook, RJ.](#) (1992). Cement sheath stress failure. *S P E Drilling & Completion* 7: 291-296. <http://dx.doi.org/10.2118/20453-PA>
- [Gorody, AW.](#) (2012). Factors affecting the variability of stray gas concentration and composition in groundwater. *Environmental Geosciences* 19: 17-31. <http://dx.doi.org/10.1306/eg.12081111013>
- [Gu, H; Siebrits, E.](#) (2008). Effect of formation modulus contrast on hydraulic fracture height containment. *S P E Prod Oper* 23: 170-176. <http://dx.doi.org/10.2118/103822-PA>

- [GWPC](http://www.gwpc.org/sites/default/files/files/Oil%20and%20Gas%20Regulation%20Report%20Hyperlinked%20Version%20Final-rfs.pdf) (Groundwater Protection Council). (2014). State oil and natural gas regulations designed to protect water resources. Morgantown, WV: U.S. Department of Energy, National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/files/Oil%20and%20Gas%20Regulation%20Report%20Hyperlinked%20Version%20Final-rfs.pdf>
- [GWPC and ALL Consulting](http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>
- [Hammack, R; Harbert, W; Sharma, S; Stewart, B; Capo, R; Wall, A; Wells, A; Diehl, R; Blaushild, D; Sams, J; Veloski, G.](http://www.netl.doe.gov/File%20Library/Research/onsite%20research/publications/NETL-TRS-3-2014%20Greene-County-Site%2020140915%201%201.pdf) (2014). An evaluation of fracture growth and gas/fluid migration as horizontal Marcellus Shale gas wells are hydraulically fractured in Greene County, Pennsylvania. (NETL-TRS-3-2014). Pittsburgh, PA: U.S. Department of Energy, National Energy Technology Laboratory. [http://www.netl.doe.gov/File%20Library/Research/onsite%20research/publications/NETL-TRS-3-2014 Greene-County-Site 20140915 1 1.pdf](http://www.netl.doe.gov/File%20Library/Research/onsite%20research/publications/NETL-TRS-3-2014%20Greene-County-Site%2020140915%201%201.pdf)
- [Harrison, SS.](http://dx.doi.org/10.1111/j.1745-6584.1983.tb01940.x) (1983). Evaluating system for ground-water contamination hazards due to gas-well drilling on the Glaciated Appalachian Plateau. *Ground Water* 21: 689-700. <http://dx.doi.org/10.1111/j.1745-6584.1983.tb01940.x>
- [Harrison, SS.](http://dx.doi.org/10.1111/gwat.12079) (1985). Contamination of aquifers by overpressurizing the annulus of oil and gas wells. *Ground Water* 23: 317-324.
- [Heilweil, VM; Stolp, BJ; Kimball, BA; Susong, DD; Marston, TM; Gardner, PM.](http://dx.doi.org/10.1111/gwat.12079) (2013). A stream-based methane monitoring approach for evaluating groundwater impacts associated with unconventional gas development. *Ground Water* 51: 511-524. <http://dx.doi.org/10.1111/gwat.12079>
- [Holditch, SA.](http://store.spe.org/Petroleum-Engineering-Handbook-Volume-IV-Production-Operations-Engineering-P61.aspx) (2007). Chapter 8: Hydraulic fracturing. In JD Clegg (Ed.), *Petroleum engineering handbook* (pp. IV-323 - IV-366). Richardson, TX: Society of Petroleum Engineers. <http://store.spe.org/Petroleum-Engineering-Handbook-Volume-IV-Production-Operations-Engineering-P61.aspx>
- [Hyne, NJ.](http://www.pennwell.com) (2012). *Nontechnical guide to petroleum geology, exploration, drilling and production*. In *Nontechnical guide to petroleum geology, exploration, drilling and production* (3 ed.). Tulsa, OK: PennWell Corporation.
- [Ingraffea, AR; Wells, MT; Santoro, RL; Shonkoff, SB.](http://dx.doi.org/10.1073/pnas.1323422111) (2014). Assessment and risk analysis of casing and cement impairment in oil and gas wells in Pennsylvania, 2000-2012. *PNAS* 111: 1095510960. <http://dx.doi.org/10.1073/pnas.1323422111>
- [IOGCC](http://iogcc.myshopify.com/products/protecting-our-countrys-resources-the-states-case-orphaned-well-plugging-initiative-2008) (Interstate Oil and Gas Compact Commission). (2008). Protecting our country's resources: The states' case, orphaned well plugging initiative. Oklahoma City, OK: Interstate Oil and Gas Compact Commission (IOGCC). <http://iogcc.myshopify.com/products/protecting-our-countrys-resources-the-states-case-orphaned-well-plugging-initiative-2008>
- [Jackson, G; Flores, C; Abolo, N; Lawal, H.](http://dx.doi.org/10.1073/pnas.1221635110) (2013a). A novel approach to modeling and forecasting frac hits in shale gas wells. Paper presented at EAGE Annual Conference & Exhibition incorporating SPE Europec, June 10-13, 2013, London, UK.
- [Jackson, RB; Vengosh, A; Darrah, TH; Warner, NR; Down, A; Poreda, RJ; Osborn, SG; Zhao, K; Karr, JD.](http://dx.doi.org/10.1073/pnas.1221635110) (2013b). Increased stray gas abundance in a subset of drinking water wells near Marcellus shale gas extraction. *PNAS* 110: 11250-11255. <http://dx.doi.org/10.1073/pnas.1221635110>
- [Jackson, RE; Dusseault, MB.](http://dx.doi.org/10.1111/gwat.12074) (2014). Gas release mechanisms from energy wellbores. Presentation presented at 48th US Rock Mechanics/Geomechanics Symposium, June 1-4, 2014, Minneapolis, Minnesota.
- [Jackson, RE; Gorody, AW; Mayer, B; Roy, JW; Ryan, MC; Van Stempvoort, DR.](http://dx.doi.org/10.1111/gwat.12074) (2013c). Groundwater protection and unconventional gas extraction: the critical need for field-based hydrogeological research. *Ground Water* 51: 488-510. <http://dx.doi.org/10.1111/gwat.12074>

- [Jacob, R.](#) (2011). Incident action plan, Franchuk 44-20 SWH incident. Plano, Texas: Denbury Onshore, LLC.
- [Jones, JR; Britt, LK.](#) (2009). Design and appraisal of hydraulic fractures. In Design and appraisal of hydraulic fractures. Richardson, TX: Society of Petroleum Engineers.
- [Kappel, WM.](#) (2013). Dissolved methane in groundwater, Upper Delaware River Basin, Pennsylvania and New York (pp. 1-6). (2013-1167). U. S. Geological Survey. <http://pubs.usgs.gov/of/2013/1167/pdf/ofr2013-1167.pdf>
- [Kappel, WM; Nystrom, EA.](#) (2012). Dissolved methane in New York groundwater, 1999-2011. (Open-File Report 20121162). Washington, DC: U.S. Geological Survey. <http://pubs.usgs.gov/of/2012/1162/>
- [Kell, S.](#) (2011). State oil and gas agency groundwater investigations and their role in advancing regulatory reforms, a two-state review: Ohio and Texas. Ground Water Protection Council. [http://fracfocus.org/sites/default/files/publications/state\\_oil\\_gas\\_agency\\_groundwater\\_investigations\\_optimized.pdf](http://fracfocus.org/sites/default/files/publications/state_oil_gas_agency_groundwater_investigations_optimized.pdf)
- [Kim, GH; Wang, JY.](#) (2014). Interpretation of hydraulic fracturing pressure in tight gas formations. Journal of Energy Resources Technology 136: 032903. <http://dx.doi.org/10.1115/1.4026460>
- [Kim, J; Moridis, GJ.](#) (2013). Development of the T+M coupled flowgeomechanical simulator to describe fracture propagation and coupled flowthermalgeomechanical processes in tight/shale gas systems. Computers and Geosciences 60: 184-198. <http://dx.doi.org/10.1016/j.cageo.2013.04.023>
- [Kim, J; Moridis, GJ.](#) (2015). Numerical analysis of fracture propagation during hydraulic fracturing operations in shale gas systems. International Journal of Rock Mechanics and Mining Sciences 76: 127-137.
- [Kim, J; Um, ES; Moridis, GJ.](#) (2014). Fracture propagation, fluid flow, and geomechanics of water-based hydraulic fracturing in shale gas systems and electromagnetic geophysical monitoring of fluid migration. SPE Hydraulic Fracturing Technology Conference, February 4-6, 2014, The Woodlands, Texas.
- [King, G; King, D.](#) (2013). Environmental risk arising from well-construction failure: Differences between barrier and well failure, and estimates of failure frequency across common well types, locations, and well age. S P E Prod Oper 28. <http://dx.doi.org/10.2118/166142-PA>
- [Kirksey, J.](#) (2013). Optimizing wellbore integrity in well construction. Presentation presented at North American Wellbore Integrity Workshop, October 16-17, 2013, Denver, CO.
- [Lacazette, A; Geiser, P.](#) (2013). Comment on Davies et al., 2012 Hydraulic fractures: How far can they go? Marine and Petroleum Geology 43: 516-518. <http://dx.doi.org/10.1016/j.marpetgeo.2012.12.008>
- [Lange, T; Sauter, M; Heitfeld, M; Schetelig, K; Brosig, K; Jahnke, W; Kissinger, A; Helmig, R; Ebigo, A; Class, H.](#) (2013). Hydraulic fracturing in unconventional gas reservoirs: risks in the geological system part 1. Environmental Earth Sciences 70: 3839-3853. <http://dx.doi.org/10.1007/s12665-013-2803-3>
- [Lawal, H; Abolo, NU; Jackson, G; Sahai, V; Flores, C.](#) (2014). A quantitative approach to analyze fracture area loss in shale gas reservoirs. SPE Latin America and Caribbean Petroleum Engineering Conference, May 21-23, 2014, Maracaibo, Venezuela.
- [Lecampion, B; Jeffrey, R; Detournay, E.](#) (2005). Resolving the geometry of hydraulic fractures from tilt measurements. Pure Appl Geophys 162: 2433-2452. <http://dx.doi.org/10.1007/s00024-005-2786-4>
- [Llewellyn, GT.](#) (2014). Evidence and mechanisms for Appalachian Basin brine migration to shallow aquifers in NE Pennsylvania, USA. Hydrogeo J 22: 1055-1066. <http://dx.doi.org/10.1007/s10040-014-1125-1>
- [McDaniel, J; Watters, L; Shadravan, A.](#) (2014). Cement sheath durability: Increasing cement sheath integrity to reduce gas migration in the Marcellus Shale Play. In SPE hydraulic fracturing technology conference proceedings. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168650-MS>
- [MCOR](#) (Marcellus Center for Outreach and Research). (2012). Extent and thickness of Marcellus Shale. University Park, PA: Pennsylvania State University. Retrieved from [http://www.marcellus.psu.edu/images/Marcellus\\_thickness.gif](http://www.marcellus.psu.edu/images/Marcellus_thickness.gif)

- [Michie, TW; Koch, CA.](#) (1991). Evaluation of injection-well risk management in the Williston Basin. *J Pet Tech* 43: 737-741. <http://dx.doi.org/10.2118/20693-PA>
- [Molofsky, LJ; Connor, JA; Wylie, AS; Wagner, T; Farhat, SK.](#) (2013). Evaluation of methane sources in groundwater in northeastern Pennsylvania. *Ground Water* 51: 333-349. <http://dx.doi.org/10.1111/gwat.12056>
- [Muehlenbachs, L; Spiller, E; Timmins, C.](#) (2012). Shale gas development and property values: Differences across drinking water sources. (NBER Working Paper No. 18390). Cambridge, MA: National Bureau of Economic Research. <http://www.nber.org/papers/w18390>
- [Mukherjee, H; Poe jr., B; Heidt, J; Watson, T; Barree, R.](#) (2000). Effect of pressure depletion on fracture-geometry evolution and production performance. *SPE Prod Facil* 15: 144-150. <http://dx.doi.org/10.2118/65064-PA>
- [Myers, T.](#) (2012a). Author's reply. *Ground Water* 50: 828-830. <http://dx.doi.org/10.1111/j.1745-6584.2012.00991.x>
- [Myers, T.](#) (2012b). Potential contaminant pathways from hydraulically fractured shale to aquifers. *Ground Water* 50: 872-882. <http://dx.doi.org/10.1111/j.1745-6584.2012.00933.x>
- [Myers, T.](#) (2013). Author's reply for comments on potential contaminant pathways from hydraulically fractured shale to aquifers' [Comment]. *Ground Water* 51: 319321. <http://dx.doi.org/10.1111/gwat.12016>
- [NETL](#) (National Energy Technology Laboratory). (2013). Modern shale gas development in the United States: An update. Pittsburgh, PA: U.S. Department of Energy. National Energy Technology Laboratory. <http://www.netl.doe.gov/File%20Library/Research/Oil-Gas/shale-gas-primer-update-2013.pdf>
- [NPC](#) (National Petroleum Council). (2011b). Plugging and abandonment of oil and gas wells. (Paper #2-25). Washington, DC: National Petroleum Council (NPC).
- [ODNR, DMRM,](#) (Ohio Department of Natural Resources, Division of Mineral Resources Management). (2008). Report on the investigation of the natural gas invasion of aquifers in Bainbridge Township of Geauga County, Ohio. Columbus, OH: ODNR. <http://oilandgas.ohiodnr.gov/portals/oilgas/pdf/bainbridge/report.pdf>
- [Oil and Gas Mineral Services.](#) (2010). MineralWise: Oil and gas terminology. Available online at <http://www.mineralweb.com/library/oil-and-gas-terms/>
- [Olawoyin, R; Wang, JY; Oyewole, SA.](#) (2013). Environmental safety assessment of drilling operations in the Marcellus-shale gas development. *S P E Drilling & Completion* 28: 212-220. <http://dx.doi.org/10.2118/163095-PA>
- [Osborn, SG; Vengosh, A; Warner, NR; Jackson, RB.](#) (2011). Methane contamination of drinking water accompanying gas-well drilling and hydraulic fracturing. *PNAS* 108: 8172-8176. <http://dx.doi.org/10.1073/pnas.1100682108>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2000). Pennsylvanias plan for addressing problem abandoned wells and orphaned wells. Harrisburg, PA: PADEP.
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2009b). Stray natural gas migration associated with oil and gas wells [draft report]. Harrisburg, PA. [http://www.dep.state.pa.us/dep/subject/advcoun/oil\\_gas/2009/Stray%20Gas%20Migration%20Cases.pdf](http://www.dep.state.pa.us/dep/subject/advcoun/oil_gas/2009/Stray%20Gas%20Migration%20Cases.pdf)
- [Palmer, ID; Moschovidis, ZA; Cameron, JR.](#) (2005). Coal failure and consequences for coalbed methane wells. Paper presented at SPE annual technical conference and exhibition, October 9-12, 2005, Dallas, TX.



- [Peterman, ZE; Thamke, J; Futa, K; Oliver, T.](#) (2012). Strontium isotope evolution of produced water in the East Poplar Oil Field, Montana. Presentation presented at US Geological Survey AAPG annual convention and exhibition, April 23, 2012, Long Beach, California.
- [Pinder, GF; Celia, MA.](#) (2006). Subsurface hydrology. Hoboken, NJ: John Wiley & Sons, Inc. <http://dx.doi.org/10.1002/0470044209>
- [Pinder, GF; Gray, WG.](#) (2008). Essentials of multiphase flow and transport in porous media. Hoboken, NJ: John Wiley & Sons.
- [Reagan, MT; Moridis, GJ; Johnson, JN; Keen, ND.](#) (2015). Numerical simulation of the environmental impact of hydraulic fracturing of tight/shale gas reservoirs on near-surface groundwater: background, base cases, shallow reservoirs, short-term gas and water transport. *Water Resour Res* 51: 1-31. <http://dx.doi.org/10.1002/2014WR016086>
- [Renpu, W.](#) (2011). Advanced well completion engineering (Third ed.). Houston, TX: Gulf Professional Publishing.
- [Révész, KM; Breen, KJ; Baldassare, AJ; Burruss, RC.](#) (2012). Carbon and hydrogen isotopic evidence for the origin of combustible gases in water-supply wells in north-central Pennsylvania. *Appl Geochem* 27: 361-375. <http://dx.doi.org/10.1016/j.apgeochem.2011.12.002>
- [Robertson, JO; Chilingar, GV; Khilyuk, LF; Endres, B.](#) (2012). Migration of gas from oil/gas fields. *Energy Source Part A* 34: 1436-1447. <http://dx.doi.org/10.1080/15567030903077899>
- [Ross, D; King, G.](#) (2007). Well completions. In MJ Economides; T Martin (Eds.), *Modern fracturing: Enhancing natural gas production* (1 ed., pp. 169-198). Houston, Texas: ET Publishing.
- [Rowe, D; Muehlenbachs, K.](#) (1999). Isotopic fingerprints of shallow gases in the Western Canadian sedimentary basin: tools for remediation of leaking heavy oil wells. *Organic Geochemistry* 30: 861-871. [http://dx.doi.org/10.1016/S0146-6380\(99\)00068-6](http://dx.doi.org/10.1016/S0146-6380(99)00068-6)
- [Roychaudhuri, B; Tsotsis, TT; Jessen, K.](#) (2011). An experimental and numerical investigation of spontaneous imbibition in gas shales. Paper presented at SPE Annual Technical Conference and Exhibition, October 30 - November 2, 2011, Denver, Colorado.
- [Rutledge, JT; Phillips, WS.](#) (2003). Hydraulic stimulation of natural fractures as revealed by induced microearthquakes, Carthage Cotton Valley gas field, east Texas. *Geophysics* 68: 441-452. <http://dx.doi.org/10.1190/1.1567214>
- [Rutqvist, J; Rinaldi, AP; Cappa, F; Moridis, GJ.](#) (2013). Modeling of fault reactivation and induced seismicity during hydraulic fracturing of shale-gas reservoirs. *Journal of Petroleum Science and Engineering* 107: 31-44. <http://dx.doi.org/10.1016/j.petrol.2013.04.023>
- [Rutqvist, J; Rinaldi, AP; Cappa, F; Moridis, GJ.](#) (2015). Modeling of fault activation and seismicity by injection directly into a fault zone associated with hydraulic fracturing of shale-gas reservoirs. *Journal of Petroleum Science and Engineering* 127: 377-386. <http://dx.doi.org/10.1016/j.petrol.2015.01.019>
- [Sabins, F.](#) (1990). Problems in cementing horizontal wells. *J Pet Tech* 42: 398-400. <http://dx.doi.org/10.2118/20005-PA>
- [Saiers, JE; Barth, E.](#) (2012). Comment on 'Potential contaminant pathways from hydraulically fractured shale aquifers' [Comment]. *Ground Water* 50: 826-828; discussion 828-830. <http://dx.doi.org/10.1111/j.1745-6584.2012.00990.x>
- [Schlumberger](#) (Schlumberger Limited). (2014). Schlumberger oilfield glossary. Available online at <http://www.glossary.oilfield.slb.com/>
- [Science Based Solutions LLC.](#) (2014). Summary of hydrogeology investigations in the Mamm Creek field area, Garfield County, Laramie, Wyoming. <http://www.garfield-county.com/oil-gas/documents/Summary-Hydrogeologic-Studies-Mamm%20Creek-Area-Feb-10-2014.pdf>



- [Senior, LA.](#) (2014). A reconnaissance spatial and temporal baseline assessment of methane and inorganic constituents in groundwater in bedrock aquifers, pike county, Pennsylvania, 201213 (pp. i-106). (2014-5117). Senior, LA. <http://pubs.usgs.gov/sir/2014/5117/support/sir2014-5117.pdf>
- [Shapiro, SA; Krüger, OS; Dinske, C; Langenbruch, C.](#) (2011). Magnitudes of induced earthquakes and geometric scales of fluid-stimulated rock volumes. *Geophysics* 76: WC55-WC63. <http://dx.doi.org/10.1190/geo2010-0349.1>
- [Sharma, S; Bowman, L; Schroeder, K; Hammack, R.](#) (2014a). Assessing changes in gas migration pathways at a hydraulic fracturing site: Example from Greene County, Pennsylvania, USA. *Appl Geochem.* <http://dx.doi.org/10.1016/j.apgeochem.2014.07.018>
- [Sharma, S; Mulder, ML; Sack, A; Schroeder, K; Hammack, R.](#) (2014b). Isotope approach to assess hydrologic connections during Marcellus Shale drilling. *Ground Water* 52: 424433. <http://dx.doi.org/10.1111/gwat.12083>
- [Siegel, DI; Azzolina, NA; Smith, BJ; Perry, AE; Bothun, RL.](#) (In Press) Methane concentrations in water wells unrelated to proximity to existing oil and gas wells in northeastern Pennsylvania. *Environ Sci Technol.* <http://dx.doi.org/10.1021/es505775c>
- [Skjerven, T; Lunde, Ø; Perander, M; Williams, B; Farquhar, R; Sinet, J; Sæby, J; Haga, HB; Finnseth, Ø; Johnsen, S.](#) (2011). Norwegian Oil and Gas Association recommended guidelines for well integrity. (117, Revision 4). Norway: Norwegian Oil and Gas Association. <http://www.norskoljeoggass.no/Global/Retningslinjer/Boring/117%20-%20Recommended%20guidelines%20Well%20integrity%20rev4%2006.06.%2011.pdf>
- [Skoumal, RJ; Brudzinski, MR; Currie, BS.](#) (2015). Earthquakes induced by hydraulic fracturing in Poland Township, Ohio. *Seismological Society of America Bulletin* 105: 189-197. <http://dx.doi.org/10.1785/0120140168>
- [Smolen, JJ.](#) (2006). Cased hole and production log evaluation. Tulsa, OK: PennWell Books.
- [Syed, T; Cutler, T.](#) (2010). Well integrity technical and regulatory considerations for CO2 injection wells. In 2010 SPE international conference on health, safety & environment in oil and gas exploration and production. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/125839-MS>
- [The Royal Society and the Royal Academy of Engineering.](#) (2012). Shale gas extraction in the UK: A review of hydraulic fracturing. London. [http://www.raeng.org.uk/news/publications/list/reports/Shale\\_Gas.pdf](http://www.raeng.org.uk/news/publications/list/reports/Shale_Gas.pdf)
- [Tilley, BJ; Muehlenbachs, K.](#) (2012). Fingerprinting of gas contaminating groundwater and soil in a petroliferous region, Alberta, Canada. In RD Morrison; G O'Sullivan (Eds.), *Environmental forensics: Proceedings of the 211 INEF Conference* (pp. 115-125). London: RSC Publishing. <http://dx.doi.org/10.1039/9781849734967-00115>
- [TIPRO](#) (Texas Independent Producers and Royalty Owners Association). (2012). Bradenhead pressure management. Austin, TX. [http://www.tipro.org/UserFiles/BHP\\_Guidance\\_Final\\_071812.pdf](http://www.tipro.org/UserFiles/BHP_Guidance_Final_071812.pdf)
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2004). Evaluation of impacts to underground sources of drinking water by hydraulic fracturing of coalbed methane reservoirs. (EPA/816/R-04/003). Washington, DC.: U.S. Environmental Protection Agency, Office of Solid Waste.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012c). Geologic sequestration of carbon dioxide: underground injection control (UIC) program class VI well construction guidance [EPA Report]. (EPA 816-R-11-020). Washington, D.C. <http://water.epa.gov/type/groundwater/uic/class6/upload/epa816r11020.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014i). Retrospective case study in northeastern Pennsylvania: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/088). Washington, D.C.

- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015j). Retrospective case study in Killdeer, North Dakota: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/103). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015l). Retrospective case study in the Raton Basin, Colorado: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/091). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015n). Review of state and industry spill data: characterization of hydraulic fracturing-related spills [EPA Report]. (EPA/601/R-14/001). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015o). Review of well operator files for hydraulically fractured oil and gas production wells: Well design and construction [EPA Report]. (EPA/601/R-14/002). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [Vaidyanathan, G.](#) (2014). Email communications between Gayathri Vaidyanathan and Ken Klewicki regarding the New Mexico Oil Conservation Division District 3 Well Communication Data. Available online
- [Valko, PP.](#) (2009). Assigning value to stimulation in the Barnett Shale: A simultaneous analysis of 7000 plus production histories and well completion records. Paper presented at SPE Hydraulic Fracturing Technology Conference, January 19-21, 2009, The Woodlands, TX.
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A.](#) (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. *Environ Sci Technol* 48: 36-52. <http://dx.doi.org/10.1021/es405118y>
- [Vidic, RD; Brantley, SL; Vandenbossche, JM; Yoxtheimer, D; Abad, JD.](#) (2013). Impact of shale gas development on regional water quality [Review]. *Science* 340: 1235009. <http://dx.doi.org/10.1126/science.1235009>
- [Vincent, M.](#) (2011). Restimulation of unconventional reservoirs: when are refracs beneficial? *Journal of Canadian Petroleum Technology* 50: 36-52. <http://dx.doi.org/10.2118/136757-PA>
- [Vulgamore, TB; Clawson, TD; Pope, CD; Wolhart, SL; Mayerhofer, MJ; Machovoe, SR; Waltman, CK.](#) (2007). Applying hydraulic fracture diagnostics to optimize stimulations in the Woodford Shale. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/110029-MS>
- [Wang, W; Dahi Taleghani, A.](#) (2014). Cement sheath integrity during hydraulic fracturing: an integrated modeling approach. In 2014 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168642-MS>
- [Warner, NR; Jackson, RB; Darrah, TH; Osborn, SG; Down, A; Zhao, K; White, A; Vengosh, A.](#) (2012). Geochemical evidence for possible natural migration of Marcellus Formation brine to shallow aquifers in Pennsylvania. *PNAS* 109: 11961-11966. <http://dx.doi.org/10.1073/pnas.1121181109>
- [Warpinski, N.](#) (2009). Microseismic monitoring: Inside and out. *J Pet Tech* 61: 80-85. <http://dx.doi.org/10.2118/118537-MS>
- [Watson, TL; Bachu, S.](#) (2009). Evaluation of the potential for gas and CO2 leakage along wellbores. *S P E Drilling & Completion* 24: 115-126. <http://dx.doi.org/10.2118/106817-PA>
- [Watts, KR.](#) (2006). A Preliminary Evaluation of Vertical Separation between Production Intervals of Coalbed-Methane Wells and Water-Supply Wells in the Raton Basin, Huerfano and Las Animas Counties, Colorado, 1999-2004. 15.
- [Weng, X; Kresse, O; Cohen, C; Wu, R; Gu, H.](#) (2011). Modeling of hydraulic fracture network propagation in a naturally fractured formation. Paper presented at SPE Hydraulic Fracturing Technology Conference, January 24-26, 2011, The Woodlands, TX.
- [Wojtanowicz, AK.](#) (2008). Environmental control of well integrity. In ST Orszulik (Ed.), *Environmental technology in the oil industry* (pp. 53-75). Houten, Netherlands: Springer Netherlands.

[Wright, PR; McMahon, PB; Mueller, DK; Clark, ML.](#) (2012). Groundwater-quality and quality-control data for two monitoring wells near Pavillion, Wyoming, April and May 2012. (USGS Data Series 718). Reston, Virginia: U.S. Geological Survey. [http://pubs.usgs.gov/ds/718/DS718\\_508.pdf](http://pubs.usgs.gov/ds/718/DS718_508.pdf)

[WYOGCC](#) (Wyoming Oil and Gas Conservation Commission). (2014). Pavillion Field Well Integrity Review. Casper, Wyoming. [http://wogcc.state.wy.us/pavillionworkinggrp/PAVILLION\\_REPORT\\_1082014\\_Final\\_Report.pdf](http://wogcc.state.wy.us/pavillionworkinggrp/PAVILLION_REPORT_1082014_Final_Report.pdf)

[Zhang, L; Anderson, N; Dilmore, R; Soeder, DJ; Bromhal, G.](#) (2014a). Leakage detection of Marcellus Shale natural gas at an Upper Devonian gas monitoring well: a 3-d numerical modeling approach. Environ Sci Technol 48: 10795-10803. <http://dx.doi.org/10.1021/es501997p>

[Zoback, MD.](#) (2010). Reservoir geomechanics. Cambridge, UK: Cambridge University Press.

# Chapter 7

---

## Flowback and Produced Water

## 7. Flowback and Produced Water

### 7.1. Introduction

1 Water is a byproduct of oil and gas production. After hydraulic fracturing is completed, either in its  
2 entirety or for a specified stage, the operator reduces the injection pressure. Water is allowed to  
3 flow back from the well to prepare for oil or gas production. This return-flow water may contain  
4 chemicals injected as part of the hydraulic fracturing fluid, chemicals characteristic of the  
5 formation, hydrocarbons, and in-situ reaction and degradation products. Initially this water,  
6 called flowback, is mostly fracturing fluid, but as time goes on, it becomes more similar to the  
7 formation water. For formations containing saline water (brine), the salinity of the water increases  
8 as time passes, marking the increased contact time with the formation and in some cases the flow of  
9 formation water itself. This later stage water is called produced water, a term which can also refer  
10 to flowback and produced water collectively.

11 Flowback and produced water are stored and accumulated at the surface for eventual reuse or  
12 disposal. Typical storage facilities include open air impoundments and closed containers such as  
13 those shown in Figure 1-1. Produced water is collected and may be taken to disposal wells,  
14 recyclers, wastewater treatment plants, or in some cases the water may be left in pits to evaporate  
15 or infiltrate. Flowback and produced water leaks can occur on the well pad as a result of human  
16 error, failure of container integrity, equipment failure, communication between wells, pipeline  
17 leaks, and blowouts.<sup>1</sup> Above-ground piping systems can connect multiple well pads to  
18 impoundments, and piping or impoundments may leak. Much produced water is transported by  
19 truck, and pad incidents leading to spills of produced water can occur when trucks are filled.  
20 On-road accidents are also possible, some of which could release produced water loads to the  
21 environment.

22 Impacts to drinking water resources can occur if spilled flowback or produced water enters surface  
23 water bodies or aquifers. Environmental transport of chemical constituents depends on the  
24 characteristics of the spill, the fluid (e.g., density, as for highly saline water), the chemicals, and the  
25 environment. Attenuation processes (e.g., dilution, biodegradation of organics) in surface water and  
26 aquifers tend to reduce concentrations.

27 We begin this chapter with a review of definitions for flowback and produced water. We then  
28 discuss typical volumes of flowback and produced water on a per-well basis. This information is  
29 aggregated to the state and basin level in Chapter 8. The characteristics of hydraulically fractured  
30 shale, tight, and coalbed methane (CBM) formations are described. Spatial and temporal trends on  
31 composition of produced water are illustrated with examples from the literature and data compiled  
32 for this report. The processes controlling the chemical composition of produced water are  
33 described in Appendix E. The potential for impacts on drinking water resources of flowback and  
34 produced water are described based on reported spill incidents, contaminant transport principles,  
35 and field study examples. The chapter concludes with a discussion of uncertainties and knowledge

---

<sup>1</sup> For discussion of well communication, see Chapter 6.

1 gaps, factors that influence the severity of impacts, and a synthesis based on the EPA research  
2 questions.

### 7.1.1. Definitions

3 Multiple definitions exist for the terms flowback and produced water. These differing definitions  
4 indicate challenges in determining the distinctions between the two terms or indicate that different  
5 usage of the terms routinely occurs among various industry, private, and public groups. However,  
6 the majority of produced water definitions are fundamentally similar. The following definition is  
7 used in this report: water that flows from oil or gas wells.

8 This definition is similar to the definition used by the American Petroleum Institute (API):  
9 “Produced water is any of the many types of water produced from oil and gas wells” ([API, 2010b](#));  
10 the definition used by the Department of Energy (DOE): “Produced water is water trapped in  
11 underground formations that is brought to the surface along with oil or gas” ([DOE, 2004](#)), and a  
12 similar definition used by the American Water Works Association (AWWA): “Produced water is the  
13 combination of flowback and formation water that returns to the surface along with the oil and  
14 natural gas” ([AWWA, 2013](#)). Produced water can variously refer to formation water, a mixture of  
15 spent hydraulic fracturing fluid and formation water or returned hydraulic fracturing fluid. Thus  
16 the term produced water is used when a distinction between fracturing fluid and formation water is  
17 not necessary.

18 In general, the term flowback refers either to fluids predominantly containing hydraulic fracturing  
19 fluid that returns to the surface or to a process used to prepare the well for production. Because  
20 formation water can contact and mix with injection fluids, the distinction between returning  
21 hydraulic fracturing fluid and formation water is not clear. In the early stages of operation,  
22 however, a higher concentration of chemical additives is expected and later, water that is typical of  
23 the formation ([Stewart, 2013a](#)). In most cases, a precise distinction between these waters is not  
24 determined during operations.

25 Various definitions have been used for the term flowback. The American Petroleum Institute  
26 defined flowback as “the fracture fluids that return to the surface after a hydraulic fracture is  
27 completed,” ([API, 2010b](#)) and the American Water Works Association used “fracturing fluids that  
28 return to the surface through the wellbore after hydraulic fracturing is complete” ([AWWA, 2013](#)).  
29 Other definitions include production of hydrocarbons from the well ([Barbot et al., 2013](#); [U.S. EPA,](#)  
30 [2012f](#)), or a time period ([USGS, 2014f](#); [Haluszczak et al., 2013](#); [Warner et al., 2013b](#); [Hayes and](#)  
31 [Severin, 2012a](#); [Hayes, 2009](#)). As mentioned above, flowback can also be defined as a process used  
32 to stimulate the well for production by allowing excess liquids and proppant to return to the  
33 surface. Because we use existing literature in our review, we do not introduce a preferred definition  
34 of flowback, but rather we mention the assumptions used by the author(s) we discuss.

## 7.1. Volume of Hydraulic Fracturing Flowback and Produced Water

35 The characteristics and volume of flowback and produced water vary by well, formation, and time.  
36 This section presents information on flowback and produced water volume over various time  
37 scales, and where possible, on a per-well and per-formation basis.



1 The amount of flowback from a well varies and depends on several types of factors, including:  
2 production, formation, and operational. Production factors include the amount of fluid injected,  
3 type of hydrocarbon produced (gas or liquid), and location within the formation. Formation factors  
4 include the formation pressure, interaction between the formation and injected fluid (capillary  
5 forces) and reactions within the reservoir. Operational factors include loss of mechanical integrity  
6 and subsurface communication between wells ([U.S. GAO, 2012](#); [Byrnes, 2011](#); [DOE, 2011a](#); [GWPC  
7 and ALL Consulting, 2009](#); [Reynolds and Kiker, 2003](#)). The latter two factors might be indicated by  
8 an unexpected increase in water production ([Reynolds and Kiker, 2003](#)).

9 The processes that allow gas and liquids to flow are related to the conditions along the faces of  
10 fractures. [Byrnes \(2011\)](#) conceptualized fluid flow across the fracture face as being composed of  
11 three phases. The first is characterized by forced imbibition of fluid into the reservoir and occurs  
12 during and immediately following fracture stimulation. Second is an unforced imbibition following  
13 stimulation where the fluid redistributes within the reservoir rock, due to capillary forces, when the  
14 well is shut-in. The last phase consists of flow out of the formation when the well is opened and  
15 pressure reduced in the borehole and fractures. The purpose of this phase is to recover as much of  
16 the injected fluid as possible ([Byrnes, 2011](#)) in order to reduce high water saturations at the  
17 fracture face and eventually allow higher gas flow rates. The length of the last phase and  
18 consequently, the amount of water removed depends on factors such as the amount of injected  
19 fluid, the permeability and effective permeability of the reservoir, capillary pressure properties of  
20 the reservoir rock, the pressure near the fracture faces, and whether the well is flowing or shut in.<sup>1</sup>  
21 The well can be shut in for varying time periods depending on operator scheduling, surface facility  
22 construction or hookup, or other reasons.

### 7.1.1. Flowback of Injected Hydraulic Fracturing Fluid

23 Generally, the fluid that initially returns to the surface has been attributed to a mixture of the  
24 injected fracturing fluid, its transformation products, and the natural formation water. In some  
25 cases, as shown below, the amount of flowback is greater than the amount of injected hydraulic  
26 fracturing fluid and the additional water comes from the formation ([Nicot et al., 2014](#)) or an  
27 adjacent formation ([Arkadakskiy and Rostron, 2013a](#)). Several authors used geochemical analyses  
28 to postulate mixing between formation water and injected fluid in the Marcellus Shale ([Engle and  
29 Rowan, 2014](#); [Barbot et al., 2013](#); [Haluszczak et al., 2013](#)); Rowan et al., 2015). These possible  
30 explanations are summarized in a following section (see Section 7.6.4). Salinity increases in  
31 flowback from highly saline formations, so it is not possible to specify precisely the amount of  
32 injected fluids that return in the flowback ([GWPC and ALL Consulting, 2009](#)). Rather, such  
33 estimates relate the amount of produced water measured at a given time after fracturing as a  
34 percentage of the total amount of injected fluid.

35 Estimates vary but in composite indicate on average that between 5% and 75% (see Table 7-1,  
36 Table 7-2, and Table 7-3) of the volume of injected fracturing fluid may flow back to the surface

---

<sup>1</sup> When multiple fluids (water, oil, gas) occupy portions of the pore space, the permeability to each fluid depends on the fraction of the pore space occupied by the fluid and the fluid's properties. As defined by [Dake \(1978\)](#), when this effective permeability is normalized by the absolute permeability, the resulting relationship is known as the relative permeability.

1 after hydraulic fracturing is complete ([U.S. EPA, 2015g](#); [Vengosh et al., 2014](#); [Mantell, 2013b](#); [Vidic](#)  
 2 [et al., 2013](#); [Minnich, 2011](#); [Xu et al., 2011](#)). These data (see Table 7-1) illustrate that the formations  
 3 differ in their water requirements for hydraulic fracturing and generation of produced water over  
 4 the short term.<sup>1</sup> Low percentages of flowback are typical, as is the decrease of flowback volume  
 5 with time as the wells enter the production phase ([Gregory et al., 2011](#); [McElreath, 2011](#); [GWPC and](#)  
 6 [ALL Consulting, 2009](#)). Some formations produce higher volumes, as noted for the Barnett Shale in  
 7 Texas ([Nicot et al., 2014](#)) and discussed below.

**Table 7-1. Data from one company’s operations indicating approximate total water use and approximate produced water volumes within 10 days after completion of wells ([Mantell, 2013b](#)).**

Formation	Approx. total average water use per well (million gal)	Produced water within the first 10 days after completion		Produced water as a percentage of average water use per well	
		Low estimate (million gal)	High or only estimate (million gal)	Low estimate (% of total water use)	High or only estimate (% of total water use)
<b><i>Gas shale plays (primarily dry gas)</i></b>					
Barnett <sup>a</sup>	3.4	0.3	1.0	9	29
Marcellus <sup>a</sup>	4.5	0.3	1.0	7	22
Haynesville	5.4	--	0.25	--	5
<b><i>Liquid plays (gas, oil, condensate)</i></b>					
Mississippi Lime	2.1	--	1.0	--	48
Cleveland/Tonkaw	2.7	0.3	1.0	11	37
Niobrara	3.7	0.3	1.0	8	27
Utica	3.8	0.3	1.0	8	26
Granite Wash	4.8	0.3	1.0	6	21
Eagle Ford	4.9	0.3	1.0	6	20

<sup>a</sup> [Mantell \(2011\)](#) reported produced water for the first 10 days at 500,000 to 600,000 gal for the Barnett, Fayetteville and Marcellus Shales.

<sup>1</sup> Flowback estimates may be based on specific time periods (e.g., the flowback during the first 10, 15, or 30 days).

**Table 7-2. Additional short-, medium-, and long-term produced water estimates.**

Location–formation	Produced water as percentage of injected fluid	Reference	Comment
<b><i>Estimates without reference to a specific data set</i></b>			
Unspecified Shale	5% – 35%	<a href="#">Hayes (2011)</a>	
Marcellus Shale	10% – 25%	<a href="#">Minnich (2011)</a>	Initial flowback
ND–Bakken	25%	<a href="#">EERC (2013)</a>	
<b><i>Estimates with reference to specific data evaluation</i></b>			
<b><i>Short duration</i></b>			
Marcellus Shale	10%	<a href="#">Clark et al. (2013)</a>	0 – 10 days
TX–Barnett	20%	<a href="#">Clark et al. (2013)</a>	0 – 10 days
TX–Haynesville	5%	<a href="#">Clark et al. (2013)</a>	0 – 10 days
AR–Fayetteville	10%	<a href="#">Clark et al. (2013)</a>	0 – 10 days
<b><i>Mid duration</i></b>			
WV–Marcellus	8%	<a href="#">Hansen et al. (2013)</a>	30 days
Marcellus Shale	24%	Hayes ( <a href="#">2011</a> , <a href="#">2009</a> )	Average from 19 wells, 90 days
<b><i>Long duration</i></b>			
TX–Barnett	~100% <sup>a</sup>	<a href="#">Nicot et al. (2014)</a>	72 months
WV–Marcellus	10% – 30%	<a href="#">Ziemkiewicz et al. (2014)</a>	Up to 115 months
TX–Eagle Ford	<20%	<a href="#">Nicot and Scanlon (2012)</a>	Lifetime
<b><i>Unspecified duration</i></b>			
PA–Marcellus	6%	<a href="#">Hansen et al. (2013)</a>	

<sup>a</sup> Approximate median with large variability: 5<sup>th</sup> percentile of 20% and 90<sup>th</sup> percentile of 350%.

**Table 7-3. Flowback and long-term produced water characteristics for wells in unconventional formations (U.S. EPA, 2015e).**Source: ([U.S. EPA, 2015g](#)).

Resource type	Drill type	Fracturing fluid (million gal)			Flowback (percent of fracturing fluid returned)		
		Median	Range	Number of data points	Median	Range	Number of data points
Shale	Horizontal	4.0	0.13–15	50,053	6%	1% – 50%	6,488
	Directional	1.6	0.051–12	124	14%	4% – 31%	19
	Vertical	1.2	0.015–22	4,152	24%	7% – 75%	18
Tight	Horizontal	2.2	0.042–9.4	765	7%	7% – 60%	39
	Directional	0.60	0.056–4.0	693	6%	0% – 60%	263
	Vertical	0.31	0.019–4.0	1,287	8%	1% – 83%	48
<b>Long-term produced water (gal/day per well)</b>							
Shale	Horizontal	900	0–19,000	22,222			
	Directional	480	22–8,700	695			
	Vertical	380	0–4,600	12,393			
Tight	Horizontal	620	0–120,000	2,394			
	Directional	750	12–1,800	3,816			
	Vertical	570	0–4,000	21,393			



- 1 In the following subsections, we first discuss water produced during the flowback period, then
- 2 longer-term produced water.

#### **7.1.1.1. Produced Water during the Flowback Period**

- 3 Data were collected from six vertical and eight horizontal wells in the Marcellus Shale of
- 4 Pennsylvania and West Virginia ([Hayes, 2009](#)). The author collected samples of flowback after one,

*This document is a draft for review purposes only and does not constitute Agency policy.*


1 five, and 14 days after hydraulic fracturing was completed, as well as a produced water sample 90  
2 days after completion of the wells. Both the vertical and horizontal wells showed their largest  
3 volume of flowback between one and five days after fracturing, as shown in Figure 7-1. The wells  
4 continued to produce water, and at 90 days, samples were available from four each of the  
5 horizontal and vertical wells. The vertical wells produced on average 180 bbl/day (7,600 gal/day or  
6 29,000 L/day) and the horizontal wells a similar 200 bbl/day (8,400 gal/day or 32,000 L/day).  
7 Results from one Marcellus Shale study were fitted to a power curve, as shown in Figure 7-2  
8 ([Ziemkiewicz et al., 2014](#)). These and the [Hayes \(2009\)](#) data show decreasing flowback with time.

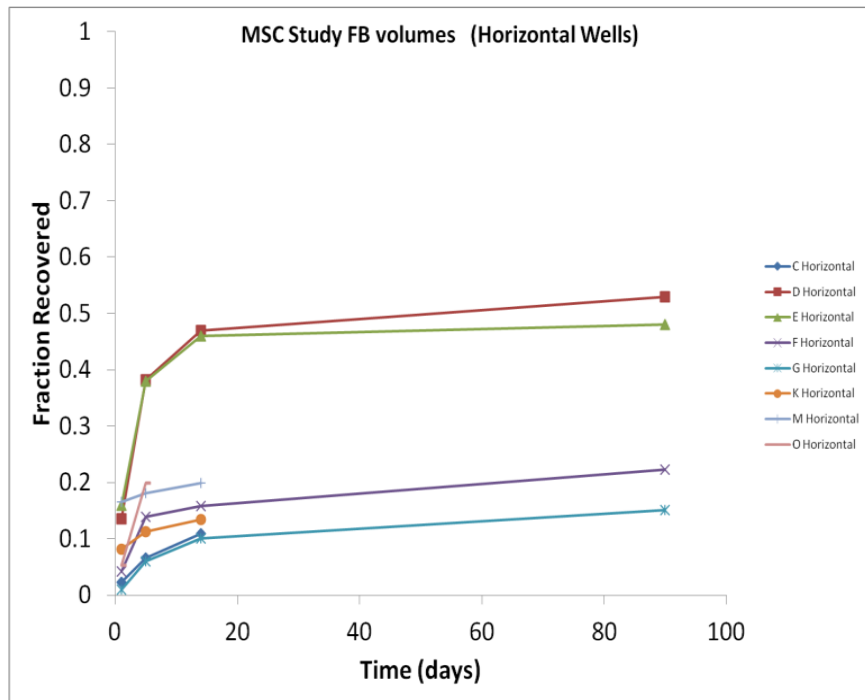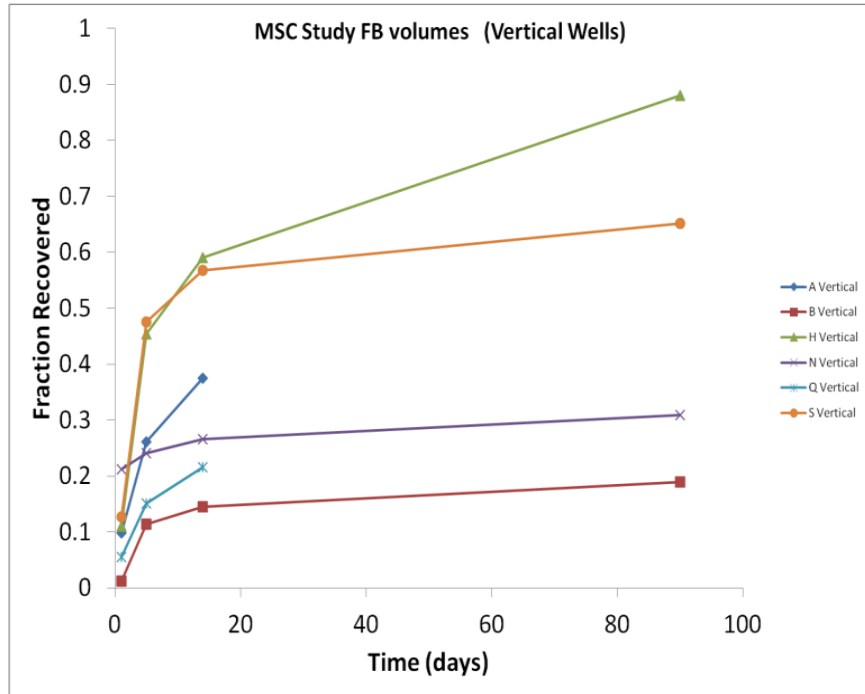

**Figure 7-1. Fraction of injected hydraulic fracturing fluid recovered from six vertical (top) and eight horizontal (bottom) wells completed in the Marcellus Shale.**

Data from [Hayes \(2009\)](#).




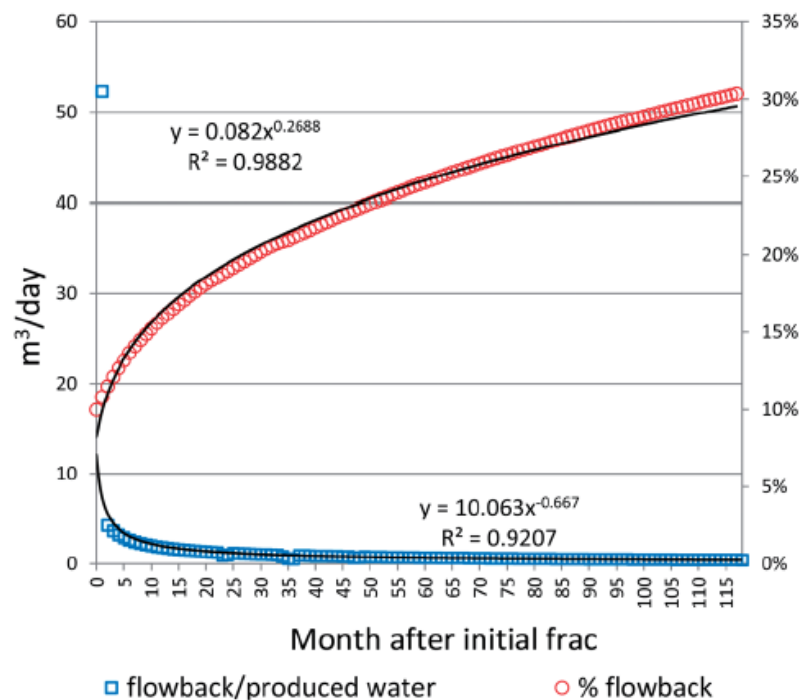

**Figure 7-2. Example of flowback and produced water from the Marcellus Shale, illustrating rapid decline in water production and cumulative return of approximately 30% of the volume of injected fluid.**

Source: [Ziemkiewicz et al. \(2014\)](#). Reprinted with permission from Ziemkiewicz, P; Quaranta, JD; Mccawley, M. (2014). Practical measures for reducing the risk of environmental contamination in shale energy production. *Environmental Science: Processes & Impacts* 16: 1692-1699. Reproduced by permission of The Royal Society of Chemistry. <http://dx.doi.org/10.1039/C3EM00510K>.

- 1 In West Virginia, water recovered at the surface within 30 days following injection or before 50% of
- 2 the injected fluid volume is returned to the surface is reported as flowback. Data from 271 wells in
- 3 the Marcellus Shale in West Virginia ([Hansen et al., 2013](#)) reveals the variability of recovery from
- 4 wells in the same formation and that the amount of injected fluid recovered was less than 15%
- 5 from over 80% of the wells (see Figure 7-3).

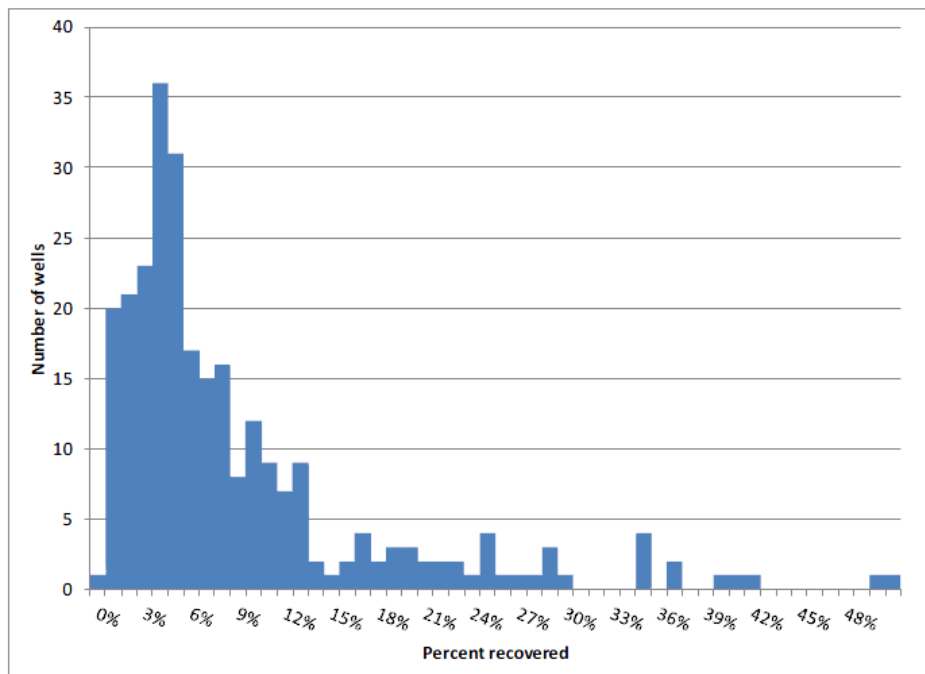

**Figure 7-3. Percent of injected fluid recovered for Marcellus Shale wells in West Virginia (2010–2012).**

Source: [Hansen et al. \(2013\)](#). One data point showing 98% recovery omitted. Reprinted with permission from Hansen, E; Mulvaney, D; Betcher, M. (2013). Water resource reporting and water footprint from Marcellus Shale development in West Virginia and Pennsylvania. Durango, CO: Earthworks Oil & Gas Accountability Project. Copyright 2013. Permission Downstream Strategies, San Jose State University, and Earthworks Oil & Gas Accountability Project.

1 The amount of flowback water produced by wells within the first few days of fracturing varies from  
 2 formation to formation. Wells in the Mississippi Lime and Permian Basin can produce 10 million gal  
 3 (37.8 million L) in the first 10 days of production. Wells in the Barnett, Eagle Ford, Granite Wash,  
 4 Cleveland/Tonkawa Sand, Niobrara, Marcellus, and Utica Shales can produce 300,000 to 1 million  
 5 gal (1.14 to 3.78 million L) within the first 10 days; while Haynesville wells produce less, about  
 6 350,000 gal (1.32 million L) ([Mantell, 2013b](#)).

### 7.1.2. Produced Water

7 During oil and gas production, other fluids which contain water are produced with hydrocarbons.  
 8 Throughout this production phase at oil and certain wet gas production facilities, produced water is  
 9 stored in tanks and pits that may contain free phase, dissolved phase, and emulsified crude oil in  
 10 the produced water.<sup>1</sup> This crude oil can be present in the produced water container or pit, because  
 11 the crude oil is not efficiently separated out by the flow-through process vessels (such as three-  
 12 phase separators, heater treaters, or gun barrels) and passes through to these containers/pits. The


<sup>1</sup> Dry natural gas occurs in the absence of liquid hydrocarbons; wet natural gas typically contains less than 85% methane along with ethane and more complex hydrocarbons ([Schlumberger, 2014](#)).

1 produced water containers and pits containing oil at production facilities are typically regulated  
2 under 40 CFR part 112, produced water containers or pits may also be subject to other applicable  
3 state and or local laws, regulations and/or ordinances.

4 [Lutz et al. \(2013\)](#) evaluated data reported to the Pennsylvania Department of Environmental  
5 Protection (PA DEP) for the time period January 2000 to December 2011. The data were divided  
6 between conventional gas wells that might have been hydraulically fractured and hydraulically  
7 fractured completions in the Marcellus Shale. The conventional wells produced less drilling water,  
8 less flowback (when fractured), and less brine than the shale wells ([Lutz et al., 2013](#); see [Table 1](#)).  
9 The average amount of produced water per well was 136,000 gal (514,000 L) for the conventional  
10 wells and 1.38 million gal (5.211 million L) for the shale wells. The produced water to gas ratio was  
11 1.27 gal (4.8 L) water per MMBtu for the shale wells, which was 2.8 times lower than for  
12 conventional wells. Both the produced water and gas produced per well decreased over the four-  
13 year period covered by the study. In contrast, conventional oil wells tend to have increased volumes  
14 of produced water as they age, and in some cases, older wells may produce five times as much  
15 water as new wells ([U.S. GAO, 2012](#)).


16 From experience in several shale formations, [Mantell \(2013b, 2011\)](#) characterized the amount of  
17 produced water over the long term as high, moderate, or low. Wells in the Barnett Shale,  
18 Cleveland/Tonkawa Sand, Mississippi Lime, and the Permian Basin can produce more than  
19 1,000 gal (3,800 L) of water per million cubic feet (MMCF) of gas because of formation  
20 characteristics. The most productive of these can be as high as 5,000 gal (19,000 L) per MMCF. As a  
21 specific example, a high-producing formation in the western United States was described as  
22 producing 4,200 gal (16,000 L) per MMCF for the life of the well ([McElreath, 2011](#)). The well was  
23 fractured and stimulated with about 4 million gal (15 million L) of water and returned  
24 60,000 gal (230,000 L) per day in the first 10 days, followed by 8,400 gal (32,000 L) per day in the  
25 remainder of the first year.

26 Similarly, produced water from horizontal wells in the Barnett Shale decreased rapidly after the  
27 wells began producing gas ([Nicot et al., 2014](#)) (see Figure 7-4). The data show a high degree of  
28 variability, which was attributed by [Nicot et al. \(2014\)](#) to a few wells with exceptionally high water  
29 production. When the produced water data were presented as the percentage of injected fluid, the  
30 median exceeded 100% at around 36 months, and the 90<sup>th</sup> percentile was 350% (see Figure 7-5).  
31 This means that roughly 50% of the wells were producing more water than was used in stimulating  
32 production. [Nicot et al. \(2014\)](#) noted an inverse relationship between gas and water production but  
33 did not identify the source or mechanism for the excess water. Systematic breaching of the  
34 underlying karstic Ellenburger Formation was not believed likely; nor was operator efficiency or  
35 skill. A number of geologic factors that could impact water migration were identified by ([DOE,  
36 2011a](#)) in the Barnett Shale, including fracture height, aperture size, and density, fracture  
37 mineralization, the presence of karst chimneys underlying parts of the Barnett Shale, and others,  
38 but the impact of these on water migration was undetermined.

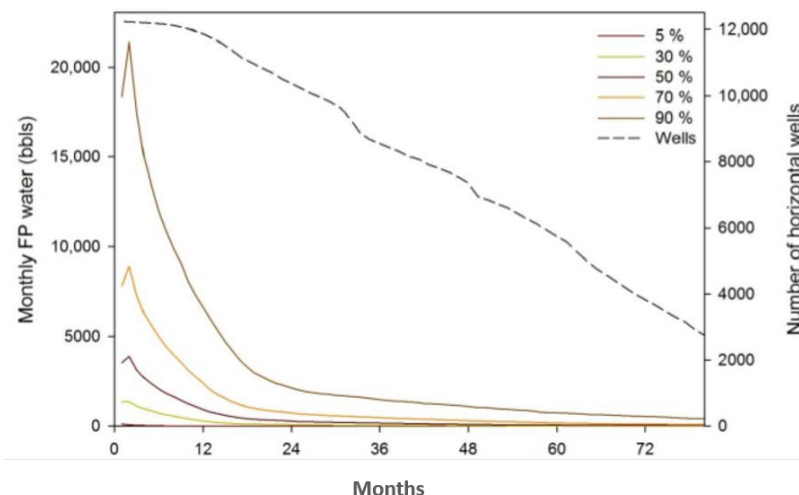

**Figure 7-4. Barnett Shale monthly water-production percentiles (5<sup>th</sup>, 30<sup>th</sup>, 50<sup>th</sup>, 70<sup>th</sup>, and 90<sup>th</sup>) and number of wells with data (dashed line).**

Source: [Nicot et al. \(2014\)](#). FP is the amount of water the flows back to the surface, commingled with water from the formation. Reprinted with permission from [Nicot, JP; Scanlon, BR; Reedy, RC; Costley, RA. \(2014\)](#). Source and fate of hydraulic fracturing water in the Barnett Shale: a historical perspective. Environ Sci Technol 48: 2464-2471. Copyright 2014 American Chemical Society.

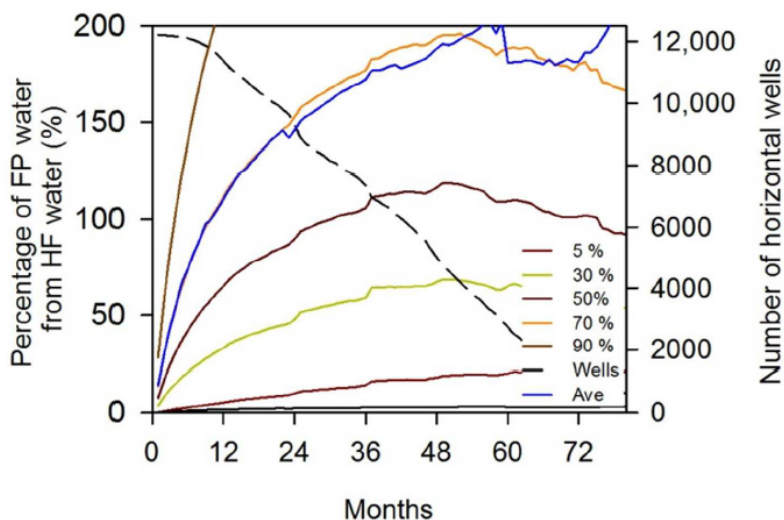

**Figure 7-5. Barnett Shale production data for approximately 72 months.**

Source: [Nicot et al. \(2014\)](#). Flowback and produced water are reported as the percentage of injected fluid. The dashed line shows the number of horizontal wells included. Data for each percentile show declining production with time, but the median production exceeds 100% of the injected fluid. FP is the amount of water the flows back to the surface, commingled with water from the formation. Reprinted with permission from [Nicot, JP; Scanlon, BR; Reedy, RC; Costley, RA. \(2014\)](#). Source and fate of hydraulic fracturing water in the Barnett Shale: a historical perspective. Environ Sci Technol 48: 2464-2471. Copyright 2014 American Chemical Society.

1 The Niobrara, Granite Wash, Eagle Ford, Haynesville, and Fayetteville Shales are relatively dry and  
2 produce between 200 and 2,000 gal (760 to 7,600 L) of produced water per MMCF (Mantell, 2013).  
3 The Utica and Marcellus Shales are viewed as drier and produce less than 200 gal (760 L)  
4 per MMCF. [DOE \(2011a\)](#) concluded that the characteristic small amount of produced water from  
5 the Marcellus Shale was due either to its low water saturation or low relative permeability to water  
6 (see Chapter 6). For dry formations, low shale permeability and high capillarity cause water to  
7 imbibe into the formation, where it is retained permanently ([He, 2011](#)). [Engelder \(2012\)](#) estimated  
8 that more than half of the fracturing fluid could be captured within the Marcellus if imbibition  
9 drove fluid just 5 cm (2 in) deep into reservoir rocks across the fracture surfaces. This estimate is in  
10 agreement with the generalized analysis presented by [Byrnes \(2011\)](#), who estimated depths of 5 to  
11 15 cm (2 to 6 in).

12 After fracture of coalbeds, water is withdrawn to liberate gas. CBM tends to produce large volumes  
13 of water early on: more in fact, than conventional gas-bearing formations ([U.S. GAO, 2012](#)). Within  
14 producing formations, water production can vary for unknown reasons ([U.S. GAO, 2012](#)). Data show  
15 that CBM production in the Powder River Basin produces 16 times more water than in the San Juan  
16 Basin ([U.S. GAO, 2012](#)).

17 The EPA ([2015q](#)) reported characteristics of long-term produced water for shale and tight  
18 formations (see Table 7-3). For shale, horizontal wells produced more water (900 gal/day) than  
19 vertical wells (380 gal/day). Typically, this would be attributed to the longer length of horizontal  
20 laterals than vertical wells, but the data were not normalized to these lengths. The formation-level  
21 data used to develop Table 7-3 appear in Table E-1 of Appendix E.

22 The EPA ([2015q](#)) reported that a general rule of thumb is that flowback occurring in the first 30  
23 days of production is roughly equal to the long-term produced water for unconventional  
24 formations. As a specific example, from Pennsylvania Marcellus Shale data, the EPA determined that  
25 for vertical wells in unconventional formations, 6% of water came from drilling, 35% from  
26 flowback, and 59% from long-term produced water; and for horizontal wells the corresponding  
27 numbers were 9%, 33%, and 58%. These values deviate from the rule of thumb, because the  
28 Marcellus Shale was believed to generate low levels of flowback relative to other formations ([U.S.](#)  
29 [EPA, 2015q](#)).

## 7.2. Flowback and Produced Water Data Sources

30 Unlike the evaluation of hydraulic fracturing fluid itself where the chemical composition may be  
31 disclosed, knowledge concerning flowback and produced water composition comes from  
32 measurements made on samples.

33 A number of factors are involved in the proper sampling and analyzing of environmental media  
34 ([U.S. EPA, 2013e](#); [ATSDR, 2005](#); [U.S. EPA, 1992](#)). There may be significant issues obtaining samples,  
35 because the specialized equipment used to contain high-pressure natural gas is not designed for  
36 producing environmental samples ([Coleman, 2011](#)).

1 To choose the correct analytical methods, it is necessary to have information on:

- 2 • Physical state of the sample.
- 3 • Identification of analytes of interest.
- 4 • Required sensitivity and quantitation limits.
- 5 • Analytical objective (i.e., unknown identification, monitoring).
- 6 • Required sample containers, preservation, and holding times.

7 Because some components of hydraulic fracturing fluid are proprietary chemicals, and subsurface  
8 reaction products may be unknown, prior knowledge of the identity of analytes may not be  
9 available. Consequently, studies may be limited in their ability to determine the presence of either  
10 unknown or proprietary constituents contained in flowback or produced water simply because of  
11 the lack of knowledge of the identities of the constituents.

12 After laboratory analysis, the results are evaluated according to quality criteria. Data may be judged  
13 to meet applicable quality criteria as determined by the analytical methods or they may be  
14 “flagged.” Typically, encountered flags are non-detect, below reporting limit or diluted to meet  
15 calibration requirements or because of matrix interference (e.g., [Hayes, 2009](#)).<sup>1</sup> For produced  
16 water, a primary interference is from high total dissolved solids (TDS). Interferences also arise from  
17 agents which cause foaming and alter surface tension ([Coleman, 2011](#)). Diluted samples result in  
18 higher detection limits, and thus lessen ability to identify lower concentrations in samples.

19 Because of identified limitations in existing methods, the EPA developed new methods for some  
20 reported components of hydraulic fracturing fluids, including ethanols and glycols ([U.S. EPA,  
21 2014k](#)), certain nonionic surfactants ([DeArmond and DiGoregorio, 2013a](#)), and acrylamide  
22 ([DeArmond and DiGoregorio, 2013b](#)).<sup>2,3</sup> Each of these methods are applicable to ground and surface  
23 waters, and the last ([DeArmond and DiGoregorio, 2013b](#)) to waters with TDS well above 20,000  
24 mg/L.

25 Generally, analytical methods are impacted by elevated TDS and chloride concentrations, especially  
26 inorganic and wet chemistry methods ([Nelson et al., 2014](#); [U.S. EPA, 2014b](#); [Coleman, 2011](#)). Matrix  
27 interference impacts standard analysis (EPA Method 8015) for glycols, resulting in high detection  
28 limits (10,000 µg/L to 50,000 µg/L) ([Coleman, 2011](#)).

29 Produced water levels of naturally occurring radionuclides may be 1,000 to 10,000 times the levels  
30 of activity found in typical environmental water samples ([U.S. EPA, 2014b](#)). The standard EPA  
31 method (Method 900.0) for gross alpha and gross beta involves evaporation of the sample to a layer  
32 of residue and analyzing emitted alpha and beta particles. The method has several noted

---

<sup>1</sup> Matrix interference occurs when components of the sample other than the analyte of interest have an effect on a measurement ([IUPAC, 2014](#)).

<sup>2</sup> The compounds included were: Diethylene Glycol, Triethylene Glycol, Tetraethylene Glycol, 2-Butoxyethanol and 2-Methoxyethanol.

<sup>3</sup> The compounds included were: C12-C16 and C18 alcohol ethoxylates, and alkylphenol ethoxylates.



1 limitations, including known under representation of radium 228, and applicability to drinking  
2 water samples with low levels (<500 mg/L) of TDS. As discussed below, produced water can have  
3 much higher TDS levels. Because of these limitations, the EPA (2014b) developed an updated  
4 method for the detection of gross alpha and gross beta to reduce the matrix interferences, although  
5 further improvement is possible.<sup>1</sup>

6 Due to the high ionic strength and dissolved solids concentration of flowback water from shale  
7 operations, Nelson et al. (2014) similarly found that traditional wet chemistry techniques (EPA  
8 Methods 903.0 and 904.0) inefficiently recover radium from samples, with radium-226 recovery  
9 sometimes less than 1% . This concern, which could lead to false negatives, was previously noted by  
10 Demorest and Wallace (1992). Nelson and coauthors demonstrated that an accurate assessment of  
11 flowback radium levels can be performed through nondestructive high-purity germanium gamma  
12 spectroscopy and emanation techniques. Studies reporting radium concentrations obtained directly  
13 via wet chemistry techniques or studies reporting third-party radium data via wet chemistry  
14 techniques may need to be evaluated appropriately as these techniques may underestimate the  
15 total radium loads of produced water (Nelson et al., 2014).

16 Data have been generated from specific produced water studies (e.g., Hayes, 2009) or compilations  
17 from various sources, such as the USGS produced water database developed in 2002 (Breit, 2002)  
18 and updated in 2014 (Blondes et al., 2014). In this database, data were compiled from a variety of  
19 sources, some of which we cite as examples below. The data that appear in this chapter and  
20 Appendix E are drawn individually from scientific literature and published reports, where  
21 necessary we have filled gaps with data from the USGS database.

### 7.3. Background on Formation Characteristics

22 Subsurface processes and resulting flowback and produced water composition vary depending  
23 upon the mineralogy, geochemistry, and structure of formation solids, as well as, residence time  
24 and other factors (Dahm et al., 2011; Blauch et al., 2009). The mineralogy and structure of  
25 formation solids are determined initially by deposition, when rock grains settle out of their  
26 transporting medium (Marshak, 2004). Generally, shale results from clays deposited in deep,  
27 oxygen-poor marine environments, and sandstone results from sand deposited in shallow marine  
28 environments (Ali et al., 2010; U.S. EPA, 2004). Coal forms when carbon-rich plant matter collects in  
29 shallow peat swamps. In the United States, coal is formed in both freshwater and marine  
30 environments (NRC, 2010). In the northern Rocky Mountains, coal formed within freshwater  
31 alluvial systems of streams, lakes, and peat swamps. In contrast are parts of the Black Warrior  
32 formation, which were deposited in brackish and marine settings (Horseley, 1981).

33 Variation in produced water composition follows, in part, from differences in formations which are  
34 related to geologic processes. After deposition, physical, chemical, and biological processes occur as

---

<sup>1</sup> The method developed for determining gross alpha (Th, U, and Po) by liquid scintillation is based on: manganese dioxide coprecipitation followed by group separation of thorium, uranium and polonium on TRU Resin, stripping with ammonium bioxalate, and pulse-shape discrimination liquid scintillation analysis. The average recovery was 74±11% of the known concentration of 230Th with recoveries which ranged from 57% to 104%.

1 sediments and are consolidated and cemented into rocks in a process called diagenesis. These  
2 processes, which can also occur in existing sedimentary rocks, are caused by increased pressure,  
3 temperature, and reaction with mineral-rich ground water ([Rushing et al., 2013](#); [Marshak, 2004](#)).  
4 Diagenesis may either decrease or increase porosity and permeability through sediment  
5 compaction and mineral precipitation, or through grain and cement dissolution ([Ali et al., 2010](#);  
6 [Schmidt and McDonald, 1979](#)). Temperature and pressure greatly affect the types and extent of  
7 subsurface reactions, influencing the solubility of formation solids, saturation of pore waters, and  
8 prevalence of precipitates ([Rushing et al., 2013](#)).

## 7.4. Flowback Composition

9 The composition of returning hydraulic fracturing fluid changes with increasing residence time. In  
10 this section, we present several examples from individual wells which demonstrate how  
11 concentrations approach apparently asymptotic values during the first few days or weeks after  
12 hydraulic fracturing.

### 7.4.1. General Characteristics

13 Several interacting factors that influence the composition of hydraulic fracturing flowback and  
14 produced water are recognized in the scientific literature: (1) the composition of injected hydraulic  
15 fracturing fluids, (2) the targeted geological formation and associated hydrocarbon products,  
16 (3) the stratigraphic environment, and (4) subsurface processes and residence time ([Barbot et al.,  
17 2013](#); [Chapman et al., 2012](#); [Dahm et al., 2011](#); [Blauch et al., 2009](#)).

18 By design, hydraulic fracturing exposes fresh, organic- and mineral-rich surfaces. Subsurface  
19 interactions between injected hydraulic fracturing fluids, formation solids, and formation waters  
20 follow. As residence time increases, allowing in situ interactions between injected fluids, formation  
21 fluids, and formation solids, changes in the geochemical content of flowback occur such that it still  
22 largely reflects that of injected fluids, while later flowback and produced water reflect that of  
23 formation-associated fluid ([Rowan et al., 2011](#)).

### 7.4.2. Temporal Changes in Flowback Composition

24 Ionic loads, metals, naturally occurring radioactive material (NORM), and organics increase in  
25 concentration as water production continues ([Barbot et al., 2013](#); [Murali Mohan et al., 2013](#); [Rowan  
26 et al., 2011](#)). The causes include precipitation and dissolution of salts, carbonates, sulfates, and  
27 silicates; pyrite oxidation; leaching and biotransformation of organic compounds; and mobilization  
28 of NORM and trace elements. Multiple geochemical studies confirm this trend ([Barbot et al., 2013](#);  
29 [Haluszczak et al., 2013](#); [Chapman et al., 2012](#); [Davis et al., 2012](#); [Gregory et al., 2011](#); [Blauch et al.,  
30 2009](#)).

31 Concurrent precipitation of sulfates (e.g.,  $\text{BaSO}_4$ ) and carbonates (e.g.,  $\text{CaCO}_3$ ) alongside decreases  
32 in pH, alkalinity, and dissolved carbon load occur over time ([Orem et al., 2014](#); [Barbot et al., 2013](#);  
33 [Blauch et al., 2009](#); [Brinck and Frost, 2007](#)). Orem and colleagues showed that organics within CBM  
34 produced waters also decrease over time, possibly due to the exhausting of coal-associated waters  
35 through formation pumping ([Orem et al., 2007](#)). Decreases in microbial abundance and diversity  
36 also occur over time after hydraulic fracturing ([Murali Mohan et al., 2013](#); [Davis et al., 2012](#)).


1 The primary dissolution of native and emplaced salts within the formation and the mobilization of  
2 in situ brines constitute the major subsurface processes that control TDS levels in flowback and  
3 produced water ([Dresel and Rose, 2010](#); [Blauch et al., 2009](#)).<sup>1</sup> Leaching of organics appears to be a  
4 result of injected and formation fluids associating with shale and coal strata ([Orem et al., 2014](#)).

### 7.4.3. Total Dissolved Solids Enrichment

5 To varying degrees, produced water is enriched in dissolved solids, and the enrichment is  
6 dependent upon residence time ([Rowan et al., 2011](#)). As an example, TDS concentrations increased  
7 until a limit was reached in flowback and produced water samples from four Marcellus Shale gas  
8 wells in three southwestern Pennsylvanian counties ([Chapman et al., 2012](#)) (see Figure 7-6). As is  
9 shown in Figure 7-7, TDS in flowback from both Westmoreland County wells became consistent  
10 with TDS concentrations cited for typical seawater (35,000 mg/L) within three days, and became  
11 consistent with TDS cited for brines (greater than 50,000 mg/L) within five days ([Chapman et al.,  
12 2012](#)). TDS concentrations during production exceeded 188,000 mg/L for one well in Greene  
13 County. Chapman et al.'s findings are further substantiated by Hayes and colleagues' earlier report  
14 of produced water TDS concentrations in 19 Marcellus Shale wells in Pennsylvania and West  
15 Virginia ([Hayes, 2009](#)). From an initial injected median value of less than 1,000 mg/L, TDS  
16 concentrations increased to a median value exceeding 200,000 mg/L within 90 days ([Hayes, 2009](#)).  
17 In the Marcellus Shale, the cation portion of TDS is typically dominated by sodium and calcium,  
18 whereas the anion portion is dominated by chloride ([Chapman et al., 2012](#); [Blauch et al., 2009](#)). In  
19 section 7.6.4, we note that there is disagreement over whether increased salinity in Marcellus Shale  
20 produced water is due to dissolution of salts or mixing of formation water with hydraulic fracturing  
21 fluid.

---

<sup>1</sup> Native salts are formed inside the rock matrix, and can include evaporite minerals such as halite (NaCl), polyhalite (K<sub>2</sub>Ca<sub>2</sub>Mg(SO<sub>4</sub>)<sub>4</sub>•2H<sub>2</sub>O), celestite (SrSO<sub>4</sub>), anhydrite (CaSO<sub>4</sub>), kieserite (MgSO<sub>4</sub>•H<sub>2</sub>O), or sylvite (KCl) ([Blauch et al., 2009](#)). Hydrologic intrusion emplaces salts within formation pores and fractures ([Blauch et al., 2009](#)).

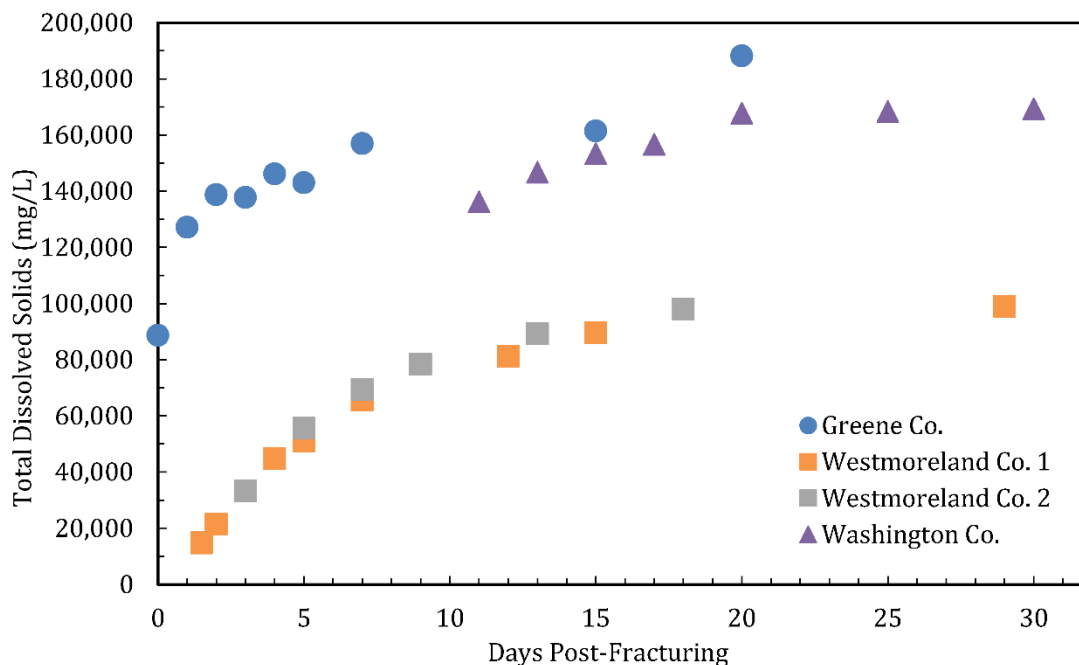


**Figure 7-6. TDS concentrations measured through time for injected fluid (at 0 days), flowback, and produced water samples from four Marcellus Shale gas wells in three southwestern Pennsylvania counties.**

Data from [Chapman et al. \(2012\)](#).

#### 7.4.4. Radionuclide Enrichment

1 Injected fluids used in hydraulic fracturing typically do not contain radioactive material ([Rowan et](#)  
 2 [al., 2011](#)).<sup>1</sup> Shales and sandstones, however, are naturally enriched in various radionuclides, as  
 3 described below ([Sturchio et al., 2001](#)). Radium in pore waters or adsorbed onto clay particles and  
 4 grain coatings can dissolve and return within flowback ([Langmuir and Riese, 1985](#)). Where data are  
 5 available, radium and TDS produced water concentrations are positively correlated with time  
 6 passed since hydraulic fracturing ([Rowan et al., 2011](#); [Fisher, 1998](#)). Radium remains adsorbed to  
 7 mineral surfaces in low saline environments, and then desorbs with increased salinity into solution  
 8 ([Sturchio et al., 2001](#)). Over the course of 20 days, Marcellus Shale produced waters from a gas well  
 9 were enriched almost fourfold in radium and from another gas well were enriched over twofold in  
 10 TDS concentrations as residence time increased ([Chapman et al., 2012](#); [Rowan et al., 2011](#)) (see  
 11 Figure 7-7).

<sup>1</sup> Recycling produced water may introduce radioactive material into hydraulic fracturing fluid. See section 8.4.3 and [PA DEP \(2015b\)](#).

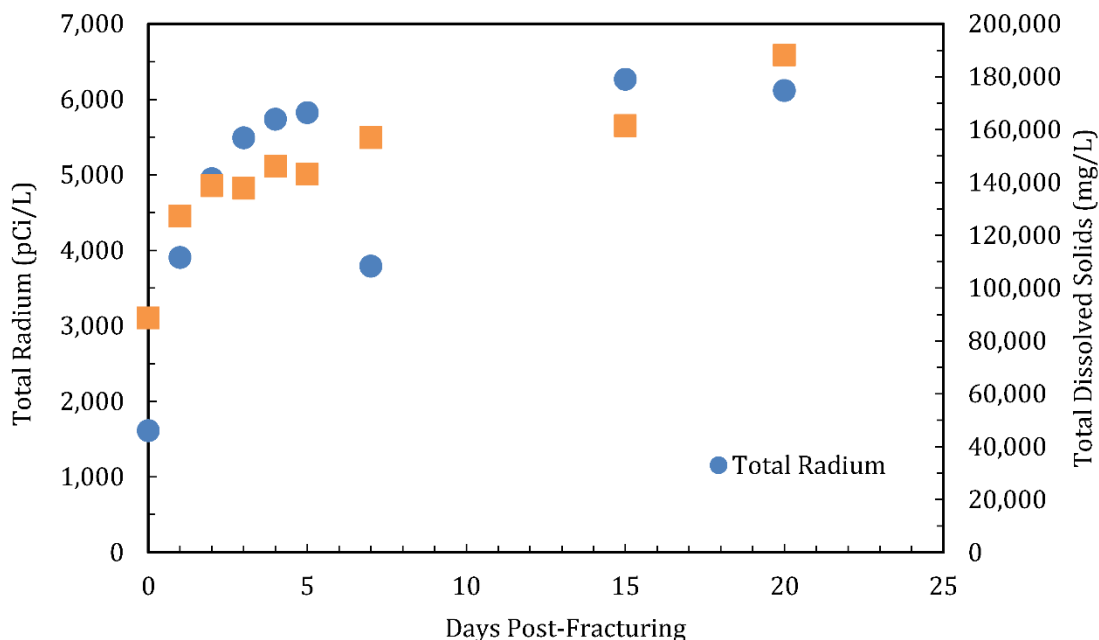

**Figure 7-7. Total radium and TDS concentrations measured through time for injected (day 0), flowback, and produced water samples from mutually exclusive Greene County, PA, Marcellus Shale gas wells.**

Data from [Rowan et al. \(2011\)](#) and [Chapman et al. \(2012\)](#).

#### 7.4.5. Leaching and Biotransformation of Naturally Occurring Organic Compounds

1 Many organics are known to leach naturally into formation water through association with shale,  
 2 sandstone, and coal strata ([Benko and Drewes, 2008](#); [Orem et al., 2007](#)). [Orem et al. \(2014\)](#) show  
 3 that formation and produced waters from shale plays that were not impacted by production  
 4 chemicals contain an array of organic compound classes associated with the formation. When  
 5 unconventional formations are hydraulically fractured, additional organics from the freshly  
 6 fractured hydrocarbon-bearing formation and the chemical additives contribute to a large increase  
 7 in flowback and produced water organic loads ([Orem et al., 2014](#)).

8 The nature of the in-situ hydrocarbons reflects the formation's thermal maturity and heavily  
 9 influences the organic content of the produced water.<sup>1</sup> The Marcellus Shale is largely considered a  
 10 mature formation and therefore consists of wet and dry gas ([Barbot et al., 2013](#); [Repetski et al.,  
 11 2008](#)). Conversely, the Utica Shale is less thermally mature; available hydrocarbon resources  
 12 consist of oil, condensate, and gas ([Repetski et al., 2008](#)). Additionally, some coals within the  
 13 eastern and west-central regions of the San Juan Basin produce little to no water during production,  
 14 due to the regional thermal maturity, hydrostratigraphy, and in situ trapping mechanisms ([New  
 15 Mexico Bureau of Mines and Mineral Resources, 1994](#)).


<sup>1</sup> With increasing subsurface temperature after burial, petroleum source material (kerogen) produces hydrocarbons in a sequence from methane (immature), to oil (more mature), to gas (mature). Gas is produced by thermal cracking of oil ([PA DCNR, 2015](#)).

1 Dissolved organic carbon (DOC) concentrations decrease from hydraulic fracturing through  
2 flowback in shales and coalbeds ([Murali Mohan et al., 2013](#); [Orem et al., 2007](#)). DOC sorption,  
3 dilution with injected or formation water, biochemical reactions, and microbial transformation (i.e.,  
4 biotransformation in the form of degradation or uptake) may all cause decreased concentrations of  
5 DOC during flowback. Organic chemical additives injected during hydraulic fracturing offer a novel  
6 carbon and energy source for biotic and abiotic reactions at depth. Injected organics include many  
7 sugar-based polymer formulations, most notably of galactose and mannose (i.e., guar gum used as a  
8 gelling agent); hydrocarbon distillates used in crosslinkers, friction reducers, and gelling agents;  
9 and ethyl and ether glycol formulations used in non-emulsifiers, crosslinkers, friction reducers, and  
10 gelling agents. ([Wuchter et al., 2013](#); [Arthur et al., 2009b](#); [Hayes, 2009](#)).

11 DOC and chloride concentrations exhibit strongly correlated inverse temporal trends ([Barbot et al.,](#)  
12 [2013](#); [Chapman et al., 2012](#)) for flowback and produced water samples obtained from three  
13 Marcellus Shale wells from the same well pad in Greene County, Pennsylvania ([Cluff et al., 2014](#)), as  
14 shown in Figure 7-8. Chloride concentrations increased five- to six-fold as a function of residence  
15 time (i.e., cumulative volumes of produced water). These chloride concentrations followed an  
16 increasing linear trend during the first two weeks of flowback (see Figure 7-8a, inset) then began to  
17 approach asymptotic levels later in production, indicating that injected fluids had acquired a brine  
18 signature as a result of subsurface mixing, fluid-solid interactions, and mineral dissolution  
19 processes.

20 DOC concentrations exhibit an inverse trend and decreased through flowback and production  
21 (Figure 7-8b) ([Cluff et al., 2014](#)). DOC levels decreased approximately twofold between injected  
22 fluid and initial flowback samples (Figure 7-8b, inset). DOC concentrations decreased by 11-fold  
23 over the study's time frame (nearly 11 months) and leveled off several months after hydraulic  
24 fracturing, presumably as a result of in situ attenuation processes ([Cluff et al., 2014](#)).



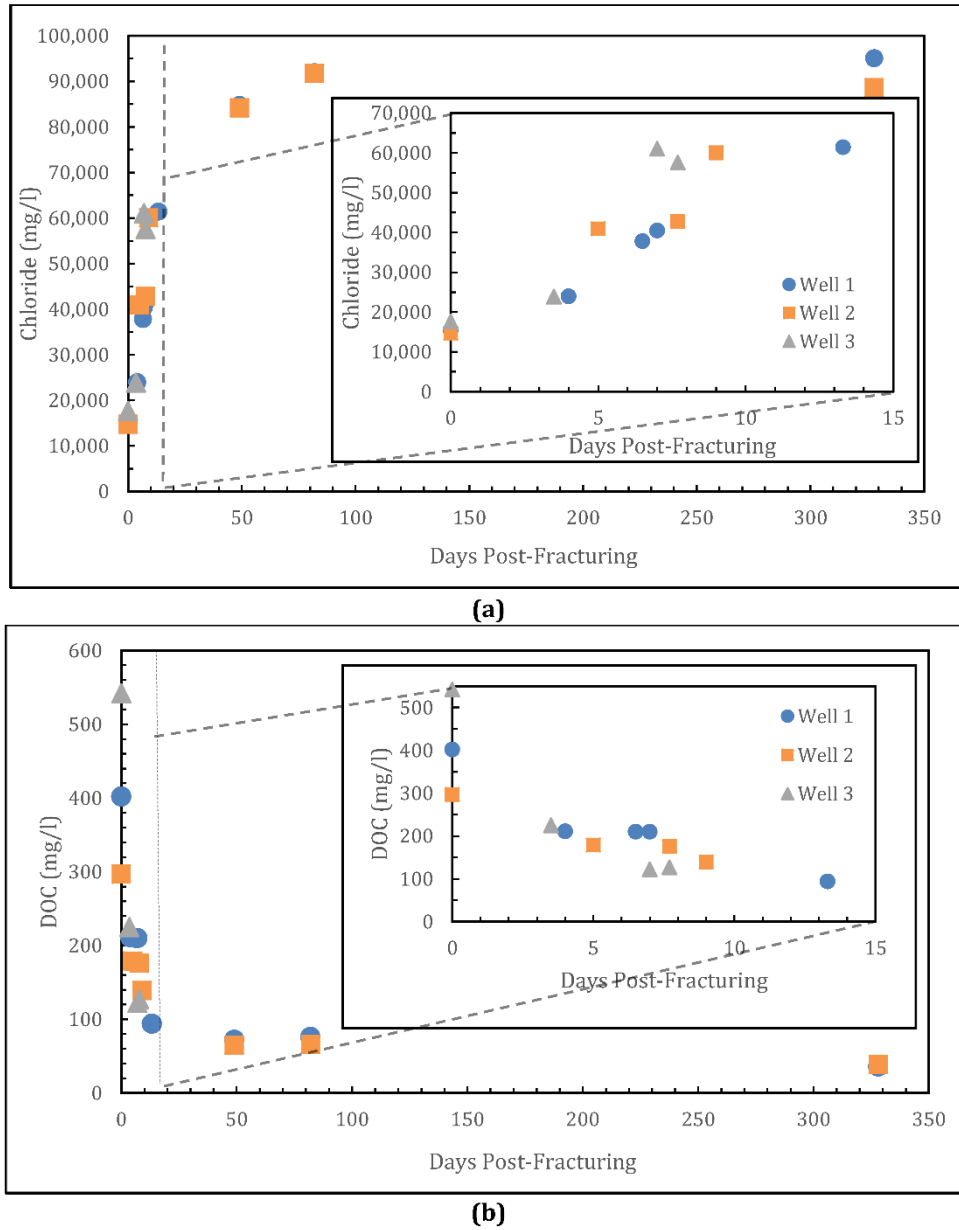

**Figure 7-8. (a) Chloride (Cl) and (b) DOC concentrations measured through time for injected (day 0), flowback, and produced water samples obtained from three Marcellus Shale gas wells from a single well pad in Greene County, PA used for hydraulic fracturing.**

Data from [Cluff et al. \(2014\)](#). Reprinted with permission from Cluff, M; Hartsock, A; Macrae, J; Carter, K; Mouser, PJ. (2014). Temporal changes in microbial ecology and geochemistry in produced water from hydraulically fractured Marcellus Shale Gas Wells. Environ Sci Technol 48: 6508-6517. Copyright 2014 American Chemical Society.

1 [Orem et al. \(2014\)](#) conducted a temporal study of two coalbed wells over the course of one year.  
2 Their results suggest that organic compound concentrations decrease over time. This trend may be  
3 due to pumping of water to the surface, which may exhaust coal-associated produced water.  
4 Subsequent produced water would not be associated with the coal. This suggests that the early  
5 produced water would contain the highest organic load ([Orem et al., 2014](#)).

6 As noted above, most literature addresses general organic parameters such as bulk total organic  
7 carbon (TOC) or DOC instead of individual organic compounds ([Sirivedhin and Dallbauman, 2004](#)).  
8 Emphasis on the prevalence of bulk organics as opposed to unique organics is due largely to the  
9 lack of analytical standards for many compounds and also a lack of knowledge regarding the types  
10 of organics to test in produced water samples ([Schlegel et al., 2013](#); [Strong et al., 2013](#)).

## 7.5. Produced Water Composition

11 In this section, we discuss the characteristics of aggregated produced water data without regard for  
12 temporal changes. Similarities between conventional and unconventional produced water are  
13 noted and the variability between formation types is described. As we discuss below, produced  
14 water may contain a range of constituents, but in widely varying amounts. Generally, these may  
15 include:

- 16 • Salts, including those composed from chloride, bromide, sulfate, sodium, magnesium and  
17 calcium.
- 18 • Metals including barium, manganese, iron, and strontium.
- 19 • Dissolved organics including BTEX and oil and grease.
- 20 • Radioactive materials including radium (radium-226 and radium-228).
- 21 • Hydraulic fracturing chemicals and their transformation products.

22 We discuss these groups of chemicals and then conclude by discussing variability within formation  
23 types and within production zones.

### 7.5.1. Similarity of Produced Water from Conventional and Unconventional Formations

24 Unconventional produced water is reported to be similar to conventional produced waters in terms  
25 of TDS, pH, alkalinity, oil and grease, TOC, and other organics and inorganics ([Wilson, 2014](#);  
26 [Haluszczak et al., 2013](#); [Alley et al., 2011](#); [Hayes, 2009](#); [Sirivedhin and Dallbauman, 2004](#)). Although  
27 salinity varies in shales and tight formations, produced water is typically characterized as saline  
28 ([Lee and Neff, 2011](#); [Blauch et al., 2009](#)). Produced water is also enriched in major anions (e.g.,  
29 chloride, bicarbonate, sulfate), cations (e.g., sodium, calcium, magnesium), metals (e.g., barium,  
30 strontium), naturally occurring radionuclides (e.g., radium-226 and radium-228) ([Chapman et al.,](#)  
31 [2012](#); [Rowan et al., 2011](#)), and organics (e.g., hydrocarbons) ([Orem et al., 2007](#); [Sirivedhin and](#)  
32 [Dallbauman, 2004](#)).

### 7.5.2. Variability in Produced Water Composition Among Unconventional Formation Types

33 [Alley et al. \(2011\)](#) compared geochemical parameters of shale gas, tight gas, and CBM produced  
34 water. This comparison aggregated data on produced water from original analyses, peer-reviewed

1 literature, and public and confidential government and industry sources and determined the  
 2 statistical significance of the results. As shown in Table 7-4, [Alley et al. \(2011\)](#) found that of the  
 3 constituents of interest common to all three types of unconventional produced water (calcium,  
 4 chloride, potassium, magnesium, manganese, sodium, and zinc):

- 5 1) Shale gas produced water had significantly different concentrations from those of CBM;
- 6 2) Shale gas produced water constituent concentrations were significantly similar to those of  
 7 tight gas, except for potassium and magnesium; and
- 8 3) Five tight gas produced water constituent concentrations (calcium, chloride, potassium,  
 9 magnesium, and sodium) were significantly similar to those of CBM ([Alley et al., 2011](#)).

10 The degree of variability between produced waters of these three resource types is consistent with  
 11 the degree of mineralogical and geochemical similarity between shale and sandstone formations,  
 12 and the lack of the same between shale and coalbed formations ([Marshak, 2004](#)).

**Table 7-4. Compiled minimum and maximum concentrations for various geochemical constituents in unconventional shale gas, tight gas, and CBM produced water (Alley et al., 2011).**

Source: ([Alley et al., 2011](#)).

Parameter	Unit	Shale gas <sup>a</sup>	Tight gas <sup>b</sup>	CBM <sup>c</sup>
Alkalinity	mg/L	160–188	1,424	54.9–9,450
Ammonium-N	mg/L	-	2.74	1.05–59
Bicarbonate	mg/L	ND–4,000	10–4,040	-
Conductivity	µS/cm	-	24,400	94.8–145,000
Nitrate	mg/L	ND–2,670	-	0.002–18.7
Oil and grease	mg/L	-	42	-
pH	SU <sup>d</sup>	1.21–8.36	5–8.6	6.56–9.87
Phosphate	mg/L	ND–5.3	-	0.05–1.5
Sulfate	mg/L	ND–3,663	12–48	0.01–5,590
Radium-226	pCi/g	0.65–1.031	-	-
Aluminum	mg/L	ND–5,290	-	0.5–5,290
Arsenic	mg/L	-	0.17	0.0001–0.06
Boron	mg/L	0.12–24	-	0.002–2.4
Barium	mg/L	ND–4,370	-	0.01–190

*This document is a draft for review purposes only and does not constitute Agency policy.*

Parameter	Unit	Shale gas <sup>a</sup>	Tight gas <sup>b</sup>	CBM <sup>c</sup>
<b>Bromine</b>	mg/L	ND–10,600	-	0.002–300
<b>Calcium</b>	mg/L	0.65–83,950	3–74,185	0.8–5,870
<b>Cadmium</b>	mg/L	-	0.37	0.0001–0.01
<b>Chlorine</b>	mg/L	48.9–212,700	52–216,000	0.7–70,100
<b>Chromium</b>	mg/L	-	0.265	0.001–0.053
<b>Copper</b>	mg/L	ND–15	0.539	ND–0.06
<b>Fluorine</b>	mg/L	ND–33	-	0.05–15.22
<b>Iron</b>	mg/L	ND–2,838	0.015	0.002–220
<b>Lithium</b>	mg/L	ND–611	-	0.0002–6.88
<b>Magnesium</b>	mg/L	1.08–25,340	2–8,750	0.2–1,830
<b>Manganese</b>	mg/L	ND–96.5	0.525	0.002–5.4
<b>Mercury</b>	mg/L	-	-	0.0001–0.0004
<b>Nickel</b>	mg/L	-	0.123	0.0003–0.20
<b>Potassium</b>	mg/L	0.21–5,490	5–2,500	0.3–186
<b>Sodium</b>	mg/L	10.04–204,302	648–80,000	8.8–34,100
<b>Strontium</b>	mg/L	0.03–1,310	-	0.032–565
<b>Uranium</b>	mg/L	-	-	0.002–0.012
<b>Zinc</b>	mg/L	ND–20	0.076	0.00002–0.59

-, no value available; ND, non-detect. If no range, but a singular concentration is given, this is the maximum concentration.

<sup>a</sup>  $n = 541$ . [Alley et al. \(2011\)](#) compiled data from [USGS \(2006\)](#); [McIntosh and Walter \(2005\)](#); [McIntosh et al. \(2002\)](#) and confidential industry documents.

<sup>b</sup>  $n = 137$ . [Alley et al. \(2011\)](#) compiled data from [USGS \(2006\)](#) and produced water samples presented in [Alley et al. \(2011\)](#).

<sup>c</sup> [Alley et al. \(2011\)](#) compiled data from [Montana GWIC \(2009\)](#); [Thordsen et al. \(2007\)](#); [ESN Rocky Mountain \(2003\)](#); [Rice et al. \(2000\)](#); [Rice \(1999\)](#); [Hunter and Moser \(1990\)](#).

<sup>d</sup> SU = standard units.

- 1 Shale gas produced water tends to be more acidic, as well as, enriched in strontium, barium, and
- 2 bromide. CBM produced water is highly alkaline, and it contains relatively low concentrations of
- 3 TDS (one to two orders of magnitude lower than in shale and sandstone). It also contains lower
- 4 levels of sulfate, calcium, magnesium, DOC, sodium, bicarbonate, and oil and grease than typically

1 observed in shale and sandstone produced waters ([Alley et al., 2011](#); [Dahm et al., 2011](#); [Benko and](#)  
2 [Drewes, 2008](#); [Van Voast, 2003](#)).<sup>1</sup>

### 7.5.3. General Water Quality Parameters

3 For this assessment, the EPA identified data characterizing the content of unconventional flowback  
4 and produced water in a total of 12 shale and tight formations and CBM basins. These formations  
5 and basins span 18 states. Note that in this subsection we treat all fluids as produced. As a  
6 consequence, the variability of reported concentrations is likely higher than if the data could be  
7 standardized to a specific point on the flowback-to-produced water continuum.

8 For most formations, the amount of general water quality parameter data is variable (see Table E-2  
9 of Appendix E). Average pH levels range from 5.87 to 8.19, with typically lower values for shales.  
10 Larger variations in average specific conductivity are seen among unconventional formations and  
11 range from 213 microsiemens ( $\mu\text{S}$ )/cm in the Bakken Shale to 184,800  $\mu\text{S}/\text{cm}$  in Devonian  
12 sandstones (see Table E-2 of Appendix E). Shale and tight formation produced waters are enriched  
13 in suspended solids, as reported concentrations for total suspended solids and turbidity exceed  
14 those of coalbeds by one to two orders of magnitude.

15 Of the data presented in Table E-3 of Appendix E, differences are evident between the Black  
16 Warrior and the three western formations (Powder River, Raton, and San Juan). The Black Warrior  
17 is higher in average chloride, specific conductivity, TDS, TOC and total suspended solids; and lower  
18 in alkalinity and bicarbonate than the other three. These differences are due to the saline or  
19 brackish conditions during deposition in the Black Warrior that contrast to the freshwater  
20 conditions for the western basins.

21 The average dissolved oxygen (DO) concentrations of CBM produced water range from 0.39-1.07  
22 mg/L (see Table E-3 Appendix E). By comparison, well-oxygenated surface water can contain up to  
23 10 mg/L DO at 15 °C ([U.S. EPA, 2012a](#)). Thus, coalbed produced water is either hypoxic (less than 2  
24 mg/L DO) or anoxic (less than 0.5 mg/L DO) and could contribute to aquatic organism stress ([USGS,](#)  
25 [2010](#); [NSTC, 2000](#)).

### 7.5.4. Salinity and Inorganics

26 The TDS profile of unconventional produced water is dominated by sodium and chloride, with large  
27 contributions to the profile from mono- and divalent cations ([Sun et al., 2013](#); [Guerra et al., 2011](#)).  
28 In order of relative abundance, the following inorganic ions are typically found in highly saline  
29 conventional produced water: sodium, chloride, calcium, magnesium, potassium, sulfate, bromide,  
30 strontium, bicarbonate, and iodide ([Lee and Neff, 2011](#)). Shale and sandstone produced water tend  
31 to be characterized as sodium-chloride-calcium water types, whereas CBM produced water tends to  
32 be characterized as sodium chloride or sodium bicarbonate water types ([Dahm et al., 2011](#)).  
33 Elevated levels of bromide, sulfate, and bicarbonate are also present ([Sun et al., 2013](#)). Elevated  
34 strontium and barium levels are characteristic of Marcellus Shale flowback and produced water

---

<sup>1</sup> Several had low representation in the [Alley et al. \(2011\)](#) data set, including the Appalachian Basin (western New York and western Pennsylvania), West Virginia, eastern Kentucky, eastern Tennessee, and northeastern Alabama.

1 ([Barbot et al., 2013](#); [Haluszczak et al., 2013](#); [Chapman et al., 2012](#)). Data representing shales and  
2 tight formations are presented in Table E-4 of Appendix E.

3 [Rowan et al. \(2015\)](#) acknowledge that the origin of saline water produced from the Marcellus Shale  
4 is a matter of debate. One idea is that injected fluid returns at higher salinity, because of dissolving  
5 halite and other minerals found in shale ([Blauch et al., 2009](#)). Blauch and colleagues hypothesized  
6 that salt layers bearing barium, calcium, iron, potassium, magnesium, sodium, and strontium likely  
7 dissolve and contribute to flowback and produced water salinity ([Blauch et al., 2009](#)). However,  
8 actual mixing of formation water and fracturing fluid was postulated by [Haluszczak et al. \(2013\)](#)  
9 from arguments based on the near-neutral pH and low levels of chloride and sulfate in the  
10 Marcellus data from [Hayes \(2009\)](#), as well as, the relationship between chloride and bromide. Engle  
11 and Rowan determined that water chemistry during the first 90 days of production is controlled by  
12 mixing of injected and formation waters and stimulation of bacterial sulfate reduction ([Engle and](#)  
13 [Rowan, 2014](#); [Haluszczak et al., 2013](#)). [Rowan et al. \(2015\)](#) argue, based on an observed shift to  
14 isotopically heavier water, that produced water actually contains formation water.<sup>1</sup> Alternately,  
15 [Barbot et al. \(2013\)](#) concluded from analysis of Marcellus Shale produced water that mixing (with  
16 formation water) alone could not explain the observed patterns in chloride concentrations.

17 Marcellus Shale produced water salinities range from less than 1,500 mg/L to over 300,000 mg/L,  
18 as shown by [Rowan et al. \(2011\)](#). By comparison, the average salinity concentration for seawater is  
19 35,000 mg/L. The TDS concentration of CBM produced water can be as low as 500 mg/L ranging to  
20 nearly 50,000 mg/L ([Dahm et al., 2011](#); [Benko and Drewes, 2008](#); [Van Voast, 2003](#)). Lower  
21 dissolved solids are expected from CBM produced water, in part, because some coals developed in  
22 fresh water environments ([Bouska, 1981](#)). [Dahm et al. \(2011\)](#) report TDS concentrations from a  
23 composite CBM produced water database ( $n = 3,255$ ) for western basins that often are less than  
24 5,000 mg/L (85% of samples). In other cases, as for the Black Warrior basin, TDS can be higher  
25 along with concentrations of species that contribute to TDS (See Table E-5 Appendix E), such as  
26 calcium, chloride, and sodium.

### 7.5.5. Metals

27 The metals content of unconventional produced water varies by well and site lithology, but is  
28 typically dominated by the same metals that are associated with conventional produced water.  
29 Unconventional produced water may also contain low levels of heavy metals (e.g., chromium,  
30 copper, nickel, zinc, cadmium, lead, arsenic, and mercury) ([Hayes, 2009](#)). Data illustrating metal  
31 concentrations in produced water appear in Tables E-6 and E-7 of Appendix E.

---

<sup>1</sup> The produced water becomes isotopically heavier because of increased prevalence of Oxygen-18 in the water, compared to the more prevalent Oxygen-16.



### 7.5.6. Naturally Occurring Radioactive Material (NORM) and Technologically Enhanced Naturally Occurring Radioactive Material (TENORM)

#### 7.5.6.1. Formation Solids Levels of NORM

1 Elevated uranium levels in formation solids have been used to identify potential areas of natural  
2 gas production for decades ([Fertl and Chilingar, 1988](#)). Marine black shales are estimated to contain  
3 an average of 15–60 ppm uranium depending on depositional conditions ([Fertl and Chilingar,  
4 1988](#)). Shales that bear significant levels of uranium include the Barnett in Texas, the Woodford in  
5 Oklahoma, the New Albany in the Illinois Basin, the Chattanooga Shale in the southeastern United  
6 States, and a group of black shales in Kansas and Oklahoma ([Swanson, 1955](#)).

#### 7.5.6.2. Produced Water Levels of TENORM

7 When exposed to the environment or concentrated NORM is termed technologically-enhanced  
8 naturally-occurring radioactive material (TENORM).<sup>1</sup> Radioactive materials commonly present in  
9 shale and sandstone sedimentary environments include uranium, thorium, radium, and their decay  
10 products. These are present in most unconventional produced water, but particularly so in  
11 Marcellus Shale produced water ([Rowan et al., 2011](#); [Fisher, 1998](#)). Low levels of uranium and  
12 thorium return during flowback, typically in the concentrated form of mineral phases or organic  
13 matter, due to insolubility under prevailing reducing conditions encountered within shale  
14 formations ([Nelson et al., 2014](#); [Sturchio et al., 2001](#)).

15 Conversely, radium, a decay product of uranium and thorium, is known to be relatively soluble  
16 within the redox range encountered in subsurface environments ([Sturchio et al., 2001](#); [Langmuir  
17 and Riese, 1985](#)). Dissolved radium primarily occurs as Ra<sup>2+</sup>, but it complexes with carbonate,  
18 chloride, and sulfate ions as well ([Sturchio et al., 2001](#); [Langmuir and Riese, 1985](#)). Ra<sup>2+</sup> can also  
19 substitute for various cations (e.g., Ba<sup>2+</sup>, Ca<sup>2+</sup>, and Sr<sup>2+</sup>) during mineral precipitation, as is  
20 sometimes the case with barite or anhydrite precipitation ([Rowan et al., 2011](#)).

21 Data from the Marcellus Shale show that radium and TDS produced water concentrations are  
22 positively correlated ([Rowan et al., 2011](#); [Fisher, 1998](#)). This pattern is expected for other  
23 formations because radium remains adsorbed to mineral surfaces in low salinity environments,  
24 then desorbs as solution salinity increases ([Sturchio et al., 2001](#)). Controlling for this TDS  
25 dependence, Marcellus Shale produced water contains statistically more radium than  
26 non-Marcellus Shale produced water, with a median total radium content of 2,460 picocuries per  
27 liter (pCi/L) ( $n = 52$ ) compared to 1,011 pCi/L ( $n = 91$ ), respectively (Rowan et al., 2011). Radium  
28 levels in Marcellus produced water are at several thousand picocuries per liter, with maximum  
29 concentrations of total radium (radium-226 and radium-228), radium-226 and radium-228  
30 reported at approximately 18,000, 9,000, and 1,300 pCi/L, respectively ([Rowan et al., 2011](#)) (see  
31 Table E-8 in Appendix E). Data from the Pennsylvania TENORM produced water study (PA DEP,

---

<sup>1</sup> The U.S. EPA Office of Radiation (<http://www.epa.gov/radiation/tenorm/>) states that technologically enhanced naturally occurring radioactive material (TENORM) is produced when activities such as uranium mining, or sewage sludge treatment, concentrate or expose radioactive materials that occur naturally in ores, soils, water, or other natural materials. Formation water containing radioactive materials would contain NORM, because they are not exposed; produced water would contain TENORM because it has been exposed to the environment.

1 2015) showed similar elevated levels, and consistently showed higher medians in unconventional  
 2 compared to conventional formations (Table E-8 in Appendix E).

### 7.5.7. Organics

3 The organic content of produced water varies by well and lithology, but consists of certain naturally  
 4 occurring and injected organic compounds. These organics may be dissolved in water or, for the  
 5 case of oil production, in the form of a separate or emulsified phase. Produced water organics can  
 6 contain any of the following: (1) volatile organic compounds (VOCs) such as benzene and toluene,  
 7 (2) semi-volatile organic compounds (SVOCs) such as phenols; and/or (3) non-VOCs such as  
 8 macromolecular natural organic matter ([Orem et al., 2014](#); [Hayes, 2009](#); [Benko and Drewes, 2008](#);  
 9 [Orem et al., 2007](#); [Sirivedhin and Dallbauman, 2004](#)). Table 7-5 presents data from naturally  
 10 occurring organic chemicals in produced water.

**Table 7-5. Concentration ranges (mg/L) of several classes of naturally occurring organic chemicals in conventional produced water worldwide (reported in Neff, 2002).**

Source: ([Neff, 2002](#))

Chemical class	Concentration range (mg/L)
TOC	≤0.1–>11,000
Total organic acids	≤0.001–10,000
Total saturated hydrocarbons	17–30
Total benzene, toluene, ethylbenzene, and xylenes (BTEX)	0.068–578
Total PAH	0.040–3
Total steranes/triterpanes	0.140–0.175
Ketones	1–2
Total phenols (primarily C <sub>0</sub> –C <sub>5</sub> phenols)	0.400–23

11 Several classes of naturally occurring organic chemicals are present in conventional and  
 12 unconventional produced waters, with large concentration ranges ([Lee and Neff, 2011](#)). In addition  
 13 to data on total organic carbon (TOC) and dissolved organic carbon (DOC) as indicators of the  
 14 presence of organics, specifically identified organics include saturated hydrocarbons, BTEX, and  
 15 polycyclic aromatic hydrocarbon (PAHs) (see Table E-9 of Appendix E). Data are lacking on the  
 16 presence and concentration of many other types of organic chemicals that might be present in  
 17 produced water, because of their use in hydraulic fracturing fluid. There are a number of reasons  
 18 for this difference, some of which could be related to analytical limitations, limited focus of  
 19 produced water studies, and undocumented subsurface reactions.

### 7.5.8. Reactions within Formations

20 The introduction of hydraulic fracturing fluids into the target formation induces a number of  
 21 changes to formation solids and fluids that influence the chemical evolution and composition of

1 flowback and produced water. These changes can result from physical processes (e.g., rock  
2 fracturing and fluid mixing) and geochemical processes (e.g., introducing novel, oxygenated fluids)  
3 that mobilize trace or major constituents into solution.

4 The creation of fractures exposes new formation surfaces to interactions involving hydraulic  
5 fracturing fluids and existing formation fluids. Formations targeted for unconventional  
6 development are composed of detrital, cement, and organic fractions. For example, elements  
7 potentially available for mobilization when exposed via fracturing include calcium, magnesium,  
8 manganese, and strontium in cement fractions, and silver, chromium, copper, molybdenum,  
9 niobium, vanadium, and zinc in organic fractions. The storage or release of these elements in newly  
10 exposed surfaces is variable and not well studied, in part due to the vast number of possible  
11 interactions occurring continuously in the environment at the rock surface ([Vine and Tourtelot,  
12 1970](#)).

13 Contact with and physical mixing of hydraulic fracturing fluids with existing formation brines also  
14 influences the geochemical evolution of produced water. For instance, Marcellus Shale brines have  
15 high concentrations of bromide, calcium, chloride, magnesium, sodium, and strontium ([Engle and  
16 Rowan, 2014](#)). Hydraulic fracturing fluid contains elevated levels of DOC, alkalinity, and sulfate  
17 ([Engle and Rowan, 2014](#)). Consequently, flowback acquires a geochemical signature reflecting both  
18 injected and formation fluids. Produced water containing both Although some constituents of  
19 hydraulic fracturing fluids are known to readily degrade in the environment, little is known  
20 regarding how the subsurface degradation proceeds or how the constituents interact within a  
21 complex matrix of organics ([Mouser et al., In Press](#)).

## 7.6. Spatial Trends

22 As was reported for the volume of produced water (see Section 7.2.2), the composition of produced  
23 water varies spatially on a regional to local scale according to the geographic and stratigraphic  
24 locations of each well within a hydraulically fractured formation ([Bibby et al., 2013](#); [Lee and Neff,  
25 2011](#)). Spatial variability of produced water content occurs (1) between plays of different rock  
26 sources (e.g., coal vs. sandstone), (2) between plays of the same rock type (e.g., Barnett Shale vs.  
27 Bakken Shale), and (3) within formations of the same source rock (e.g., northeastern vs.  
28 southwestern Marcellus Shale) ([Barbot et al., 2013](#); [Alley et al., 2011](#); [Breit, 2002](#)).

29 Geographic variability in produced water content has been established at a regional scale for  
30 conventional produced water. As an example, [Benko and Drewes \(2008\)](#) demonstrate TDS  
31 variability in conventional produced water among fourteen western geologic basins (e.g., Williston,  
32 San Juan, and Permian Basins). Median TDS in these basins range from as low as 4,900 mg/L in the  
33 Big Horn Basin to as high as 132,400 mg/L in the Williston Basin based on over 133,000 produced  
34 water samples from fourteen basins ([Benko and Drewes, 2008](#)).<sup>1</sup>

---

<sup>1</sup> Data were drawn from the USGS National Produced Water Geochemical Database v2.0. Published updates made in October 2014 to the database (v2.1) are not reflected in this document.

1 High TDS (more than 200,000 ppm) is common throughout the central portion of the United States  
2 in various basins. Low TDS (<10,000 ppm) was found in the basins of the Rocky Mountains, and  
3 sometimes in Texas and California. In other areas, there was a mixture of mid-range, which in the  
4 case of Illinois was correlated to the depth of producing zones ([Breit, 2002](#)).

5 Data further illustrating variability within shale, tight-gas and coalbed formations at both the  
6 formation and local scales are presented and discussed in Section E-3 of Appendix E.

## 7.7. Spill Impacts on Drinking Water Resources

7 Surface spills of flowback and produced water from unconventional oil and gas production have  
8 occurred across the country and in some cases have caused impacts to drinking water resources, as  
9 described in this section. Released fluids, if not contained on-site, may flow into nearby surface  
10 waters or infiltrate into ground water via soil. In this section, we first briefly describe the potential  
11 for spills from produced water handling equipment. Next, we address individually-reported spill  
12 events. These have originated from pipeline leaks, well blowouts, well communication events, and  
13 leaking pits and impoundments. We then summarize several studies of aggregated spill data, most  
14 of which are based on state agency spill reports. The section concludes with discussion of two cases.

### 7.7.1. Produced Water Management and Spill Potential

15 Produced water is typically transported from the wellhead through a series of pipes or flowlines to  
16 on-site storage or treatment units ([GWPC and IOGCC, 2014](#)). Faulty connections at either end of the  
17 transfer process or leaks or ruptures in the lines carrying the fluid can result in surface spills.

18 Recovered fluids may be transferred to surface impoundments for long-term storage and  
19 evaporation. Surface impoundments are typically uncovered earthen pits that may or may not be  
20 lined. Recovered fluids may overflow from surface impoundments due to improper pit design and  
21 weather events.

22 Produced water that is to be treated or disposed of off-site is typically stored in storage tanks or  
23 impoundments until it can be loaded into transport trucks for removal ([Gilmore et al., 2013](#)). Tank  
24 storage systems are typically closed loop systems in which produced water is transported from the  
25 wellhead to aboveground storage tanks through interconnecting pipelines ([GWPC and IOGCC,  
26 2014](#)). Failure of connections and lines during the transfer process or the failure of a storage tank  
27 can result in a surface release of fluids.

28 Depending on its characteristics, produced water, may be recycled and reused on-site. It can be  
29 directly reused without treatment (after blending with freshwater) or it can be treated on-site prior  
30 to reuse ([Boschee, 2014](#)). As with other flowback management options, these systems also present  
31 spill potential during transfer of fluids.

## 7.7.2. Spills of Hydraulic Fracturing Flowback and Produced Water from Unconventional Oil and Gas Production

### 7.7.2.1. Pipeline Leaks

1 In some locations, pipelines are used to transport produced water. Aggregated information on  
2 pipeline leaks from the whole country is not available. This section, rather, contains examples of  
3 incidents that have occurred. A leak was detailed in a field report from [PA DEP \(2009a\)](#), which  
4 described a leak from a 90-degree bend in an overland pipe carrying a mixture of flowback and  
5 freshwater between two impoundments. Along a 0.4 mi (0.6 km) length of the impacted stream,  
6 168 fish and 6 salamanders were killed; beyond a confluence at 0.6 km with a creek no additional  
7 dead fish were found. The release was estimated at 250 bbl (11,000 gal or 40,000 L). In response to  
8 the incident, the pipeline was shut off, a dam was constructed for recovering the water, water was  
9 vacuumed from the stream, and the stream was flushed with fresh water ([PA DEP, 2009a](#)).

10 In January 2015, 70,000 barrels (2,940,000 gal or 11,130,000 L) of produced water containing  
11 petroleum hydrocarbons ([North Dakota Department of Health, 2015](#)) were released from a broken  
12 pipeline that crosses Blacktail Creek in Williams County, ND. The response included placing  
13 adsorbent booms in the creek, excavating contaminated soil, removing oil-coated ice, and removing  
14 produced water from the creek. The electrical conductivity and chloride concentration in water  
15 along the creek, the Little Muddy River, and Missouri River were found to be elevated above  
16 background levels, as were samples taken from ground water recovery trenches.

17 More incidents from North Dakota are documented at the North Dakota Department of Health  
18 (NDDOH) Environmental Health web site (see <http://www.ndhealth.gov/EHS/Spills/>). For the  
19 period from November, 2012 to November 2013, NDDOH reported 552 releases of produced water  
20 which were retained within the boundaries of the production or exploration facility and 104 which  
21 were not (see [http://www.ndhealth.gov/ehs/foia/spills/ChartWebPageOG\\_20121101\\_](http://www.ndhealth.gov/ehs/foia/spills/ChartWebPageOG_20121101_20131111.pdf)  
22 [20131111.pdf](http://www.ndhealth.gov/ehs/foia/spills/ChartWebPageOG_20121101_20131111.pdf)).

### 7.7.2.2. Well Blowouts

23 Fingerprinting of water from two monitoring wells in Killdeer, ND, was used to determine that  
24 brine contamination in the two wells resulted from a well blowout during a hydraulic fracturing  
25 operation. Although the target formation was the Bakken Shale, data indicated that the residual  
26 signatures of the brine were characteristic of the overlying Madison limestone formation ([U.S. EPA, 2015j](#)).  
27 Prior research into out-of-zone hydraulic fracturing of the Bakken formation indicated that  
28 a large number of hydraulically fractured wells contain water that is external to the Bakken Zone  
29 ([Arkadakskiy and Rostron, 2013a](#); [Arkadakskiy and Rostron, 2012a](#); [Peterman et al., 2012](#)). The  
30 Bakken wells that contained external water were found to all contain water from the Mississippian  
31 Lodgepole formation (part of the Madison Group). The average volume of external water was 34%  
32 and the external water volume ranged from 10% to 100% ([Arkadakskiy and Rostron, 2013a](#)).  
33 Another example of a well blowout associated with a hydraulic fracturing operation occurred in  
34 Clearfield County, PA. The well blew out, resulting in an uncontrolled flow of approximately  
35 35,000 gal (132,000 L) of brine and fracturing fluid, along with an unquantified amount of gas;  
36 some of the fluids reportedly reached a nearby stream ([Barnes, 2010](#)). The blowout occurred while



1 the company was drilling out the plugs used to isolate one fracture stage from another. An  
2 independent investigation found that the primary cause of the incident was that the only blowout  
3 preventer on the well had not been properly tested. In addition, the company did not have certified  
4 well control experts on hand or a written pressure control procedure ([Vittitow, 2010](#)). In North  
5 Dakota, a blowout preventer failed, causing a release of between 50 and 70 barrels per day (2,100  
6 gal/day or 7,900 L/day and 2,940 gal/day or 11,000 L/day) of flowback and oil ([Reuters, 2014](#)). A  
7 3-ft berm was placed around the well for containment. Frozen droplets of oil and water sprayed on  
8 a nearby frozen creek. Liquid flowing from the well was collected and trucked offsite. Multiple well  
9 communication events reported by the media have also led to flowback and produced water spills  
10 ranging from around 700 to 35,000 gal (2,600 L to 130,000 L) ([Vaidyanathan, 2013a](#)).

### 7.7.2.3. Leaks from Pits and Impoundments

11 Leaks of flowback and produced water from on-site pits and impoundments have caused releases  
12 as large as 57,000 gal (220,000 L) and have caused surface and ground water impacts  
13 ([Vaidyanathan, 2013b](#); [PBFC 2011](#); [PADEP 2010](#)). VOCs have been measured in groundwater near  
14 the Duncan Oil Field in New Mexico downgradient of an unlined pit storing produced water ([Sumi,  
15 2004](#); [Eiceman, 1986](#)). Aspects of environmental transport from unlined pits are discussed below in  
16 Section 7.8.5.

17 Two of the EPA's retrospective case studies found potential impacts from produced water  
18 impoundments. In the southwest Pennsylvania case study ([U.S. EPA, 2015k](#)), elevated chloride  
19 concentrations and their timing relative to historical data suggested a recent ground water impact  
20 to a private water well occurred near an impoundment. The water quality trends suggested that the  
21 chloride anomaly was related to the impoundment, but site-specific data were not available to  
22 provide definitive assessment of the causes(s) and the longevity of the impact. Evaluation of other  
23 water quality parameters did not provide clear evidence of flowback or produced water impacts.

24 In the Wise County, TX case study ([U.S. EPA, 2015m](#)), impacts to two water wells were attributed to  
25 brine, but the data collected for the study were not sufficient to distinguish among four possible  
26 sources, one of which was leaks from reserve pits and/or impoundments. The others were: brine  
27 migrating from underlying formations along wellbores, brine migrating from underlying formations  
28 along natural fractures, and brine migrating from a nearby brine injection well. Alternate sources  
29 for the impacts were considered, including road salting, landfill leachate, septic tanks, and animal  
30 wastes, but evaluation of data showed that these were not likely. A third well experienced similar  
31 impacts, but a landfill leachate source could not be ruled out in that case. [Richter and Kreitler  
32 \(1993\)](#) reviewed sources of salinity to ground water resources by evaluating reviewing major  
33 sources, which included natural saline ground water, halite dissolution, sea-water intrusion, oil-  
34 field brine, agriculture, saline seeps and road salt. For each source [Richter and Kreitler \(1993\)](#)  
35 provided a state-by-state review of the potential occurrence, which can be used as a general guide  
36 to potential sources of salt at a specific area of interest.

### 7.7.2.4. Data Compilation Studies

37 Environmental impacts from hydraulic fracturing-related fluids have been explored to a limited  
38 extent in recent scientific literature ([Brantley et al., 2014](#); [Frag and Harper, 2014](#); [Gross et al.,](#)



1 [2013; Olmstead et al., 2013; Papoulias and Velasco, 2013; Vidic et al., 2013; Considine et al., 2012;](#)  
2 [Rozell and Reaven, 2012](#)).

3 From an Oklahoma Corporation Commission database of almost 13,000 releases reported from  
4 1993 to 2003, [Fisher and Sublette \(2005\)](#) determined that the primary origins of produced water  
5 releases were leaks from lines, tanks, wellheads, with lesser numbers of releases from surface  
6 equipment, and pits. The most common cause was overflows followed by illegal activity, storms, fire  
7 accidents and corrosion. For these types of releases, the median release volume ranged from 20 bbl  
8 (840 gal or 3,180 L) to 60 bbl (2,500 gal or 9,500 L), and the maximums from 200 bbl (8,400 gal or  
9 31,800 L) to 2,800 bbl (118,000 gal or 445,200 L).

10 As noted in Text Box 5-14 of Chapter 5, [U.S. EPA \(2015n\)](#) characterized hydraulic fracturing-related  
11 spills. Of the spills related to hydraulic fracturing activities (457 spills), 225 (49%) were spills of  
12 flowback and produced water. These spills were characterized with respect to volumes, spilled  
13 materials, sources, causes, environmental receptors, containment, and response. Most of the  
14 produced water spills in the EPA study occurred in Colorado (48%) and Pennsylvania (21%).  
15 Flowback and produced water constitute 84% (approximately 2.0 million gal or 7.6 million L) of the  
16 total volume of hydraulic fracturing-related spills as calculated from Appendix B of [U.S. EPA](#)  
17 [\(2015n\)](#).<sup>1</sup> Flowback and produced water spills were characterized by numerous low-volume spills;  
18 half of the spills with reported volumes were less than 1,000 gal (3,800 L), and few spills exceeded  
19 10,000 gal (38,000 L). Of the volume of spilled flowback and produced water, 16% was recovered  
20 for on-site use or disposal, 76% was reported as unrecovered, and 8% was unknown. The potential  
21 impact of the unknown and unrecovered volume on drinking water resources is unknown.

22 Known sources for flowback and produced water spills include storage containers (e.g., pits,  
23 impoundments, or tanks), wells or wellheads, hoses or lines, and equipment. Storage containers  
24 accounted for 58% of flowback and produced water spills. The fewest spills occurred from wells  
25 and wellheads, but these spills had the greatest spill volumes compared to all other sources.

26 The causes of these spills were human error (38%), equipment failure (17%), failures of container  
27 integrity (13%), miscellaneous causes (e.g., well communication, well blowout), and unknown  
28 causes. Most of the volume spilled (74%), however, came from spills caused by a failure of  
29 container integrity.

30 In some of the cases, spills reached environmental receptors: soil (141 spills), surface water (17  
31 spills), and ground water (1 spill); of these spills, 13 reached both soil and surface water.  
32 Consequently 146 unique produced water spills reached environmental receptors, accounting for  
33 65% of the 225 cases and accounting for approximately 422,000 gal (1.60 million L) of flowback  
34 and produced water. Spills with known volumes that reached a surface water body ranged from

---

<sup>1</sup> Chemicals and products, fracturing fluid, fracturing water, equipment fluids, hydrocarbons, and unknown fluids constitute the additional 16% (approximately 360,000 gal or 1.4 million L) of the total volume of hydraulic fracturing-related spills as calculated from Appendix B of [U.S. EPA \(2015d\)](#).

1 less than 170 gal (640 L) to almost 74,000 gal (280,000 L). In 30 cases, it is unknown whether a spill  
2 of flowback and produced water reached an environmental receptor of any type.

3 [Gross et al. \(2013\)](#) analyzed the Colorado Oil and Gas Conservation Commission’s database for  
4 ground water BTEX concentrations linked to hydraulic fracturing-related surface spills between  
5 July 2010 and July 2011 in Weld County, CO. Only spills with an impact on ground water were  
6 included in the study. The 77 reported spills accounted for less than 0.5% of nearly 18,000 active  
7 wells. Forty-six of the 77 spills consisted of produced water and oil. Of the remaining spills, 23  
8 consisted of only oil and 8 consisted of only produced water. Thus the results that follow include  
9 cases with no produced water spill. From these composited spills, benzene concentrations in 90%  
10 of the ground water samples exceeded 5 µg/L, the U.S. drinking water standard. Additionally, 30%  
11 of toluene, 12% of ethylbenzene, and 8% of xylene sample concentrations exceeded 1 mg/L, 0.7  
12 mg/L and 10 mg/L, respectively ([Gross et al., 2013](#)).

13 Based on five spills for which volumes were reported, the average volume of a produced water spill  
14 was 294 gal (1,110 L), ranging from 42 (160 L) to 1,176 gal (4,450 L) ([Gross et al., 2013](#)). Spill areas  
15 averaged 2,120 ft<sup>2</sup>, with an average depth of 7 ft. Tank battery systems and production facilities  
16 were the biggest volume sources of spills with ground water impacts. Equipment failure was the  
17 most common cause of spills with ground water impacts. Shallow ground water within the study  
18 area (Niobrara Shale within the Denver-Julesburg Basin) is the main source of water for residents  
19 due to limited surface water availability. Of the 77 reported spills, secondary containment was  
20 absent from 51 of them ([Gross et al., 2013](#)).

21 As noted from the Colorado ([Gross et al., 2013](#)) and Oklahoma ([Fisher and Sublette, 2005](#)) studies,  
22 oil releases may occur alongside produced water spills. Review of recent oil field incidents in North  
23 Dakota also shows incidents with both produced water and oil releases  
24 (<http://www.ndhealth.gov/EHS/Spills/>). Oil releases are characterized by a number of features  
25 including their unique hydrocarbon composition and physical properties. Impacts can include:  
26 surface runoff, infiltration into soils, formation of sheens and oil slicks on surface waters,  
27 evaporation, oxidation, biodegradation, emulsion formation, and particle deposition ([U.S. EPA,](#)  
28 [1999](#)).

29 A statistical analysis of oil and gas violations in Pennsylvania found that violations regarding  
30 structurally unsound impoundments or inadequate freeboard (vertical distance from the surface  
31 water level to the overflow elevation) were the second most frequent type of violation with 439  
32 instances in the period from 2008 to 2010 ([Olawoyin et al., 2013](#)). In a study of pits and  
33 impoundments in West Virginia, [Ziemkiewicz et al. \(2014\)](#) found common problems of slope  
34 stability and liner deficiencies. Construction quality control and quality assurance were often  
35 inadequate; the authors found a lack of field compaction testing, use of improper types of soil,  
36 excessive slope lengths, buried debris, and insufficient erosion control ([Ziemkiewicz et al., 2014](#)).

37 [Brantley et al. \(2014\)](#) reviewed PA DEP’s online oil and gas compliance database for notices of  
38 violation issued to companies developing unconventional gas resources. Between May 2009 and  
39 April 2013, 8 spills of flowback and produced water ranging from more than 4,000 gal (15,000 L) to

1 more than 57,000 gal (220,000 L) reached surface water resources. The spills typically resulted in  
2 local impacts to environmental receptors and required remediation and monitoring. However, the  
3 study indicated the likelihood of a leak or spill of hydraulic fracturing-related fluids was low (less  
4 than 1%, based on 32 large spills out of more than 4,000 complete wells). Due to lack of data,  
5 specific impacts to the eight receiving surface waters were not discussed, other than noting the  
6 produced water had contacted the surface water.

7 The [Brantley et al. \(2014\)](#) analysis of the PA DEP positive determination letters written in response  
8 to water-user complaints illustrates the importance of pre-drilling sampling, as it is one criterion  
9 that allows operators to refute the presumption that drilling caused water supply impacts (see  
10 Chapter 6). The importance of this pre-drilling sampling and analysis is highlighted by naturally  
11 occurring exceedances of EPA secondary MCLs for manganese and iron in private wells in  
12 Pennsylvania ([Boyer et al., 2011](#); [Williams et al., 1998](#)). [Boyer et al. \(2011\)](#) state that more than  
13 40% of private water wells in Pennsylvania fail to meet federal drinking water standards. [Boyer et  
14 al. \(2011\)](#) analyzed pre-drilling samples from private water wells in northeastern and  
15 southwestern Pennsylvania and showed that 20% (of 222 wells) failed the drinking water standard  
16 for iron and 27% (of 203 wells) failed for manganese.<sup>1</sup> [Williams et al. \(1998\)](#), in their evaluation of  
17 over 200 wells in Bradford, Tioga, and Potter counties in northeastern Pennsylvania, indicate about  
18 50% of the wells exceeded secondary MCLs for iron and manganese.<sup>2</sup> According to [Boyer et al.  
19 \(2011\)](#), higher concentrations of these constituents tend to be associated with the sodium chloride  
20 (Na-Cl) type ground water often found in valleys in zones of more restricted ground water flow  
21 (portions of aquifers with low permeability). Saline water can be found at shallow depths in these  
22 areas ([Williams et al., 1998](#)).

23 As an example of another set of criteria for assessing sites potentially contaminated by hydraulic  
24 fracturing activities, the EPA ([2012f](#)) developed an approach to study sites where the impacts to  
25 drinking water resources and the potential sources of the impacts are unknown, but may have been  
26 the object of water-user complaints. The approach is based on a tiered scheme where results from  
27 each tier are used to refine activities in higher tiers. The four tiers were as follows:

- 28 • Verify potential issue:
  - 29 ○ Evaluate existing data and information from operators, private citizens, state and
  - 30 local agencies, and tribes (as appropriate).
  - 31 ○ Conduct site visits.
  - 32 ○ Interview stakeholders and interested parties.
- 33 • Determine approach for detailed investigations:
  - 34 ○ Conduct initial sampling of water wells, taps, surface water and soils.

---

<sup>1</sup> Percentage of other parameters failing standards: 17% of 233 wells for pH, 3% of 233 wells for TDS, <1% of 226 wells for chloride, 1% of 218 wells for Barium, <1% of 177 wells for sulfate, 33% of 125 wells for coliforms, 4% of 115 wells for arsenic, 8% of 122 wells for fecal coliforms, 32% of 102 samples for turbidity.

<sup>2</sup> Naturally occurring constituents occasionally exceeding EPA primary MCLs in this area include barium, combined radium-226 and radium-228, and arsenic.

- 1           ○ Identify potential evidence of drinking water contamination.
- 2           ○ Develop conceptual site model describing possible sources and pathways of the
- 3           reported or potential contamination.
- 4           ○ Develop, calibrate, and test fate and transport model(s).
- 5       • Conduct detailed investigations to detect and evaluate potential sources of contamination:
- 6           ○ Conduct additional sampling of soils, aquifer, surface water, and produced water
- 7           pits/tanks where present.
- 8           ○ Conduct additional testing, including further water testing with new monitoring
- 9           points, soil gas surveys, geophysical testing, well mechanical integrity testing, and
- 10          stable isotope analyses.
- 11          ○ Refine conceptual site model and further test exposure scenarios.
- 12          ○ Refine fate and transport model(s) based on new data.
- 13       • Determine the source(s) of any impacts to drinking water resources:
- 14          ○ Develop multiple lines of evidence to determine the source(s) of impacts to
- 15          drinking water resources.
- 16          ○ Exclude possible sources and pathways of the reported contamination.
- 17          ○ Assess uncertainties associated with conclusions regarding the source(s) of
- 18          impacts.

19 This tiered assessment strategy provides an outline for collecting data and evaluating lines of  
20 evidence for determining whether impacts have occurred.

### 7.7.3. Case Studies of Potentially Impacted Sites

#### 7.7.3.1. Flowback and Produced Water Release from an Illegal Discharge Impacts Surface and Ground Water in Lycoming County, Pennsylvania

21 An estimated 6,300 gal to more than 57,000 gal (24,000 to 220,000 L) of Marcellus Shale produced  
22 water was illegally discharged at XTO Energy Inc.'s Marquardt pad and flowed into the  
23 Susquehanna River watershed in November 2010 ([U.S. EPA, 2013g](#)).<sup>1</sup> Overland and subsurface flow  
24 of released fluids affected proximal surface water, a subsurface spring, and soil. No impacts to  
25 drinking water wells and springs within 1 mile of the release were observed at the last sampling  
26 date (17 days post-spill). However, residual, soil-associated produced water constituents could  
27 reach drinking water resources in the future through surface runoff or infiltration to the ground  
28 water ([Science Applications International Corporation, 2010](#)). The release, which occurred at XTO's  
29 Marquardt 8537H well pad in Penn Township, Lycoming County, PA, was discovered after a routine  
30 inspection by the Pennsylvania Department of Environmental Protection. Subsequent investigation

---

<sup>1</sup> Violations associated with this incident can be found at the Pennsylvania Department of Environmental Protection's Oil and Gas Compliance Report database found at [http://www.portal.state.pa.us/portal/server.pt/community/oil\\_and\\_gas\\_compliance\\_report/20299](http://www.portal.state.pa.us/portal/server.pt/community/oil_and_gas_compliance_report/20299) under the following inspection IDs: 1928978, 1928992, and 1929005.

1 revealed that flowback and produced water had been discharging into surface waters for over  
2 two months after the fluid was released from multiple tanks with open or missing valves on  
3 November 16, 2010 ([U.S. EPA, 2013g](#)).

4 Geochemical characterization of this produced water indicated concentrations of barium, chloride,  
5 iron, manganese, and TDS above Pennsylvania’s surface water quality standards, and above the  
6 statewide health standards for medium-specific concentrations (SHS MSCs) for ground water use in  
7 residential and nonresidential settings ([Science Applications International Corporation, 2010](#)). The  
8 produced water also contained elevated levels of bromide, calcium, sodium, and strontium, which  
9 lack state surface water quality standards and SHS MSCs ([Science Applications International  
10 Corporation, 2010](#)).

11 Post-spill surface water delineations indicated that released fluids migrated to an unnamed stream  
12 known as Tributary 19617. The released fluids migrated approximately 1,400 ft (427 m) overland  
13 to a depression which contains a natural fracture with a hydrological connection to a spring  
14 ([Schmidley and Smith, 2011](#)). The distance from the depression to the stream is approximately  
15 600 ft (183 m). Released fluids also drained through surface soils into ground water, which was  
16 then released in seeps to the spring and stream; elevated levels of barium, bromide, calcium,  
17 chloride, sodium, strontium, and TDS resulted ([U.S. EPA, 2013g](#)). Elevated levels of these  
18 constituents, particularly barium, bromide, and strontium, were indicative of Marcellus Shale  
19 flowback and produced water that had mixed with surface water ([Brantley et al., 2014](#)). Barium and  
20 chloride were the only dissolved constituents detected in the stream that exceeded state surface  
21 water quality standards; the remaining constituents lack established state surface water quality  
22 standards.

23 Results from XTO’s temporal study of surface water quality confirmed impacts to the stream from  
24 produced water. Surface water quality was characterized at the confluence of the stream and  
25 spring, and at the stream’s upstream and downstream segments, for 65 days post-spill ([Science  
26 Applications International Corporation, 2010](#)). Downstream barium and bromide levels were one to  
27 two orders of magnitude greater than upstream levels through this period. In addition, stream  
28 strontium levels were two to three orders of magnitude greater than upstream levels at this time.  
29 Chloride was initially detected in the stream with concentrations exceeding state water quality  
30 standards ([Schmidley and Smith, 2011](#)). Average chloride concentrations for stream samples were  
31 two orders of magnitude greater than upstream concentrations ([PA DEP, 2011c](#)). By January 2011,  
32 stream chloride concentrations had dropped below the limit established by Pennsylvania’s surface  
33 water quality standards.

34 Delineation of chloride concentrations within on-site soil indicated soil impacts due to overland  
35 flow of flowback and produced water ([Science Applications International Corporation, 2010](#)). Five  
36 hundred tons of affected soil was consequently excavated for off-site disposal. Chloride  
37 concentrations decreased with increased distance from the spill site but remained elevated above  
38 background levels even at distances of a few thousand feet ([Science Applications International  
39 Corporation, 2010](#)). Produced water constituents that were present in soil at concentrations above  
40 background levels (i.e., barium, sodium, strontium) could be available for long-term runoff and



1 infiltration. For instance, the continued presence of chloride in affected soils is likely due to  
2 precipitated chloride salts in soil pores from residual produced water ([Science Applications  
3 International Corporation, 2010](#)), which may leach later. Near-term sampling (up to 17 days after  
4 the spill) found no elevated constituents indicative of runoff or infiltration of produced water when  
5 XTO sampled 14 drinking water wells and springs within one mile of the well pad. XTO was ordered  
6 to create a storm water collection system for off-site disposal of impacted storm water and to  
7 establish on-site water monitoring wells to track long-term ground water quality between the well  
8 pad and the stream ([Schmidley and Smith, 2011](#)). Other cases of illegal dumping have been  
9 reported ([Caniglia, 2014](#); [U.S. EPA, 2013g](#); [Pattera, 2011](#)).

### **7.7.3.2. Flowback Fluid Reaches Towanda Creek Due to Well Blowout in Bradford County, Pennsylvania, Causing Short-Term Impacts**

10 The Chesapeake Energy ATGAS 2H well, located in Leroy Township, Bradford County, PA,  
11 experienced a wellhead flange failure on April 19, 2011, during hydraulic fracturing operations.  
12 Approximately ten thousand gallons (38,000 L) of flowback fluids spilled into an unnamed tributary  
13 of Towanda Creek, a state-designated trout stock fishery and a tributary of the Susquehanna River  
14 ([USGS, 2013b](#); [SAIC and GES, 2011](#)). Chesapeake conducted post-spill surface and ground water  
15 monitoring ([SAIC and GES, 2011](#)). In addition, the EPA, PADEP, and Chesapeake collected split  
16 samples from seven private wells within the vicinity of the blowout. The EPA requested that the  
17 Agency for Toxic Substances and Disease Registry (ATSDR) evaluate the environmental data  
18 collected from seven private wells to determine whether harmful health effects would be expected  
19 from consuming or using the well water. Data from Pre-blowout private well samples, collected  
20 approximately six months prior to drilling activity at the site, were included in the evaluation.

21 Between the pre- and post-blowout samples, [ATSDR \(2013\)](#) determined that there was factor of ten  
22 increases in some analyte concentrations (methane, barium, calcium, chloride, magnesium,  
23 manganese, potassium, and sodium) and a factor of 7 increase in iron concentration in one well  
24 (RW04) near the site. Other wells showed elevated levels of certain analytes.<sup>1</sup> ATSDR concluded  
25 that although the available data *suggested* that the ground water near this site is impacted by gas  
26 activities, the data for RW04 did not conclusively indicate an impact. [ATSDR \(2013\)](#) concluded that  
27 further evaluation is needed to characterize any relationship between the drinking water wells and  
28 aquifers as a result of changes in site conditions. Further sampling would be required to determine  
29 current impacts, trends, and chronic exposures to ground water constituents related to natural gas  
30 activities.

---

<sup>1</sup> Elevated sodium levels were detected in 6 wells, levels in 5 of them (RW02, RW03, RW05, RW06, and RW07) may be of concern to sensitive subpopulations; while the last (RW04) would exceed the dietary guideline for both sensitive and the general population. ATSDR judged that elevated lithium concentration in two wells (RW04 and RW06) could be a concern to individuals undergoing lithium therapy. One well (RW02) showed elevated arsenic concentrations, but these were similar in the pre- and post-blowout samples. Gross alpha radiation levels were above the EPA maximum contaminant level in one well (RW03), and ATSDR did not expect adverse health effects from drinking this water. ATSDR did not expect adverse health effects for the user of five private wells (RW01, RW03, RW05, RW06 (excepting for possible lithium impacts) and RW07).



1 Chesapeake concluded that there were short-term impacts to surface waters of a farm pond within  
2 the vicinity of the well pad, the unnamed tributary, and Towanda Creek following the event ([SAIC  
3 and GES, 2011](#)). The lower 500 feet of the unnamed tributary exhibited elevated chloride, TDS, and  
4 specific conductance, which returned to background levels in under a week. Towanda Creek  
5 experienced these same elevations in concentration, but only at its confluence with the unnamed  
6 tributary; elevated chloride, TDS, and specific conductance returned to background levels the day  
7 after the blowout ([SAIC and GES, 2011](#)).

#### 7.7.4. Roadway Transport of Produced Water

8 Accidents during transportation of hydraulic fracturing produced water are a possible mechanism  
9 leading to potential impacts to drinking water. Nationwide data are not available, however, on the  
10 number of such accidents that result in impacts. An estimate of releases from truck transport of  
11 produced water could be made as follows:

$$\text{Total number of truckloads} = \frac{\text{Total number of wells} \times \text{Produced water volume per well}}{\text{Produced water volume per truck}}$$

12 Then the total distance traveled by all trucks is given by:

$$\text{Total distance traveled} = \text{Total number of truckloads} \times \text{Distance per truck}$$

13 The number of crashes impacting drinking water resources can be estimated from:

$$\begin{aligned} \text{Total crashes impacting drinking water resources} \\ = \text{Fraction of crashes releasing waste that impacts drinking water resources} \\ \times \text{Fraction of all crashes releasing waste} \times \text{Crashes per distance} \end{aligned}$$

14 Estimates of all but one of the quantities in these calculations can be made from various literature  
15 sources, which are described in Appendix E. A key parameter is the number of crashes of trucks per  
16 distance traveled. In 2012, the U.S. Department of Transportation (DOT) estimated that the number  
17 of crashes per 100 million highway miles driven of a type of large truck was 110, which is a  
18 relatively small number. A key parameter that is unknown is the number of crashes which impact  
19 drinking water resources, so definitive estimates of impacts to drinking water resources cannot be  
20 made. Alternatively, as an upper bound on drinking water resource impacts, the number of crashes  
21 which release waste can be estimated. Based on various assumptions and scenarios presented in  
22 Appendix E, the number of crashes with releases is bounded by the low tens of events. At 20 m<sup>3</sup> per  
23 truckload, the volumes are low relative to the typical volume of produced water.

24 Several limitations are inherent in this analysis, including differing rural road accident rates and  
25 highway rates, differing produced water endpoints, and differing amounts of produced water  
26 transported. Further, the estimates present an upper bound on impacts, because not all releases  
27 would reach or impact drinking water resources.

### 7.7.5. Studies of Environmental Transport of Released Produced Water

1 In this subsection, we describe transport study results that illustrate how produced waters have  
2 been shown to be transported from historical disposal practices and spills. Over the history of oil  
3 production in the U.S., produced water disposal methods have evolved from land application to  
4 storage in unlined ponds to deep well injection ([Whittemore, 2007](#)), although some unlined pits  
5 continue in use where allowed by states. The changes in practice occurred because of pollution  
6 impacts: first to surface waters and aquatic biota, and then to ground water from disposal ponds.  
7 Evaluation of sites contaminated by these historic practices sheds light on the potential for  
8 transport of released produced water, as discussed below.

9 Impacts to ground water might occur following a spill on land. When the liquid is highly saline, its  
10 migration is affected by its high density and viscosity compared with that of fresh water. When  
11 spilled flowback or produced water flows over land, a fraction of the liquid is subject to infiltration.  
12 The fraction depends on the rate of release, surface cover (i.e., pavement, cracked pavement,  
13 vegetation, bare soil, etc.), slope of the land surface, subsurface permeability, and the moisture  
14 content in the subsurface.

15 The potential for impacts from produced water spills depends on the distance from the source to  
16 receptor; the distance depends on local topography. One study investigated receptor distances on a  
17 formation basis ([Entrekin et al., 2011](#)). The distance between gas wells and drainage ways was  
18 determined to average 273 m (890 ft) for the Marcellus Shale and 353 m (1160 ft) for the  
19 Fayetteville Shale ([Entrekin et al., 2011](#)). Some wells were much closer, being as close as 1 m (3.28  
20 ft). For one location in each formation a separate analysis gave a mean estimate of 153 m (500 ft)  
21 for the Marcellus Shale and 130 m (430 ft) for the Fayetteville Shale. The average distance to public  
22 drinking water intakes was 15 km (9.32 mi). The average distance to public water supply wells was  
23 37 km (23.0 mi) for the Marcellus Shale and 123 km (76.4 mi) for the Fayetteville Shale. As the  
24 density of gas development increases the number of gas wells located close to drainage ways and  
25 public water supply wells may also increase.

26 For example, [Whittemore \(2007\)](#) described a site with relatively little infiltration due to moderate  
27 to low permeability of silty clay soil and low permeability of underlying shale units. Thus, most of  
28 the historically surface-disposed produced water at the site flowed into surface drainages.  
29 Observed historic levels of chloride in receiving waters resulted from the relative balance of  
30 produced water releases and precipitation runoff, with high concentrations corresponding to low  
31 stream flows. Persistent surface water chloride contamination was attributed to slow flushing and  
32 discharge of contaminated ground water.

33 Transport from the land surface to the water table is further characterized in general by flow  
34 through variably water-saturated media, preferential flow paths, fractures in clays, and  
35 macropores. Preferential flow paths along microscale heterogeneities are known to exist and  
36 dominate transport even after cycles of repeated drying and rewetting. The effect of flowback on  
37 transport of colloids has recently been evaluated in laboratory sand columns. The authors found  
38 that flowback increased the mobility of colloidal particles, which potentially serve as a source of  
39 aquifer contamination ([Sang et al., 2014](#)).

1 In another study, [Otton et al. \(2007\)](#) reported on a site in Oklahoma where two abandoned pits  
2 were major sources for releases of produced water and oil. Saline water from the pits flowed  
3 through thin soils and readily percolated into underlying permeable bedrock. Deeper, less  
4 permeable bedrock was contaminated by salt water later in the history of the site, presumably due  
5 to fractures ([Otton et al., 2007](#)). The mechanisms proposed were lateral movement through  
6 permeable sand bodies, vertical movement along shale fractures, and possibly increased  
7 permeability from clay flocculation and shrinkage due to the presence of highly saline water ([Otton  
8 et al., 2007](#)).

9 Because it is denser than freshwater, saline produced water can migrate downward through  
10 aquifers. [Whittemore \(2007\)](#) reported finding oilfield brine with a chloride concentration of 32,900  
11 mg/L at the base of the High Plains aquifer. Where aquifers discharge to streams, saline stream  
12 water has been reported, although at reduced concentrations ([Whittemore, 2007](#)), likely due to  
13 diffusion within the aquifer and mixing with stream water. The stream flow rate, in part,  
14 determines mixing of substances in surface waters. High flows are related to lower chemical  
15 concentrations, and vice versa, as demonstrated for bromide by [States et al. \(2013\)](#) for the  
16 Allegheny River.

17 Generally, the deeper that brine can move into an aquifer, as impacted by the volume and timing of  
18 the release, the longer the duration of contamination ([Whittemore, 2007](#)). [Kharaka et al. \(2007\)](#)  
19 reported on studies at a site in Oklahoma with one abandoned and two active unlined brine pits.  
20 Produced water from these pits penetrated 3- to 7-m thick shale and siltstone units, creating three  
21 plumes of high-salinity water (5,000 to 30,000 mg/L TDS). The impact of these plumes on the  
22 receiving water body (Skiatook Lake) was judged to be minimal, although the estimate was based  
23 on a number of notably uncertain transport quantities ([Otton et al., 2007](#)).

24 Chloride impacts from produced water spills were studied through scenario modeling releases of  
25 100 bbl (4,200 gal or 15,900 L) and 10,000 bbl (420,000 gal or 1.59 million L) ([API, 2005](#)). The  
26 scenarios included transport through a homogeneous or heterogeneous unsaturated zone using the  
27 HYDRUS-1D model ([Šimunek et al., 1998](#)) and mixing within the top portion of a shallow aquifer  
28 using a specially developed spreadsheet model. The results of the scenario modeling indicated that  
29 ground water quality is unlikely to be impaired for spills with small soil penetration depths, which  
30 correspond to spills distributed over large areas. Large spills of 100,000 bbl (4.2 million gal or 15.9  
31 million L) over sandy unsaturated zones were found to have a high potential to impact ground  
32 water quality ([API, 2005](#)). Spills of less than 100 bbl (420 gal or 1,590 L) were not modeled and  
33 were presumed to have low impacts based on the results from the larger spills. The results were  
34 constrained by the underlying assumptions of HYDRUS-1D—that there were no preferential flow  
35 paths, including fractured systems, systems with macropores, or fine scale heterogeneities. More  
36 rapid and spatially extensive transport could occur in these settings.

#### 7.7.6. Coalbed Methane

37 A CBM produced water impoundment in the Powder River Basin of Wyoming was studied for its  
38 impact on ground water ([Healy et al., 2011](#); [Healy et al., 2008](#)). Infiltration of water from the  
39 impoundment was found to create a perched water mound in the unsaturated zone above bedrock

1 in a location with historically little recharge. The subsurface sediments were found to be highly  
2 heterogeneous both physically and chemically, which increased the complexity of studying the site.  
3 Elevated concentrations of TDS, chloride, nitrate, and selenium were found at the site. For example,  
4 TDS exceeded 100,000 mg/L in one lysimeter sample, while the concentration was 2,275 mg/L in a  
5 composite CBM produced water sample ([Healy et al., 2008](#)). Most of the solutes found in the ground  
6 water mound did not originate with the CBM produced water, but rather were the consequence of  
7 dissolution of previously existing salts and minerals. The mechanisms were thought to be gypsum  
8 dissolution, cation exchange, and pyrite dissolution. Data from other sites indicated that the study  
9 site's ground water chemistry may not be typical and that the same phenomena may not occur at  
10 other sites in the basin ([Healy et al., 2011](#)).

### 7.7.7. Transport Properties


11 The identified constituents of flowback and produced water include inorganic chemicals in the form  
12 of cations and anions (including various types of metals, metalloids, and non-metals, and  
13 radioactive materials, among others) and organic chemicals, including identified compounds in  
14 various classes, and unidentified materials measured as TOC and DOC. Environmental transport of  
15 these chemicals depends on properties of the chemical and properties of the environment, and is  
16 extensively discussed in Section 5.8.3. In this section we discuss the characteristics of transport for  
17 inorganics and note that some inorganics may move with the water, while many of the others are  
18 influenced by reactions. For organic chemicals identified in produced water, we discuss EPI Suite™  
19 estimates of the main transport parameters identified in Chapter 5, while noting the influences of  
20 salinity and temperature on these properties.

21 Transport of inorganic chemicals depends on the nature of ground water and vadose zone flow, and  
22 potential reactions among the inorganic chemical, solid surfaces, and geochemistry of the water.  
23 Some inorganic anions (i.e., chloride and bromide) move with their carrier liquid and are mostly  
24 impacted by physical transport mechanisms: flow of water and dispersion. In addition to the flow-  
25 related processes, transport of most inorganics is driven by three mechanisms related to  
26 partitioning to the solid phase: adsorption, absorption, and precipitation. The effects of these  
27 mechanisms depend on both chemical and environmental characteristics, including the surface  
28 reactivity, solubility, and redox sensitivity of the contaminant; and the type and abundance of  
29 reactive mineral phases, and the ground-water chemistry ([U.S. EPA, 2007](#)). Through the use of  
30 transport models, the effects of physical transport mechanisms and chemical processes are  
31 integrated. Examples of transport models for reactive metals include the Geochemist's Workbench  
32 ([Bethke, 2014](#)) and Hydrus ([Šimunek et al., 1998](#)).

33 Properties of organic chemicals which tend to affect the likelihood that a chemical will reach and  
34 impact drinking water resources if spilled include high chemical mobility in water, low volatility,  
35 and high persistence in water. Using the EPA chemical database EPI Suite™, we were able to obtain  
36 actual or estimated physicochemical properties for 86 of the 134 organic chemicals identified in  
37 produced water and listed in Appendix A. A portion of these, 66, are used in the chemical mixing  
38 stage (see Appendix Table C-8). EPI Suite™ results were generated for solubility, octanol water  
39 partition coefficient ( $K_{ow}$ ), and the Henry's constant (see Figure 7-9). The log  $K_{ow}$  values are of the

1 identified organic chemicals skewed positively, indicating some of the chemicals have low mobility  
 2 which may result in less extensive dissolved contaminant plumes in ground water. These  
 3 compounds, however, have a higher tendency to sorb to particulate or colloidal materials and hence  
 4 be transported in systems where particle transport is dominant, for example: colloid transport in  
 5 ground water and sediment transport in surface water. The log Henry constant values tend to be  
 6 below 0 indicating that at equilibrium the concentration in air is less than the concentration in  
 7 water. This behavior is reflected in the log solubility plot, as the solubilities skew conversely toward  
 8 high values.

9 The EPI Suite™ results are constrained by their applicability to one temperature (25 °C), and  
 10 salinity (low). Temperature changes impact Henry’s constant,  $K_{ow}$ , and solubility, and depend on the  
 11 characteristics of the chemical and ions present ([Borrirukwisitsak et al., 2012](#); [Schwarzenbach et al., 2002](#)).  
 12 In some cases the effect changes exponentially with salinity ([Schwarzenbach et al., 2002](#)).  
 13 Therefore, property values that depart from the EPI Suite™ values are expected for produced water  
 14 at elevated temperature and salinity.

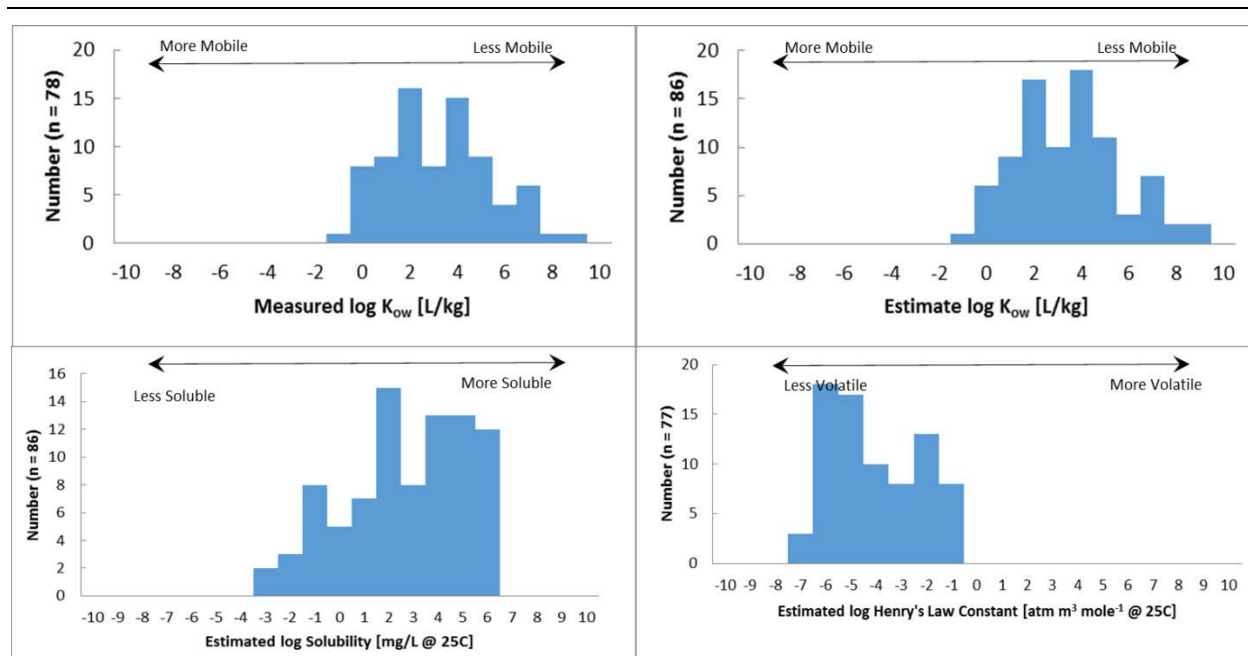

**Figure 7-9. Histograms of physicochemical properties of 86 organic chemicals identified in produced water (physicochemical properties estimated by EPI Suite™).**

## 7.8. Synthesis

15 After hydraulic fracturing is completed, the operator reduces injection pressure and water is  
 16 allowed to flow back from the well to prepare for oil or gas production. The flowback water may  
 17 contain fracturing fluid, fluid from the surrounding formation, and hydrocarbons. Initially this  
 18 flowback is mostly fracturing fluid, but as time passes, the produced water becomes more similar to  
 19 the water in the formation. This water is stored at the surface for eventual reuse or disposal.

1 Impacts to drinking water from flowback and produced water can occur if spilled flowback or  
2 produced water enters surface water bodies or aquifers.

### 7.8.1. Summary of Findings

3 The volume and composition of flowback and produced water vary geographically, both within and  
4 between different formations with time and with other site-specific factors. High initial rates of  
5 flowback decrease as time continues. The amount of fracturing fluid returned to the surface varies,  
6 and typically averages 10% to 25%. In most cases, lower flow rates of produced water continue  
7 throughout gas production.<sup>1</sup> In some formations (i.e., the Barnett Shale), the ultimate volume of  
8 produced water can exceed the volume of hydraulic fracturing fluid because of inflow of water.

9 The composition of flowback changes with time as the hydraulic fracturing fluid contacts the  
10 formation and mixes with the formation water. At the same time, reactions occur between the  
11 constituents of the fracturing fluid and the formation. Although varying within and between  
12 formations, shale and tight gas produced water typically contains high levels of TDS (salinity) and  
13 associated ionic constituents (bromide, calcium, chloride, iron, potassium, manganese, and sodium).  
14 Produced water may contain toxic materials, including barium, cadmium, chromium, lead, mercury,  
15 nitrate, selenium, and BTEX. CBM produced water can have lower levels of salinity if its coal source  
16 was deposited under freshwater conditions.

17 Flowback and produced water spills are known to have occurred across the country. The causes  
18 identified for these spills are container and equipment failures, human error, well communication,  
19 blowouts, pipeline leaks, and illegal dumping. Spills due to trucking accidents are possible, but  
20 accident rates in the United States suggest only a small number of such releases occur.

21 USGS studies of impacts of produced water disposal in unlined pits document the potential for  
22 surface releases (in these cases over multiple years) that have led to ground water impacts.  
23 Contaminant plumes can be traced to high TDS water disposed of in the pits, or geochemical  
24 reaction between infiltrating low-TDS water, in the case of CBM produced water, releasing existing  
25 minerals from the unsaturated zone to ground water.

### 7.8.2. Factors Affecting the Frequency or Severity of Impacts

26 The potential of spills of flowback and produced water to affect drinking water resources depends  
27 upon the release volume, duration, and composition. Larger spills of greater duration are more  
28 likely to reach a nearby drinking water resource than are smaller spills. The composition of the  
29 spilled fluid will also impact the severity of a spill, as certain constituents are more likely to affect  
30 the quality of a drinking water resource. Low-volume and short-duration spills are less likely to  
31 cause impacts, (see Section 7.7.5).

32 Potential impacts to water resources from hydraulic fracturing-related spills are expected to be  
33 affected by watershed and water body characteristics. For example, overland flow is affected by  
34 surface topography and surface cover. Infiltration of spilled produced water reduces the amount of

---

<sup>1</sup> Note that increasing produced water flow rates are indicative of water breakthrough and declining oil production.



1 water threatening surface water bodies. However, infiltration through soil may lead to ground  
2 water impacts. Produced water with lower constituent concentrations may produce lesser impacts,  
3 but the USGS studies of CBM produced water impoundments described in section 7.7.5 showed  
4 impacts caused by CBM water mobilizing existing minerals. The USGS studies on historical disposal  
5 of saline produced water in unlined pits detected ground water plumes discharging into surface  
6 water bodies. The potential impact to drinking water in such cases depends on the location of  
7 drinking water wells and the size of any surface water supply reservoir.

### 7.8.3. Uncertainties

8 We first discuss data gaps in our overall knowledge of flowback and produced water; closing such  
9 gaps would enable us to better predict impacts on drinking water resources. Second, we present  
10 uncertainties that, based on site-specific conditions, also affect our ability to determine potential  
11 impacts.

#### 7.8.3.1. General Data Gaps

12 Knowledge of volume and some compositional aspects of flowback and produced water are known  
13 from published sources. Most of the available data on TENORM has come from the Marcellus Shale,  
14 where these are typically high in comparison to the limited data available from other formations.  
15 Only a few studies have attempted to sample and characterize the organic fraction of flowback and  
16 produced water; some data are available for shale and CBM, but none are available for tight  
17 formations. The reported organic chemical data from flowback likely does not capture the full range  
18 of chemicals that may be present, either as original components of the hydraulic fracturing solution  
19 or transformation products generated in the subsurface.

20 Characterization of produced water organics is limited by several factors. Development or use of  
21 proper analytical procedures depends upon knowing the identities of injected chemicals. Because  
22 the formulation of hydraulic fracturing fluids can contain proprietary chemicals, the exact  
23 formulations are not available. In addition, subsurface transformations yield degradation products,  
24 which themselves must have appropriate analytical methods. Further difficulties are due to matrix  
25 interference from high-TDS produced water. These problems result in the need to develop new  
26 methods for analyzing both organics and inorganics in produced water.

27 Nationwide data on spills of flowback and produced water are limited in two primary ways: the  
28 completeness of reported data cannot be determined, and individual states' reporting requirements  
29 differ ([U.S. EPA, 2015n](#)). Despite various studies, the total number of spills occurring in the United  
30 States, their release volumes and associated concentrations, can only be roughly estimated because  
31 of underlying data limitations.

#### 7.8.3.2. Uncertainties at Individual Spill Sites

32 Spills of flowback and produced water present many uncertainties that, in combination, limit our  
33 ability to predict impacts on drinking water resources. Spills vary in volume, duration, and  
34 composition. The spilled liquid could be fracturing fluid mixed with formation water in a  
35 proportion that depends on the time that has passed since fracturing. As described in Section 7.7,  
36 spills may originate from blowouts, well communication, aboveground or underground pipeline

1 breaks, leaking impoundments, failed containers, human error (including illegal activities, failure to  
2 detect spills, and failure to report spills) or unknown causes. The difference between these causes  
3 affect the size and location of the spill. In addition, the factors governing transport of spilled fluid to  
4 a potential receptor vary by site: the presence and quality of secondary or emergency containment  
5 and spill response; the rate of overland flow and infiltration; the distance to a surface water body or  
6 drinking water well; and transport and fate processes. Impacts to drinking water resources from  
7 spills of flowback and produced water depend on environmental transport parameters, which can  
8 in principle be determined but are unlikely to be known or adequately specified in advance of a  
9 spill.

10 Because some constituents of flowback and produced water are constituents of natural waters (e.g.,  
11 bromide in coastal surface waters) or can be released into the environment by other pollution  
12 events (e.g., benzene from gasoline releases, or bromide from coal mine drainage), baseline  
13 sampling prior to impacts is one way to increase certainty of an impact determination. Further  
14 sampling and investigation may be used to develop the linkage between a release and a  
15 documented drinking water impact. Produced water spill response typically includes delineation of  
16 the extent of oiled soils, sheens on water surfaces, and the extent of saline water. Extensive  
17 characterization of produced water is typically not part of spill response, and therefore the  
18 chemicals, and their concentrations, potentially impacting drinking water resources are not usually  
19 known.

#### 7.8.4. Conclusions

20 Flowback and produced water has the potential to affect the quality of drinking water resources if it  
21 enters into a surface or ground water body used as a drinking water resource. This can occur  
22 through spills at well pads, or during transport of flowback. Specific impacts depend upon the spill  
23 itself, the environmental conditions surrounding the spill, water body and watershed  
24 characteristics, and the composition of the spilled fluid. Flowback and produced water may contain  
25 toxic constituents and can potentially render water unpalatable or unsafe to drink. Conclusive  
26 determination of impacts to water resources depends on commitment of resources to the  
27 implementation of sampling, analysis and evaluation strategies

#### **Text Box 7-1. Research Questions Revisited.**

28 ***What is currently known about the frequency, severity, and causes of spills of flowback and produced***  
29 ***water?***

- 30 • Surface spills of flowback and produced water from unconventional oil and gas production have occurred  
31 across the country. Some produced water spills have affected drinking water resources, including a few  
32 private drinking water wells. The majority of flowback and produced water spills are under 1,000  
33 gallons. The causes identified for these are container and equipment failures, human error, well  
34 communication, blowouts, pipeline leaks, and illegal dumping.

35 ***What is the composition of hydraulic fracturing flowback and produced water, and what factors might***  
36 ***influence this composition?***

- 1 • The composition of flowback and produced water must be determined through sampling and analysis,  
2 both of which have limitations. The former due to the ability to access through production equipment and  
3 the latter due to issues with identifying target analytes in advance of analysis and the existence of  
4 appropriate analytical methods.
- 5 • The geochemical content of water flowing back initially reflects injected fluids. After initial flowback,  
6 returning fluid geochemistry shifts to reflect the geochemistry of formation waters and formation solids.
- 7 • According to available literature and data, conventional and unconventional flowback and produced  
8 water content are often similar with respect to the occurrence and concentration of many constituents.
- 9 • The least statistical variability in produced water content is exhibited between shale gas and tight gas  
10 produced water, and the most statistical variability is exhibited between shale gas and coalbed methane  
11 produced water.
- 12 • Much produced water is generally characterized as saline (with the exception of most coalbed methane  
13 produced water) and enriched in major anions, cations, metals, naturally occurring radionuclides, and  
14 organics.
- 15 • Shale and coalbed produced water is enriched in benzene. Benzene is a constituent of concern in  
16 Marcellus Shale, Raton CBM, and San Juan CBM produced water. Shale produced water is more likely to  
17 contain elevated average total BTEX levels than other unconventional produced water.
- 18 • Typically, unconventional produced water contains low levels of heavy metals. Elevated strontium and  
19 barium levels, however, are characteristic of Marcellus Shale flowback and produced water. CBM and, in  
20 particular, shale produced water are likely to contain NORM levels of concern.
- 21 • Composition data were limited. Most of the available data on produced water content were for shale  
22 formations and CBM basins, while little data were available for sandstone formations. Additionally, the  
23 majority of data were for inorganics, and little data were available for organics. Many more organic  
24 chemicals have been reported to have been used in hydraulic fracturing fluid than have been identified in  
25 produced water. The difference may be due to analytical limitations, limited study scopes, and  
26 undocumented subsurface reactions.
- 27 • Hydraulic fracturing flowback and produced water composition is influenced by the composition of  
28 injected hydraulic fracturing fluids, the targeted geological formation and associated hydrocarbon  
29 products, the stratigraphic environment, and subsurface processes and residence time.
- 30 • Spatial variability of produced water content occurs between plays of different rock sources (e.g., coal vs.  
31 sandstone), between plays of the same rock type (e.g., Barnett Shale vs. Bakken Shale), and within  
32 formations of the same source rock (e.g., northeastern vs. southwestern Marcellus Shale).

33 ***What are the chemical and physical properties of hydraulic fracturing flowback and produced water***  
34 ***constituents?***

- 35 • The identified constituents of flowback and produced water include inorganic chemicals (cations and  
36 anions in the form of metals, metalloids, non-metals, and radioactive materials), organic chemicals and  
37 compounds, and unidentified materials measured as TOC (total organic carbon) and DOC (dissolved  
38 organic carbon). Some constituents are readily transported with water (i.e., chloride and bromide), while  
39 others depend strongly on the geochemical conditions in the receiving water body (i.e., radium and  
40 barium), and assessment of their transport is based on site-specific factors. Using the EPA chemical

1 database EPI Suite, we were able to obtain actual or estimated physicochemical properties for 86 (64%)  
2 of the 134 chemicals identified in produced water.

- 3 • As in the case of chemicals in hydraulic fracturing fluid, chemical properties that affect the likelihood of  
4 an organic chemical in produced water reaching and impact drinking water resources in the short-term,  
5 include: high chemical mobility in water, low volatility, and high persistence in water. In general, EPI  
6 suite results suggest that organic chemicals in produced water tend toward lower mobility in water.  
7 Consequently these chemicals could remain in soils or sediments nearby spills. Low mobility may result  
8 in smaller dissolved contaminant plumes in ground water. Although these compounds are more likely to  
9 be transported associated with sediments in surface water or small particles in ground water. Organic  
10 chemical properties vary with salinity and the effects depend on the nature of the chemical.

### 11 ***If spills occur, how might hydraulic fracturing flowback and produced water contaminate drinking*** 12 ***water resources?***

- 13 • Spills of flowback or produced water might impact drinking water resources if the spill or release is of  
14 sufficient volume and duration, to reach the resource at a sufficient concentration. Impacts to in-use  
15 drinking water depend on proximity to sources. Scientific literature and published reports have shown  
16 that produced water spills have impacted drinking water resources.

## 7.9. References for Chapter 7

[Ali, SA; Clark, WJ; Moore, WR; Dribus, JR.](#) (2010). Diagenesis and reservoir quality. *Oilfield Rev* 22: 14-27.

[Alley, B; Beebe, A; Rodgers, J; Castle, JW.](#) (2011). Chemical and physical characterization of produced waters from conventional and unconventional fossil fuel resources. *Chemosphere* 85: 74-82.  
<http://dx.doi.org/10.1016/j.chemosphere.2011.05.043>

[API](#) (American Petroleum Institute). (2005). Modeling study of produced water release scenarios. (Publication Number 4734). Washington, D.C.: API Publishing Services.  
[http://www.api.org/~media/files/ehs/environmental\\_performance/4734.pdf?la=en](http://www.api.org/~media/files/ehs/environmental_performance/4734.pdf?la=en)

[API](#) (American Petroleum Institute). (2010b). Water management associated with hydraulic fracturing. Washington, D.C.: API Publishing Services.  
[http://www.api.org/~media/Files/Policy/Exploration/HF2\\_e1.pdf](http://www.api.org/~media/Files/Policy/Exploration/HF2_e1.pdf)

[Arkadakskiy, S.; Rostron, BJ.](#) (2012a). Stable isotope geochemistry helps in reducing out-of-zone hydraulic fracturing and unwanted brine production from the Bakken Reservoir. Available online at  
[http://isobrine.com/wp-content/uploads/2013/04/Arkadakskiy\\_Rostron\\_20121.pdf](http://isobrine.com/wp-content/uploads/2013/04/Arkadakskiy_Rostron_20121.pdf)

[Arkadakskiy, S; Rostron, B.](#) (2013a). Tracking out-of-zone hydraulic fracturing in the Bakken with naturally occurring tracers. Paper presented at GeoConvention 2013: Integration Canadian Society of Petroleum Geologists, May 6-10, 2013, Calgary, AB, Canada.

[Arthur, JD; Bohm, B; Coughlin, BJ; Layne, M.](#) (2009b). Evaluating the environmental implications of hydraulic fracturing in shale gas reservoirs. Paper presented at SPE Americas E&P Environmental and Safety Conference, March 23-25, 2009, San Antonio, TX.

[ATSDR](#) (Agency for Toxic Substances and Disease Registry). (2005). Public health assessment guidance manual (Update). Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.  
<http://www.atsdr.cdc.gov/hac/PHAManual/toc.html>

- [ATSDR](#) (Agency for Toxic Substances and Disease Registry). (2013). Health consultation: Chesapeake ATGAS 2H well site, Leroy Hill Road, Leroy, Leroy Township, Bradford County, PA. Atlanta, GA: ATSDR, Division of Community Health Investigations.  
[http://www.atsdr.cdc.gov/HAC/pha/ChesapeakeATGASWellSite/ChesapeakeATGASWellSiteHC10282013\\_508.pdf](http://www.atsdr.cdc.gov/HAC/pha/ChesapeakeATGASWellSite/ChesapeakeATGASWellSiteHC10282013_508.pdf)
- [AWWA](#) (American Water Works Association). (2013). Water and hydraulic fracturing: A white paper from the American Water Works Association. Denver, CO.  
<http://www.awwa.org/Portals/0/files/legreg/documents/AWWAFrackingReport.pdf>
- [Barbot, E; Vidic, NS; Gregory, KB; Vidic, RD.](#) (2013). Spatial and temporal correlation of water quality parameters of produced waters from Devonian-age shale following hydraulic fracturing. *Environ Sci Technol* 47: 2562-2569.
- [Barnes, T.](#) (2010). 2 drillers fined for Pennsylvania gas well blowout. Available online at <http://www.post-gazette.com/news/environment/2010/07/14/2-drillers-fined-for-Pennsylvania-gas-well-blowout/stories/201007140241> (accessed March 3, 2015).
- [Benko, KL; Drewes, JE.](#) (2008). Produced water in the Western United States: Geographical distribution, occurrence, and composition. *Environ Eng Sci* 25: 239-246.
- [Bethke, CM, ; Yeakel, S.](#) (2014). The geochemists workbench. Release 10.0. *GWB essentials guide* (Version Release 10.0). Champaign, IL: Aqueous Solutions, LLC. Retrieved from <http://www.gwb.com/pdf/GWB10/GWBessentials.pdf>
- [Bibby, KI; Brantley, SL; Reible, DD; Linden, KG; Mouser, PJ; Gregory, KB; Ellis, BR; Vidic, RD.](#) (2013). Suggested reporting parameters for investigations of wastewater from unconventional shale gas extraction. *Environ Sci Technol* 47: 13220-13221. <http://dx.doi.org/10.1021/es404960z>
- [Blauch, ME; Myers, RR; Moore, TR; Lipinski, BA.](#) (2009). Marcellus shale post-frac flowback waters - where is all the salt coming from and what are the implications? In *Proceedings of the SPE Eastern Regional Meeting*. Richardson, TX: Society of Petroleum Engineers.
- [Blondes, MS; Gans, KD; Thordsen, JJ; Reidy, ME; Thomas, B; Engle, MA; Kharaka, YK; Rowan, EL.](#) (2014). Data: U.S. Geological Survey National Produced Waters Geochemical Database v2.0 (Provisional) [Database]: U.S. Geological Survey :: USGS. Retrieved from <http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsofEnergyProductionandUse/ProducedWaters.aspx#3822349-data>
- [Borrirukwisitsak, S; Keenan, HE; Gauchotte-Lindsay, C.](#) (2012). Effects of salinity, pH and temperature on the octanol-water partition coefficient of bisphenol A. *IJESD* 3: 460-464.  
<http://dx.doi.org/10.7763/IJESD.2012.V3.267>
- [Boschee, P.](#) (2014). Produced and flowback water recycling and reuse: Economics, limitations, and technology. *Oil and Gas Facilities* 3: 16-22.
- [Bouska, V.](#) (1981). *Geochemistry of coal*. New York, NY: Elsevier.
- [Boyer, EW; Swistock, BR; Clark, J; Madden, M; Rizzo, DE.](#) (2011). The impact of Marcellus gas drilling on rural drinking water supplies. Harrisburg, PA: The Center for Rural Pennsylvania.  
<http://www.iogawv.com/Resources/Docs/Marcellus-drinking-water-2011.pdf>
- [Brantley, SL; Yoxtheimer, D; Arjmand, S; Grieve, P; Vidic, R; Pollak, J; Llewellyn, GT; Abad, J; Simon, C.](#) (2014). Water resource impacts during unconventional shale gas development: The Pennsylvania experience. *Int J Coal Geol* 126: 140-156. <http://dx.doi.org/10.1016/j.coal.2013.12.017>
- [Breit, GN.](#) (2002). USGS Produced waters database. Available online at <http://energy.cr.usgs.gov/prov/prodwat/>
- [Brinck, EL; Frost, CD.](#) (2007). Detecting infiltration and impacts of introduced water using strontium isotopes. *Ground Water* 45: 554-568. <http://dx.doi.org/10.1111/j.1745-6584.2007.00345.x>

- [Byrnes, AP.](#) (2011). Role of induced and natural imbibition in frac fluid transport and fate in gas shales. Presentation presented at Technical Workshops for Hydraulic Fracturing Study: Fate & Transport, March 28-29, 2011, Arlington, VA.
- [Caniglia, J.](#) (2014). Youngstown contractor sentenced to 28 months for dumping fracking waste. Available online at [http://www.cleveland.com/court-justice/index.ssf/2014/08/youngstown\\_contractor\\_sentence.html](http://www.cleveland.com/court-justice/index.ssf/2014/08/youngstown_contractor_sentence.html) (accessed March 12, 2015).
- [Chapman, EC; Capo, RC; Stewart, BW; Kirby, CS; Hammack, RW; Schroeder, KT; Edenborn, HM.](#) (2012). Geochemical and strontium isotope characterization of produced waters from Marcellus Shale natural gas extraction. *Environ Sci Technol* 46: 3545-3553.
- [Clark, CE; Horner, RM; Harto, CB.](#) (2013). Life Cycle Water Consumption for Shale Gas and Conventional Natural Gas. *Environ Sci Technol* 47: 11829-11836. <http://dx.doi.org/10.1021/es4013855>
- [Cluff, M; Hartsock, A; Macrae, J; Carter, K; Mouser, PJ.](#) (2014). Temporal changes in microbial ecology and geochemistry in produced water from hydraulically fractured Marcellus Shale Gas Wells. *Environ Sci Technol* 48: 6508-6517. <http://dx.doi.org/10.1021/es501173p>
- [Coleman, N.](#) (2011). Produced formation water sample results from shale plays. Presentation presented at Technical Workshops for the Hydraulic Fracturing Study: Chemical & Analytical Methods, February 24-25, 2011, Arlington, VA.
- [Considine, T; Watson, R; Considine, N; and Martin, J.](#) (2012). Environmental impacts during Marcellus shale gas drilling: Causes, impacts, and remedies. (Report 2012-1). Buffalo, NY: Shale Resources and Society Institute. <http://cce.cornell.edu/EnergyClimateChange/NaturalGasDev/Documents/UBSRSI-Environmental%20Impact%20Report%202012.pdf>
- [Dahm, KG; Guerra, KL; Xu, P; Drewes, JE.](#) (2011). Composite geochemical database for coalbed methane produced water quality in the Rocky Mountain region. *Environ Sci Technol* 45: 7655-7663. <http://dx.doi.org/10.1021/es201021n>
- [Dake, LP.](#) (1978). Fundamentals of reservoir engineering. Boston, MA: Elsevier. <http://www.ing.unp.edu.ar/asignaturas/reservorios/Fundamentals%20of%20Reservoir%20Engineering%20%28L.P.%20Dake%29.pdf>
- [Davis, IP; Struchtemeyer, CG; Elshahed, MS.](#) (2012). Bacterial communities associated with production facilities of two newly drilled thermogenic natural gas wells in the Barnett Shale (Texas, USA). *Microb Ecol* 64: 942-954. <http://dx.doi.org/10.1007/s00248-012-0073-3>
- [DeArmond, PD; DiGoregorio, AL.](#) (2013a). Characterization of liquid chromatography-tandem mass spectrometry method for the determination of acrylamide in complex environmental samples. *Anal Bioanal Chem* 405: 4159-4166. <http://dx.doi.org/10.1007/s00216-013-6822-4>
- [DeArmond, PD; DiGoregorio, AL.](#) (2013b). Rapid liquid chromatography-tandem mass spectrometry-based method for the analysis of alcohol ethoxylates and alkylphenol ethoxylates in environmental samples. *J Chromatogr A* 1305: 154-163. <http://dx.doi.org/10.1016/j.chroma.2013.07.017>
- [Demorest, DL; Wallace, ES.](#) (1992). Radiochemical determination of norm in produced water utilizing wet chemistry separation followed by radiochemical analysis. In JP Ray; Engelhardt; Fr (Eds.), *Produced water: Technological/environmental issues and solutions* (pp. 257-266). New York, NY: Plenum Press. [http://dx.doi.org/10.1007/978-1-4615-2902-6\\_21](http://dx.doi.org/10.1007/978-1-4615-2902-6_21)
- [DOE](#) (U.S. Department of Energy). (2004). A white paper describing produced water from production of crude oil, natural gas, and coal bed methane. Lemont, IL: Argonne National Laboratory. [http://seca.doe.gov/technologies/oil-gas/publications/oil\\_pubs/prodwaterpaper.pdf](http://seca.doe.gov/technologies/oil-gas/publications/oil_pubs/prodwaterpaper.pdf)
- [DOE](#) (U.S. Department of Energy). (2011a). A comparative study of the Mississippian Barnett shale, Fort Worth basin, and Devonian Marcellus shale, Appalachian basin. (DOE/NETL-2011/1478). <http://www.netl.doe.gov/technologies/oil-gas/publications/brochures/DOE-NETL-2011-1478%20Marcellus-Barnett.pdf>



- [Dresel, PE; Rose, AW.](#) (2010). Chemistry and origin of oil and gas well brines in western Pennsylvania (pp. 48). (Open-File Report OFOG 1001.0). Harrisburg, PA: Pennsylvania Geological Survey, 4th ser. <http://www.marcellus.psu.edu/resources/PDFs/brines.pdf>
- [EERC](#) (Energy and Environmental Research Center, University of North Dakota). (2013). BakkenSmart: water [Fact Sheet]. Grand Forks, ND: Energy and Environmental Research Center. <http://www.undeerc.org/bakken/pdfs/NDIC-NDPC-Water-Fact-Sheet.pdf>
- [Eiceman, GA.](#) (1986). Hazardous organic wastes from natural gas production, processing and distribution: Environmental fates. (WRRRI report, no. 227). New Mexico: Water Resources Research Institute. <http://wrri.nmsu.edu/publish/techrpt/abstracts/abs227.html>
- [Engelder, T.](#) (2012). Capillary tension and imbibition sequester frack fluid in Marcellus gas shale [Letter]. PNAS 109: E3625; author reply E3626. <http://dx.doi.org/10.1073/pnas.1216133110>
- [Engle, MA; Rowan, EL.](#) (2014). Geochemical evolution of produced waters from hydraulic fracturing of the Marcellus Shale, northern Appalachian Basin: A multivariate compositional data analysis approach. Int J Coal Geol 126: 45-56. <http://dx.doi.org/10.1016/j.coal.2013.11.010>
- [Entrekin, S; Evans-White, M; Johnson, B; Hagenbuch, E.](#) (2011). Rapid expansion of natural gas development poses a threat to surface waters. Front Ecol Environ 9: 503-511. <http://dx.doi.org/10.1890/110053>
- [ESN Rocky Mountain](#) (Environmental Services Network Rocky Mountain). (2003). Produced gas and water testing of CBM gas wells in the Raton Basin. Golden, CO. [https://cogcc.state.co.us/Library/RatonBasin/ESN%20Final\\_Report.pdf](https://cogcc.state.co.us/Library/RatonBasin/ESN%20Final_Report.pdf)
- [Farang, AM; Harper, DD.](#) (2014). A review of environmental impacts of salts from produced waters on aquatic resources. Int J Coal Geol 126: 157-161. <http://dx.doi.org/10.1016/j.coal.2013.12.006>
- [Fertl, WH; Chilingar, GV.](#) (1988). Total organic carbon content determined from well logs. SPE Formation Evaluation 3: 407-419. <http://dx.doi.org/10.2118/15612-PA>
- [Fisher, JB; Sublette, KL.](#) (2005). Environmental releases from exploration and production operations in Oklahoma: Type, volume, causes, and prevention. Environmental Geosciences 12: 89-99. <http://dx.doi.org/10.1306/eg.11160404039>
- [Fisher, RS.](#) (1998). Geologic and geochemical controls on naturally occurring radioactive materials (NORM) in produced water from oil, gas, and geothermal operations. Environmental Geosciences 5: 139-150. <http://dx.doi.org/10.1046/j.1526-0984.1998.08018.x>
- [Gilmore, K; Hupp, R; Glathar, J.](#) (2013). Transport of Hydraulic Fracturing Water and Wastes in the Susquehanna River Basin, Pennsylvania. J Environ Eng 140: B4013002. [http://dx.doi.org/10.1061/\(ASCE\)EE.1943-7870.0000810](http://dx.doi.org/10.1061/(ASCE)EE.1943-7870.0000810)
- [Gregory, KB; Vidic, RD; Dzombak, DA.](#) (2011). Water management challenges associated with the production of shale gas by hydraulic fracturing. Elements 7: 181-186.
- [Gross, SA; Avens, HJ; Banducci, AM; Sahmel, J; Panko, JM; Tvermoes, BE.](#) (2013). Analysis of BTEX groundwater concentrations from surface spills associated with hydraulic fracturing operations. J Air Waste Manag Assoc 63: 424-432. <http://dx.doi.org/10.1080/10962247.2012.759166>
- [Guerra, K; Dahm, K; Dunderf, S.](#) (2011). Oil and gas produced water management and beneficial use in the western United States. (Science and Technology Program Report No. 157). Denver, CO: U.S. Department of the Interior Bureau of Reclamation.
- [GWPC and ALL Consulting](#) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>

- [GWPC and IOGCC](#) (Ground Water Protection Council and Interstate Oil and Gas Compact Commission). (2014). Fracturing fluid management. Available online at <http://fracfocus.org/hydraulic-fracturing-how-it-works/drilling-risks-safeguards> (accessed December 12, 2014).
- [Haluszczak, LO; Rose, AW; Kump, LR](#). (2013). Geochemical evaluation of flowback brine from Marcellus gas wells in Pennsylvania, USA. *Appl Geochem* 28: 55-61. <http://dx.doi.org/10.1016/j.apgeochem.2012.10.002>
- [Hansen, E; Mulvaney, D; Betcher, M](#). (2013). Water resource reporting and water footprint from Marcellus Shale development in West Virginia and Pennsylvania. Durango, CO: Earthworks Oil & Gas Accountability Project. [http://www.downstreamstrategies.com/documents/reports\\_publication/marcellus\\_wv\\_pa.pdf](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf)
- [Hayes, T](#). (2009). Sampling and analysis of water streams associated with the development of Marcellus shale gas. Des Plaines, IL: Marcellus Shale Coalition. <http://eidmarcellus.org/wp-content/uploads/2012/11/MSCommission-Report.pdf>
- [Hayes, T](#). (2011). Characterization of Marcellus and Barnett shale flowback waters and technology development for water reuse. Paper presented at Hydraulic Fracturing Study: March 2011 Technical Workshop on Water Resource Management, March 29-30, 2011, Arlington, VA.
- [Hayes, T; Severin, B](#). (2012a). Characterization of flowback water from the the Marcellus and the Barnett shale regions. Barnett and Appalachian shale water management and reuse technologies. (08122-05.09; Contract 08122-05). Hayes, T; Severin, B. [http://www.rpsea.org/media/files/project/2146b3a0/08122-05-RT-Characterization\\_Flowback\\_Waters\\_Marcellus\\_Barnett\\_Shale\\_Regions-03-20-12.pdf](http://www.rpsea.org/media/files/project/2146b3a0/08122-05-RT-Characterization_Flowback_Waters_Marcellus_Barnett_Shale_Regions-03-20-12.pdf)
- [He, Z](#). (2011). Flow of gas and water in hydraulically fractured shale gas reservoirs. EPA HF Workshop, March 28-29, 2011, Arlington, VA.
- [Healy, RW; Bartos, TT; Rice, CA; Mckinley, MP; Smith, BD](#). (2011). Groundwater chemistry near an impoundment for produced water, Powder River Basin, Wyoming, USA. *J Hydrol* 403: 37-48. <http://dx.doi.org/10.1016/j.jhydrol.2011.03.042>
- [Healy, RW; Rice, CA; Bartos, TT; Mckinley, MP](#). (2008). Infiltration from an impoundment for coal-bed natural gas, Powder River Basin, Wyoming: Evolution of water and sediment chemistry. *Water Resour Res* 44: n/a-n/a. <http://dx.doi.org/10.1029/2007wr006396>
- [Horse, CA](#). (1981). Depositional environments of the Pennsylvanian Pottsville Formation in the Black Warrior Basin of Alabama. *Journal of Sedimentary Research* 51: 799-806. <http://dx.doi.org/10.1306/212F7DB5-2B24-11D7-8648000102C1865D>
- [Hunter, JA; Moser, PH](#). (1990). Ground water availability in Jefferson County, Alabama: geological survey special map 224. Tuscaloosa, AL: Geological Survey of Alabama. [http://www.ogb.state.al.us/documents/pubs/onlinepubs/Special\\_Maps/SM224\\_.PDF](http://www.ogb.state.al.us/documents/pubs/onlinepubs/Special_Maps/SM224_.PDF)
- [IUPAC](#) (International Union of Pure and Applied Chemistry). (2014). Gold Book: matrix effect. Available online at <http://goldbook.iupac.org/M03759.html> (accessed April 8, 2015).
- [Kharaka, YK; Kakouros, E; Thordsen, JJ; Ambats, G; Abbott, MM](#). (2007). Fate and groundwater impacts of produced water releases at OSPER B site, Osage County, Oklahoma. *Appl Geochem* 22: 2164-2176. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.005>
- [Langmuir, D; Riese, AC](#). (1985). THE THERMODYNAMIC PROPERTIES OF RADIUM. *Geochim Cosmo Acta* 49: 1593-1601.
- [Lee, K; Neff, J](#). (2011). Produced water: Environmental risks and advances in mitigation technologies. New York, NY: Springer. <http://dx.doi.org/10.1007/978-1-4614-0046-2>
- [Levis, E](#). (2011). Texas company pays \$93,710 settlement for polluting Clearfield County Creek. Pennsylvania Fish and Boat Commission. <https://www.fish.state.pa.us/newsreleases/2011press/eog-settlement.htm>
- [Lutz, BD; Lewis, AN; Doyle, MW](#). (2013). Generation, transport, and disposal of wastewater associated with Marcellus Shale gas development. *Water Resour Res* 49: 647-656.

- [Mantell, ME.](#) (2011). Produced water reuse and recycling challenges and opportunities across major shale plays. Presentation presented at Hydraulic Fracturing Study: March 2011 Technical Workshop #4 on Water Resources Management, March 29-30, 2011, Arlington, VA.
- [Mantell, ME.](#) (2013b). Recycling and reuse of produced water to reduce freshwater use in hydraulic fracturing operations. In Summary of the technical workshop on water acquisition modeling: Assessing impacts through modeling and other means (pp. A20-A27). Washington, D.C.: U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/summary-technical-workshop-water-acquisition-modeling-assessing-impacts-through-modeling-and>
- [Marshak, S.](#) (2004). Essentials of geology (1st ed.). New York, NY: W.W. Norton and Company.
- [McElreath, D.](#) (2011). Comparison of hydraulic fracturing fluids composition with produced formation water following fracturing Implications for fate and transport. Presentation presented at Hydraulic Fracturing Study: March 2011 Technical Workshop on Fate and Transport, March 28-29, 2011, Arlington, VA.
- [McIntosh, JC; Walter, LM.](#) (2005). Volumetrically significant recharge of Pleistocene glacial meltwaters into epicratonic basins: Constraints imposed by solute mass balances. *Chem Geol* 222: 292-309. <http://dx.doi.org/10.1016/j.chemgeo.2005.07.010>
- [McIntosh, JC; Walter, LM; Martini, AM.](#) (2002). Pleistocene recharge to midcontinent basins: effects on salinity structure and microbial gas generation. *Geochim Cosmochim Acta* 66: 1681-1700. [http://dx.doi.org/10.1016/S0016-7037\(01\)00885-7](http://dx.doi.org/10.1016/S0016-7037(01)00885-7)
- [Minnich, K.](#) (2011). A water chemistry perspective on flowback reuse with several case studies. Minnich, K. [http://www2.epa.gov/sites/production/files/documents/10\\_Minnich\\_-\\_Chemistry\\_508.pdf](http://www2.epa.gov/sites/production/files/documents/10_Minnich_-_Chemistry_508.pdf)
- [Montana GWIC](#) (Montana Ground Water Information Center). (2009). Coal bed methane powder river basin: Montana Bureau of Mines and Geology Ground Water Information Center. Butte, MT.
- [Mouser, P; Liu, S; Cluff, M; McHugh, M; Lenhart, J; MacRae, J.](#) (In Press) Biodegradation of hydraulic fracturing fluid organic additives in sediment-groundwater microcosms.
- [Murali Mohan, A; Hartsock, A; Hammack, RW; Vidic, RD; Gregory, KB.](#) (2013). Microbial communities in flowback water impoundments from hydraulic fracturing for recovery of shale gas. *FEMS Microbiol Ecol.* <http://dx.doi.org/10.1111/1574-6941.12183>
- [Neff, JM.](#) (2002). Bioaccumulation in marine organisms: Effect of contaminants from oil well produced water. Amsterdam: Elsevier.
- [Nelson, AW; May, D; Knight, AW; Eitrheim, ES; Mehrhoff, M; Shannon, R; Litman, R; Schultz, MK.](#) (2014). Matrix complications in the determination of radium levels in hydraulic fracturing flowback water from Marcellus Shale. 1: 204-208. <http://dx.doi.org/10.1021/ez5000379>
- [New Mexico Bureau of Mines and Mineral Resources.](#) (1994). Coalbed methane in the upper cretaceous fruitland formation, San Juan Basin, New Mexico and Colorado. Socorro, NM: New Mexico Bureau of Mines and Mineral Resources, New Mexico Institute of Mining and Technology. <https://geoinfo.nmt.edu/publications/monographs/bulletins/146/>
- [Nicot, JP; Scanlon, BR.](#) (2012). Water use for shale-gas production in Texas, U.S. *Environ Sci Technol* 46: 3580-3586. <http://dx.doi.org/10.1021/es204602t>
- [Nicot, JP; Scanlon, BR; Reedy, RC; Costley, RA.](#) (2014). Source and fate of hydraulic fracturing water in the Barnett Shale: a historical perspective. *Environ Sci Technol* 48: 2464-2471. <http://dx.doi.org/10.1021/es404050r>
- [North Dakota Department of Health.](#) (2015). Oil field environmental incident summary, incident 20150107160242. Available online at [http://www.ndhealth.gov/EHS/FOIA/Spills/Summary Reports/20150107160242\\_Summary\\_Report.pdf](http://www.ndhealth.gov/EHS/FOIA/Spills/Summary%20Reports/20150107160242_Summary_Report.pdf)

- [NRC](#) (National Research Council). (2010). Management and effects of coalbed methane produced water in the western United States. Washington, DC: National Academies Press.  
[http://www.nap.edu/catalog.php?record\\_id=12915](http://www.nap.edu/catalog.php?record_id=12915)
- [NSTC](#) (National Science and Technology Council). (2000). Integrated assessment of hypoxia in the Northern Gulf of Mexico. Washington, DC: U.S. National Science and Technology Council, Committee on Environment and Natural Resources. [http://oceanservice.noaa.gov/products/hypox\\_final.pdf](http://oceanservice.noaa.gov/products/hypox_final.pdf)
- [Olawoyin, R; Wang, JY; Oyewole, SA](#). (2013). Environmental safety assessment of drilling operations in the Marcellus-shale gas development. *S P E Drilling & Completion* 28: 212-220.  
<http://dx.doi.org/10.2118/163095-PA>
- [Olmstead, SM; Muehlenbachs, LA; Shih, JS; Chu, Z; Krupnick, AJ](#). (2013). Shale gas development impacts on surface water quality in Pennsylvania. *PNAS* 110: 4962-4967.  
<http://dx.doi.org/10.1073/pnas.1213871110>
- [Orem, W; Tatu, C; Varonka, M; Lerch, H; Bates, A; Engle, M; Crosby, L; Mcintosh, J](#). (2014). Organic substances in produced and formation water from unconventional natural gas extraction in coal and shale. *Int J Coal Geol* 126: 20-31. <http://dx.doi.org/10.1016/j.coal.2014.01.003>
- [Orem, WH; Tatu, CA; Lerch, HE; Rice, CA; Bartos, TT; Bates, AL; Tewalt, S; Corum, MD](#). (2007). Organic compounds in produced waters from coalbed natural gas wells in the Powder River Basin, Wyoming, USA. *Appl Geochem* 22: 2240-2256. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.010>
- [Otton, JK; Zielinski, RA; Smith, BD; Abbott, MM](#). (2007). Geologic controls on movement of produced-water releases at US geological survey research Site A, Skiatook lake, Osage county, Oklahoma. *Appl Geochem* 22: 2138-2154. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.015>
- [PA DCNR](#) (Pennsylvania Department of Conservation and Natural Resources). (2015). Thermal maturation and petroleum generation. Available online at [http://www.dcnr.state.pa.us/topogeo/econresource/oilandgas/marcellus/sourcerock\\_index/sourcerock\\_maturation/index.htm](http://www.dcnr.state.pa.us/topogeo/econresource/oilandgas/marcellus/sourcerock_index/sourcerock_maturation/index.htm) (accessed April 9, 2015).
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2009a). Inspection Report, inspection record #1835041, enforcement record #251134. Harrisburg, PA: Commonwealth of Pennsylvania Department of Environmental Protection, Oil and Gas Management Program.
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2010). DEP Fines Atlas Resources for drilling wastewater spill in Washington County. Available online at <http://www.portal.state.pa.us/portal/server.pt/community/newsroom/14287?id=13595&typeid=1> (accessed February 13, 2014).
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2011c). Surface water sample analytical results from XTO 308 response data from XTO February 3, 2011 CAWP addendum. Indiana, PA: XTO Energy.
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015b). Technologically enhanced naturally occurring radioactive materials (TENORM) study report. Harrisburg, PA.  
[http://www.library.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study\\_Report\\_Rev\\_0\\_01-15-2015.pdf](http://www.library.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study_Report_Rev_0_01-15-2015.pdf)
- [Papoulias, DM; Velasco, AL](#). (2013). Histopathological analysis of fish from Acorn Fork Creek, Kentucky, exposed to hydraulic fracturing fluid releases. *Southeastern Naturalist* 12: 92-111.
- [Pattera, P](#). (2011). DEP shuts down Tri-County Waste Water over illegal dumping. Available online at [http://triblive.com/x/pittsburghtrib/news/regional/s\\_728516.html#axzz3UCvkvM7t](http://triblive.com/x/pittsburghtrib/news/regional/s_728516.html#axzz3UCvkvM7t) (accessed March 12, 2015).
- [Peterman, ZE; Thamke, J; Futa, K; Oliver, T](#). (2012). Strontium isotope evolution of produced water in the East Poplar Oil Field, Montana. Presentation presented at US Geological Survey AAPG annual convention and exhibition, April 23, 2012, Long Beach, California.

- [Repetski, JE; Ryder, RT; Weary, DJ; Harris, AG; Trippie, MH.](#) (2008). Thermal maturity patterns (CAI and %Ro) in upper ordovician and devonian rocks of the Appalachian Basin: A major revision of USGS map I917E using new subsurface collections. U.S. Geological Survey. <http://pubs.usgs.gov/sim/3006/SIM3006.pdf>
- [Reuters.](#) (2014). UPDATE 2-oil well in North Dakota out of control, leaking. Available online at <http://www.reuters.com/article/2014/02/14/energy-crude-blowout-idUSL2N0LJ15820140214> (accessed March 2, 2015).
- [Reynolds, RR; Kiker, RD.](#) (2003). Produced water and associated issues a manual for the independent operator. (Oklahoma Geological Survey Open-File Report 6-2003). Tulsa, OK: Oklahoma Geological Survey. [http://karl.nrcce.wvu.edu/regional/pww/produced\\_water.pdf](http://karl.nrcce.wvu.edu/regional/pww/produced_water.pdf)
- [Rice, CA.](#) (1999). Waters co-produced with coal-bed methane from the Ferron Sandstone in east central Utah: chemical and isotopic composition, volumes, and impacts of disposal [Abstract]. Geological Society of America Abstracts with Programs 31: A385.
- [Rice, CA; Ellis, MS; Bullock, JH.](#) (2000). Water co-produced with coalbed methane in the Powder River basin, Wyoming: Preliminary compositional data. (Open File-Report 00-372). Denver, CO: U.S. Department of the Interior, U.S. Geological Survey.
- [Richter, BC; Kreitler, CW.](#) (1993). Geochemical techniques for identifying sources of ground-water salinization. Boca Raton, FL: CRC Press. <http://www.crcpress.com/product/isbn/9781566700009>
- [Rowan, EL; Engle, MA; Kirby, CS; Kraemer, TF.](#) (2011). Radium content of oil- and gas-field produced waters in the northern Appalachian Basin (USA): Summary and discussion of data. (Scientific Investigations Report 20115135). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2011/5135/>
- [Rowan, EL; Engle, MA; Kraemer, TF; Schroeder, KT; Hammack, RW; Doughten, MW.](#) (2015). Geochemical and isotopic evolution of water produced from Middle Devonian Marcellus shale gas wells, Appalachian basin, Pennsylvania. AAPG Bulletin 99: 181-206. <http://dx.doi.org/10.1306/07071413146>
- [Rozell, DJ; Reaven, SJ.](#) (2012). Water pollution risk associated with natural gas extraction from the Marcellus Shale. Risk Anal 32: 13821393. <http://dx.doi.org/10.1111/j.1539-6924.2011.01757.x>
- [Rushing, JA; Newsham, KE; Blasingame, TA.](#) (2013). Rock typing: Keys to understanding productivity in tight gas sands. SPE Unconventional Reservoirs Conference, February 10-12, 2008, Keystone, Colorado, USA.
- [SAIC and GES](#) (SAIC Energy, Environment & Infrastructure, LLC and Groundwater & Environmental Services, Inc). (2011). ATGAS investigation initial site characterization and response, April 19, 2011 to May 2, 2011, ATGAS2H Well Pad, permit no. 37-015-21237, Leroy Township, Bradford County, PA. Harrisburg, Pennsylvania: Chesapeake Appalachia, LLC. [http://www.chk.com/news/articles/documents/atgas\\_initial\\_site\\_characterization\\_report\\_final\\_08292011.pdf](http://www.chk.com/news/articles/documents/atgas_initial_site_characterization_report_final_08292011.pdf)
- [Sang, W; Stoof, CR; Zhang, W; Morales, VL; Gao, B; Kay, RW; Liu, L; Zhang, Y; Steenhuis, TS.](#) (2014). Effect of hydrofracking fluid on colloid transport in the unsaturated zone. Environ Sci Technol 48: 8266-8274. <http://dx.doi.org/10.1021/es501441e>
- [Schlegel, ME; McIntosh, JC; Petsch, ST; Orem, WH; Jones, EJP; Martini, AM.](#) (2013). Extent and limits of biodegradation by in situ methanogenic consortia in shale and formation fluids. Appl Geochem 28: 172-184. <http://dx.doi.org/10.1016/j.apgeochem.2012.10.008>
- [Schlumberger](#) (Schlumberger Limited). (2014). Schlumberger oilfield glossary. Available online at <http://www.glossary.oilfield.slb.com/>
- [Schmidley, EB; Smith, BJ.](#) (2011). Personal communication from Schmidley and Smith to DiCello: CAWP Addendum EM Survey & Well Location; XTO Energy, Inc. Marquardt Release. Available online



- [Schmidt, V; McDonald, DA.](#) (1979). The role of secondary porosity in the course of sandstone diagenesis. In PA Schole; PR Schluger (Eds.), *Aspects of diagenesis : based on symposia sponsored by the Eastern and by the Rocky Mountain Sections, The Society of Economic Paleontologists and Mineralogists* (pp. 175-207). Tulsa, OK: The Society of Economic Paleontologists and Mineralogists (SEPM).  
[http://archives.datapages.com/data/sepm\\_sp/SP26/The\\_Role\\_of\\_Secondary\\_Porosity.html](http://archives.datapages.com/data/sepm_sp/SP26/The_Role_of_Secondary_Porosity.html)
- [Schwarzenbach, RP; Gschwend, PM; Imboden, DM.](#) (2002). *Environmental Organic Chemistry*. In *Environmental organic chemistry* (2 ed.). Hoboken, NJ: John Wiley & Sons, Inc.
- [Science Applications International Corporation.](#) (2010). XTO - Marquardt pad soil and water corrective action workplan. (XTO-EPA0001074). Indiana, PA: XTO Energy.
- [Šimunek, J; Šejna, M; van Genuchten, MT.](#) (1998). The HYDRUS-1D software package for simulating the one-dimensional movement of water, heat, and multiple solutes in variably-saturated media, Version 2.0, IGWMC-TPS-70. Available online
- [Sirivedhin, T; Dallbauman, L.](#) (2004). Organic matrix in produced water from the Osage-Skiatook petroleum environmental research site, Osage county, Oklahoma. *Chemosphere* 57: 463-469.
- [States, S; Cyprych, G; Stoner, M; Wydra, F; Kuchta, J; Monnell, J; Casson, L.](#) (2013). Marcellus Shale drilling and brominated THMs in Pittsburgh, Pa., drinking water. *J Am Water Works Assoc* 105: E432-E448.  
<http://dx.doi.org/10.5942/jawwa.2013.105.0093>
- [Stewart, DR.](#) (2013a). Analytical testing for hydraulic fracturing fluid water recovery and reuse. In *Summary of the technical workshop on analytical chemical methods* (pp. B6-B10). Stewart, DR.  
<http://www2.epa.gov/sites/production/files/documents/analytical-chemical-methods-technical-workshop-summary.pdf>
- [Strong, L; Gould, T; Kasinkas, L; Sadowsky, M; Aksan, A; Wackett, L.](#) (2013). Biodegradation in waters from hydraulic fracturing: chemistry, microbiology, and engineering. *J Environ Eng* 140: B4013001.  
[http://dx.doi.org/10.1061/\(ASCE\)EE.1943-7870.0000792](http://dx.doi.org/10.1061/(ASCE)EE.1943-7870.0000792)
- [Sturchio, NC; Banner, JL; Binz, CM; Heraty, LB; Musgrove, M.](#) (2001). Radium geochemistry of ground waters in Paleozoic carbonate aquifers, midcontinent, USA. *Appl Geochem* 16: 109-122.
- [Sumi, L.](#) (2004). Pit pollution: Background on the issues, with a New Mexico case study. Washington, DC: Earthworks: Oil and Gas Accountability Project.  
<http://www.earthworksaction.org/files/publications/PitReport.pdf>
- [Sun, M; Lowry, GV; Gregory, KB.](#) (2013). Selective oxidation of bromide in wastewater brines from hydraulic fracturing. *Water Res* 47: 3723-3731. <http://dx.doi.org/10.1016/j.watres.2013.04.041>
- [Swanson, VE.](#) (1955). Uranium in marine black shales of the United States. In *Contributions to the geology of uranium and thorium by the United States Geological Survey and Atomic Energy Commission for the United Nations International Conference on Peaceful Uses of Atomic Energy, Geneva, Switzerland, 1955* (pp. 451-456). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/pp/0300/report.pdf>
- [Thordsen, JJ; . Kharaka, YK; Ambats, G; Kakouros, E; Abbott, MM.](#) (2007). *Geochemical data from produced water contamination investigations: Osage-Skiatook Petroleum Environmental Research (OSPER) sites, Osage County, Oklahoma. (Open-File Report 2007-1055)*. Reston, VA: United States Geological Survey.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (1992). *Guidance for data useability in risk assessment (part A) - final. (Publication 9285.7-09A)*. Washington, D.C.  
<http://www.epa.gov/oswer/riskassessment/datause/parta.htm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (1999). *Understanding oil spills and oil spill response [EPA Report]. (EPA 540-K-99-007)*. Washington, D.C.: U.S. Environmental Protection Agency, Office of Emergency and Remedial Response.  
<http://www4.nau.edu/itep/waste/hazsubmap/docs/OilSpill/EPAUnderstandingOilSpillsAndOilSpillResponse1999.pdf>



- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2004). Evaluation of impacts to underground sources of drinking water by hydraulic fracturing of coalbed methane reservoirs. (EPA/816/R-04/003). Washington, DC.: U.S. Environmental Protection Agency, Office of Solid Waste.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2007). Monitored natural attenuation of inorganic contaminants in ground water: volume 1 technical basis for assessment [EPA Report]. (EPA/600/R-07/139). Washington, D.C. <http://nepis.epa.gov/Adobe/PDF/60000N4K.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012a). 5.2 Dissolved oxygen and biochemical oxygen demand. In Water Monitoring and Assessment. <http://water.epa.gov/type/rsl/monitoring/vms52.cfm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012f). Study of the potential impacts of hydraulic fracturing on drinking water resources: Progress report. (EPA/601/R-12/011). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://nepis.epa.gov/exe/ZyPURL.cgi?Dockey=P100FH8M.txt>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013e). SW-846 on-line. Available online at <http://www.epa.gov/epawaste/hazard/testmethods/sw846/online/index.htm> (accessed April 8, 2015).
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013g). XTO Energy, Inc. Settlement. Available online at <http://www2.epa.gov/enforcement/xto-energy-inc-settlement>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014b). Development of rapid radiochemical method for gross alpha and gross beta activity concentration in flowback and produced waters from hydraulic fracturing operations [EPA Report]. (EPA/600/R-14/107). Washington, D.C. <http://www2.epa.gov/hfstudy/development-rapid-radiochemical-method-gross-alpha-and-gross-beta-activity-concentration>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014b). The verification of a method for detecting and quantifying diethylene glycol, triethylene glycol, tetraethylene glycol, 2-butoxyethanol and 2-methoxyethanol in ground and surface waters [EPA Report]. (EPA/600/R-14/008). Washington, D.C. <http://www2.epa.gov/hfstudy/verification-method-detecting-and-quantifying-diethylene-glycol-triethylene-glycol>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015j). Retrospective case study in Killdeer, North Dakota: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/103). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015k). Retrospective case study in southwestern Pennsylvania: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/084). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015m). Retrospective case study in Wise County, Texas: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/090). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015n). Review of state and industry spill data: characterization of hydraulic fracturing-related spills [EPA Report]. (EPA/601/R-14/001). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015q). Technical development document for proposed effluent limitation guidelines and standards for oil and gas extraction. (EPA-821-R-15-003). Washington, D.C. <http://water.epa.gov/scitech/wastetech/guide/oilandgas/unconv.cfm>
- [U.S. GAO](#) (U.S. Government Accountability Office). (2012). Energy-water nexus: Information on the quantity, quality, and management of water produced during oil and gas production. (GAO-12-156). Washington, D.C. <http://www.gao.gov/products/GAO-12-156>

- [USGS](#) (U.S. Geological Survey). (2006). Produced Water Database [Database]: U.S. Geological Survey :: USGS. Retrieved from <http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsofEnergyProductionandUse/ProducedWaters.aspx#3822110-overview>
- [USGS](#) (U.S. Geological Survey). (2010). Volatile organic compounds in the nation's ground water and drinking-water supply wells: Supporting information. Glossary. Available online at [http://water.usgs.gov/nawqa/vocs/national\\_assessment/report/glossary.html](http://water.usgs.gov/nawqa/vocs/national_assessment/report/glossary.html)
- [USGS](#) (U.S. Geological Survey). (2013b). National hydrography dataset: High-resolution flowline data: The national map. Retrieved from <http://viewer.nationalmap.gov/viewer/>
- [USGS](#) (U.S. Geological Survey). (2014f). USGS investigations of water produced during hydrocarbon reservoir development [Fact Sheet]. Reston, VA. <http://dx.doi.org/10.3133/fs20143104>
- [Vaidyanathan, G.](#) (2013a). Hydraulic fracturing: when 2 wells meet, spills can often follow. Available online at <http://www.eenews.net/energywire/stories/1059985587> (accessed September 2, 2014).
- [Vaidyanathan, G.](#) (2013b). XTO comes out swinging against 'unwarranted' criminal charges in Pa. E&E News 0.
- [Van Voast, WA.](#) (2003). Geochemical signature of formation waters associated with coalbed methane. AAPG Bulletin 87: 667-676.
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A.](#) (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. Environ Sci Technol 48: 36-52. <http://dx.doi.org/10.1021/es405118y>
- [Vidic, RD; Brantley, SL; Vandenbossche, JM; Yoxtheimer, D; Abad, JD.](#) (2013). Impact of shale gas development on regional water quality [Review]. Science 340: 1235009. <http://dx.doi.org/10.1126/science.1235009>
- [Vine, JD; Tourtelot, EB.](#) (1970). Geochemistry of black shale deposits; A summary report. Econ Geol 65: 253-272. <http://dx.doi.org/10.2113/gsecongeo.65.3.253>
- [Vittitow, JG, Sr.](#) (2010). Well control incident analysis, EOG Resources Inc., Punxautawney Hunting Club 36H, Clearfield County, Pennsylvania. Bedrock Engineering. [http://www.pahouse.com/EnvResources/documents/BEDROCK\\_ENGINEERING\\_PHC\\_36H\\_Incident\\_Report\\_Final.pdf](http://www.pahouse.com/EnvResources/documents/BEDROCK_ENGINEERING_PHC_36H_Incident_Report_Final.pdf)
- [Warner, NR; Kresse, TM; Hays, PD; Down, A; Karr, JD; Jackson, RB; Vengosh, A.](#) (2013b). Geochemical and isotopic variations in shallow groundwater in areas of the Fayetteville Shale development, north-central Arkansas. Appl Geochem 35: 207-220.
- [Whittemore, DO.](#) (2007). Fate and identification of oil-brine contamination in different hydrogeologic settings. Appl Geochem 22: 2099-2114. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.002>
- [Williams, JE; Taylor, LE; Low, DJ.](#) (1998). Hydrogeology and Groundwater Quality of the Glaciated Valleys of Bradford, Tioga, and Potter Counties, Pennsylvania. 98.
- [Wilson, B.](#) (2014). Geologic and baseline groundwater evidence for naturally occurring, shallowly sourced, thermogenic gas in northeastern Pennsylvania. AAPG Bulletin 98: 373-394. <http://dx.doi.org/10.1306/08061312218>
- [Wuchter, C; Banning, E; Mincer, TJ; Drenzek, NJ; Coolen, MJ.](#) (2013). Microbial diversity and methanogenic activity of Antrim Shale formation waters from recently fractured wells. FMICB 4: 1-14. <http://dx.doi.org/10.3389/fmicb.2013.00367>
- [Xu, B; Hill, AD; Zhu, D; Wang, L.](#) (2011). Experimental evaluation of guar fracture fluid filter cake behavior. Paper presented at SPE Hydraulic Fracturing Technology Conference, January 24-26, 2011, The Woodlands, TX.

[Ziemkiewicz, P; Quaranta, JD; Mccawley, M.](#) (2014). Practical measures for reducing the risk of environmental contamination in shale energy production. *Environ Sci Process Impacts* 16: 1692-1699.  
<http://dx.doi.org/10.1039/c3em00510k>

## Chapter 8

---

# Wastewater Treatment and Waste Disposal

## 8. Wastewater Treatment and Waste Disposal

### 8.1. Introduction

1 Hydraulic fracturing used for the development of oil and gas resources results in the production of  
2 wastewater containing a range of problematic or potentially problematic constituents (see Chapter  
3 7) and requiring management. For the purposes of this assessment, hydraulic fracturing  
4 wastewater encompasses flowback and produced water (often referred to together as produced  
5 water) that is managed using any of a number of practices, including treatment and discharge,  
6 reuse, or injection into Class IID wells regulated under the Underground Injection Control (UIC)  
7 program under the Safe Drinking Water Act (SDWA) (see also Chapter 1).<sup>1</sup> In this chapter, the term  
8 “wastewater” is generally used. In limited cases where more specific information is provided about  
9 a wastewater (e.g., a source indicates that the wastewater is flowback), that information is also  
10 noted.

11 Although wells producing from either unconventional or conventional oil and gas reservoirs  
12 generate produced water during the course of their productive lifespan, wells conducting modern  
13 high-volume hydraulic fracturing can generate a large volume of flowback water in the period  
14 immediately after fracturing. Stakeholders reported to the U.S. Government Accountability Office  
15 that flowback volumes could be 420,000 gal to 2.52 Mgal (10,000 to 60,000 bbl or 1.59 million to  
16 9.54 million L) per well per hydraulic fracture ([U.S. GAO, 2012](#)) (see Chapter 7.1.1 for more  
17 information on produced water volumes per well in various geologic basins and plays). This  
18 necessitates having a wastewater management strategy in place at the beginning of activities at the  
19 well. Selection of management choices may depend upon the quality and volume of the fluids,  
20 logistics, and economics.

21 Treatment and disposal strategies vary throughout the United States and may include underground  
22 injection, on-site or offsite treatment for reuse in subsequent hydraulic fracturing operations, reuse  
23 without treatment, or other uses. In some areas, wastewater may be applied to the land (e.g., for  
24 irrigation) or held in pits for evaporation. The large majority of wastewater generated from all oil  
25 and gas operations in the United States is disposed of via Class IID wells ([Clark and Veil, 2009](#)). As  
26 hydraulic fracturing activity matures, costs of different disposal practices may change in various  
27 regions due to factors such as regulations, available infrastructure, feasibility and cost of reuse  
28 practices, and other concerns that are difficult to anticipate and quantify at the time of this  
29 assessment.

30 Over the past decade, the rapid increase in modern hydraulic fracturing activities has led to the  
31 need to manage the associated wastewater. There has been a shift towards reuse in areas where

---

<sup>1</sup> The term “wastewater” is being used in this study as a general description of certain waters and is not intended to constitute a term of art for legal or regulatory purposes. This general description does not, and is not intended to, provide that the production, recovery, or recycling of oil, including the production, recovery, or recycling of produced water or flowback water, constitutes “wastewater treatment” for the purposes of the Oil Pollution Prevention regulation (with the exception of dry gas operations), which includes the Spill Prevention, Control, and Countermeasure rule and the Facility Response Plan rule, 40 CFR 112 et seq.

1 there are relatively few Class IID wells (e.g., the Marcellus Shale region) and indications of interest  
2 in reuse in areas where access to water for fracturing is limited (e.g., Anadarko Basin in TX and OK).  
3 The term reuse is sometimes used to imply no treatment or basic treatment (e.g., media filtration)  
4 for the removal of constituents other than total dissolved solids (TDS), while recycling is sometimes  
5 used to convey more extensive treatment (e.g., reverse osmosis (RO)) to remove TDS ([Slutz et al.,  
6 2012](#)). In this document, the term “reuse” will be used to indicate use of wastewater for subsequent  
7 hydraulic fracturing, without regard to the level of treatment.

8 This chapter provides follow-on to Chapter 7, which discusses the composition and per-well  
9 volumes of produced water and the processes involved in its generation. In this chapter,  
10 discussions are included on management practices for hydraulic fracturing wastewaters, available  
11 wastewater production information, and estimated aggregate volumes of wastewater generated for  
12 several states with active hydraulic fracturing (Section 8.2). As a complement to information on the  
13 composition of wastewaters in Chapter 7, issues of concern associated with wastewater  
14 constituents are also presented (Section 8.3). Management methods that are used in 2014-2015 or  
15 have been used in recent years are described (Section 8.4). Information is then presented on the  
16 types and effectiveness of treatment processes that are suitable for removal of constituents of  
17 concern in hydraulic fracturing wastewaters, either in centralized waste treatment facilities (CWTs)  
18 or on-site treatment; examples of CWTs are presented (Section 8.5 and Appendix F). With the  
19 background provided in the earlier sections of the chapter, documented and potential impacts on  
20 drinking water resources are discussed (Section 8.6), and a final synthesis discussion is then  
21 provided (Section 8.7).

22 This chapter makes use of background information collected by the EPA’s Office of Water (OW) as  
23 part of its development of proposed effluent limitations guidelines and standards for wastewater  
24 from unconventional oil and gas resources ([U.S. EPA, 2015q](#)). These are defined by guidelines and  
25 standards as resources in low permeability formations including oil and gas shales, tight oil, and  
26 low permeability sandstones and carbonates. Coalbed methane is beyond the scope of those  
27 standards. In this chapter we consider wastewater generated by hydraulic fracturing of those  
28 unconventional oil and gas resources included in the background research done by OW in addition  
29 to wastewater generated by hydraulic fracturing in coalbed methane plays and conventional  
30 reservoirs.


## 8.2. Volumes of Hydraulic Fracturing Wastewater

31 This section of Chapter 8 provides a general overview of aggregate wastewater quantities  
32 generated in the course of hydraulic fracturing and subsequent oil and gas production, including  
33 estimates at regional and state levels. It also discusses methodologies used to produce these  
34 estimates and the challenges associated with the preparation and use of available estimates.  
35 (Chapter 7 provides a more in-depth discussion of the processes affecting produced water volumes  
36 and presents some typical per-well values and temporal patterns.) Wastewater volumes most likely  
37 will vary in the future as the amount and locations of hydraulic fracturing activities change and as  
38 existing wells age and move into later phases of production. The volumes and management of



1 wastewater are important factors affecting the potential for wastewater to affect drinking water  
2 resources.

3 The volume of wastewater generated is generally tied to the volume of oil and gas production; as  
4 operators increase hydrocarbon production, there will be a corresponding increase in wastewater  
5 volumes to be managed. For example, data from the Pennsylvania Department of Environmental  
6 Protection (PA DEP) ([PA DEP, 2015a](#)) (see Figure 8-1) show trends in volumes of wastewater  
7 compared to gas produced from wells in the Marcellus Shale in Pennsylvania. Although the data  
8 show some variation, they demonstrate a general correlation between wastewater and produced  
9 gas.

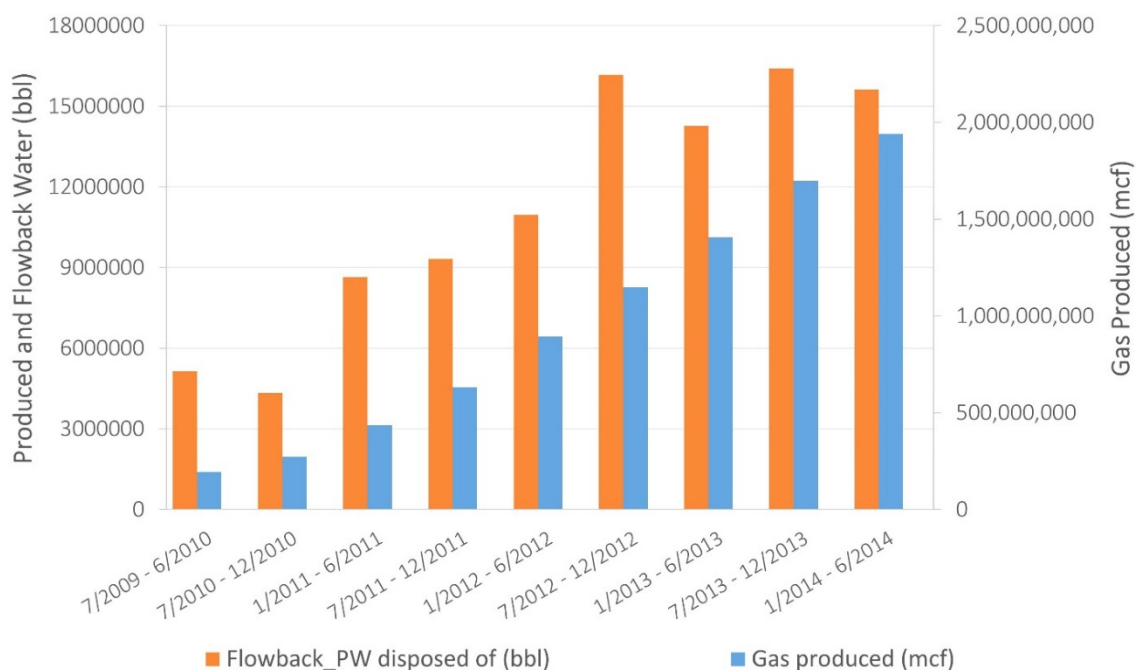

**Figure 8-1. Produced and flowback water volumes and produced gas volumes from unconventional wells in Pennsylvania from July of 2009 through June of 2014.**

Source: [PA DEP \(2015a\)](#).

10 Information presented in Chapter 7 highlights the initial rapid recovery of fluid in the first weeks  
11 after fracturing (see Figure 7-2), with a subsequent substantial reduction in the volume of water  
12 flowing through the well to the surface. This is followed by recovery of produced water during the  
13 longer-term productive phase of the well's life. One source suggests that, as a general rule of thumb,  
14 the amount of flowback produced in the days or weeks after hydraulic fracturing is roughly  
15 comparable to the amount of long-term produced water generated over a span of years, which may  
16 vary considerably among wells ([IHS, 2013](#)). Thus, on a local level, operators can anticipate a  
17 relatively large volume of wastewater in the weeks following fracturing, with slower subsequent  
18 production of wastewater. Wells also generate some amount of drilling-fluid waste. Compared to

1 produced water, however, drilling wastewater can constitute a relatively small portion of the total  
2 wastewater produced (e.g., <10% in Pennsylvania during 2004-2013) ([U.S. EPA, 2015q](#)) and is not  
3 discussed further in this assessment.

4 In addition to variation in per-well wastewater volumes, aggregate wastewater production for an  
5 area or region will vary from year to year with hydraulic fracturing activity. For instance, the  
6 average annual volume of wastewater generated by all gas production (both shale gas and  
7 conventional) in Pennsylvania quadrupled from the 2001-2006 period to the 2008-2011 period.  
8 During the latter period, wastewater volume averaged 1.1 billion gal (26 million bbl or 4.2 billion L)  
9 per year ([Wilson and Vanbriesen, 2012](#)).

### 8.2.1. National Level Estimate


10 [Clark and Veil \(2009\)](#) estimated that in 2007, the approximately one million active oil and gas wells  
11 in the United States generated approximately 2.4 billion GPD (57.4 million bbl/day; 9.1 billion  
12 L/day) of wastewater; no newer comprehensive national-level estimate exists in the literature as of  
13 April 2015. Note that this estimate is not limited to wastewater from hydraulic fracturing  
14 operations. This national-level estimate is reported to represent total oil and gas wastewater (from  
15 conventional and unconventional resources, and from wells hydraulically fractured and wells not  
16 hydraulically fractured), but the authors note that it does not include the flowback water  
17 component. Although [Clark and Veil \(2009\)](#) conducted a state-by-state analysis, the report may  
18 have underestimated production due to significant data limitations: 1) data based on a timeframe  
19 preceding the dramatic increase in hydraulic fracturing activity seen in more recent years; 2)  
20 estimates based on data that were collected and maintained in a variety of ways, making data  
21 synthesis difficult; and 3) incomplete data ([U.S. GAO, 2012](#)).

### 8.2.2. Regional/State and Formation Level Estimates

22 The amount of wastewater generated in a given region varies widely depending upon the volume of  
23 wastewater generated per well and the number of wells in the area. The factors influencing  
24 wastewater production are discussed in Chapter 7, which also discusses differences among  
25 formations in volumes recovered during flowback and long-term water production. Table 7-2  
26 provides rates of produced water generation for a number of formations in the United States.

27 At an aggregate level, wastewater volumes and geographic variability have been assessed for oil  
28 and gas production in several studies. A 2011 study by the Bureau of Land Management (BLM)  
29 ([Guerra et al., 2011](#)) states that more than 80% of oil and gas wastewater is generated in the  
30 western United States, including volumes from both conventional and unconventional resources.  
31 The BLM report notes substantial contributions from coalbed methane (CBM) wells, in particular  
32 those in the Powder River Basin (Wyoming). The authors state that Wyoming produces the second  
33 highest volume of water among the western United States. [Guerra et al. \(2011\)](#) also highlight the  
34 large portion of wells and wastewater associated with Texas (44% of U.S. produced water volume).  
35 Although the authors do not identify all wastewater contributions from production involving  
36 hydraulic fracturing, the regions with established oil and gas production are likely to have methods  
37 and infrastructure available for management of hydraulic fracturing wastewater. Figure 8-2  
38 summarizes the findings for these western states, demonstrating the wide variability in wastewater

1 from state to state (likely reflecting differences in formation geology and oil and gas production  
2 activity).

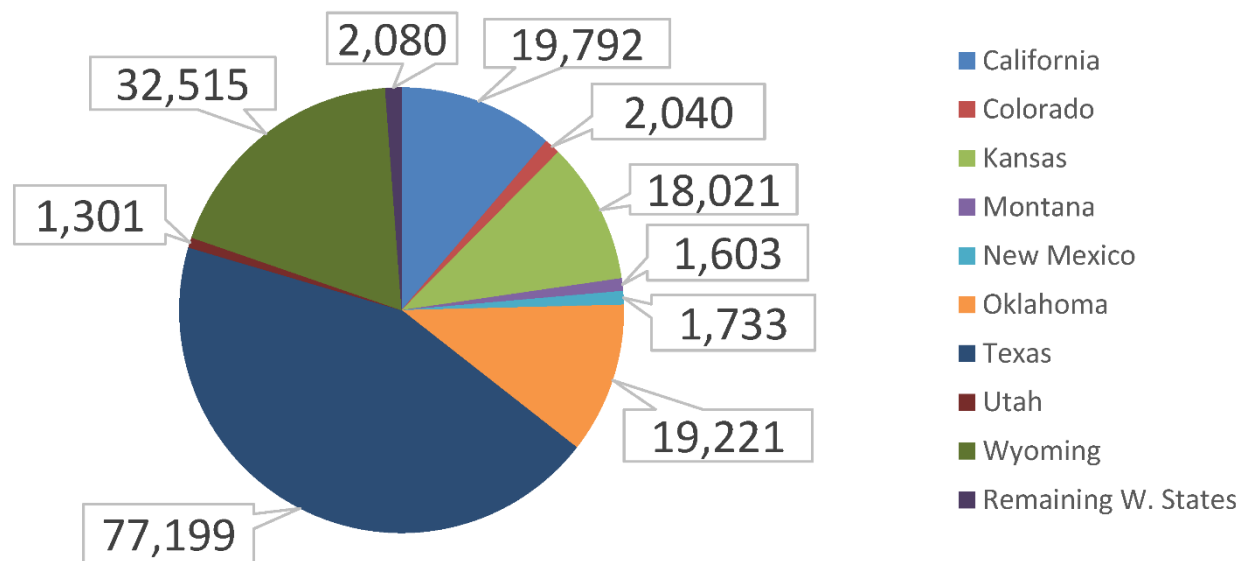

**Figure 8-2. Wastewater quantities in the western United States (billions of gallons per year).**

Source: [Guerra et al. \(2011\)](#).

3 Table 8-1 presents estimates of the numbers of wells and volumes of hydraulic fracturing  
4 wastewater generated in North Dakota, Ohio, Pennsylvania, Texas, and West Virginia. The data  
5 shown in this table come from publicly available state websites and databases; data for West  
6 Virginia reference a report by [Hansen et al. \(2013\)](#) that compiled available flowback data from West  
7 Virginia. The reported volumes have been summed by year. These states are represented in Table  
8 8-1 because the produced water volumes were readily identifiable as associated with hydraulic  
9 fracturing activity. Differences in the years presented for the states are due to differences in data  
10 availability from the state agency databases. However, the increases in the numbers of wells  
11 producing wastewater and the volumes of wastewater produced are generally consistent with the  
12 timing of the expansion of high-volume hydraulic fracturing and track with the increase in  
13 horizontal wells seen in Figure 2-12.

14 Several states with mature oil and gas industries (California, Colorado, New Mexico Utah,  
15 Wyoming) make produced water volumes publicly available by well as part of their oil and gas  
16 production data, but they do not directly indicate which wells have been hydraulically fractured.  
17 Some states (Colorado, Utah, and Wyoming) specify the producing formation along with volumes of  
18 hydrocarbons and produced water. New Mexico provides data for separate basins as well as for the  
19 entire state. Determining volumes of hydraulic fracturing wastewater for these states is challenging  
20 because there is a possibility of either inadvertently including wastewater from wells not  
21 hydraulically fractured or of missing volumes that should be included. Appendix Table F-1 provides

- 1 estimates of wastewater volumes in these states in regions where hydraulic fracturing activity is
- 2 taking place along with notes on data limitations.
- 3 The data in Table 8-1 and Appendix Table F-1 illustrate the challenges both for compiling a national
- 4 estimate of hydraulic fracturing wastewater as well as comparing wastewater production among
- 5 states due to dissimilar data types, presentation, and availability.

**Table 8-1. Estimated volumes (millions of gallons) of wastewater based on state data for selected years and numbers of wells producing fluid.**

State	Basin	Principal Lithologies	Data Type	2000	2004	2008	2010	2011	2012	2013	2014	Comments
North Dakota	Williston	Shale	Produced water	2	3	130	790	1,900	4,500	8,500	9,700	From North Dakota Oil and Gas Commission website. <sup>a</sup> Data provided for six members of the Bakken Shale. Produced water includes flowback (reports are submitted within 30 days of well completion.)
			<i>Wells</i>	161	152	844	2,083	3,303	5,036	6,913	8,039	
Ohio	Appalachian	Shale	Primarily flowback water	-	-	-	-	3	29	110	-	Data from Ohio DNR Division of Oil and Gas. <sup>b</sup> Utica and Marcellus data for 2011 and 2012. Utica and Marcellus data for 2013. Brine is noted by agency to be mostly flowback.
			<i>Wells</i>	-	-	-	-	9	86	400	-	
Pennsylvania	Appalachian	Shale	Flowback water	-	-	-	92	340	410	350	210	Waste data from PA DEP. <sup>c</sup> 2nd half of 2010 and first half of 2014. Data described as unconventional as determined by formation. Separate codes are provided by PA DEP for flowback and produced water.
			<i>Wells</i>	-	-	-	334	1,564	1,622	1,465	895	
			Produced water	-	-	-	90	400	730	930	440	
			<i>Wells</i>	-	-	-	1,035	1,826	3,665	4,761	4,889	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	Basin	Principal Lithologies	Data Type	2000	2004	2008	2010	2011	2012	2013	2014	Comments
Pennsylvania cont.	Appalachian cont.	Shale, cont.	Flowback and produced water	-	-	-	180	740	1,100	1,300	650	
			<i>Wells</i>	-	-	-	1,232	2,434	4,039	5,015	5,150	
Texas	Unspecified (entire state)	Shale, Sandstone	Flowback water - injected volumes	-	-	-	-	490	2,200	3,100	2,000	Waste injection data from Texas Railroad Commission. <sup>d</sup> Monthly totals are provided for entire state. Oct - Dec for 2011, full years for 2012 and 2013, and Jan - Oct for 2014
West Virginia	Appalachian	Shale	Flowback water - Estimated total disposed	-	-	-	120	110	59	-	-	Estimates from <a href="#">Hansen et al. (2013)</a> .

<sup>a</sup> North Dakota Industrial Commission. Department of Mineral Resources. Bakken Horizontal Wells By Producing Zone:

<https://www.dmr.nd.gov/oilgas/bakkenwells.asp>.

<sup>b</sup> Ohio Department of Natural Resources, Division of Oil and Gas Resources. Oil and Gas Well Production. <http://oilandgas.ohiodnr.gov/production#ARCH1>.

<sup>c</sup> Pennsylvania Department of Environmental Protection. PA DEP Oil and Gas Reporting Web site. <https://www.paoilandgasreporting.state.pa.us/publicreports/Modules/Welcome/Agreement.aspx>

<sup>d</sup> Railroad Commission of Texas. Injection Volume Query. <http://webapps.rrc.state.tx.us/H10/searchVolume.do;jsessionid=J3cgVHhK9nkWPrC7ZcWNMgzyF9LCYyR1NmvDy3F1Q05wqXfcGNGN!1841197795?fromMain=yes&sessionId=143075601021612>. Texas state data provide an aggregate total amount of flowback fluid injected for the past few years. (Data on brine volumes injected do not differentiate hydraulically fractured wells and are therefore not presented here.) These values are interpreted as estimates of generated flowback water as based on reported quantities of “fracture water flow back” injected into Class IID wells.



### 8.2.3. Estimation Methodologies and Challenges

1 Compiling and comparing data regarding wastewater production at the wide array of oil and gas  
2 locations in the United States presents challenges, and various approaches are used to estimate  
3 wastewater volumes, both at the state and national level. Data from state agency web sites and  
4 databases can be a ready source of information, whether publicly available and downloadable or  
5 provided directly by agencies upon request. However, due to sometimes significant differences in  
6 the types of data collected, mechanisms, formats, and definitions used, data cannot always be  
7 directly compared from state to state and can be difficult to aggregate at a national level. The  
8 inconsistencies encountered in data searches for this assessment agree with recent conclusions by  
9 [Malone et al. \(2015\)](#), who noted inconsistencies among 10 states with unconventional oil and gas  
10 activity in the accessibility, usability, completeness, accuracy, and cost of various types of data (e.g.,  
11 wells drilled, production, waste, Class IID wells).

12 One challenge associated with using state production data to estimate the volume of wastewater  
13 nationally or regionally is the lack of consistency in data collection ([U.S. GAO, 2012](#)). Some states do  
14 not include a listing of wastewater (usually listed as produced water volumes) in their publicly  
15 available oil and gas production reports, while others do. State tracking of wastewater volumes may  
16 or may not include information that helps in determining whether the producing well was  
17 hydraulically fractured (e.g., an indicator of resource type or formation). It also might not be clear  
18 whether volumes listed as produced water include the flowback component. Some states (e.g.,  
19 Colorado) include information on disposal and management methods along with production data,  
20 and others do not.

21 Given these limitations, some studies have generated estimates of wastewater volume using water-  
22 to-gas and water-to-oil ratios along with the reports of hydrocarbon production ([Murray, 2013](#)).  
23 The reliability of any wastewater estimates made using this method will need to be evaluated in  
24 terms of the quality, timeframe, and spatial coverage of the available data, as well as the extent of  
25 the area to which the estimates will be applied. Water-to-hydrocarbon ratios are empirical  
26 estimates. Because these ratios show a wide variation among formations, reliable data are needed  
27 to formulate a ratio in a particular region.

28 Another approach to estimating wastewater volumes would entail multiplying per-well estimates  
29 of flowback and produced water production rates by the numbers of wells in a given area.  
30 Challenges associated with this approach include obtaining accurate estimates of the number of  
31 new and existing wells, along with accurate estimates of per-well water production both during the  
32 flowback period and during the production phase of the wells' lifecycle. In particular, it can be  
33 challenging to correctly match per-well wastewater production estimates, which will vary by  
34 formation, with counts of wells, which may or may not be clearly labeled by or associated with  
35 specific formations. Temporal variability in wastewater generation would also be difficult to  
36 capture and would add to uncertainty. Such an approach, however, may be attempted for order of  
37 magnitude estimates if the necessary data are available and reliable.

### 8.3. Wastewater Characteristics

1 Along with wastewater volume, wastewater characteristics are important for understanding the  
2 potential impacts of management and disposal of hydraulic fracturing wastewater on drinking  
3 water resources. Chapter 7 provides in-depth detail on produced water chemistry. This section  
4 provides brief highlights of the important features of wastewater composition as well as the  
5 characteristics of the residuals produced during wastewater treatment.

#### 8.3.1. Wastewater

6 This section briefly discusses why the composition of hydraulic fracturing wastewaters needs to be  
7 considered when planning for wastewater management, especially if treatment or reuse are  
8 planned. Concerns associated with selected constituents are presented; treatment considerations  
9 associated with various wastewater constituents are included in Section 8.5.

##### 8.3.1.1. Total Dissolved Solids and Inorganics

10 Wastewaters are generally high in total dissolved solids (TDS), especially waters from shale and  
11 tight sandstone formations, with values ranging from less than 1,000 mg/L to hundreds of  
12 thousands of mg/L (see Section 7.6.4 and Table 7-4). The TDS in wastewaters from shale  
13 formations is typically dominated by sodium and chloride and may also include elevated  
14 concentrations of bromide, bicarbonate, sulfate, calcium, magnesium, barium, strontium, radium,  
15 organics, and heavy metals ([Chapman et al., 2012](#); [Rowan et al., 2011](#); [Blauch et al., 2009](#); [Orem et  
16 al., 2007](#); [Sirivedhin and Dallbauman, 2004](#)). Within each play, the minimum and maximum values  
17 shown in Table 7-4 suggest spatial variation that may need to be accommodated when considering  
18 management strategies such as reuse or treatment. In contrast to shales and sandstones, TDS  
19 values for wastewater from CBM formations are generally lower, with concentrations ranging from  
20 approximately 250 mg/L to 39,000 mg/L ([Benko and Drewes, 2008](#); [Van Voast, 2003](#)) (see  
21 Appendix Table E-3). This results in fewer treatment challenges and a wider array of management  
22 options.

23 Although TDS has a secondary maximum contaminant level (MCL) (secondary MCLs are non-  
24 mandatory water quality standards) of 500 mg/L for aesthetic purposes, it is not considered a  
25 health-based contaminant and is therefore not regulated under the EPA's National Primary  
26 Drinking Water Regulations, although other standards may apply. For example, a maximum  
27 concentration of 500 mg/L has been used by the state of Pennsylvania for some industrial  
28 wastewater discharges. Constituents commonly found in TDS from hydraulic fracturing  
29 wastewaters may have potential impacts on health or create burdens on downstream drinking  
30 water treatment plants if discharged at high concentrations to drinking water resources. Bromide,  
31 for example, can contribute to the increased formation of disinfection by-products (DBPs) during  
32 drinking water treatment ([Hammer and VanBriesen, 2012](#)); see Section 8.6.1.

33 Metals (e.g., barium, cadmium, chromium, lead, copper, manganese, nickel, thallium, and zinc)  
34 present in TDS can be toxic to humans and aquatic life at certain concentrations. Health effects of  
35 these metals can include kidney damage, liver damage, skin conditions, high blood pressure, and  
36 developmental problems ([U.S. EPA, 2015i](#)). To ensure safe drinking water, the EPA has established

1 primary MCLs for a number of these constituents. MCLs and action levels for these metals vary from  
2 0.002 mg/L for thallium to 1.3 mg/L for copper ([U.S. EPA, 2015i](#)). Cadmium has been found in  
3 produced water from tight gas formations at concentrations as high as 0.37 mg/L (the MCL is 0.005  
4 mg/L), and chromium has been found at concentrations up to 0.265 mg/L (the MCL is 0.1 mg/L)  
5 (see Table 7-4).

6 Other constituents of concern among dissolved solids are chloride, sulfate, barium, and boron.  
7 Elevated concentrations of chloride and sulfate are of concern because of drinking water aesthetics,  
8 and the EPA has established secondary MCLs for both chloride and sulfate of 250 mg/L ([U.S. EPA,](#)  
9 [2015i](#); [Hammer and VanBriesen, 2012](#)). Barium has a primary MCL of 2 mg/L and has been found in  
10 some shale gas produced waters at concentrations in the thousands of mg/L (see Table 7-4). Boron  
11 is not regulated under the National Primary Drinking Water Regulations, but internal plant  
12 specifications for one CWT (e.g., the Pinedale Anticline Facility) and waste discharge requirements  
13 (WDR) permit for another (e.g., San Ardo Water Reclamation Facility) limit boron effluent  
14 concentrations to 0.75 mg/L ([Shafer, 2011](#); [Webb et al., 2009](#)).

### 8.3.1.2. Organics

15 Less information is available about organic constituents in hydraulic fracturing wastewaters than  
16 about inorganic constituents, but there are several studies that include some analyses of organic  
17 constituents. The organic content in flowback waters can vary based on the chemical additives used  
18 and the formation but generally consists of polymers, oil and grease, volatile organic compounds  
19 (VOCs), and semi-volatile organic compounds (SVOCs) ([Walsh, 2013](#); [Hayes, 2009](#)). Examples of  
20 other constituents detected include alcohols, naphthalene, acetone, and carbon disulfide ([U.S. EPA,](#)  
21 [2015i](#)) (see Appendix Table E-10). Wastewater associated with CBM wells may have high  
22 concentrations of aromatic and halogenated organic contaminants that that may require treatment  
23 depending on how the wastewater will be managed or disposed of ([Pashin et al., 2014](#); [Sirivedhin](#)  
24 [and Dallbauman, 2004](#)). Concentrations of BTEX (benzene, toluene, ethylbenzene, and xylenes), in  
25 CBM produced waters are, however, lower than in shale produced waters (see Appendix Table E-9).

26 Certain organic compounds are of concern in drinking water because they can cause damage to the  
27 nervous system, kidneys, and/or liver and can increase the risk of cancer if ingested over a period  
28 of time ([U.S. EPA, 2006](#)). Some organics in chemical additives are known carcinogens, including 2-  
29 butoxyethanol (2BE), naphthalene, benzene, and polyacrylamide ([Hammer and VanBriesen, 2012](#)).  
30 Many organics are regulated for drinking water under the National Primary Drinking Water  
31 Regulations. Section 8.6.4 provides further discussion of documented or potential situations in  
32 which organic constituents have or might reach drinking water resources.

### 8.3.1.3. Radionuclides

33 Radionuclides are constituents of concern in some hydraulic fracturing wastewaters, with most  
34 available data obtained for the Marcellus Shale in Pennsylvania (see Appendix Table E-8). Results  
35 from a USGS report ([Rowan et al., 2011](#)) indicate that radium-226 and radium-228 are the  
36 predominant radionuclides in Marcellus Shale wastewater, and they account for most of the gross  
37 alpha and gross beta activity in the waters studied. There are limited data on radionuclides in  
38 wastewater from formations other than the Marcellus Shale, but information on the naturally

1 occurring radioactive material (NORM) in the formations themselves, in particular uranium and  
2 thorium, may suggest the potential for high levels of radionuclides in produced water, especially  
3 where TDS concentrations are also high. Sections 7.5.4 and 7.6.6 provide further information on  
4 radionuclides in formations and in produced waters.

5 The primary radioactive contaminants found in hydraulic fracturing wastewaters (radium, gross  
6 alpha radiation, and gross beta radiation) can increase the risk of cancer if consumed at elevated  
7 levels over time ([U.S. EPA, 2015i](#)). Therefore, the EPA has established drinking water MCLs for  
8 combined radium (radium-226 plus radium-228), gross alpha, and gross beta of 5 pCi/L, 15 pCi/L,  
9 and 4 millirems/year, respectively (see Section 8.6.2).

### 8.3.2. Constituents in Residuals

10 Depending on the water being treated and treatment processes used, treatment residuals may  
11 consist of sludges, spent media (used filter materials), or brines. Residuals can include constituents  
12 such as total suspended solids (TSS), TDS, metals, radionuclides, and organics. The treatment  
13 process tends to concentrate wastewater constituents in the residuals. As an illustration of the  
14 degree of concentration that can take place, processes such as electrodialysis and mechanical vapor  
15 recompression have been found to yield residuals streams with TDS concentrations in excess of  
16 150,000 mg/L, from treating waters with influent TDS concentrations of approximately 50,000 –  
17 70,000 mg/L ([Hayes et al., 2014](#); [Peraki and Ghazanfari, 2014](#)).

18 Also, technologically enhanced naturally occurring radioactive material (TENORM) in wastewaters  
19 may cause residual wastes to have elevated gamma radiation emissions ([Kappel et al., 2013](#)).<sup>1</sup> One  
20 study calculated that typical solids produced by precipitation processes designed to remove barium  
21 and strontium from Marcellus Shale wastewater would contain between 2,571 and 18,087 pCi/g of  
22 radium in the barium sulfate precipitate ([Zhang et al., 2014b](#)). Another similar study using mass  
23 balances calculated that sludge from a sulfate precipitation process would average a radium  
24 concentration of 213 pCi/g in sludge ([Silva et al., 2012](#)). [Silva et al. \(2012\)](#) estimated a radium-226  
25 concentration of 58 pCi/g in sludge from lime softening processes, a level that would necessitate  
26 disposal of low level radioactive waste.

## 8.4. Wastewater Management Practices

27 Operators have several strategies for management of hydraulic fracturing wastewaters (see Figure  
28 8-3), with the most common choice being disposal via Class IID wells ([Clark et al., 2013](#); [Hammer  
29 and VanBriesen, 2012](#)). Other practices include reuse in subsequent hydraulic fracturing operations  
30 (with varying levels of treatment), treatment at a CWT (often followed by reuse), evaporation (in  
31 arid regions), or in some cases, depending on state and local requirements, various other  
32 wastewater management strategies (e.g., irrigation, which involves no discharge to waters of the  
33 U.S.). The management methods shown in Figure 8-3 represent various strategies, not all of which  
34 will happen together.


---

<sup>1</sup> Technologically enhanced naturally occurring radioactive materials (TENORM) are radionuclides that have been concentrated or enhanced as the result of human activity.

1 At one time, treatment of unconventional oil and gas wastewaters at publicly owned treatment  
 2 works (POTWs) was a common practice for wastewater management in the Marcellus region ([Lutz  
 3 et al., 2013](#)). However, this practice has been essentially discontinued following a request from PA  
 4 DEP that, by May 19, 2011, oil and gas operators stop sending Marcellus Shale wastewater to 15  
 5 POTWs and CWTs that discharged to surface waters ([U.S. EPA, 2015h](#)).

6 Each of these wastewater management strategies may potentially lead to an impact on drinking  
 7 water resources during some phase of their execution. Such impacts may include accidental  
 8 releases during transport (see Chapter 7), discharges of treated wastewaters from CWTs or POTWs  
 9 where treatment for certain constituents has been inadequate, migration of constituents in  
 10 wastewaters that have been applied to land, leakage from on-site storage pits (see Chapter 7),  
 11 inappropriate management of residuals (e.g., leaching from landfills or land application), or  
 12 accumulation of constituents in sediments near outfalls of CWTs or POTWs that have treated  
 13 hydraulic fracturing wastewater.

14 A reliable census of nationwide wastewater management practices is difficult to assemble due to a  
 15 lack of consistent and comparable data among states, but Table 8-2 illustrates the variability in the  
 16 primary wastewater management methods using available qualitative and quantitative sources.  
 17 Disposal via underground injection predominates in most regions. Reuse is most prevalent in the  
 18 Appalachian Basin in Pennsylvania. Moderate reuse occurs in the Arkoma (OK, AR) and Anadarko  
 19 (OK, TX) basins, and use of CWTs occurs predominantly in Pennsylvania.

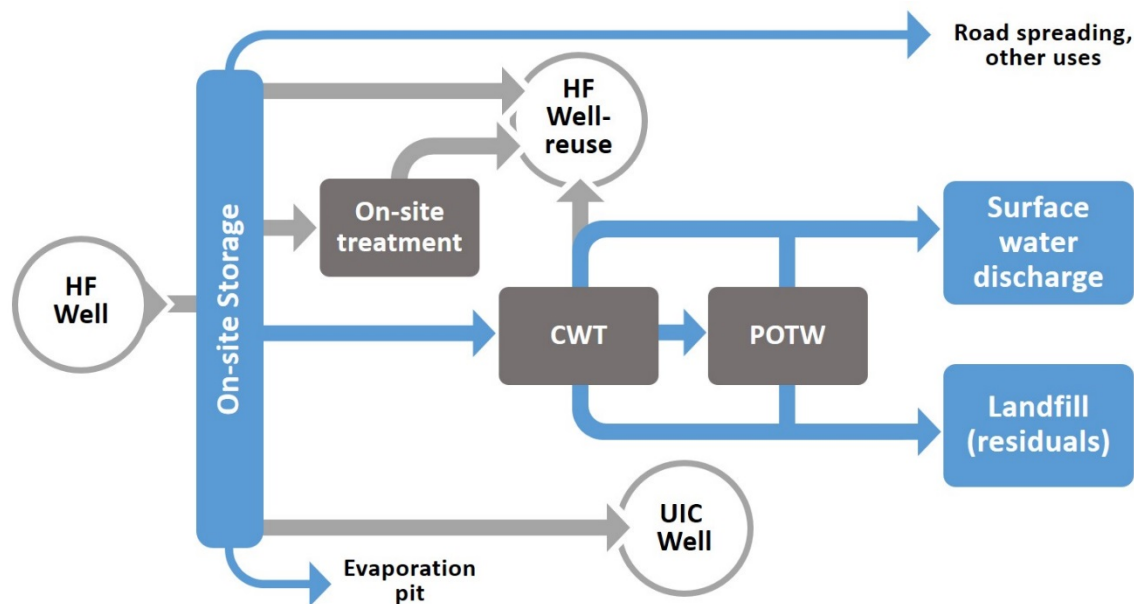

**Figure 8-3. Schematic of wastewater management strategies.**

**Table 8-2. Hydraulic fracturing wastewater management practices in recent years.**

Source: ([U.S. EPA, 2015g](#)).

Basin	Formation	Resource type	Reuse	Injection for disposal	CWT facilities	Notes	Available data <sup>b</sup>
Michigan	Antrim	Shale Gas		XXX			Qualitative
Appalachian	Marcellus/Utica (PA)	Shale Gas	XXX	XX	XX	Limited Class IID wells in east	Quantitative
	Marcellus/Utica (WV)	Shale Gas/Oil	XXX	XX	X		Quantitative
	Marcellus/Utica (OH)	Shale Gas/Oil	XX	XXX	X		Mixed
Anadarko	Granite Wash	Tight Gas	XX	XXX	X <sup>a</sup>		Mixed
	Mississippi Lime	Tight Oil	X	XXX		Reuse limited but is being evaluated	Qualitative
	Woodford; Cana; Caney	Shale Gas/Oil	X	XXX	X <sup>a</sup>		Qualitative
Arkoma	Fayetteville	Shale Gas	XX	XX	X <sup>a</sup>	Few existing Class IID wells; new CWT facilities are under construction	Mixed
Fort Worth	Barnett	Shale Gas	X	XXX	X <sup>a</sup>	Reuse not typically effective due to high TDS early in flowback and abundance of Class IID wells	Mixed
Permian	Avalon/Bone Springs, Wolfcamp, Spraberry	Shale/tight Oil/gas	X	XXX	X <sup>a</sup>		Mixed
TX-LA-MS Salt	Haynesville	Tight Gas	X	XXX		Reuse not typically cost effective due to high TDS early in flowback and abundance of Class IID wells	Mixed

*This document is a draft for review purposes only and does not constitute Agency policy.*



Basin	Formation	Resource type	Reuse	Injection for disposal	CWT facilities	Notes	Available data <sup>b</sup>
West Gulf	Eagle Ford, Pearsall	Shale Gas/Oil	X	XXX	X		Mixed
Denver Julesburg	Niobrara	Shale Gas/Oil	X	XXX	X		Mixed
Piceance; Green River	Mesaverde/Lance	Tight Gas	X	XX	X	Also managed through evaporation to atmosphere in ponds in this region	Qualitative
Williston	Bakken	Shale Oil	X	XXX		Reuse limited but is being evaluated	Mixed

<sup>a</sup> CWT facilities in these formations are operator owned.

<sup>b</sup> This column indicates the type of data on which EPA based the number of X’s. In most cases, EPA used a mixture of qualitative and quantitative data sources along with engineering judgment to determine the number of X’s.

XXX—The majority (≥ 50%) of wastewater is managed with this management practice.

XX—A moderate portion (≥ 10% and < 50%) of wastewater is managed with this management practice.

X—This management practice has been documented in this location but for a small (< 10%) or unknown percent of wastewater.

1 Management choices are affected by cost and a number of other factors, including the chemical  
2 properties of the wastewater; the volume, duration, and flow rate of the water generated; the  
3 logistical feasibility of various options; the availability of necessary infrastructure; federal, state,  
4 and local regulations; and operator discretion ([U.S. GAO, 2012](#); [NPC, 2011a](#)). The economics (such  
5 as transport, storage, and disposal costs) and availability of various treatment and disposal  
6 methods are of primary importance ([U.S. GAO, 2012](#)). For example, as of early 2015, Pennsylvania  
7 has nine operating Class IID wells within the state, whereas Texas has nearly 7,900 ([U.S. EPA,](#)  
8 [2015q](#)).

9 The availability and use of management strategies may change in a region over time as oil and gas  
10 development increases or decreases, changing the volumes of wastewater that need to be handled  
11 on a local, state, and regional level (see Text Box 8-1 for more information on hydraulic fracturing  
12 wastewater management in Pennsylvania). Figure 8-4 illustrates shifting wastewater management  
13 practices in Pennsylvania over the last several years as shale gas development has proceeded in the  
14 Marcellus Shale. On-site reuse (labeled as “Reuse HF” in Figure 8-4) has grown. Also, most CWT  
15 management of Marcellus wastewater in recent years has been at zero-discharge facilities (i.e., for  
16 reuse) (an estimated 80% in 2012 and 90% in 2013) ([PA DEP, 2015a](#)). Combined with the volumes  
17 managed via on-site reuse, Pennsylvania reuse rates are approximately 85% to 80%. In contrast,  
18 wastewater disposal data for Colorado (see Figure 8-5) show a steady use of injection wells  
19 (injected on lease) since 2000, and an apparent decrease in the use of onsite pits (state data were  
20 filtered for formations indicated in the literature to be targets for hydraulic fracturing).

**Text Box 8-1. Temporal Trends in Wastewater Management – Experience of Pennsylvania.**


1 Gross natural gas withdrawals from shale formations in the United States increased 518% between 2007 and  
2 2012 ([EIA, 2014c](#)). This production increase has led to larger volumes of wastewater that require appropriate  
3 management ([Vidic et al., 2013](#); [Gregory et al., 2011](#); [Kargbo et al., 2010](#)). The rapid increase in wastewater  
4 generated from oil and gas wells used for hydraulic fracturing has led to many changes in the wastewater  
5 disposal practices in the oil and gas industry. Changes have been most evident in Pennsylvania, which has  
6 experienced more than a 1,400% increase in natural gas production since 2000 ([EIA, 2014c](#)).

7 [Lutz et al. \(2013\)](#) estimated that total wastewater generation in the Marcellus region increased 570%  
8 between 2004 and 2013 and concluded that this increase has created stress on the existing wastewater  
9 disposal infrastructure. In 2010, in response to concerns over elevated TDS in the Monongahela River basin  
10 and studies linking high TDS (and in particular high bromide levels) to elevated DBP levels in drinking water  
11 systems ([PA DEP, 2011a](#)), PA DEP amended Chapter 95 Wastewater Treatment Requirements under the  
12 Clean Streams Law for new discharges of TDS in wastewaters. This regulation is also known informally as the  
13 2010 TDS regulation. The regulation disallowed any new indirect discharges (i.e., discharges to POTWs) of  
14 hydraulic fracturing waste and set limits of treated discharges from CWTs of 500 mg/L TDS, 250 mg/L  
15 chloride, 10 mg/L barium, and 10 mg/L strontium. Existing discharges were exempt.

16 In April 2011, PA DEP requested that oil and gas well operators transporting unconventional wastewater to  
17 the eight CWTs and seven POTWs that were exempt from the 2010 TDS regulation voluntarily stop  
18 discharging to these facilities. Follow-up letters from PA DEP to the owners of the wells specified that the role  
19 of bromides from Marcellus Shale wastewaters in the formation of total trihalomethanes (TTHM) was of  
20 concern ([PA DEP, 2011a](#)).


21 Between early 2011 and late 2011, although reported wastewater flows more than doubled, Marcellus  
22 drilling companies in Pennsylvania reduced their wastewater flows to CWTs that were exempt from the 2010  
23 TDS regulation by 98%, and discharge to POTWs was ‘virtually eliminated’ ([Hammer and VanBriesen, 2012](#)).

24 Along with the decreased discharges from POTWs, there has been increased reuse of wastewater in the  
25 Marcellus Shale region. From 2008-2011, reuse of Marcellus wastewater has increased, POTW treatment  
26 volumes have decreased, tracking of wastewater has improved, and wastewater transportation distances  
27 have decreased ([Rahm et al., 2013](#)). [Maloney and Yoxtheimer \(2012\)](#) analyzed data from 2011 and found that  
28 reuse of flowback water increased to 90% by volume. Disposed flowback water comprised 8% of the total  
29 volume. Brine water, which was defined as formation water, was reused (58%), disposed via injection well  
30 (27%), or sent to industrial waste treatment plants (14%). Of all the fluid wastes in the analysis, brine water  
31 was most likely to be transported to other states (28%). They also concluded that wastewater disposal to  
32 municipal sewage treatment plants declined nearly 100% from the first half of 2011 to the second half.

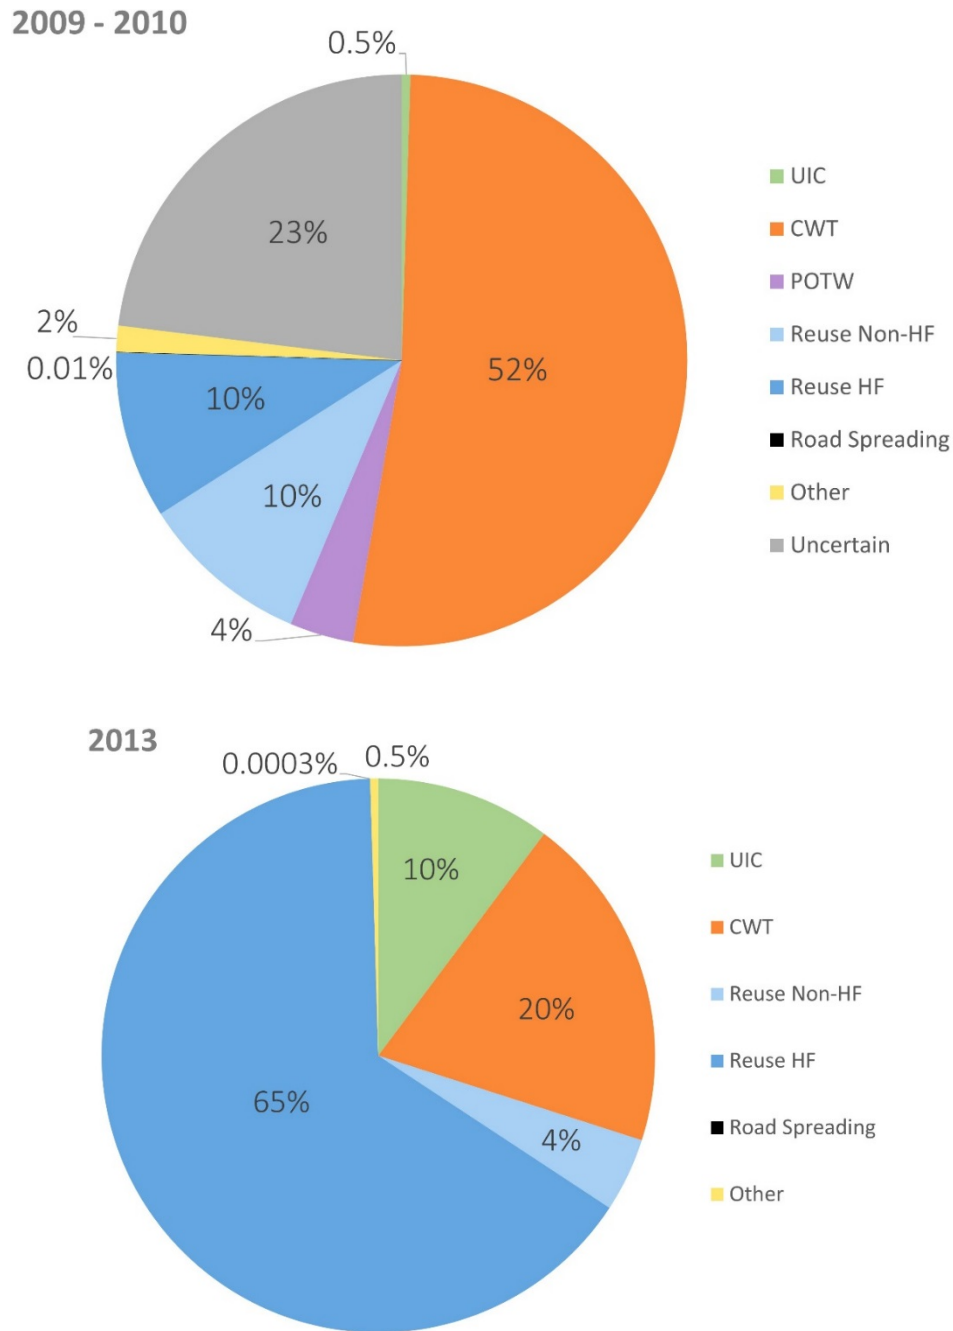

**Figure 8-4. Percentages of Marcellus Shale wastewater managed via various practices for (top) the second half of 2009 and first half of 2010 (total estimated volume of 216 Mgal), and (bottom) 2013 (total estimated volume of 1.3 billion gallons).**

“Reuse HF” indicates on-site reuse. Source: Waste data from [PA DEP \(2015a\)](#).

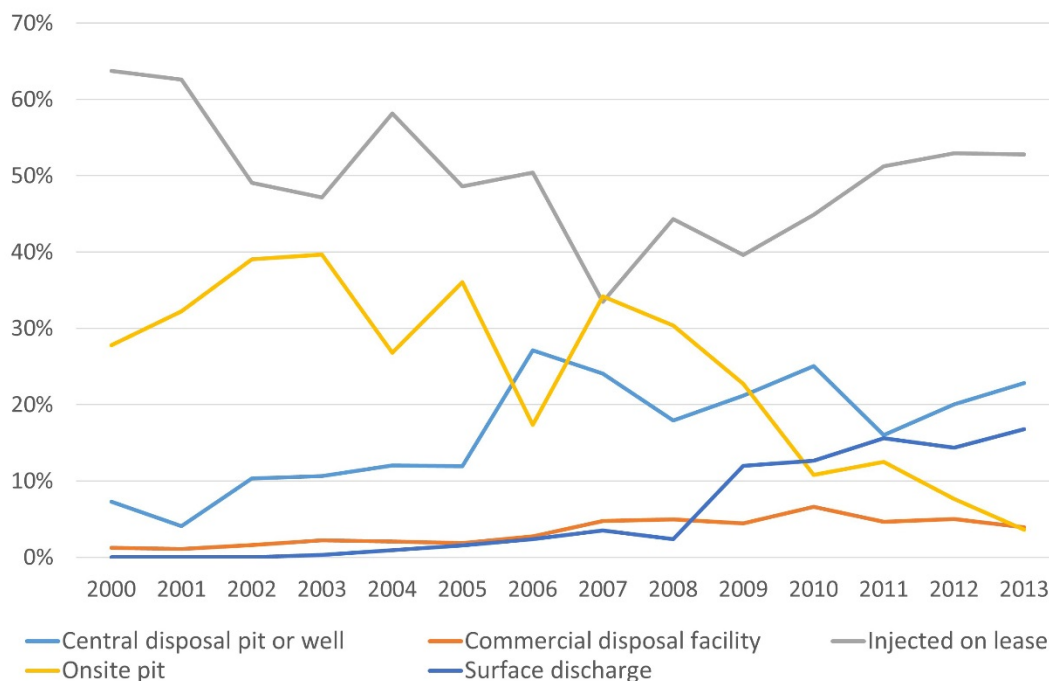

**Figure 8-5. Management of wastewater in Colorado in regions where hydraulic fracturing is being performed.**

Source: Production data from [COGCC \(2015\)](#).

1 Regulations also affect management options and vary geographically. At the Federal level, existing  
 2 oil and gas effluent limitations guidelines and standards (ELGs) can be found under 40 CFR Part  
 3 435. These ELGs apply to conventional and unconventional oil and gas extraction facilities in  
 4 various subcategories (e.g., Offshore, Onshore, Stripper Wells), with the exception of CBM  
 5 discharges, which are not subject to the existing regulations. Subpart C, the Onshore subcategory,  
 6 prohibits the discharge of wastewater pollutants to waters of the U.S. from onshore oil and gas  
 7 extraction facilities. This “zero-discharge standard” means that oil and gas produced water  
 8 pollutants cannot be directly discharged to surface waters. Operators have met these regulations  
 9 through underground injection, reuse, or transfer of produced water to POTWs and/or CWTs. West  
 10 of the 98th meridian (the arid western portion of the continental United States), discharges of  
 11 wastewater from onshore oil and gas extraction facilities may be permitted for direct discharge to  
 12 waters of the U.S. if the produced water has a use in agriculture or wildlife propagation when  
 13 discharged into navigable waters. Definitions in 40 CFR 435.51(c) explain that the term “use in  
 14 agricultural or wildlife propagation” means that (1) the produced water is of good enough quality  
 15 to be used for wildlife or livestock watering or other agricultural uses; and (2) the produced water  
 16 is actually put to such use during periods of discharge. The regulations at 40 CFR 435.52 specify  
 17 that the only allowable discharge is produced water, with an oil and grease concentration not  
 18 exceeding 35 milligrams per liter (mg/L). The regulations prohibit the discharge of waste  
 19 pollutants into navigable waters from any source (other than produced water) associated with

1 production, field exploration, drilling, well completion, or well treatment (i.e., drilling muds, drill  
2 cuttings, produced sands).

3 Unpermitted discharges of wastes related to hydraulic fracturing have been described in a number  
4 of instances. In Pennsylvania, discharges of brine into a storm drain that discharges to a tributary of  
5 the Mahoning River in Ohio. Analyses of the brine and drill cuttings that were discharged indicated  
6 the presence of contaminants, including benzene and toluene ([U.S. Department of Justice, 2014](#)). In  
7 California, an oil production company periodically discharged hydraulic fracturing wastewaters to  
8 an unlined sump for 12 days. It was concluded by the prosecution that the discharge posed a threat  
9 to groundwater quality ([Bacher, 2013](#)). These unauthorized discharges represent both documented  
10 and potential impacts on drinking water resources. However, data do not exist to evaluate whether  
11 such episodes are uncommon or whether they happen on a more frequent basis and remain largely  
12 undetected.

13 The following section provides an overview of hydraulic fracturing wastewater management  
14 methods, with some discussion of the geographic and temporal variations in practices. Discussion is  
15 provided on common treatment and disposal methods including on-site storage, underground  
16 injection, CWTs, reuse of hydraulic fracturing fluids, and evaporation methods. This section also  
17 provides discussion on past treatment of hydraulic fracturing wastewater at POTWs. Other  
18 management practices are also covered. Brief descriptions of treatment technologies applicable to  
19 hydraulic fracturing wastewater are available in Appendix F.

#### 8.4.1. Underground Injection

20 Oil and gas wastewater may be disposed of via Class II injection wells regulated under the  
21 Underground Injection Control (UIC) Program under the Safe Drinking Water Act (SDWA)<sup>1</sup>. Class II  
22 wells include those used for enhanced oil recovery (IIR), disposal (IID), and hydrocarbon storage  
23 (IIH). Nationwide, injection wells dispose of a large fraction of wastewater from the oil and gas  
24 industry, including wastewater associated with hydraulic fracturing. A 2009 study notes that the oil  
25 and gas industry in the United States generated about 882 billion gal (21 billion bbl or 3.34 trillion  
26 L) of produced water in 2007 ([Clark and Veil, 2009](#)). More than 98% of this volume was managed  
27 via some form of underground injection, with 40% injected into Class II wells. However, a good  
28 national estimate of the amount of hydraulic fracturing wastewater injected into Class II wells is  
29 difficult to develop due to lack of available on data injection volumes specific to hydraulic fracturing  
30 operations that are compiled and able to be compared among states. Also, wastewater management  
31 methods are not well tracked in all states. Regional numbers of Class IID wells and generally low  
32 reuse rates (see Section 8.4.3), however, are consistent with Class IID wells being a primary means  
33 of wastewater management in many areas with hydraulic fracturing activity.

34 This assessment does not address whether there are documented or potential impacts on drinking  
35 water resources associated with the injection of hydraulic fracturing wastewaters into Class IID  
36 wells. However, should the feasibility of managing hydraulic fracturing wastewater via

---

<sup>1</sup> States may be given federal approval to run a UIC program under Section 1422 or 1425 of SDWA.



1 underground injection be limited in any way or become less economically advantageous, operators  
 2 will likely adjust their wastewater management programs to favor other local practices such as  
 3 treatment and discharge or reuse. Any new wastewater management decisions would then have to  
 4 be evaluated in terms of potential impacts on drinking water resources.

5 The decision to inject hydraulic fracturing wastewater into Class IID wells depends, in part, on cost  
 6 and on the proximity of the production well to the disposal well (and, therefore, transportation  
 7 costs). For oil and gas producers, underground injection is usually the least expensive management  
 8 strategy unless significant trucking is needed to transport the wastewater to a disposal well ([U.S.  
 9 GAO, 2012](#)).

10 Class IID wells are not distributed uniformly among states due to differences in geology (including  
 11 depth and permeability of formations), permitting, and historical demand for disposal of oil and gas  
 12 wastewater. Table 8-3 shows the numbers of active Class IID wells across the United States, with  
 13 the total count at a little over 27,000. The greatest numbers of wells are found in Texas, Oklahoma,  
 14 and Kansas. For example, Texas has nearly 7,900 Class IID wells, with an estimated daily disposal  
 15 volume of approximately 400 million gal per day (MGD) (1.5 billion L/day) (see Table 8-3). This  
 16 large disposal capacity in Texas is consistent with the availability of formations with suitable  
 17 geology and the demand for wastewater disposal associated with a mature and active oil and gas  
 18 industry. In contrast, Class IID wells are a relatively small portion of Marcellus wastewater  
 19 management in Pennsylvania (about 10% in 2013 and the first half of 2014) ([PA DEP, 2015a](#))  
 20 because the state has nine injection wells as of early 2015. Wastewater is generally transported out  
 21 of state when being managed through injection into Class IID wells. The local availability of Class  
 22 IID wells and the capacity to accept large volumes of wastewater may begin to be affected by recent  
 23 state actions concerning seismic activity associated with injection ([U.S. EPA, 2014f](#)).

**Table 8-3. Distribution of active Class IID wells across the United States.**

Source: [U.S. EPA \(2015g\)](#).

State	Nearby basins with hydraulic fracturing	Number of active Class IID wells (2012-2014)	Average disposal rate per well (GPD/well) <sup>a</sup>	Total state disposal rate (MGD)

State	Nearby basins with hydraulic fracturing	Number of active Class IID wells (2012-2014)	Average disposal rate per well (GPD/well) <sup>a</sup>	Total state disposal rate (MGD)
AK	North Slope	45	182,000	8.2
OH	Appalachian	188	8,900	1.7
WV		66	7,180	0.47
PA		9	6,380	0.057
NY		10 <sup>b</sup>	3,530	0.035
VA		12	17,500	0.21
TN		0	0	0
MD		0	0	0
NC		Multiple basins	0	0
KS	Cherokee, Anadarko, Arkoma	5,516	20,900	120
OK		4,622 <sup>c</sup>	35,900	170
AR		611 <sup>d</sup>	30,900	19
MO		11	1,270	0.014
CO	Denver-Julesburg, Green River, Piceance, Uinta	294	50,200	15
WY		330	-- <sup>e</sup>	-- <sup>e</sup>
UT		109	74,400	8.1
NE		113	18,100	2.0
TX	Fort Worth, Western Gulf, Permian, San Juan, Raton	7,876	54,200	430
NM		736	48,600	36
IN	Illinois	183	3,580	0.66
IL		1,054	-- <sup>e</sup>	-- <sup>e</sup>
KY		58	1,750	0.10
MI	Michigan	779 <sup>c</sup>	16,600	13
CA	San Joaquin	826	77,800	64

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	Nearby basins with hydraulic fracturing	Number of active Class IID wells (2012-2014)	Average disposal rate per well (GPD/well) <sup>a</sup>	Total state disposal rate (MGD)
LA	TX-LA-MS Salt	2,448	42,100	100
MS		499	69,500	35
AL		85	44,200	3.8
ND	Williston	395	31,600	12
MT		199	31,100	6.2
SD		21	10,200	0.21
All other states (NV, FL, OR, IA, and WA) <sup>f</sup>		42	89,400	3.8
Total (not including missing states)		27,137	40,400	1,040

<sup>a</sup> Typical injection volumes per well are based on historical annual volumes for injection for disposal divided by the number of active Class IID wells during the same year (primarily data from 2007 to 2013).

<sup>b</sup> These wells are not currently permitted to accept unconventional oil and gas extraction wastewater.

<sup>c</sup> With the exception of Oklahoma and Michigan, wells on tribal lands have not been intentionally included. Wells on tribal lands may be counted if state databases contained them.

<sup>d</sup> Only 24 of the 611 active Class II wells in Arkansas are in the northern half of the state, close to the Fayetteville formation.

<sup>e</sup> Disposal rates and/or number of Class IID wells is unknown.

<sup>f</sup> These are states that have minimal oil and gas activity. The number of wells shown for these states may include all types of Class II wells (e.g., Class II enhanced recovery wells) and therefore is an upper estimate. All other states not listed in this table have minimal oil and gas activity and no active Class IID wells.

#### 8.4.2. Centralized Waste Treatment Facilities

- 1 A CWT facility is generally defined as a facility that accepts industrial materials (hazardous, non-  
2 hazardous, solid, or liquid) generated at another facility (off-site) for treatment and/or recovery  
3 ([EPA, 2000](#)). (A POTW treats local municipal wastewater.) As a group, CWTs that accept oil and gas  
4 wastewater offer a wide variety of treatment capabilities and configurations. The fate of treated  
5 effluent at CWTs also varies, and can include the following: reuse in fracturing operations, direct  
6 discharge (to a receiving water under a National Pollution Discharge Elimination System (NPDES)  
7 permit), indirect discharge (to a POTW), or a combination of these. Zero discharge facilities do not  
8 discharge to either surface water or a POTW; effluent is generally used for reuse, although  
9 evaporation or land application may also be done. Some CWTs may be configured so that they only  
10 partially treat the waste stream if allowed by the end use (a reuse application that does not require  
11 TDS removal). Potential impacts on drinking water resources associated with treatment in CWTs  
12 will depend upon whether the CWT treats adequately for constituents of concern prior to discharge  
13 to surface water or to a POTW, and whether treatment residuals are managed appropriately.
- 14 Clean Water Act (CWA) regulations only apply to facilities that discharge treated wastewater to  
15 surface waters or POTWs. For zero-discharge facilities, Pennsylvania and Texas have adopted

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 regulations to control permitting. PA DEP issues permits (General Permit WMGR123) that allow  
2 zero-discharge CWTs to treat and release water back to oil and gas industries for reuse (see the  
3 Eureka Resources Facility in Williamsport, PA listed in Table 8-7 as an example of a zero-discharge  
4 facility<sup>1</sup>). The Texas Railroad Commission (TXRRC) regulates and categorizes wastewater recycling  
5 facilities into different categories: off-lease commercial recycling facilities (capable of being moved  
6 from one location to another) and stationary commercial recycling facilities. The Texas regulations  
7 also promote oil and gas wastewater treatment for reuse and water sharing (see  
8 <http://www.rrc.state.tx.us/rules/rule.php>).

9 Wastewater from hydraulically fractured wells can be transported by truck or pipeline to and from  
10 a CWT ([Easton, 2014](#)); this may present a vulnerability for spills or leaks (see Chapter 7). The  
11 treated wastewater from CWTs may be integrated with other sources of water (for example, treated  
12 municipal wastewater, storm water drainage, or other treated industrial waste streams) for reuse  
13 applications ([Easton, 2014](#)).

#### **8.4.2.1. Numbers and Locations of CWTs**

14 Although there are CWTs serving hydraulic fracturing operations throughout the country, including  
15 the Barnett and Fayetteville shale plays plus oil fields in Texas and Wyoming, historically the  
16 majority have served Marcellus Shale operations. This is likely because the low availability of  
17 injection wells ([Boschee, 2014](#)) in Pennsylvania necessitates other forms of management. An EPA  
18 study ([U.S. EPA, 2015q](#)) identified 73 CWT facilities that have either accepted or plan to accept  
19 hydraulic fracturing wastewater (see Table 8-4). Of these, 39 are located in Pennsylvania. Most of  
20 these are zero-discharge facilities; they do not discharge to surface waters or POTWs, and they  
21 often do not include TDS removal. According to EPA research ([U.S. EPA, 2015q](#)), the number of CWT  
22 facilities serving operators in the Marcellus and Utica Shales has increased since the mid-2000s as  
23 the number of wells drilled in the Marcellus and Utica Shales has increased, growing from roughly  
24 five CWTs in 2004 to over 40 in 2013. A similar trend has been noted for the Fayetteville Shale  
25 region in Arkansas, where there are fewer Class IID wells available relative to the rest of the state  
26 ([U.S. EPA, 2015q](#)).

27 In other regions, a small number of newer facilities have emerged in the last several years, most  
28 often with TDS removal capabilities. In Texas, for example, two zero-discharge facilities are  
29 available to treat wastewater from the Eagle Ford (beginning in 2011 and 2013), both equipped  
30 with TDS removal, and one zero-discharge facility with TDS removal is located in the Barnett Shale  
31 region (operational beginning in 2008). In Wyoming, the four facilities in the region of the  
32 Mesaverde/Lance formations (operations beginning between 2006 and 2012; two zero-discharge  
33 and two with multiple discharge options) are all capable of TDS removal ([U.S. EPA, 2015q](#)).

---

<sup>1</sup> The facility is also permitted for indirect discharge to the Williamsport Sewer Authority.

**Table 8-4. Number, by state, of CWT facilities that have accepted or plan to accept wastewater from hydraulic fracturing activities.**Source: [U.S. EPA \(2015g\)](#).

State	Formation(s) served where hydraulic fracturing occurs	Zero-discharge CWT facilities <sup>a</sup>		CWT facilities that discharge to surface water or POTW <sup>a</sup>		Discharging CWT facilities with multiple discharge options <sup>a</sup>		Total known facilities
		Non-TDS removal treatment	TDS removal treatment	Non-TDS removal treatment	TDS removal treatment	Non-TDS removal treatment	TDS removal treatment	
AR	Fayetteville	2	0	0	0	0	1	3
CO	Niobrara, Piceance Basin	3 (1)	0	0	0	0	0	3
ND	Bakken	0	1 (1)	0	0	0	0	1
OH	Utica, Marcellus	10 (7)	0	1	0	0	0	11
OK	Woodford	2	0	0	0	0	0	2
PA	Utica, Marcellus	23	7 (3)	6	0	0	3 (1)	39
TX	Eagle Ford, Barnett, Granite Wash	1	3	0	0	0	0	4
WV	Marcellus, Utica	4 (2)	0	0	0	1	1	6
WY	Mesaverde, Lance	0	2	0	0	0	2	4
<b>Total</b>		45	13	7	0	1	7	73

<sup>a</sup> Number of facilities also includes facilities that have not yet opened but are under construction, pending permit approval, or in the planning stages. Facilities that are not accepting process wastewater from hydraulic fracturing activities but plan to in the future are noted parenthetically.

1 Because few states maintain a comprehensive list of CWT facilities and the count provided by the  
2 EPA ([U.S. EPA, 2015q](#)) includes facilities that plan to accept unconventional oil and gas  
3 wastewaters, the data in Table 8-4 do not precisely reflect the number of facilities currently  
4 available for handling hydraulic fracturing wastewaters. Additional discussion of CWTs in  
5 unconventional oil and gas fields are reviewed in the literature for areas including the Barnett  
6 ([Hayes and Severin, 2012b](#)) and the Fayetteville ([Veil, 2011](#)) as well as other oil fields in Texas and  
7 Wyoming ([Boschee, 2014, 2012](#)). In addition, news releases and company announcements indicate  
8 that new wastewater treatment facilities are being planned ([Greenhunter, 2014](#); [Geiver, 2013](#);  
9 [Purestream, 2013](#); [Alanco, 2012](#); [Sionix, 2011](#)).

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 Based on oil and gas waste disposal information available from PA DEP ([PA DEP, 2015a](#)) dating  
2 back to 2009, the estimated volumes of Marcellus wastewater sent to CWTs range from  
3 approximately 113 Mgal (428 million L) in the latter half of 2009 and first half of 2010, to about  
4 183 Mgal (693 million L) in 2011, and about 252 Mgal (954 million L) in 2013. These constitute  
5 about 52% of the total wastewater volume in 2009-2010, about 25% in 2011, and 20% in 2013,  
6 indicating that although total amounts of wastewater have increased (see Table 8-1), the  
7 percentage managed through CWTs has decreased.

8 Among the Marcellus wastewater sent to CWTs, an estimated 35% was sent to zero-discharge  
9 facilities in Pennsylvania (those with general permits) in the latter half of 2010, and 42% was sent  
10 to facilities with NPDES permits (indicating that they can discharge to surface waters). About 23%  
11 went to CWTs whose permit types were more difficult to ascertain, generally outside of  
12 Pennsylvania. By 2013, the portion sent to zero-discharge facilities had risen to 90%, with about  
13 5% sent to CWTs with NPDES permits and 5% sent to CWTs whose discharge permit type is not  
14 clear. The high percentage sent to zero-discharge CWTs is consistent with the concerted focus on  
15 reuse in Pennsylvania, although CWTs with NPDES permits also often provide treated wastewater  
16 for reuse, further limiting discharges to surface waters. The waste records do not indicate if a CWT  
17 has more than one permit type.

#### 8.4.2.2. Residuals Management

18 Certain treatment processes at CWTs produce liquid or solids residuals as a by-product of that  
19 process. The residuals produced depend on the constituents in the treated water and the treatment  
20 process used. Residuals can consist of sludges (from precipitation, filtration, settling units, and  
21 biological processes); spent media (media requiring replacement or regeneration from filtration,  
22 adsorption, or ion exchange processes); concentrated brines (from membrane processes and some  
23 evaporation processes); and regeneration and cleaning chemicals (from ion exchange, adsorption,  
24 and membrane processes) ([Fakhru'l-Razi et al., 2009](#)). Residuals from CWTs can constitute a  
25 considerable fraction of solid waste in an oil or gas production area. [Chiado \(2014\)](#) found that solid  
26 wastes from hydraulic fracturing in the Marcellus accounted for 5% of the weight of waste  
27 deposited in landfills in the area, with some area landfills reaching as high as 60% landfill mass  
28 coming from hydraulic fracturing activities.

#### 29 *Management of Solid Residuals*

30 CWTs may apply additional treatment to solid residuals including thickening, stabilization (e.g.,  
31 anaerobic digestion), and dewatering processes prior to disposal. The solid residuals are then  
32 typically sent to a landfill, land applied, or incinerated ([Morillon et al., 2002](#)). Pollutants may  
33 accumulate in sludge, which may limit land application as a disposal option. For example, wastes  
34 containing TENORMs can be problematic due to the possibility of radon emissions from the landfill  
35 ([Walter et al., 2012](#)). In some states, many landfills that are specifically permitted to accept  
36 TENORM have criteria written into their permits, including gamma exposure rate (radiation) levels  
37 and radioactivity concentration limits. Most non-hazardous landfills have limits on maximum  
38 radiation that can be accepted. For example, Pennsylvania requires alarms to be set at all municipal  
39 landfills, with a trigger set at 10  $\mu\text{R/hr}$  above background radiation (Pa Code Title 25, Ch. 273.223



1 c). Texas sets a radioactivity limit, requiring that any waste disposed by burial contains less than 30  
2 pCi/g radium or 150 pCi/g of other radionuclides (TX Code Ch 4 Section F Section 4.620). Some  
3 states have volumetric limitations on TENORM in their permits (e.g., Colorado).

4 Solid residual wastes have the potential to impact the quality of drinking water resources if  
5 contaminants leach to groundwater or surface water. In a recent study by PA DEP, radium was  
6 detected in leachate from 34 of 51 landfills, with radium-226 concentrations ranging from 54 to  
7 416 pCi/L, and radium-228 ranging from 2.5 to 1,100 pCi/L ([PA DEP, 2015b](#)). [Countess et al. \(2014\)](#)  
8 studied the potential for barium, calcium, sodium, and strontium to leach from sludges generated at  
9 a CWT handling hydraulic fracturing wastewaters in Pennsylvania. Tests used various strong acid  
10 solutions (to simulate the worst case scenario) and weak acid digestions (to simulate  
11 environmental conditions). The extent of leaching varied by constituent and by fluid type; the data  
12 illustrate the possibility of leaching of these constituents from landfills.

### 13 *Management of Liquid Residuals*

14 Practices for management of liquid residual streams are generally the same as for untreated  
15 hydraulic fracturing wastewaters, although the reduced volumes tend to lower costs ([Hammer and](#)  
16 [VanBriesen, 2012](#)). Concentrations of contaminants, however, will be higher. Liquids mixed with  
17 other wastes can be disposed of in landfills if the liquid concentration is low enough. If the liquid is  
18 not injected into a disposal well, treatment to remove salts would be required for surface water  
19 discharge to meet NPDES permit requirements and protect the water quality for downstream users  
20 (e.g., drinking water utilities) (see Section 8.6). Because some constituents of concentrated  
21 residuals can pass through or impact municipal wastewater treatment processes ([Linarić et al.,](#)  
22 [2013](#); [Hammer and VanBriesen, 2012](#)), these residuals may not be appropriate for discharge to a  
23 POTW. Elevated salt concentrations, in particular, can reduce or inhibit microbiological treatment  
24 at municipal wastewater systems such as activated sludge treatment ([Linarić et al., 2013](#)).

#### 8.4.3. Water Reuse for Hydraulic Fracturing

25 Water reuse in hydraulic fracturing operations has increased in recent years, with wastewaters  
26 being used to formulate hydraulic fracturing fluids for subsequent fracturing jobs ([Boschee, 2014,](#)  
27 [2012](#); [Gregory et al., 2011](#); [Rassenfoss, 2011](#)). Wastewater may be reused after some form of  
28 treatment (sometimes only settling), depending on the reuse water quality requirements, and it  
29 may be supplied for use in hydraulic fracturing through various routes. Reused water is discussed  
30 in Chapter 4 of this report (Water Acquisition) as well as in this chapter, though in a different  
31 context. The water reuse rate described in this chapter is the amount or percentage of generated  
32 wastewater that is managed by being provided to operators for use in additional hydraulic  
33 fracturing operations. In contrast, Chapter 4 discusses reused wastewater as a source water and as  
34 one part of the base fluid for new fracturing fluid.

35 Hydraulic fracturing wastewater reuse reduces costs associated with other forms of wastewater  
36 management, and the economic benefits and feasibility of reuse can be expected to figure into  
37 ongoing wastewater management decisions. However, although reuse minimizes other forms of  
38 wastewater management on a local and short-term basis (e.g., those involving direct or indirect

1 discharge to surface waters), reuse can result in the accumulation of dissolved solids (e.g., salts and  
2 TENORMs) as the process returns water to the subsurface. For example, data from a PA DEP study  
3 ([PA DEP, 2015b](#)) suggests that hydraulic fracturing fluids that include reused wastewater already  
4 contain radium-226 and radium-228. Eventually, wastewaters with a component that has been  
5 reused more than once will need to be definitively managed, either through treatment or injection.  
6 Residuals from treatment will also require proper management to avoid potential impacts on water  
7 resources (see Section 8.4.2.2) ([Kappel et al., 2013](#)).

#### 8.4.3.1. Factors in Considering Reuse

8 In making the decision whether to manage wastewater via reuse, operators have several factors to  
9 consider ([Slutz et al., 2012](#); [NPC, 2011a](#)):

- 10 • Wastewater generation rates compared to water demand for future fracturing operations,
- 11 • Wastewater quality and treatment requirements for use in future operations,
- 12 • The costs and benefits of wastewater management for reuse compared with other  
13 management strategies,
- 14 • Available infrastructure and treatment technologies, and
- 15 • Regulatory considerations.

16 Among these factors, costs may be the most significant driver, weighing the costs of transportation  
17 from the generating well to the treatment facility and to the new well against the costs for transport  
18 to alternative locations (a disposal well or CWT). Trucking large quantities of water can be  
19 relatively expensive (from \$0.50 to \$8.00 per barrel), rendering on-site treatment technologies and  
20 reuse potentially economically competitive in some settings ([Dahm and Chapman, 2014](#); [Guerra et  
21 al., 2011](#)). Also, logistics, including proximity of the water sources for aggregation, may be a factor  
22 in implementing reuse. For example, [Boschee \(2014\)](#) notes that in the Permian Basin, older  
23 conventional wells are linked by pipelines to a central disposal facility, facilitating movement of  
24 treated water to areas where it is needed for reuse.

25 Regulatory factors may facilitate reuse. In 2013, the Texas Railroad Commission adopted rules  
26 intended to encourage statewide water conservation. These rules facilitate reuse by eliminating the  
27 need for a permit when operators reuse on their own lease or transfer the fluids to another  
28 operator for use in hydraulic fracturing ([Rushton and Castaneda, 2014](#)). Data for the years after  
29 2013 will allow evaluation of whether reuse increases.

30 Recommended compositional ranges for base fluid may shift in the future as fracturing fluid  
31 technology continues to develop. Development of fracturing mixture additives that are brine-  
32 tolerant have allowed for the use of high TDS wastewaters (up to tens of thousands of mg/L) for  
33 reuse in fracturing ([Tiemann et al., 2014](#); [GTI, 2012](#); [Minnich, 2011](#)). Some new fracturing fluid  
34 systems are claimed to be able to tolerate salt concentrations exceeding 300,000 mg/L ([Boschee,  
35 2014](#)). This greater flexibility in acceptable water chemistry can facilitate reuse both logistically  
36 and economically by reducing treatment needs. Additional discussion of the water quality feasible  
37 for reuse and examples of recommended constituent concentrations are included in Appendix F.

1 Reuse rates may also fluctuate with changes in the supply and demand of treated wastewater and  
 2 the availability of fresh water. Flowback may be preferable to later-stage produced water for reuse  
 3 because it is typically generated in larger quantities from a single location as opposed to water  
 4 produced later on, which is generated in smaller volumes over time from many different locations.  
 5 Flowback water also tends to have lower TDS concentrations than later-stage produced water; in  
 6 the Marcellus, TDS has been shown to increase from tens of thousands to about 100,000 mg/L  
 7 during the first 30 days ([Barbot et al., 2013](#); [Maloney and Yoxtheimer, 2012](#)) (see Chapter 7). The  
 8 changing production rate and quality of wastewaters generated in a region as more wells go into  
 9 production need to be taken into account, as well as possible decreases in the demand for reused  
 10 water as plays mature ([Lutz et al., 2013](#); [Hayes and Severin, 2012b](#); [Slutz et al., 2012](#)).

#### 8.4.3.2. Reuse Rates

11 Reliable information on reuse practices throughout the United States is hampered by a limited  
 12 amount of data that are available and represent different regions of the country. In Table 8-5,  
 13 estimates have been compiled from various literature sources. Reuse rates are highest in the  
 14 Appalachian Basin, associated primarily with the Marcellus Shale. Documentation of reuse practices  
 15 is also more readily available for that region than for other parts of the country.

16 A number of studies have estimated reuse rates for Marcellus wastewater. Although the reported  
 17 values can differ substantially (see Table 8-5), the data point to a steep increase in reuse since  
 18 2008, with rates increasing from 0% to 10% in 2008 to upwards of 90% in 2013. As an example, an  
 19 analysis of waste disposal information from the PA DEP for Marcellus wells in Pennsylvania  
 20 ([Hansen et al., 2013](#)) reports an increase in reuse from 9% (7.17 million gal or 27.1 million L) of  
 21 total wastewater volumes in 2008 to 56% (343.79 million gal or 1.3014 billion L) in 2011. During  
 22 that same timeframe, the authors report that disposal via brine/industrial waste treatment plants  
 23 increased from 32% in 2008 to 70% in 2009, and then declined to 30% in 2011. Because some  
 24 industrial waste treatment plants can treat wastewater for reuse, some of the volumes indicated by  
 25 [Hansen et al. \(2013\)](#) as managed by this route may have ultimately been used for fracturing,  
 26 meaning that the 56% value for 2011 is most likely an underestimate.

**Table 8-5. Estimated percentages of reuse of hydraulic fracturing wastewater.**

Play or Basin	Source and Year	2008	2009	2010	2011	2012	2013
<b>East Coast</b>							
Marcellus, PA	<a href="#">Rahm et al. (2013)</a>	9	8	25 – 48	67 - 80		
Marcellus, PA	<a href="#">Ma et al. (2014)</a>		15 - 20				90
Marcellus, PA	<a href="#">Shaffer et al. (2013)</a>					90	
Marcellus, WV	<a href="#">Hansen et al. (2013)</a>			88	73	65 (partial year)	
Marcellus, PA	<a href="#">Hansen et al. (2013)</a>	9	6	20	56		
Marcellus, PA	<a href="#">Maloney and Yoxtheimer (2012)</a>				71.6		
Marcellus, PA	<a href="#">Tiemann et al. (2014)</a>				72	87	

*This document is a draft for review purposes only and does not constitute Agency policy.*

Play or Basin	Source and Year	2008	2009	2010	2011	2012	2013
Marcellus, PA	<a href="#">Rassenfoss (2011)</a>			~67 overall (general estimate) 96 (one specific company)			
Marcellus, PA	<a href="#">Wendel (2011)</a>			75-85	90		
Marcellus, PA	<a href="#">Lutz et al. (2013)</a>	13 (prior to 2011)			56		
Marcellus, PA (SW region)	<a href="#">Rahm et al. (2013)</a>	~10	~15	~25-45	~70-80		
Marcellus, PA (NE region)	<a href="#">Rahm et al. (2013)</a>	0	0	~55-70	~90-100		
Marcellus, PA	<a href="#">Rahm and Riha (2014)</a>				55-80 (general estimate – appears to cover recent years)		
<b>Gulf Coast &amp; Midcontinent</b>							
Fayetteville	<a href="#">Veil (2011)</a>			20 (single company target)			
West Permian	<a href="#">Nicot et al. (2012)</a>				0		
Midland Permian	<a href="#">Nicot et al. (2012)</a>				2		
Anadarko	<a href="#">Nicot et al. (2012)</a>				20		
Barnett	<a href="#">Nicot et al. (2012)</a>				5		
Barnett	<a href="#">Rahm and Riha (2014)</a>				5 (general estimate – appears to cover recent years)		
Eagle Ford	<a href="#">Nicot and Scanlon (2012)</a>				0	20 (estimate based on interviews)	
East Texas	<a href="#">Nicot and Scanlon (2012)</a>				5		
Haynesville	<a href="#">Argonne National Laboratory (2014)</a>						0
Haynesville	<a href="#">Rahm and Riha (2014)</a>				5 (general estimate – appears to cover recent years)		
<b>West Coast &amp; Upper Plains</b>							
Bakken	<a href="#">Argonne National Laboratory (2014)</a>						0

- 1 According to [Maloney and Yoxtheimer \(2012\)](#), about 331 million gal (7.9 million bbl or 1.25 billion
- 2 L) of flowback and about 381 million gal (about 9.1 million bbl or 1.4 billion L) of produced water
- 3 (excluding flowback) were generated in the Marcellus in 2011. For flowback and produced water

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 combined, about 72% was reused. Of the flowback, 90% was managed through reuse (other than  
2 road spreading). Of produced brine water, 55.7% was reused (with 11.6% treated in CWTs and  
3 27.8% injected into Class IID wells in Ohio). Reuse is higher in the northeastern part of the  
4 Marcellus; in the southwestern portion, easier access to Class IID wells in Ohio makes disposal by  
5 injection more feasible ([Rahm et al., 2013](#)).

6 Data from Marcellus wastewater management reports submitted to PA DEP ([PA DEP, 2015a](#)) were  
7 compiled for this assessment; the data suggest that rates of reuse for hydraulic fracturing (as  
8 indicated by a waste disposal method of either “Reuse Other than Road Spreading” or a zero-  
9 discharge CWT) increased from about 28% in the second half of 2010 to about 60% in 2011, 83% in  
10 2013, and 89% in the first half of 2014. These values may be underestimates because wastewater  
11 treated at facilities with NPDES permits can be provided to operators for reuse, and the permit  
12 types for some facilities could not be determined. Among the forms of reuse, on-site reuse (“Reuse  
13 Other than Road Spreading”) has risen steadily over the past few years, from about 8% in the  
14 second half of 2010 to about 48% in 2011, 62% in 2012, and nearly 70% in the first half of 2014.

15 Outside of the Marcellus region, a lower percentage of wastewater from hydraulic fracturing  
16 operations is reused. According to published literature, in Texas in 2011, 0% to 5% of wastewater  
17 was reused in most basins, with the exception of the Anadarko Basin (20%) ([Nicot and Scanlon,  
18 2012](#)); see Table 8-5. [Ma et al. \(2014\)](#) note that only a small amount of reuse is occurring in the  
19 Barnett Shale. Reuse has not yet been pursued aggressively in New Mexico or in the Bakken (North  
20 Dakota) ([Argonne National Laboratory, 2014](#); [LeBas et al., 2013](#)). Other sources, however, indicate  
21 growing interest in reuse, as evidenced in specialized conferences (e.g., “Produced Water Reuse  
22 Initiative 2014” on produced water reuse in Rocky Mountain oil and shale gas plays), and available  
23 state-developed information on reuse (e.g., fact sheet by the Colorado Oil and Gas Conservation  
24 Commission) ([Colorado Division of Water Resources; Colorado Water Conservation Board;  
25 Colorado Oil and Gas Conservation Commission, 2014](#)). The fact sheet discusses piping and trucking  
26 wastewater to CWTs in the Piceance Basin to treat for reuse.

#### 8.4.4. Evaporation

27 In drier climates of the western United States, natural evaporation may be an option for treatment  
28 of hydraulic fracturing wastewater (see Figure 8-6). Production data from the California  
29 Department of Conservation’s Division of Oil, Gas, and Geothermal Resources (DOGGR) ([California  
30 Department of Conservation, 2015](#)), for example, lists “evaporation-percolation” as the  
31 management method for 23% to 30% of the wastewater from Kern County over the last few years.  
32 However, data on volumes of wastewater managed are not readily available for all states where this  
33 practice is employed.

34 Evaporation is a simple water management strategy that consists of transporting wastewater to a  
35 pond or pit with a large surface area and allowing passive evaporation of the water from the surface  
36 ([Clark and Veil, 2009](#)). The rate of evaporation depends on the quality of the wastewater as well as  
37 the size, depth, and location of the pond. Evaporation also depends on local humidity, temperature,  
38 and wind ([NETL, 2014](#)). The residual brine or solid can be disposed of in an underground injection  
39 well or landfill (see Section 8.4.3.2 for more details). In colder, dry climates, a freeze-thaw

1 evaporation method has been used to purify water from oil and gas wastewater ([Boysen et al.](#)  
2 [1999](#)).



**Figure 8-6. Lined evaporation pit in the Battle Creek Field (Montana).**

Source: [DOE \(2006\)](#). Permission from ALL Consulting.

3 Alternatively, operators may transport wastewater by truck to an off-site commercial facility.  
4 Commercial evaporation facilities exist in Colorado, Utah, New Mexico, and Wyoming ([NETL, 2014](#);  
5 [DOE, 2004](#)). [Nowak and Bradish \(2010\)](#) described the design, construction, and operation of two  
6 large commercial evaporation facilities in Southern Cross, Wyoming and Danish Flats, Utah. Each  
7 facility includes 14,000-gal (53,000 L) three-stage concrete receiving tanks, a sludge pond, and a  
8 series of five-acre (20,234 m<sup>2</sup>) evaporation ponds connected by gravity or force-main underground  
9 piping. The Wyoming facility, which opened in 2008, consists of two ponds with a total capacity of  
10 approximately 84 million gal (2 million bbl or 320 million L). The Utah facility, open since 2009,  
11 consists of 13 ponds with a total capacity of 218.4 million gal (5.2 million bbl or 826.7 million L).  
12 Each facility receives 420,000 to 1.47 million gal (10,000 to 35,000 bbl or 1.6 million to 5.56 million  
13 L) per day of wastewater from oil and gas production companies in the area. Evaporation pits are  
14 subject to state regulatory agency approval and must meet state standards for water quality and  
15 quantity ([Boysen et al., 2002](#)). Impacts on drinking water resources from evaporation pits might  
16 arise if a pit is breached due to extreme weather or other factors affecting infrastructure and if  
17 leaking wastewater reaches a surface water body; such events as related specifically to evaporation  
18 pits appear not to have not been evaluated in the literature, and their prevalence is unknown.




#### 8.4.5. Publicly Owned Treatment Works

1 Prior to the development of unconventional resources, POTWs were used to treat wastewater and  
2 other wastes from conventional oil and gas operations in some eastern states. Although this is not a  
3 common treatment method for oil and gas wastes in the United States, the small number of  
4 injection wells for waste disposal in Pennsylvania drove the need for disposal alternatives ([Wilson  
5 and Vanbriesen, 2012](#)). When development of the Marcellus Shale began, POTWs continued to be  
6 used to treat wastewater, including wastes originating from new unconventional oil and gas wells  
7 ([Kappel et al., 2013](#); [Soeder and Kappel, 2009](#)). However, unconventional wastewater from the  
8 Marcellus region is difficult to treat at POTWs due to elevated concentrations of halides, heavy  
9 metals, organic compounds, radionuclides, and salts ([Lutz et al., 2013](#); [Schmidt, 2013](#)). Most of  
10 these constituents have the potential to pass through the unit treatment processes commonly used  
11 in POTWs and can be discharged into receiving waters ([Cusick, 2013](#); [Kappel et al., 2013](#)). In  
12 addition, research has found that sudden, extreme salt fluctuations can disturb POTW biological  
13 treatment processes ([Linarić et al., 2013](#); [Lefebvre and Moletta, 2006](#)). In order to meet NPDES  
14 requirements, POTWs used to blend the hydraulic fracturing wastewater with incoming municipal  
15 wastewater. For example, [Ferrar et al. \(2013\)](#) note that, per PA DEP requirements, one facility could  
16 only accept up to 1% of their influent volume from unconventional oil and gas wastewater per day.

17 The annual reported volume of oil and gas produced wastewater treated at POTWs in the Marcellus  
18 Shale region peaked in 2008 and has since declined to virtually zero (see Figure 8-7). This decline  
19 has been attributed to stricter discharge limits for TDS for POTWs in Pennsylvania and widespread  
20 voluntary compliance on behalf of oil and gas operators with the May 2011 request from PA DEP to  
21 cease sending Marcellus Shale wastewater to 15 treatment plants (including both POTWs and  
22 CWTs) by May 19, 2011 ([Rahm et al., 2013](#)). To comply with the request, the oil and gas industry in  
23 Pennsylvania accelerated the transition of wastewater deliveries from POTWs to CWTs for better  
24 removal of metals and suspended solids ([Schmidt, 2013](#)). However, treated effluent from CWTs  
25 may be delivered to POTWs for additional treatment assuming treatment processes at POTWs are  
26 not adversely affected and the POTWs can continue to meet NPDES discharge limits ([Hammer and  
27 VanBriesen, 2012](#)). General Pretreatment Regulations and State and local regulations typically  
28 govern the pre-treated water volumes and qualities that can be accepted by the POTW.

29 Although operators stopped sending Marcellus Shale wastewater to POTWs in May of 2011,  
30 conventionally produced wastes have continued to be processed at POTWs in Pennsylvania,  
31 although at small volumes (29 Mgal and 20 Mgal for the years 2010 and 2011, respectively) ([Wilson  
32 and Vanbriesen, 2012](#)).

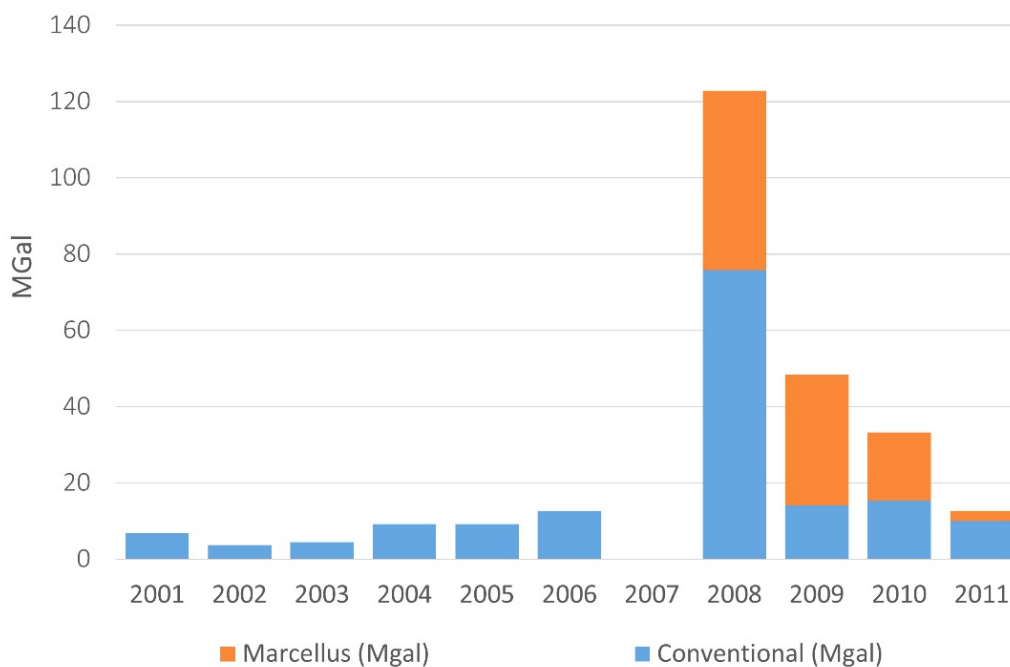

**Figure 8-7. Oil and gas wastewater volumes discharged to POTWs from 2001-2011 in the Marcellus Shale.**

Source: [Lutz et al. \(2013\)](#).

1 At least one study has evaluated POTW effluent chemistry before and after the cessation of  
 2 treatment of hydraulic fracturing wastewater. [Ferrar et al. \(2013\)](#) collected effluent samples from  
 3 two POTWs and one CWT facility in Pennsylvania before and after the 2011 PA DEP request.  
 4 Results from POTW effluent samples collected while the facilities were still treating Marcellus Shale  
 5 wastewater showed that concentrations of several analytes (barium, manganese, strontium, TDS,  
 6 and chloride) were greater than various drinking water and surface water criteria (i.e., EPA MCLs  
 7 and secondary MCLs for drinking water, surface water quality standards for aquatic life, and/or  
 8 surface water standards for human consumption of aquatic organisms). Results for effluent samples  
 9 collected after the POTWs stopped receiving Marcellus wastewater showed a statistically  
 10 significant decrease in the concentrations of several of these constituents. In particular, one of the  
 11 two POTWs showed a decrease in average barium concentration from 5.99 mg/L to 0.141 mg/L, a  
 12 decrease in the average strontium concentration from 48.3 mg/L to 0.236 mg/L, and a decrease in  
 13 the average bromide concentration from 20.9 mg/L to <0.016 mg/L. Influent concentrations at the  
 14 other POTW were lower (0.55 mg/L for barium, 1.63 mg/L for strontium, and 0.60 for bromide),  
 15 but significant decreases in these constituents were also seen in the effluents (0.036 mg/L barium,  
 16 0.228 mg/L strontium, and 0.119 for bromide); this POTW had continued to accept conventional oil  
 17 and gas wastewater. The authors conclude that the decreases in the concentrations of the various  
 18 constituents indicate that the elevated concentrations in the first samplings can be attributed to the  
 19 contribution of wastewater from unconventional natural gas development.

#### 8.4.6. Other Management Practices and Issues

1 Additional strategies for wastewater management in some states include discharging to surface  
2 waters and land application. Wastewater from CBM fracturing and production, in particular,  
3 generally has lower TDS concentrations than wastewater from other types of unconventional plays  
4 and lends itself more readily to beneficial use. Below is a discussion of these other management  
5 practices.

##### 8.4.6.1. Land Application, Including Road Spreading

6 Land application has been done using brines from conventional oil and gas production. Road  
7 spreading can be done for dust control or de-icing. Although recent data are not available, an  
8 American Petroleum Institute (API) survey estimated that approximately 75.6 million gal (1.8  
9 million bbl or 286 million L) of wastewater was used for road spreading in 1995 ([API, 2000](#)). The  
10 API estimate does not specifically identify hydraulic fracturing wastewater. There is no current  
11 nationwide estimate of the extent of road spreading using hydraulic fracturing wastewater.

12 Road spreading with hydraulic fracturing wastewater is regulated primarily at the state level  
13 ([Hammer and VanBriesen, 2012](#)) and is prohibited in some states. For example, with annual  
14 approval of a plan to minimize the potential for pollution, PA DEP allows spreading of brines from  
15 conventional wells for dust control or road stabilization. Hydraulic fracturing flowback, however,  
16 cannot be used for dust control and road stabilization ([PA DEP, 2011b](#)). In West Virginia, use of gas  
17 well brines for roadway de-icing is allowed per a 2011 memorandum of agreement between the  
18 West Virginia Division of Highways and the West Virginia Department of Environmental Protection,  
19 but the use of “hydraulic fracturing return fluids” is not permitted ([Tiemann et al., 2014](#); [West  
20 Virginia DEP, 2011](#)).

21 Concerns about road application center on contaminants such as barium, strontium, and radium. A  
22 report from PA DEP analyzed several commercial rock salt samples and compared results with  
23 contaminants found in Marcellus Shale flowback samples; the results noted elevated barium,  
24 strontium, and radionuclide levels in Marcellus Shale brines compared with commercial rock salt  
25 ([Titler and Curry, 2011](#)). Another study found increases in metals (radium, strontium, calcium, and  
26 sodium) in soils ranging from 1.2 to 6.2 times the original concentration (for radium and sodium,  
27 respectively), attributed to road spreading of wastewater from conventional oil and gas wells for  
28 de-icing purposes ([Skalak et al., 2014](#)).

29 Potential impacts on drinking water resources from road spreading, have been noted by [Tiemann et  
30 al. \(2014\)](#) and [Hammer and VanBriesen \(2012\)](#). These include potential effects of runoff on surface  
31 water, or migration of brines to groundwater. Snowmelt may carry salts or other chemicals from  
32 the application site, with the possibility of transport increasing if application rates are high or rain  
33 occurs soon after application ([Hammer and VanBriesen, 2012](#)). Research on the impacts of  
34 conventional road salt application has documented long-term salinization of both surface water and  
35 ground water in the northern United States; by the 1990s, 24% of public supply wells in the Chicago  
36 area had chloride concentrations exceeding 100 mg/L ([Kelly, 2008](#); [Kaushal et al., 2005](#)). When  
37 conventional oil field brine was used in a controlled road spreading experiment, elevated chloride  
38 concentrations were detected in shallow ground water (531 ppm in winter and 1,360 ppm in

1 summer ([Bair and Digel, 1990](#)). The amount of salt contributed to drinking water resources due to  
2 road application of hydraulic fracturing wastewaters has not been quantified.

3 In managing solid wastes from oil and gas production, a study on land application of oilfield scales  
4 and sludges suggested that radium in samples became more mobile after incubation with soil under  
5 moist conditions, due to microbial processes and interactions with the soil and water ([Matthews et  
6 al., 2006](#)). Overall, potential effects from land application on drinking water resources are not well  
7 understood.

8 Additionally, drill cuttings must be managed; in some places they are left in the reserve pit (pit for  
9 waste storage), allowed to dry and, buried on-site ([Kappel et al., 2013](#)). More, commonly, however,  
10 drill cuttings are disposed of in landfills ([Chiado, 2014](#)); about half of Marcellus drill cuttings are  
11 disposed of in Pennsylvania, while the rest are trucked to Ohio or West Virginia ([Maloney and  
12 Yoxtheimer, 2012](#)).

#### **8.4.6.2. Management of Coalbed Methane Wastewater**

13 Wastewater from CBM wells can be managed like other hydraulic fracturing wastewater discussed  
14 above. However, the wastewater from CBM wells can also be of higher average quality (e.g., lower  
15 TDS content) than wastewater from other hydraulically fractured wells, which makes it more  
16 suitable for certain management practices and uses. A number of management strategies have been  
17 proposed or implemented, with varying degrees of treatment required depending on the quality of  
18 the wastewater and the requirements of the intended use ([Hulme, 2005](#); [DOE, 2003, 2002](#)).  
19 Although specific volumes managed through the various practices below are not well documented,  
20 qualitative information and considerations for feasibility are available and presented below.

21 CBM wastewater quality, which can range from an average of nearly 1,000 mg/L TDS in the Powder  
22 River Basin to an average of about 4,700 mg/L in the San Juan Basin (see Appendix Table E-3),  
23 plays a large role in how the wastewater is managed. In basins with higher TDS such as the San  
24 Juan, Uinta, and Piceance, nearly all the wastewater is disposed of in injection wells. Wastewater  
25 may also be injected for aquifer storage and recovery, with the intention of later recovering the  
26 water for some other use ([DOE, 2003](#)).

27 Discharge to rivers and streams for wildlife, livestock, and agricultural use, a management option  
28 governed by the CWA, may be permitted in some cases. To be discharged, the wastewater must  
29 meet technology-based limitations established by the permit authority and any applicable water  
30 quality water quality standards. Direct discharge to streams (with or without treatment) is possible  
31 where wastewater is of higher quality. This is a more common method of wastewater management  
32 in basins such as the Raton Basin in Colorado and the Tongue River drainage of the Powder River  
33 Basin in Montana ([NRC, 2010](#)).

34 Agricultural uses include livestock watering, crop irrigation, and commercial fisheries. Livestock  
35 watering with CBM wastewater is a common practice, and irrigation is an area of active research  
36 (e.g., [Engle et al., 2011](#); [NRC, 2010](#)). Irrigation with treated CBM wastewater would be most suitable  
37 on coarse-textured soils, for cultivation of salt-tolerant crops ([DOE, 2003](#)). [NRC \(2010\)](#) remarks  
38 that “use of CBM produced water for irrigation appears practical and sustainable,” provided that

1 appropriate measures are taken such as selective application, dilution or blending, appropriate  
2 timing, and rehabilitation of soils. Approximately 13% of CBM wastewater in the Powder River  
3 Basin in Wyoming, and 26% to 30% in Montana, is used for irrigation ([NRC, 2010](#)).

4 As noted above, a degree of treatment is needed for some uses. [Plumlee et al. \(2014\)](#) examined the  
5 feasibility, treatment requirements, and cost of several hypothetical uses for CBM wastewater. In  
6 several cases, costs for these uses were projected to be comparable to or less than estimated  
7 disposal costs. In one case study CBM wastewater for stream augmentation or crop irrigation was  
8 estimated to cost between \$0.26 and \$0.27 a barrel and disposal costs ranged from \$0.01 per barrel  
9 (pipeline collection system with impoundment) to \$2.00 per barrel (hauling for disposal or  
10 treatment).

11 The applicability of particular uses may be limited by ecological and regulatory considerations, as  
12 well as the irregular nature of CBM wastewater production (voluminous at first, and then declining  
13 and halting after a period of years). Legal issues, including overlapping jurisdictions at the state  
14 level and, in western states, senior water rights claims in over-appropriated basins, may also  
15 determine use of CBM wastewater ([Wolfe and Graham, 2002](#)).

#### **8.4.6.3. Other Documented Uses of Hydraulic Fracturing Wastewater**

16 Uses of wastewater from shales or other hydraulically fractured formations face many of the same  
17 possibilities and limitations as those associated with wastewater from CBM operations. The biggest  
18 difference is in the quality of the water. Wastewaters vary widely in water quality, with TDS values  
19 from shale sand tight sand formations ranging from less than 1,000 mg/L TDS to hundreds of  
20 thousands of mg/L TDS ([DOE, 2006](#)). Wastewaters on the lower end of the TDS spectrum could be  
21 reused in many of the same ways as CBM wastewaters, depending on the concentrations of  
22 potentially harmful constituents and applicable federal, state, and local regulations. High TDS  
23 wastewaters have more limited uses, and pre-treatment may be necessary ([Shaffer et al., 2013](#);  
24 [Guerra et al., 2011](#); [DOE, 2006](#)).

25 Documented potential uses for wastewater in the western United States include livestock watering,  
26 irrigation, supplementing stream flow, fire protection, road spreading, and industrial uses, with  
27 each having their own water quality requirements and applicability ([Guerra et al., 2011](#)). Guerra et  
28 al. summarized the least conservative TDS standards for five possible uses in the western United  
29 States that include 500 mg/L for drinking water (the secondary MCL), 625 mg/L for groundwater  
30 recharge, 1,000 mg/L for surface water discharge, 1,920 mg/L for irrigation, and 10,000 mg/L for  
31 livestock watering. The authors estimated that wastewater from 88% of unconventional wells in  
32 the western United States could be used for livestock watering without treatment for TDS removal  
33 based on a maximum TDS concentration of 10,000 mg/L. Wastewater from 10% of unconventional  
34 wells were estimated to meet the criterion of 1,000 mg/L TDS for surface water discharge ([Guerra  
35 et al., 2011](#)).

36 A 2006 Department of Energy (DOE) study points out that the quality necessary for use in  
37 agriculture depends on the plant or animal species involved. Other important factors include the  
38 sodium adsorption ratio and concentrations of TDS, calcium, magnesium, and other constituents



1 ([DOE, 2006](#)). The authors note that in the Bighorn Basin in Wyoming, low salinity wastewater is  
2 used for agriculture and livestock watering after minimal treatment to remove oil and grease ([DOE,](#)  
3 [2006](#)).

## 8.5. Summary and Analysis of Wastewater Treatment

4 A variety of individual treatment techniques and combinations of techniques may be employed for  
5 removal of hydraulic fracturing wastewater constituents of concern. These include methods  
6 commonly employed in municipal wastewater treatment as well as more advanced processes such  
7 as desalination. Treatment technologies are selected based on the water quality of the wastewater  
8 to be treated and the effluent concentration required for the intended management method(s) (i.e.,  
9 reuse, discharge to POTW, and discharge to surface water body). For example, if reuse is planned,  
10 the level of treatment will depend on the water quality needed to formulate the new fracturing  
11 fluid.

12 This section discusses treatment technologies that are most effective for removing specific  
13 hydraulic fracturing wastewater constituents. It provides information on the unit processes  
14 appropriate for treating different types of constituents as well as challenges associated with their  
15 use. Considerations when designing a treatment system are also discussed for both centralized and  
16 on-site (i.e., mobile) facilities.

### 8.5.1. Overview of Treatment Processes for Hydraulic Fracturing Wastewater

17 This section provides a brief overview of the treatment technologies used to treat hydraulic  
18 fracturing wastewater; Appendix F provides more in-depth descriptions of these technologies.

19 The most basic treatment need for oil and gas wastewaters, including those from hydraulic  
20 fracturing operations is separation to remove suspended solids and oil and grease, done using basic  
21 separation technologies (e.g., hydrocyclones, dissolved air or induced gas flotation, media filtration,  
22 or biological aerated filters). Other treatment processes that may be used include media filtration  
23 after chemical precipitation for hardness and metals ([Boschee, 2014](#)), adsorption technologies,  
24 including ion exchange (organics, heavy metals, and some anions) ([Igunnu and Chen, 2014](#)), a  
25 variety of membrane processes (microfiltration, ultrafiltration, nanofiltration, RO), and distillation  
26 technologies. In particular, advanced processes such as RO or distillation methods (e.g., mechanical  
27 vapor recompression (MVR)) are needed for significant reduction in TDS ([Drewes et al., 2009](#); [LEau](#)  
28 [LLC, 2008](#); [Hamieh and Beckman, 2006](#)). An emerging technology is electrocoagulation, which has  
29 been used in mobile treatment systems to treat hydraulic fracturing wastewaters ([Halliburton,](#)  
30 [2014](#); [Igunnu and Chen, 2014](#)). Removal efficiencies for hydraulic fracturing wastewater  
31 constituents by treatment technology are provided in Appendix F.

### 8.5.2. Treatment of Hydraulic Fracturing Waste Constituents of Concern

32 The constituents prevalent in hydraulic fracturing wastewater include suspended solids, TDS,  
33 anions (e.g., chloride, bromide, and sulfate), metals, radionuclides, and organic compounds (see  
34 Section 8.3 and Chapter 7). If the end use of the wastewater necessitates treatment, a variety of  
35 technologies can be employed. This section discusses effective unit processes for removing these  
36 constituents and provides examples of treatment processes being used in the field as well as



- 1 emerging technologies. Table 8-6 provides an overview of influent and effluent results at various
- 2 CWTs for the constituents of concern listed in this section and the specific technology(ies) used to
- 3 remove them.

**Table 8-6. Studies of removal efficiencies and influent/effluent data for various processes and facilities.**

Constituents of concern	Location and results				
	Pinedale Anticline Water Reclamation Facility, Wyoming ( <a href="#">Shafer, 2011</a> )	Maggie Spain Water-Recycling Facility, Barnett Shale, Texas ( <a href="#">Hayes et al., 2014</a> )	Judsonia, Sunnydale, Arkansas ( <a href="#">U.S. EPA, 2015f</a> )	9-month study treating Marcellus Shale waste using thermal distillation ( <a href="#">Boschee, 2014</a> ; <a href="#">Bruff and Jikich, 2011</a> )	San Ardo Water Reclamation Facility, San Ardo, California (Conventional oil and gas) ( <a href="#">Dahm and Chapman, 2014</a> ; <a href="#">Webb et al., 2009</a> )
TSS	Results not reported.	90% Inf. = 1,272 mg/L Eff. = 9 mg/L  Chemical oxidation, coagulation, and clarification	No influent data. Eff.: <4 mg/L  Meets NPDES Permit  Settling, biological treatment, and induced gas flotation	>90% Inf.: 35 to 114 mg/L Eff.: <3 to 3 mg/L  100 micron mesh bag filter	Results not reported.
TDS	>99% Inf. = 8,000 to 15,000 mg/L Eff. = 41 mg/L  RO	99.7% Inf. = 49,550 mg/L Eff. = 171 mg/L  MVR (3 units in parallel)	Results not reported.  MVR	98% Inf.: 22,350 to 37,600 mg/L Eff.: 9 to 400 mg/L  Thermal distillation	97% Inf. = 7,000 mg/L Eff. = 180 mg/L  Ion exchange softening and double-pass RO

*This document is a draft for review purposes only and does not constitute Agency policy.*

Constituents of concern	Location and results				
	Pinedale Anticline Water Reclamation Facility, Wyoming ( <a href="#">Shafer, 2011</a> )	Maggie Spain Water-Recycling Facility, Barnett Shale, Texas ( <a href="#">Hayes et al., 2014</a> )	Judsonia, Sunnydale, Arkansas ( <a href="#">U.S. EPA, 2015f</a> )	9-month study treating Marcellus Shale waste using thermal distillation ( <a href="#">Boschee, 2014</a> ; <a href="#">Bruff and Jikich, 2011</a> )	San Ardo Water Reclamation Facility, San Ardo, California (Conventional oil and gas) ( <a href="#">Dahm and Chapman, 2014</a> ; <a href="#">Webb et al., 2009</a> )
Anions	Chloride: >99% Inf. = 3,600 to 6,750 mg/L Eff. = 18 mg/L  Sulfate: 99% Inf. = 10 to 100 mg/L Eff. = non-detect  RO	Sulfate: 98% Inf. = 309 mg/L Eff. = 6 mg/L  Chemical oxidation, coagulation, clarification, and MVR	Sulfate: No influent data. Eff.: 12 mg/L  Meets NPDES Permit MVR	Bromide: >99% Inf.: 101 to 162.5 mg/L Eff.: <0.1 to 1.6 mg/L  Chloride: 98% Inf.: 9,760 to 16,240 mg/L Eff.: 2.9 to 184.2 mg/L  Sulfate: 93% Inf.: 20.4 to <100 mg/L Eff.: <1 to 2.2 mg/L	Chloride: >99% Inf. = 3,400 mg/L Eff. = 11 mg/L  Double-pass RO Sulfate: 6% Inf. = 133 mg/L Eff. = 125 mg/L
				Fluoride: 96% Inf.: <2 to <20 mg/L Eff.: <0.2 to 0.42 mg/L  Thermal distillation	Sulfuric acid is added after RO to neutralize the pH so no sulfate removal is expected.

This document is a draft for review purposes only and does not constitute Agency policy.

Constituents of concern	Location and results				
	Pinedale Anticline Water Reclamation Facility, Wyoming ( <a href="#">Shafer, 2011</a> )	Maggie Spain Water-Recycling Facility, Barnett Shale, Texas ( <a href="#">Hayes et al., 2014</a> )	Judsonia, Sunnydale, Arkansas ( <a href="#">U.S. EPA, 2015f</a> )	9-month study treating Marcellus Shale waste using thermal distillation ( <a href="#">Boschee, 2014</a> ; <a href="#">Bruff and Jikich, 2011</a> )	San Ardo Water Reclamation Facility, San Ardo, California (Conventional oil and gas) ( <a href="#">Dahm and Chapman, 2014</a> ; <a href="#">Webb et al., 2009</a> )
Metals	Boron: 99% Inf. = 15 to 30 mg/L Eff. = non-detect  Ion exchange	Iron: >99% Inf. = 28 mg/L Eff. = 0.1 mg/L  For iron, 90% attributed to chemical oxidation, coagulation, and clarification  Boron: 98% Inf. = 17 mg/L Eff. = 0.4 mg/L  Barium: >99% Inf. = 15 mg/L Eff. = 0.1 mg/L  Calcium: >99% Inf. = 2,916 mg/L Eff. = 3.2 mg/L	Cobalt: No influent data. Eff.: <0.007 mg/L  Tin: No influent data. Eff.: <0.1 mg/L  Arsenic: No influent data. Eff.: <0.001 mg/L  Cadmium: No influent data. Eff.: <0.0001 mg/L  Chromium: No influent data. Eff.: <0.007 mg/L  Copper: No influent data. Eff.: <0.029 mg/L	Copper: >99% Inf. = <0.2 to <1.0 mg/L Eff. = <0.02 to <0.08 mg/L  Zinc: inf below detect Inf. = <0.2 to <1.0 mg/L Eff. = <0.02 to 0.05 mg/L  Barium: >99% Inf. = 260.5 to 405.5 mg/L Eff. = <0.1 to 4.54 mg/L  Strontium: 98% Inf. = 233 to 379 mg/L Eff. = 0.026 to 3.93 mg/L  Iron: Inf. = 13.9 to 22.9 mg/L Eff. = <0.02 to 0.06 mg/L  Manganese: 98% Inf. = 2 to 2.9 mg/L Eff. = <0.02 to 0.04 mg/L	Sodium: 98% Inf. = 2,300 mg/L Eff. = 50 mg/L  Boron: >99% Inf. = 26 mg/L Eff. = 0.1 mg/L  RO with elevated influent pH

This document is a draft for review purposes only and does not constitute Agency policy.

Constituents of concern	Location and results				
	Pinedale Anticline Water Reclamation Facility, Wyoming ( <a href="#">Shafer, 2011</a> )	Maggie Spain Water-Recycling Facility, Barnett Shale, Texas ( <a href="#">Hayes et al., 2014</a> )	Judsonia, Sunnydale, Arkansas ( <a href="#">U.S. EPA, 2015f</a> )	9-month study treating Marcellus Shale waste using thermal distillation ( <a href="#">Boschee, 2014</a> ; <a href="#">Bruff and Jikich, 2011</a> )	San Ardo Water Reclamation Facility, San Ardo, California (Conventional oil and gas) ( <a href="#">Dahm and Chapman, 2014</a> ; <a href="#">Webb et al., 2009</a> )
Metals, cont.		Magnesium: >99% Inf. = 316 mg/L Eff. = 0.4 mg/L  Sodium: >99% Inf. = 10,741 mg/L Eff. = 14.3 mg/L  Strontium: >99% Inf. = 505 mg/L Eff. = 0.5 mg/L  MVR	Lead: No influent data. Eff.: <0.001 mg/L  Mercury: No influent data. Eff.: <0.005 mg/L  Nickel: No influent data. Eff.: 0.002 mg/L  Silver: No influent data. Eff.: <0.0002 mg/L  Zinc: No influent data. Eff.: 0.02 mg/L  Cyanide: No influent data. Eff.: <0.01 mg/L  Meets NPDES permit except for TMDLs for hexavalent chromium and mercury	Boron: 97% Inf. = <1 to 3.12 mg/L Eff. = 0.02 to 0.06 mg/L  Calcium: 98% Inf. = 1,175 to 1,933 mg/L Eff. = 0.36 to 22.2 mg/L  Lithium: 99% Inf. = 9.1 to 14.3 mg/L Eff. = non-detect to 0.13 mg/L  Magnesium: 98% Inf. = 109.8 to 176.8 mg/L Eff. = <0.1 to 2.04 mg/L  Sodium: 98% Inf. = 4,712 to 7,781 mg/L Eff. = 0.37 to 87.9 mg/L  Arsenic: 82% Inf. = <0.01 to 0.028 mg/L Eff. = <0.005 mg/L  Titanium: 86% Inf. = <0.01 to 0.037 mg/L Eff. = <0.005 mg/L	

This document is a draft for review purposes only and does not constitute Agency policy.

Constituents of concern	Location and results				
	Pinedale Anticline Water Reclamation Facility, Wyoming ( <a href="#">Shafer, 2011</a> )	Maggie Spain Water-Recycling Facility, Barnett Shale, Texas ( <a href="#">Hayes et al., 2014</a> )	Judsonia, Sunnydale, Arkansas ( <a href="#">U.S. EPA, 2015f</a> )	9-month study treating Marcellus Shale waste using thermal distillation ( <a href="#">Boschee, 2014</a> ; <a href="#">Bruff and Jikich, 2011</a> )	San Ardo Water Reclamation Facility, San Ardo, California (Conventional oil and gas) ( <a href="#">Dahm and Chapman, 2014</a> ; <a href="#">Webb et al., 2009</a> )
Metals, cont.			Settling, biological treatment, induced gas flotation, and MVR	Thermal distillation	
Radio-nuclides	Results not reported.	Results not reported.	Not regulated under permit – believed to be absent.	Radium-226: 97% - 99% Inf. = 130 to 162 pCi/L Eff. = 0.224 to 2.87 pCi/L  Radium-228: 97% - 99% Inf. = 45 to 85.5 pCi/L Eff. = 0.259 to 1.32 pCi/L  Gross Alpha: 97% - >99% Inf. = 161 to 664 pCi/L Eff. = 0.841 to 6.49 pCi/L  Gross Beta: 98% - >99% Inf. = 79.7 to 847 pCi/L Eff. = 0.259 to 1.57 pCi/L  Thorium 232: 71% - 90% Inf. = 0.055 to 0.114 pCi/L Eff. = 0.011 to 0.016 pCi/L  Thermal distillation	Results not reported.

*This document is a draft for review purposes only and does not constitute Agency policy.*



Constituents of concern	Location and results				
	Pinedale Anticline Water Reclamation Facility, Wyoming ( <a href="#">Shafer, 2011</a> )	Maggie Spain Water-Recycling Facility, Barnett Shale, Texas ( <a href="#">Hayes et al., 2014</a> )	Judsonia, Sunnydale, Arkansas ( <a href="#">U.S. EPA, 2015f</a> )	9-month study treating Marcellus Shale waste using thermal distillation ( <a href="#">Boschee, 2014</a> ; <a href="#">Bruff and Jikich, 2011</a> )	San Ardo Water Reclamation Facility, San Ardo, California (Conventional oil and gas) ( <a href="#">Dahm and Chapman, 2014</a> ; <a href="#">Webb et al., 2009</a> )
Organics	<p>O&amp;G: 99% Inf. = 50 to 2,400 mg/L Eff. = non-detect</p> <p>BTEX: 99% Inf. = 28 to 80 mg/L Eff. = non-detect</p> <p>Gasoline range organics: RO: 99% Inf. = 88 to 420 mg/L Eff. = non-detect</p> <p>Diesel range organics: 99% Inf. = 77 to 1,100 mg/L Eff. = non-detect</p> <p>Methanol: 99% Inf. = 40 to 1,500 mg/L Eff. = non-detect</p> <p>Oil-water separator, anaerobic and aerobic biological treatment, coagulation, flocculation, flotation, sand filtration, membrane bioreactor, and ultrafiltration</p>	<p>TPH: &gt;80% Inf. = 388 mg/L Eff. = 4.6 mg/L</p> <p>BTEX: 94% Inf. = 3.3 mg/L Eff. = 0.2 mg/L</p> <p>TOC: 48% Inf. = 42 mg/L Eff. = 22 mg/L</p> <p>MVR</p>	<p>Biochemical oxygen demand: No influent data. Eff.: &lt;2 mg/L</p> <p>O&amp;G: No influent data. Eff.: &lt;5 mg/L</p> <p>Benzo (k) fluoranthene: No influent data. Eff.: &lt;0.005 mg/L</p> <p>Bis (2-Ethylhexyl) Phthalate: No influent data. Eff.: &lt;0.001 mg/L</p> <p>Butyl benzyl phthalate: No influent data. Eff.: &lt;0.001 mg/L</p> <p>Meets NPDES permit</p> <p>Settling, biological treatment, induced gas flotation, and MVR</p>	<p>Acetone: 93% Inf. = 8.71 to 13.8 mg/L Eff. = 0.524 to 0.949 mg/L</p> <p>Toluene: &gt;80% Inf. = 0.0083 to 0.0015 mg/L Eff. = non-detect to 0.0013 mg/L</p> <p>Methane: &gt;99% Inf. = 0.748 to 5.49 mg/L Eff. = non-detect to 0.0013 mg/L</p> <p>DRO: 0 to 82% Inf. = 4 to 7.1 mg/L Eff. = 0.99 to 4.9 mg/L</p> <p>O&amp;G: No removal</p> <p>Thermal distillation</p>	Results not reported.

This document is a draft for review purposes only and does not constitute Agency policy.

### 8.5.2.1. Total Suspended Solids

1 The reduction of TSS is typically required for reuse. Hydraulic fracturing wastewaters containing  
2 suspended solids can plug the well and damage equipment if reused for other fracking operations  
3 ([Tiemann et al., 2014](#); [Hammer and VanBriesen, 2012](#)). For treated water that is discharged, the  
4 EPA has a secondary treatment standard for POTWs that limits TSS in the effluent to 30 mg/L (30-  
5 day average). In addition, most advanced treatment technologies require the removal of TSS prior  
6 to treatment to avoid operational problems such as membrane fouling/scaling and to extend the life  
7 of the treatment unit. TSS can be removed by several processes, such as coagulation, flocculation,  
8 sedimentation, and filtration (including microfiltration and media and bag and/or cartridge  
9 filtration), and with hydrocyclones, dissolved air flotation, freeze-thaw evaporation,  
10 electrocoagulation, and biological aerated filters ([Boschee, 2014](#); [Igunnu and Chen, 2014](#); [Drewes et  
11 al., 2009](#); [Fakhru'l-Razi et al., 2009](#)) (see Appendix F).

12 Technologies that remove TSS have been employed in the Marcellus Shale (sedimentation and  
13 filtration) ([Mantell, 2013a](#)); Utica Shale (chemical precipitation and filtration) ([Mantell, 2013a](#));  
14 Barnett Shale (chemical precipitation and inclined plate clarifier, >90% removal) ([Hayes et al.,  
15 2014](#)); and Utah (electrocoagulation, 90% removal) ([Halliburton, 2014](#)). Details of examples of  
16 operating treatment facilities are provided in Table 8-6.

### 8.5.2.2. Total Dissolved Solids

17 The TDS concentration of hydraulic fracturing wastewater is a key treatment consideration, with  
18 the TDS removal needed dependent upon the intended use of the treatment effluent. POTW  
19 treatment and basic treatment processes at a CWT (i.e., chemical precipitation, sedimentation, and  
20 filtration) are not reliable methods for removing TDS. Reduction requires more advanced treatment  
21 processes such as RO, nanofiltration, thermal distillation (including MVR), evaporation, and/or  
22 crystallization ([Olsson et al., 2013](#); [Boschee, 2012](#); [Drewes et al., 2009](#)). RO and thermal distillation  
23 processes can treat waste streams with TDS concentrations up to 45,000 mg/L and more than  
24 100,000 mg/L, respectively ([Tiemann et al., 2014](#)). As noted in section 8.5.1, pretreatment (e.g.,  
25 chemical precipitation, flotation, etc.) is typically needed to remove constituents that may cause  
26 fouling or scaling or to remove specific constituents not removed by a particular advanced process.  
27 Extremely high TDS waters may require a series of advanced treatment processes to remove TDS to  
28 desired levels. However, the cost of treating high-TDS waters may preclude facilities from choosing  
29 treatment if other options such as deep well injection are available and more cost-effective  
30 ([Tiemann et al., 2014](#)). Emerging technologies such as membrane distillation and forward osmosis  
31 are also showing promise for TDS removal and require less energy compared to other desalination  
32 processes ([Shaffer et al., 2013](#)).

33 Examples of facilities with advanced technologies and their effectiveness in reducing TDS  
34 concentrations in hydraulic fracturing wastewaters from conventional and unconventional  
35 resources are summarized in Table 8-6.

### 8.5.2.3. Anions

36 Although chemical precipitation processes can reduce concentrations of multivalent anions such as  
37 sulfate, monovalent anions (e.g., bromide and chloride) are not removed by basic treatment

1 processes and require more advanced treatment such as RO, nanofiltration, thermal distillation  
2 (including MVR), evaporation, and/or crystallization ([Hammer and VanBriesen, 2012](#)).

3 Ion exchange and adsorption are effective treatment processes for removing fluoride but not  
4 typically the anions of concern in hydraulic fracturing wastewaters (bromide, chloride, sulfate)  
5 ([Drewes et al., 2009](#)). Emerging technologies applicable to TDS will typically remove anions.  
6 However, issues discussed above, such as the potential for scaling, still apply.

#### 8.5.2.4. Metals and Metalloids

7 Chemical precipitation, including lime softening and chemical oxidation, is effective at removing  
8 metals (e.g., sodium sulfate reacts with metals to form solid precipitates such as barium sulfate)  
9 ([Drewes et al., 2009](#); [Fakhru'l-Razi et al., 2009](#)). However, as mentioned in Section 8.5.2.3, chemical  
10 precipitation does not adequately remove monovalent ions (e.g., sodium, potassium), and the  
11 produced solid residuals from this process typically require further treatment, such as de-watering  
12 ([Duraismy et al., 2013](#); [Hammer and VanBriesen, 2012](#)). Media filtration can remove metals if  
13 coagulation/oxidation is implemented prior to filtration ([Duraismy et al., 2013](#)). Advanced  
14 treatment processes such as distillation (with pH adjustment to prevent scaling), evaporation, RO,  
15 and nanofiltration can remove dissolved metals and metalloids ([Hayes et al., 2014](#); [Igunnu and  
16 Chen, 2014](#); [Bruff and Jikich, 2011](#); [Drewes et al., 2009](#)). However, if metal oxides are present or  
17 formed during treatment, they must be removed prior to RO and nanofiltration processes to  
18 prevent membrane fouling ([Drewes et al., 2009](#)). Also, boron is not easily removed by RO, achieving  
19 less than 50% rejection (the percentage of a constituent captured and thus removed by the  
20 membrane) at neutral pH (rejection is greater at higher pH values) ([Drewes et al., 2009](#)). Ion  
21 exchange can be used to remove other metals such as calcium, magnesium, barium, strontium, and  
22 certain oxidized heavy metals such as chromate and selenate ([Drewes et al., 2009](#)). Adsorption can  
23 remove metals but is typically used as a polishing step to prolong the replacement/regeneration of  
24 the adsorptive media ([Igunnu and Chen, 2014](#)).

25 The literature provides examples of facilities able to reduce metal and metalloid concentrations in  
26 conventional and unconventional hydraulic fracturing wastewaters, some of which are provided in  
27 Table 8-6. The facilities in Table 8-6 have achieved removals of 98%–99% for a number of metals.  
28 Other work demonstrating effective removal includes a 99% reduction in barium using chemical  
29 precipitation (Marcellus Shale region) ([Warner et al., 2013a](#)) and over 90% boron removal with RO  
30 (at pH of 10.8) at two California facilities ([Webb et al., 2009](#); [Kennedy/Jenks Consultants, 2002](#)).  
31 However, influent concentration must be considered together with removal efficiency to determine  
32 whether effluent quality meets the requirements dictated by end use or by regulations. In the case  
33 of the facility described by [Kennedy/Jenks Consultants \(2002\)](#) the boron effluent concentration of  
34 1.9 mg/L (average influent concentration of 16.5 mg/L) was not low enough to meet California's  
35 action level of 1 mg/L.

36 Newer treatment methods for metals removal include electrocoagulation ([Halliburton, 2014](#);  
37 [Gomes et al., 2009](#)) and electrodialysis ([Banasiak and Schäfer, 2009](#)). Testing of electrocoagulation  
38 has been performed in the Green River Basin ([Halliburton, 2014](#)) and the Eagle Ford Shale ([Gomes  
39 et al., 2009](#)). While showing promising results in some trials, results of these early studies have

1 illustrated challenges, with removal efficiencies affected by factors such as pH and salt content.  
2 Membrane distillation has also shown promise in removing heavy metals and boron in wastewaters  
3 ([Camacho et al., 2013](#)).

#### 8.5.2.5. Radionuclides

4 Several processes (e.g., RO, nanofiltration, and thermal distillation) are effective for removing  
5 radionuclides ([Drewes et al., 2009](#)). Ion exchange can be used to treat for specific radionuclides  
6 such as radium ([Drewes et al., 2009](#)). Chemical precipitation of radium with barium sulfate has also  
7 been shown to be a very effective method for removing radium ([Zhang et al., 2014b](#)).

8 Data on radionuclide removals achieved in active treatment plants are scarce. The literature does  
9 provide some data from the Marcellus Shale region on use of distillation and chemical precipitation  
10 (co-precipitation of radium with barium sulfate). The nine-month pilot-scale study conducted by  
11 [Bruff and Jikich \(2011\)](#) showed that distillation treatment could achieve high removal efficiencies  
12 for radionuclides (see Table 8-6), and [Warner et al. \(2013b\)](#) reported that a CWT achieved over  
13 99% removal of radium via co-precipitation of radium with barium sulfate. However, in both  
14 studies, radionuclides were detected in effluent samples, and the CWT was discharging to a surface  
15 water body during this time ([Warner et al., 2013b](#); [Bruff and Jikich, 2011](#)); see Section 8.6.2.  
16 Effluent from distillation treatment was found to contain up to 6.49 pCi/L for gross alpha (from 249  
17 pCi/L prior to distillation) ([Bruff and Jikich, 2011](#)). Between 2010 and 2012, samples of wastewater  
18 effluent from a western PA CWT contained a mean radium level of 4 pCi/L ([Warner et al., 2013a](#)).

#### 8.5.2.6. Organics

19 Because hydraulic fracturing wastewaters can contain various types of organic compounds that  
20 each have different properties, specific treatment processes or series of processes are used to  
21 target the various classes of organic contaminants. Effectiveness of treatment depends on the  
22 specific organic compound and the technology employed (see Appendix F). It should be noted that  
23 in many studies, rather than testing for several organic constituents, researchers often measure  
24 organics in terms of biochemical oxygen demand and/or chemical oxygen demand, which are an  
25 indirect measure of the amount of organic compounds in the water. Organic compounds may also  
26 be measured and/or reported in groupings such as total petroleum hydrocarbons (TPH) (which  
27 include gasoline range organics (GROs) and diesel range organics (DROs)), oil and grease, VOCs  
28 (which include BTEX), and SVOCs.

29 Based on examples found in literature, facilities have demonstrated the capability to treat for  
30 organic compounds in hydraulic fracturing wastewaters using a single process or a series of  
31 processes ([Hayes et al., 2014](#); [Bruff and Jikich, 2011](#); [Shafer, 2011](#)) (see Table 8-6). The processes  
32 can include anaerobic and aerobic biological treatment, coagulation, flocculation, flotation,  
33 filtration, bioremediation, ultrafiltration, MVR, and dewvaporation. Forward osmosis is an  
34 emerging technology that may be promising for organics removal in hydraulic fracturing  
35 wastewaters because it is capable of rejecting the same organic contaminants as commercially-  
36 available pressure-driven processes ([Drewes et al., 2009](#)).

### 8.5.2.7. Estimated Treatment Removal Efficiencies


1 There are relatively few studies that have evaluated the ability of individual treatment processes to  
2 remove constituents from hydraulic fracturing wastewater and present the resulting water quality.  
3 Furthermore, although a specific technology may demonstrate a high removal percentage for a  
4 particular constituent, if the influent concentration of that constituent is extremely high, the  
5 constituent concentration in the treated water may still exceed permit limits and/or disposal  
6 requirements. Appendix Table F-4 presents the results of simple calculations pairing average  
7 hydraulic fracturing wastewater concentrations from Chapter 7 with treatment process removal  
8 efficiencies reported in the literature in Table F-2.

9 As an example, radium in wastewater from the Marcellus Shale and Upper Devonian sandstones can  
10 be in the thousands of pCi/L. With a 95% removal rate, chemical precipitation may result in effluent  
11 that still exceeds 100 pCi/L. Distillation and reverse osmosis might produce effluent with  
12 concentrations in the tens of pCi/L. A radium concentration of 120 pCi/L, however, could be  
13 reduced to less than 5 pCi/L by RO or distillation. Wastewater with barium concentrations in the  
14 range of 140 – 160 mg/L (e.g., the Cotton Valley and Mesaverde tight sands) might be reduced to  
15 concentrations under 5 mg/L by distillation and roughly 11-13 mg/L by RO. Barium concentrations  
16 in the thousands of mg/L would be substantially reduced by any of several processes but might still  
17 be relatively high and could exceed 100 mg/L. Table F-4 also illustrates the potential for achieving  
18 low concentrations of organic compounds in wastewater treated with freeze-thaw evaporation or  
19 advanced oxidation and precipitation.

20 This analysis is intended to highlight the potential impacts of influent concentration on treatment  
21 outcome and to illustrate the relative capabilities of various treatment processes for an example set  
22 of constituents. Removal efficiencies would differ and likely be greater with a full set of  
23 pretreatment and treatment processes that would be seen in a CWT (see Table 8-6).

### 8.5.3. Design of Treatment Trains for CWTs

24 Based on the chemical composition of the hydraulic fracturing wastewater and the desired effluent  
25 water quality, a series of treatment technologies will most likely be necessary. The possible  
26 combinations of unit processes to formulate treatment trains are extensive. One report identified  
27 41 different treatment unit processes that have been used in the treatment of oil and gas  
28 wastewater and 19 unique treatment trains (combinations of unit processes) ([Drewes et al., 2009](#)).  
29 [Fakhru'l-Razi et al. \(2009\)](#) also provide examples of process flow diagrams that have been used in  
30 pilot-scale and commercial applications for treating oil and gas wastewater. Figure 8-8 shows the  
31 treatment train for the Pinedale Anticline Facility, which includes pretreatment for dispersed oil,  
32 VOCs, and heavy metals and advanced treatment for removal of TDS, dissolved organics, and boron.  
33 This CWT can either discharge to surface water or provide the treated wastewater to operators for  
34 reuse.

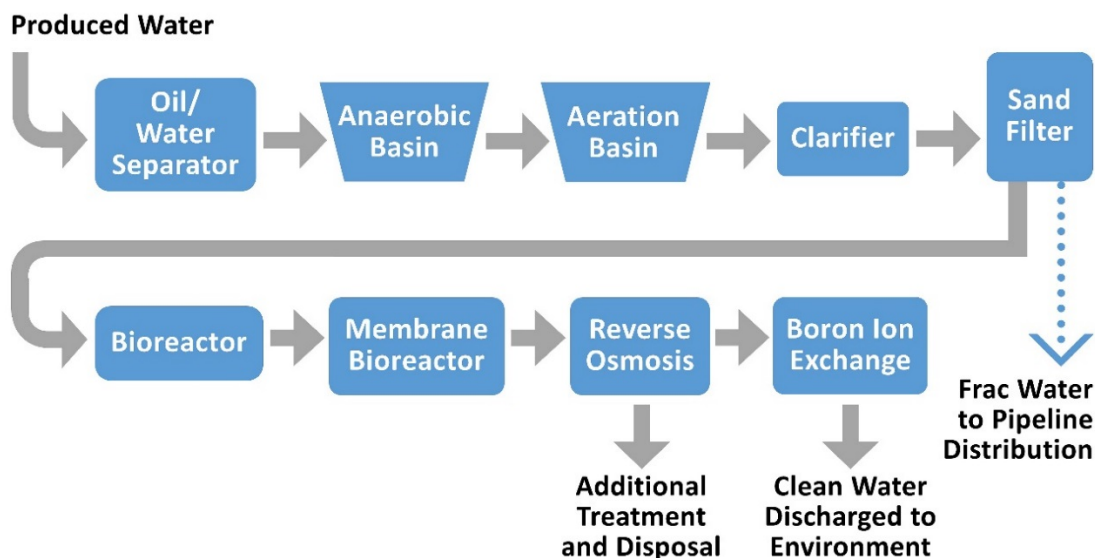

**Figure 8-8. Full discharge water process used in the Pinedale Anticline field.**

Source: [Boschee \(2012\)](#).

- 1 Table 8-7 provides information on some CWTs in locations across the country and the processes
- 2 they employ. The table also notes for each facility whether data are readily available on effluent
- 3 quality. Comprehensive and systematic data on influent and effluent quality from a range of CWTs
- 4 that treat to a variety of water quality levels is difficult to procure, rendering it challenging to
- 5 understand removal efficiencies and resulting effluent quality, especially when a facility offers a
- 6 range of water quality products (e.g., for reuse vs. discharge). For those facilities with NPDES
- 7 permits, discharge monitoring report (DMR) data may be available for some constituents, although
- 8 if the facility does not discharge regularly, these data will be sporadic.
- 9 CWTs such as the Judsonia Central Water Treatment Facility in Arkansas, the Casella-Altela
- 10 Regional Environmental Services, and Clarion Altela Environmental Services (see Table 8-7)
- 11 facilities have NPDES permits and use MVR or thermal distillation for TDS removal. As of March
- 12 2015, the Pinedale Anticline Facility and the Judsonia Facility appear to be the only CWTs in Table
- 13 8-7 discharging to a surface water body.



**Table 8-7. Examples of centralized waste treatment facilities.**

Facility	State	Description of Unit Processes	Does CWT have a NPDES permit for discharge?	Does CWT provide effluent for reuse?	Does CWT have advanced process for TDS removal?	What is the status of the facility as of January 2015?	Are effluent quality data available through literature search?
Pinedale Anticline Water Reclamation Facility <sup>a</sup>	WY	Oil/water separation, biological treatment, aeration, clarification, sand filtration, bioreactor, membrane bioreactor, RO, and ion exchange	No - However, facility is permitted to discharge under 40 CFR 435 Subpart E (WY0054224). Facility is permitted to discharge up to 25% of its effluent stream	Yes	Yes, RO ( <a href="#">Boschee, 2014, 2012</a> )	The treatment plant produces treated water for reuse and for discharge to surface water. The website indicates the facility is in operation and is recycling to support drilling operations and is discharging to the New Fork River ( <a href="http://hswater.squarespace.com/pinedale-anticline/">http://hswater.squarespace.com/pinedale-anticline/</a> ).	Yes – DMR data available on Wyoming DEQ website. Some information can also be obtained from <a href="#">Shafer (2011)</a> .
SEECO – Judsonia Water Reuse Recycling Facility	AR	Settling, biological treatment, induced gas flotation, and MVR	Yes - AR0052051	Yes	Yes, MVR	The treatment plant provides treated water for reuse and for discharge to surface water. Based on DMR data from late 2014-early 2015, the system is discharging treated water to a surface water body, though intermittently.	DMR data available

*This document is a draft for review purposes only and does not constitute Agency policy.*

Facility	State	Description of Unit Processes	Does CWT have a NPDES permit for discharge?	Does CWT provide effluent for reuse?	Does CWT have advanced process for TDS removal?	What is the status of the facility as of January 2015?	Are effluent quality data available through literature search?
Eureka Resources – Williamsport 2 <sup>nd</sup> Street Facility	PA	Settling, oil/water separation, chemical precipitation, clarification, MVR. Can treat with or without TDS removal.	No - However, future plans to install RO for direct discharge capability	Yes	Yes, MVR	Per <a href="#">Ertel et al. (2013)</a> , the facility provides treatment wastewater for reuse and indirect discharge.  The facility treats entirely or almost entirely hydraulic fracturing wastewater.	No
Standing Stone Facility, Bradford County	PA	Settling, oil/water separation, chemical precipitation, clarification, MVR, crystallization	Yes - PA0232351	Yes	Yes, MVR, crystallizer	The facility can provide treated wastewater for reuse and also has received an NPDES permit for direct discharge.  The facility treats hydraulic fracturing wastewater.	No

*This document is a draft for review purposes only and does not constitute Agency policy.*

Facility	State	Description of Unit Processes	Does CWT have a NPDES permit for discharge?	Does CWT provide effluent for reuse?	Does CWT have advanced process for TDS removal?	What is the status of the facility as of January 2015?	Are effluent quality data available through literature search?
Wellington Water Works	CO	Dissolved air flotation, pre-filtration, microfiltration with ceramic membranes, activated carbon adsorption. Water is pumped to an aquifer storage and recovery well. Water is then extracted and treated with RO ( <a href="#">Alzahrani et al., 2013</a> ).	Permit number issued by CO (61879)	Yes	Yes, RO but only after the water is sent to an aquifer storage and recovery well	Per <a href="#">Stewart (2013b)</a> , the facility is providing treated wastewater for reuse, for agricultural use, to a shallow well to augment the municipal drinking water supply, and for discharge to the Colorado River.	No
Casella Altela Regional Environmental Services (CARES) McKean Facility	McKean County, PA	Pretreatment system (not defined in literature) and thermal distillation	Yes – PA0102288	Yes	Yes – thermal distillation	The treatment plant is capable of reuse and recycle for fracturing operations and surface water discharge of excess water. However, the facility’s website indicates it is only treating water for reuse/recycle as of early 2015 ( <a href="http://caresforwater.com/location/cares-mckean">http://caresforwater.com/location/cares-mckean</a> ).	No - just NPDES discharge requirements

*This document is a draft for review purposes only and does not constitute Agency policy.*

Facility	State	Description of Unit Processes	Does CWT have a NPDES permit for discharge?	Does CWT provide effluent for reuse?	Does CWT have advanced process for TDS removal?	What is the status of the facility as of January 2015?	Are effluent quality data available through literature search?
Clarion Altela Environmental Services (CAES) Facility	Clarion County, PA	Pretreatment system (not defined in literature) and thermal distillation	Yes – PA0103632	Yes	Yes – thermal distillation	The treatment plant capable of reuse and recycle for fracturing operations and surface water discharge of excess water. However, the facility's website indicates it is only treating water for reuse/recycle as of early 2015 ( <a href="http://caeswater.com/technology/">http://caeswater.com/technology/</a> ).	No – just NPDES discharge requirements
Terraqua Resource Management (aka. Water Tower Square Gas Well Wastewater Processing Facility)	Lycoming County, PA	Equalization tanks, oil-water separation via chemical addition (sulfuric acid, emulsion breaker), pH adjustment, coagulation, flocculation, inclined plate clarifier, sand filtration	Yes – PA0233650 Permit pending approval for discharge to stream (as of 4/17/2009)	Yes	No – However, TARM recognizes that they can't discharge, until they install TDS treatment	According to its website (last updated 2012), the facility reuses/recycles treated water for fracturing operations ( <a href="http://www.tarmsolutions.com/solutions/">http://www.tarmsolutions.com/solutions/</a> ).	No
Maggie Spain Water-Recycling Facility	Decatur, TX	Settling, flash mixer with lime and polymer addition, inclined plate clarifier, surge tank, MVR	No	Yes	Yes – MVR	A 17-month pilot study using a commercial-scale mobile treatment facility was concluded in 2011. The status is unclear as of early 2015.	Yes – Some information can be obtained from <a href="#">Hayes et al. (2014)</a> .

*This document is a draft for review purposes only and does not constitute Agency policy.*

Facility	State	Description of Unit Processes	Does CWT have a NPDES permit for discharge?	Does CWT provide effluent for reuse?	Does CWT have advanced process for TDS removal?	What is the status of the facility as of January 2015?	Are effluent quality data available through literature search?
Fountain Quail/NAC Services - Kenedy	Kenedy, TX	Oil-water separator, coagulation, flocculation, sedimentation, filtration, MVR.	No	Yes	Yes – MVR	According to its website, the facility reuses/recycles treated water for fracturing operations ( <a href="http://www.aqua-pure.com/operations/shale/ford/ford.html">http://www.aqua-pure.com/operations/shale/ford/ford.html</a> ).	No
Purestream - Gonzales facility	Gonzales, TX	Induced gas flotation and MVR	No	Yes	Yes - MVR	Per <a href="#">Dahm and Chapman (2014)</a> commercial operations deployed March 2014 for reuse/recycle for fracturing operations.	No
LINN Energy Fyre Ranch - Granite Wash	Wheeler County, TX	Induced gas flotation and MVR	No	Yes	Yes - MVR	AVARA system installed for reuse/recycle in June 2014. <a href="http://purestream.com/index.php/water-management/vapor-recompression/photos-and-videos">http://purestream.com/index.php/water-management/vapor-recompression/photos-and-videos</a>	No

*This document is a draft for review purposes only and does not constitute Agency policy.*

Facility	State	Description of Unit Processes	Does CWT have a NPDES permit for discharge?	Does CWT provide effluent for reuse?	Does CWT have advanced process for TDS removal?	What is the status of the facility as of January 2015?	Are effluent quality data available through literature search?
Fluid Recovery Service Josephine Facility <sup>b</sup>	PA	Oil-water separator, aeration, chemical precipitation with sodium sulfate, lime, and a polymer, inclined plate clarifier	Expired - PA0095273	No	No	The facility claims to have stopped accepting Marcellus wastewater September 30, 2011 (Ferrar et al., 2013). It treats conventional oil and gas wastewater. The facility will be upgrading to include evaporative technology that will enable it to attain monthly average TDS levels of 500 mg/L or less.	Yes – Some effluent results obtained from Ferrar et al. (2013) and Warner et al. (2013a). Also minimal DMR data from the EPA.
Fluid Recovery Service Franklin Facility <sup>b</sup>	PA	Oil-water separator, aeration, chemical precipitation with sodium sulfate, lime, and a polymer, inclined plate clarifier	Expired - PA0101508	No	No	This facility is not accepting wastewater from hydraulic fracturing operations as of January 2015. The facility will be upgrading to include evaporative technology that will enable it to attain monthly average TDS levels of 500 mg/L or less.	Minimal DMR data from the EPA.

This document is a draft for review purposes only and does not constitute Agency policy.



Facility	State	Description of Unit Processes	Does CWT have a NPDES permit for discharge?	Does CWT provide effluent for reuse?	Does CWT have advanced process for TDS removal?	What is the status of the facility as of January 2015?	Are effluent quality data available through literature search?
Hart Resources-Creekside Facility <sup>b</sup>	PA	Oil-water separator, aeration, chemical precipitation with sodium sulfate, lime, and a polymer, inclined plate clarifier	Expired - PA0095443	No	No	This facility is not accepting wastewater from hydraulic fracturing operations as of January 2015. The facility will be upgrading to include evaporative technology that will enable it to attain monthly average TDS levels of 500 mg/L or less.	Minimal DMR data from the EPA.

<sup>a</sup> For Pinedale Anticline Water Reclamation Facility, surface water discharges are permitted under 40 CFR 435 Subpart E (beneficial use subcategory agricultural and wildlife water) not 40 CFR 437 (the discharge permit for CWTs). For the purposes of this assessment, this facility is included with CWTs.

<sup>b</sup> As of May 15, 2013, these facilities are under an administrative order (AO). According to the AO, these facilities must comply with a monthly effluent limit for TDS not to exceed 500 mg/L. This will allow them to treat high-saline wastewaters typical of unconventional oil and gas operations. To meet the requirements of the AO, they have applied to PADEP for a NPDES permit and are planning to install treatment for TDS.

## 8.6. Potential Impacts on Drinking Water Resources

1 Several articles have noted potential effects of hydraulic fracturing wastewater on water resources  
2 ([Vengosh et al., 2014](#); [Olmstead et al., 2013](#); [Rahm et al., 2013](#); [States et al., 2013](#); [Vidic et al., 2013](#);  
3 [Rozell and Reaven, 2012](#); [Entrekin et al., 2011](#)), with one study using probability modeling  
4 indicating that water pollution risk associated with gas extraction in the Marcellus Shale is highest  
5 for the wastewater disposal aspects of the operation ([Rozell and Reaven, 2012](#)). Whether drinking  
6 water resources are affected by hydraulic fracturing wastewater depends at least in part upon the  
7 characteristics of the wastewater, the form of discharge or other management practice, and the  
8 processes used if the wastewater is treated. Other site-specific factors (e.g., size of receiving water  
9 and volume of wastewater) determine the magnitude and nature of potential effects, but a thorough  
10 exploration of local factors is beyond the scope of this assessment. The majority of hydraulic  
11 fracturing wastewater is either injected into a disposal well or, in the case of the Marcellus region,  
12 reused for other hydraulic fracturing jobs. Potential impacts on drinking water resources may occur  
13 on a local level through several routes: treated wastewater may be discharged directly from  
14 centralized waste treatment facilities (CWTs) or indirectly from publicly owned treatment works  
15 (POTWs) that receive CWT effluent; sediments in water bodies receiving effluent may accumulate  
16 contaminants; spills or leaks may be associated with on-site storage or transportation (see Chapter  
17 7); and in previous years, hydraulic fracturing wastewater treated at POTWs was discharged to  
18 surface waters.

19 It has been suggested that the most significant effects of hydraulic fracturing on surface water  
20 quality are related to discharges of partially treated wastewater, although these effects vary  
21 according to region ([Kuwayama et al., 2015](#)). A recent study ([Bowen et al., 2015](#)) concluded that  
22 there is currently no clear evidence of national-level trends in surface water quality (as measured  
23 by specific conductivity and chloride) in areas where unconventional oil and gas production is  
24 taking place. These authors note that available national level databases have limitations for  
25 assessing this question.

26 Pits and impoundments associated with waste management may have impacts on drinking water  
27 resources and are discussed in Chapter 7. In addition, unauthorized discharge of wastewater is a  
28 potential mechanism for impacts on drinking water resources. Descriptions of several incidents and  
29 resulting legal actions have been publicly reported. However, such events are not generally  
30 described in the scientific literature, and the prevalence of this type of activity is unclear.

31 Important considerations regarding the potential impact of hydraulic fracturing wastewater on a  
32 receiving waterbody include whether constituents in the wastewater are known to have health  
33 effects, if they are regulated drinking water contaminants, or if they may give rise to regulated  
34 compounds. For some classes of constituents, such as disinfection by-product (DBP) precursors,  
35 considerable research exists. For others, information is limited regarding their concentrations in  
36 effluents and whether they are likely to affect drinking water at intakes. The following subsections  
37 identify several classes of constituents known to occur in hydraulic fracturing wastewater, discuss  
38 whether potential impacts are likely, and provide specific examples of information gaps.

### 8.6.1. Bromide and Chloride

1 Bromide and chloride are two constituents commonly found in high-total dissolved solids (TDS)  
2 hydraulic fracturing wastewater. As noted in section 8.3.1.1, chloride is a regulated contaminant  
3 with a secondary MCL standard of 250 mg/L. Bromide is not regulated but is of concern due to its  
4 role in the formation of DBPs ([Parker et al., 2014](#); [Krasner, 2009](#)) (see Appendix F for information  
5 on DBP formation). High-TDS wastewaters from the Marcellus Shale can be of concern because the  
6 limited availability of underground injection for disposal can result in a higher rate of discharge of  
7 treated wastewater to surface waters compared to other parts of the country. In response to  
8 concerns in part over bromide in discharges, operators in Pennsylvania have discontinued the  
9 practice of sending wastewater from hydraulic fracturing operations to POTWs ([States et al., 2013](#)).  
10 Also, CWTs have been shifting towards treatment of those wastewaters for reuse rather than  
11 discharging to surface water bodies ([Hammer and VanBriesen, 2012](#)).

12 [States et al. \(2013\)](#) found a strong correlation between bromide concentrations in source water  
13 from the Allegheny River in Pennsylvania and the percentage of brominated trihalomethanes in  
14 finished drinking water. The authors noted that source water containing 50 µg/L bromide resulted  
15 in treated water with approximately 62% of its finished water total trihalomethanes consisting of  
16 bromoform, dibromochloromethane, and bromodichloromethane. Source water containing 150  
17 µg/L bromide resulted in finished water TTHMs composed of approximately 83% brominated  
18 species. Allegheny River bromide concentrations measured during the study ranged from less than  
19 25 µg/L to 299 µg/L, with the highest bromide concentrations measured under low-flow  
20 conditions. Industrial wastewater sites accounted for approximately 50% of the increase in  
21 bromide load as water moved downriver.

22 In addition, a related constituent, iodide can be a constituent in hydraulic fracturing wastewater  
23 (see Chapter 7). Although its effects have not been as well documented as those associated with  
24 bromide ([Xu et al., 2008](#)), iodide raises some of the same concerns (such as DBP formation) as  
25 bromide does ([Parker et al., 2014](#); [Krasner, 2009](#)). Iodinated DBPs are not regulated by the EPA as  
26 of early 2015.

27 As discussed in Section 8.5, removal of dissolved solids, including chloride and bromide, requires  
28 advanced treatment processes such as reverse osmosis (RO), distillation, evaporation, or  
29 crystallization. Unless the treatment plant receiving the high-TDS wastewater employs processes  
30 specifically designed to remove these constituents, effluent discharge may contain high levels of  
31 bromide and chloride. Drinking water treatment plants with intakes downstream of these  
32 discharges may receive water with correspondingly higher levels of bromide and chloride and may  
33 have difficulty complying with Safe Drinking Water Act (SDWA) regulations related to DBPs.

#### 8.6.1.1. Effects on Receiving Streams

34 Studies show that discharges from oil and gas wastewater treatment facilities can elevate TDS,  
35 bromide, and chloride levels in receiving waters ([States et al., 2013](#); [Wilson and Van Briesen, 2013](#)).  
36 [Wilson and Van Briesen \(2013\)](#) measured bromide, chloride, and other constituents at water  
37 intakes downstream of wastewater discharges for three years in the Monongahela River in western  
38 Pennsylvania. By evaluating water chemistry data in the context of flow measurements, the authors

1 attributed an overall decrease in bromide concentrations from 2010 to 2012 to a decrease in  
2 bromide loading; they note that this is likely to be associated with a decrease in management of  
3 fossil fuel wastewater at treatment plants that discharge to surface water.

4 Although treatment plant effluents will be diluted upon reaching the receiving water, the dilution  
5 may not be adequate to avoid water quality problems if there are existing pollutant loads in the  
6 waterbody from contributors such as acid mine drainage or power plant effluents ([Ferrar et al.  
7 2013](#)). [Warner et al. \(2013a\)](#) evaluated effluent from the Josephine Brine Treatment Facility (which  
8 treated both conventional and unconventional oil and gas wastewater at the time of the study) and  
9 concluded that even a 500 to 3,000-fold dilution of the wastewater would not reduce bromide  
10 levels to background. In addition, downstream levels of chloride in the receiving stream were  
11 elevated, with a downstream value of 88 mg/L as compared to an upstream value of 18 mg/L.

12 A study by [Hladik et al. \(2014\)](#) focused on sampling at sites downstream and near the outfalls of  
13 plants that treated oil and gas wastewater in Pennsylvania. The authors documented brominated  
14 and iodinated DBPs (e.g., dibromochloronitromethane (DBNM); dibromiodomethane) at the  
15 outfalls of CWTs and POTWs and noted that this DBP signature was different than for those plants  
16 that did not accept oil and gas wastewater. For example, concentrations of  
17 dibromochloronitromethane ranged from 0.26 to 8.7 µg/L, and dibromiodomethane was  
18 measured at 0.98 and 1.3 µg/L; neither compound was detected at an upstream site or at the outfall  
19 of the POTW not accepting oil and gas wastewater. These brominated and iodinated compounds are  
20 considered more toxic than other types of DBPs ([Richardson et al., 2007](#)). Hladik et al. note that  
21 these elevated DBP levels could contribute to DBPs at downstream drinking water intakes and can  
22 also be an indicator of the potential for more highly brominated and iodinated DPBs forming in  
23 drinking treatment plants downstream of these discharges ([Hladik et al., 2014](#)). The sites studied  
24 by [Hladik et al. \(2014\)](#) received wastewater from both conventional and unconventional oil and gas  
25 development.

26 Research suggests that a relatively small portion of hydraulic fracturing wastewater effluent can  
27 notably affect DBP formation. In laboratory studies, [Parker et al. \(2014\)](#) diluted hydraulic fracturing  
28 wastewater from the Marcellus and Fayetteville shales with Allegheny and Ohio River waters and  
29 then disinfected the mixtures. In chlorinated samples containing as little as 0.01% hydraulic  
30 fracturing wastewater, the THM composition shifted significantly away from chloroform species to  
31 a greater representation of brominated and iodinated species.

32 Elevated concentrations of bromide in effluents can place a burden on downstream drinking water  
33 treatment systems. [States et al. \(2013\)](#) studied influent and finished water at the Pittsburgh Water  
34 and Sewer Authority (PWSA) drinking water system, concluding that elevated bromide in the  
35 source water led to elevated total trihalomethanes (TTHM) formation in the treated drinking water.  
36 The authors also noted a substantial increase in the percentage of brominated TTHMs ([States et al.,  
37 2013](#)), as discussed above. The utility modified their treatment process and proposed  
38 improvements to their storage facilities to address the elevated TTHM levels in the distribution  
39 system ([Chester Engineers, 2012](#)).

### 8.6.1.2. Modeling

1 The EPA's contaminant modeling shows that that the strategies most likely to reduce bromide  
2 impacts on downstream users include reducing effluent concentrations (e.g., discharging flowback  
3 versus produced water), discharging during higher stream flow periods, and using a pulsing or  
4 intermittent discharge. [Weaver et al. \(In Press\)](#) developed a computer model to estimate river and  
5 stream bromide concentrations after treated water discharges. The model utilizes existing data for  
6 bromide concentrations in produced water, flowback, and mixtures, combined with existing stream  
7 flow data from USGS stations in Pennsylvania. The model parameters include steady state versus  
8 transient inputs to receiving waters, high and low streamflow months, varying effluent  
9 concentration and types (produced, flowback, and mixed). For steady-state scenarios in the model,  
10 bromide concentrations are lowest under high flow conditions with lower concentrations of  
11 effluent (flowback and mixed water).

12 A source apportionment study conducted by the EPA considered the relative contributions of  
13 bromide, chloride, nitrate, and sulfate from CWTs primarily treating hydraulic fracturing  
14 wastewater to the Allegheny River Basin and to water at two downstream public water system  
15 intakes on the Allegheny River ([U.S. EPA, 2015p](#)). The Allegheny River and its tributaries receive  
16 runoff and discharges containing an array of contaminants, including these anions. Contaminant  
17 sources include discharges from CWTs for oil and gas wastewater, runoff from acid mine drainage  
18 and mining operations, discharges from coal-fired electric power stations, industrial wastewater  
19 treatment plant effluents, and POTW discharges. The Allegheny River is also the water supply for  
20 thirteen public water systems that serve over 500,000 people in western Pennsylvania.

21 In Pennsylvania, wastewater produced from hydraulic fracturing of the Marcellus formation has  
22 been mostly diverted from CWTs and POTWs that discharge to public waters in the state ([Hammer  
23 and VanBriesen, 2012](#)). Wastewater produced from hydraulic fracturing of non-Marcellus  
24 formations, however, continues to be sent to surface-discharging facilities on the Allegheny River.

25 The source apportionment study considered contributions of bromide, chloride, nitrate and sulfate  
26 to public water supplies from CWTs and other upriver sources by: developing chemical source  
27 profiles, or fingerprints, for discharges upstream of the public water system intakes; characterizing  
28 water quality in the river upstream and downstream of the CWTs, electric generating stations, and  
29 industrial facilities; characterizing the water quality at the public water system intakes; and  
30 analyzing the sampling data collected with the EPA Positive Matrix Factorization (PMF) receptor  
31 model in order to quantify relative contributions of contaminant sources to the anions found at the  
32 public water system intakes. The study focused on low-flow conditions.

33 CWTs and coal-fired power plants with flue gas desulfurization were found to contribute bromide  
34 to the two public water supply intakes. Although acid mine drainage also contributed bromide, its  
35 contribution was minor (9% at one intake) compared to the contributions from the CWTs (89%  
36 and 37% at the two intakes) and coal-fired power plants (50-59% at one intake). The CWTs, coal-  
37 fired power plants, and acid mine drainage combined accounted for 88-89% of the bromide at one  
38 intake and 96% of the bromide at the other intake.

### 8.6.1.3. Summary

1 Most drinking water treatment plants are not designed to address high concentrations of TDS  
2 (including bromide and iodide), limiting their options for restricting the formation of brominated  
3 and iodinated DBPs. Tighter restrictions on TDS in effluent from POTWs and CWTs have led to a  
4 reduction in in-stream bromide concentrations. Advanced treatment processes at CWTs such as  
5 reverse osmosis, distillation, evaporation, or crystallization can reduce chloride, bromide, and  
6 iodide in surface waters. Strategies such as reducing effluent concentrations, discharging during  
7 higher stream flow periods, and utilizing a pulsing or intermittent discharge could also reduce the  
8 potential impact of elevated TDS on drinking water treatment plants.

### 8.6.2. Radionuclides

9 Potential impacts on drinking water resources from technologically enhanced naturally occurring  
10 radioactive material (TENORMs) associated with hydraulic fracturing wastewater may arise from a  
11 number of sources, including: treated wastewater that does not have adequately reduced  
12 radionuclide concentrations, accumulation of radionuclides in surface water sediments  
13 downstream of wastewater treatment plant discharge points, migration from soils that have  
14 accumulated radionuclides from previous activities such as pits or land application, and inadequate  
15 management of treatment plant solids that have accumulated radionuclides (such as filter cake).

16 In Pennsylvania between 2007 and 2010, TENORM-bearing produced wastewaters were sent to  
17 POTWs, which are generally not required to monitor for radioactivity ([Resnikoff et al., 2010](#)).  
18 Although the practice of management of Marcellus waters via POTWs has declined, there is still  
19 potential for input of radionuclides to surface waters via discharge of CWT effluents either directly  
20 to surface waters or indirectly through discharge to POTWs.

21 Data regarding TENORM content in oil and gas wastes that are treated and discharged to surface  
22 waters are limited. However, a recent study by the Pennsylvania Department of Environmental  
23 Protection (PA DEP) ([PA DEP, 2015b](#)) provides information that helps fill this data gap. The study  
24 began in 2013 and examined radionuclide (radium-226, radium-228, K-40, gross alpha, gross beta)  
25 levels at 29 wastewater plants in Pennsylvania that cover a range of both sources and treatment  
26 plant types, including POTWs, CWTs that treat oil and gas wastewaters and can discharge to surface  
27 water or a POTW, and zero liquid discharge facilities treating oil and gas wastewater. Four of the 10  
28 discharging CWTs sampled during the study discharged to surface water under a National Pollution  
29 Discharge Elimination System (NDPES) permit, and the others discharged to POTWs. Six of the  
30 POTWs in the study received effluent from a CWT along with municipal wastewater. The CWTs in  
31 the study are not described as receiving exclusively Marcellus wastewater, but the study itself was  
32 motivated by concerns over an increase in radionuclides in oil and gas wastes observed during the  
33 expansion of Marcellus Shale production.

34 The POTWs receiving influent from CWTs treating oil and gas wastewater (along with municipal  
35 wastewater influent) had average effluent radium-226 concentrations of 103 pCi/L (unfiltered) and  
36 129 pCi/L (filtered) (filtration is used to remove very fine particulates from the water). Those  
37 POTWs not receiving influent from CWTs treating oil and gas wastewater effluent had higher  
38 average radium-226 values in unfiltered samples (145 pCi/L) and lower values for filtered samples



1 (47 pCi/L). For perspective, the maximum contaminant level (MCL) for radium-226 plus radium-  
2 228 is 5 pCi/L. For reference, radium-226 in river water generally ranges from 0.014 pCi/L to 0.54  
3 pCi/L (0.5 to 20 mBq/L) ([IAEA, 2014](#)). The results of the POTW sampling are inconclusive as to  
4 whether the effluents from POTWs receiving CWT-treated oil and gas wastewater are routinely  
5 higher than the effluents from those without this type of influent.

6 For the CWTs in the PA DEP study, average radium-226 content in the effluents was an order of  
7 magnitude higher than in effluents from the POTWs (1,840 pCi/L unfiltered, 2,100 pCi/L, filtered).  
8 The effluent averages were similar to averages for the influent concentrations, although median  
9 concentrations in the effluents were much lower than in the influents. Effluent from zero-discharge  
10 facilities averaged 2,610 pCi/L radium-226 and 295 pCi/L radium-228, although these effluents  
11 would most likely be reused as fracturing fluid ([PA DEP, 2015b](#)). The authors do note a potential for  
12 environmental effects from spills of influent or effluent from zero-discharge facilities.

13 [Warner et al. \(2013a\)](#) noted that if the activities of radium-226 and radium-228 in Marcellus brine  
14 influent at the CWT they studied are similar to those reported by other researchers ([Rowan et al.,  
15 2011](#)), then the CWT achieved a 1,000-fold reduction in radium content via a process of radium  
16 coprecipitation with barium sulfate. The detection of radium in effluents from this CWT (mean  
17 values of 4 pCi/L of radium-226 and 2 pCi/L of radium-228) even with what may be high treatment  
18 removal efficiency underscores the fact that effluent concentrations depend not only upon the  
19 treatment processes used but also the influent concentration.

20 An additional concern related to evaluation of radionuclide concentrations in wastewater is that the  
21 high TDS content of hydraulic fracturing wastewater can result in poor recovery of chemical  
22 constituents when using wet chemical techniques, leading to underestimations of constituent  
23 concentrations. In particular, recovery for radium may be as low as <1% ([Nelson et al., 2014](#)).  
24 Underestimation of radium content may lead to failure in identifying an impact or potential impact  
25 on drinking water resources.

26 In addition to concerns over of the potential for TENORM in discharges to surface waters, there are  
27 may be a legacy of accumulation of radionuclides in surface water sediments. Studies of effluent,  
28 stream water, and stream sediment associated with a CWT in western Pennsylvania that has  
29 treated both conventional and unconventional oil and gas wastewaters indicate that radium-226  
30 levels in stream sediment samples at the point of discharge are approximately 200 times greater  
31 than upstream and background sediments. This indicates the potential for accumulation of  
32 contaminants in localized areas of wastewater discharge facilities ([Warner et al., 2013a](#)). Although  
33 the CWT in question also accepted conventional oil and gas wastewater, [Warner et al. \(2013a\)](#)  
34 observed that the radium-228/radium-226 ratio in the river sediments near the discharge (0.22-  
35 0.27) is consistent with ratios in Marcellus wastewater. The authors interpret this as an indication  
36 that the radium accumulated in the sediments originated from the discharge of treated  
37 unconventional oil and gas wastewater. Another study, however, did not find elevated levels of  
38 alkali earth metals (including radium) in sediments just downstream of the discharge points of five  
39 POTWs that had previously treated Marcellus wastewater ([Skalak et al., 2014](#)). Accumulation of  
40 contaminants in sediment may be dependent on treatment processes and their removal rates for

1 various constituents as well as stream chemistry and hydrologic characteristics. Contamination  
2 with radium-226 would be potentially be long lived; the half-life of radium-226 is approximately  
3 1,600 years, while the half-life of radium-228 is 5.76 years.

4 The recent PA DEP study ([PA DEP, 2015b](#)) found that the radium-226 content in sediments near the  
5 discharge points for POTWs receiving treated oil and gas effluent from CWTs (along with their  
6 municipal wastewater influent) exceeds typical background soil levels of approximately 1 to 2  
7 pCi/g of radium-226 and radium-228. The authors conclude that wastewater effluent is the most  
8 likely source for the radium in these samples. Results indicate an average of 9.00 pCi/g radium-226  
9 and 3.52 pCi/g radium-228 in sediments near outfalls of POTWs. Sediments at 4 CWTs receiving oil  
10 and gas wastewater and that discharge to surface water have much higher average concentrations  
11 of 84.2 pCi/g for radium-226 and 19.8 pCi/g for radium-228. However, the concentrations of  
12 radium in the sediments does not correlate with concentrations of radium in the effluents  
13 suggesting that sorption over time affects the concentration of radium in the sediments ([PA DEP,](#)  
14 [2015b](#)).

15 The association of radium with sediments near discharge points is attributed to adsorption of  
16 radium to the sediments, a process governed by factors such as the salinity of the water and  
17 sediment characteristics. In particular, radium has a high affinity for iron and manganese  
18 (hydr)oxides in sediment. Increased salinity promotes desorption of radium from sediments, while  
19 lower salinity promotes adsorption, with radium adsorbing particularly strongly to sediments high  
20 in iron and manganese (hydro)oxides ([Porcelli et al., 2014](#); [Gonneea et al., 2008](#)). [Warner et al.](#)  
21 [\(2013a\)](#) speculate that the discharge of saline CWT effluent into less saline stream water facilitates  
22 sorption of radium onto streambed sediments. The long-term fate of radium sorbed to sediments  
23 depends upon changes in water salinity and the sediment properties, including any redox processes  
24 that may affect iron and manganese minerals in the sediments.

25 Other solids may contain radionuclides; filter cake samples from treatment at POTWs were found  
26 by [PA DEP \(2015b\)](#) to have radium contents greater than typical soil concentrations, and they  
27 exhibited a large variation. Filter cake from CWTs had radium concentrations higher than in POTW  
28 filter cake. The authors conclude that although the risk to workers and the public from handling  
29 and temporary storage of these materials is minimal, there may be environmental risks from spills  
30 or long term disposal. There could be impacts on surface waters through spills or effects on ground  
31 waters from landfill leachate.

32 Radionuclide accumulation in CWTs or POTWs may continue to affect the plant even after  
33 discontinuing treatment of high radionuclide wastewater. Radium can adsorb onto scales in pipes  
34 and tanks and will also co-precipitate calcium, barium, and strontium in sulfate minerals ([USGS,](#)  
35 [2014e](#)). Pipe scale in oil and gas production facilities can have radium concentrations as high as  
36 154,000 pCi/g, although concentrations of less than 13,500 pCi/g are more common ([Schubert et](#)  
37 [al., 2014](#)). A similar issue, the potential for accumulation and possible release of radionuclides and  
38 other trace inorganic constituents in water distribution systems has gained attention, with the  
39 potential for drinking water concentrations to exceed drinking water standards ([Water Research](#)  
40 [Foundation, 2010](#)). Scale eventually removed from pipes or other equipment may end up in

1 landfills and then leach into groundwater or run off to a surface water body ([USGS, 2013c](#)).  
2 Although barium sulfate phases are relatively insoluble, one study demonstrates that barium  
3 sulfate scales that were buried in soil could be reduced by microbially mediated processes, allowing  
4 release of co-precipitated elements such as radium due to leaching by rainwater ([Swann et al.](#)  
5 [2004](#)). Monitoring would be needed in order to ascertain the potential for accumulation and release  
6 of radionuclides from systems that have treated or continue to treat hydraulic fracturing  
7 wastewaters with elevated TENORM concentrations.

8 Accumulation of radionuclides (potassium, thorium, bismuth, radium, and lead) has been evaluated  
9 in two pits in Texas that have stored fluids associated with hydraulic fracturing ([Rich and Crosby,](#)  
10 [2013](#)). Gamma radiation in these pits has been found to vary from 8 to 23 pCi/g, with beta radiation  
11 varying from 6 to 1329 pCi/g ([Rich and Crosby, 2013](#)). Although the study sample size was small,  
12 the results suggest that radionuclides associated with sediments from some reserve pits could have  
13 potential impacts on surface waters or ground waters. This could happen through migration of  
14 affected sediments or soils to surface waters or through leaching to ground water.

15 Salt and radionuclide accumulation can occur near road spreading sites; one study in Pennsylvania  
16 found a 20% increase in radium concentrations in soils near roads where wastewaters from  
17 conventional operations had been spread for de-icing ([Skalak et al., 2014](#)). Accumulation of  
18 radionuclides in soils near roads presents a vehicle for potential impacts on drinking water  
19 resources. The extent to which hydraulic fracturing wastewater contributes to this depends upon  
20 state-level regulations regarding whether hydraulic fracturing wastewater can be used for road  
21 spreading.

22 Effluents and receiving waters can be monitored for radionuclides. Research suggests that radium-  
23 226 and radium-228 are the predominant radionuclides in Marcellus Shale wastewater, and they  
24 account for most of the gross alpha and gross beta activity in the waters studied ([Rowan et al.](#)  
25 [2011](#)). Gross alpha and gross beta measurement may therefore serve as an effective screening  
26 mechanism for overall radionuclide concentrations in hydraulic fracturing wastewater. This in turn  
27 can help in evaluating management strategies. Portable gamma spectrometers allow rapid  
28 screening of wastewater effluents. Sediments may also be measured for radionuclide  
29 concentrations at discharge points.

### 8.6.3. Metals

30 Given the presence in hydraulic fracturing wastewaters of some heavy metals, as well as barium  
31 and strontium concentrations that can reach hundreds or even thousands of mg/L (see Table 7-10),  
32 surface waters may be impacted if discharges from CTWs or POTWs indirectly receiving oil and gas  
33 wastewater via CWTs are not managed appropriately. Spills may also affect surface waters.

34 Common treatment processes, such as coagulation, are effective at removing many metals (see  
35 Section 8.5.2.4). A request by the EPA for effluent sampling from seven facilities in Pennsylvania  
36 treating oil and gas wastewaters revealed low to modest concentrations of copper (0-50 µg/L), zinc  
37 (14 – 256 µg/L), and nickel (8 – 22 µg/L) ([U.S. EPA, 2015d, e](#)). However, metals such as barium and  
38 strontium have been found to range from low to elevated in some CWT effluents. For the year 2011,

1 for example, effluent from a Pennsylvania CWT had average barium levels ranging from 9 to 98  
2 mg/L ([PA DEP, 2015a](#)). That facility was operating with a barium removal stage and was treating  
3 both conventional and hydraulic fracturing wastewater, although effluent concentrations dropped  
4 after May, 2011. The facility is scheduled to upgrade its TDS removal capabilities.

5 Data collected by the EPA between October 2011 and February 2013 at seven Pennsylvania  
6 facilities indicate effluent barium concentrations ranging from 0.35 to 25 mg/L (median of 3.5 mg/L  
7 and average of 6.7 mg/L). Strontium concentrations ranged from 0.36 to 546 mg/L (median of 297  
8 mg/L and mean of 236 mg/L ([U.S. EPA, 2015e](#)). A December 2010 effluent sampling effort in at a  
9 discharging CWT in Pennsylvania reported average barium and strontium concentrations of 27  
10 mg/L and nearly 3,000 mg/L, respectively (eight samples from one plant) ([Volz et al., 2011](#)). The  
11 facility treats conventional oil and gas wastewaters, and it also received Marcellus wastewater until  
12 September, 2011.

13 Limited data are available on metal concentrations in wastewater and treated effluents that are  
14 directly discharged; additional information would be needed to assess whether there will be  
15 downstream effects on drinking water utilities. NPDES discharge permits, which restrict TDS  
16 discharge concentrations, will likely reduce metal effluent concentrations due to the additional  
17 treatment necessary to minimize TDS.

#### 8.6.4. Volatile Organic Compounds

18 Benzene is a common constituent in hydraulic fracturing wastewater, and it is of concern due to  
19 recognized human health effects. A wide range of concentrations of BTEX compounds occurs in  
20 wastewater from the Barnett and Marcellus shales. Natural gas formations generally produce more  
21 BTEX than oil formations ([Veil et al., 2004](#)). Generally, lower concentrations of BTEX occur in  
22 wastewater from coalbed methane (CBM) production (see Appendix Table E-9). Processes such as  
23 aeration or dissolved air flotation can remove volatile organic compounds (VOCs) during treatment,  
24 but if treatment is not adequate, the VOCs may reach water resources. The average concentration of  
25 benzene in a December 2010 sampling effort was 12 µg/L in the discharge of a Pennsylvania CWT  
26 ([Volz et al., 2011](#)). The facility was receiving wastewater from both conventional and  
27 unconventional operations at that time. [Ferrari et al. \(2013\)](#) measured mean concentrations of  
28 benzene, toluene, ethylbenzene, and xylene in effluents from the same facility, and mean  
29 concentrations among the four compounds ranged from about 2 to 46 µg/L. Concentrations were  
30 lower for samples taken after May 19, 2011 than before, and the effect was considered statistically  
31 significant. The treatment processes at this facility do not include aeration.

32 Leakage from pits or spills creates another potential route of entry to drinking water resources.  
33 VOCs have been measured in groundwater near the Duncan Oil Field in New Mexico, downgradient  
34 of an unlined pit storing oil and gas wastewater ([Sumi, 2004](#); [Eiceman, 1986](#)). VOCs and oil were  
35 also found in groundwater about 213 feet (65m) downgradient from an unlined pit in Oklahoma  
36 ([Kharaka et al., 2002](#)).

### 8.6.5. Semi-Volatile Organic Compounds

1 Little is known about the fate of the SVOC, 2-butoxyethanol (2-BE) (an antifoaming and anti-  
2 corrosion agent used in slick-water) ([Volz et al., 2011](#)) or its potential impact on surface waters,  
3 drinking water resources, or drinking water systems. This compound is very soluble in water and is  
4 subject to biodegradation, with a half-life estimation of 1-4 weeks in the environment ([Wess et al.,  
5 1998](#)). The EPA has not classified 2-BE (or other glycol ethers) for carcinogenicity. 2-BE was  
6 detected in the discharge of a Pennsylvania CWT at concentrations of 59 mg/L ([Volz et al., 2011](#)).  
7 [Ferrar et al. \(2013\)](#) detected 2-BE in the effluents from a CWT in western Pennsylvania at average  
8 concentrations of 34 – 45 mg/L; the latter value was measured when the CWT was receiving only  
9 conventional oil and gas wastewater. Data are lacking on 2-BE concentrations in surface waters that  
10 receive treated effluents from hydraulic fracturing wastewater treatment systems.

11 Polycyclic aromatic hydrocarbons are another common group of semi-volatile organic compounds  
12 (SVOCs) in oil and gas wastewater. They have been detected in soils 164 feet (50 m) downgradient  
13 of an unlined pit in New Mexico ([Sumi, 2004](#); [Eiceman, 1986](#)). PAHs were also found in birds in  
14 wetlands fed by oil and gas wastewater discharges in Wyoming ([Ramirez, 2002](#)).

### 8.6.6. Oil and Grease

15 Oil and gas wastewater often contains oil and grease from the formation or from oil-based drilling  
16 fluids. Typically, oil and grease are separated from the wastewater before discharge either by a heat  
17 treatment or by allowing gravity separation followed by skimming. If these processes are  
18 inefficient, oil and grease may be integrated with the discharge to surface waters. For example, in  
19 some cases, oil and grease are allowed to separate in pits, and water is then withdrawn from the  
20 lower part of the pit with a standpipe. If the oil layer is allowed to drop to the level of the standpipe  
21 or if the water is agitated, oil and grease may be discharged along with the water. Oil and grease are  
22 also often dispersed in wastewater in the form of small droplets that are 4 to 6 microns in diameter.  
23 These droplets can be difficult to remove using typical oil/water separators ([Veil et al., 2004](#)). In a  
24 study by the U.S. Fish and Wildlife Service regarding permitted oil and gas discharges between  
25 1996 and 1999 from Wyoming oil fields, 15% of the 62 discharges to Wyoming wetlands reviewed  
26 showed visible oil sheens in the receiving water and 10 of the sites sampled exceeded discharge  
27 limits of 10 mg/L of oil and grease ([Ramirez, 2002](#)).

## 8.7. Synthesis

28 Hydraulic fracturing operations produce fluids during the flowback and production phases  
29 (collectively called wastewater) of a production well, along with liquid and solid treatment  
30 residuals from treatment processes. A variety of management strategies may be considered, with  
31 cost frequently a driving factor. Available information suggests that Class IID wells regulated under  
32 the Underground Injection Control (UIC) Program are the most frequently used wastewater  
33 management practice, but reuse, discharge after treatment, and various other uses are also  
34 employed.



### 8.7.1. Summary of Findings

1 Hundreds of billions of gallons of wastewater are generated annually in the United States by the oil  
2 and gas industry, although national level estimates are difficult to reliably obtain. It is also difficult  
3 to produce a nationwide estimate of the amount of wastewater that is attributable specifically to  
4 hydraulic fracturing because some states do not specifically identify wastewater from hydraulic  
5 fracturing operations in their available wastewater data.

6 The total amount of wastewater produced in an area corresponds generally to oil and gas  
7 production and, therefore, may increase if hydrocarbon production increases in a region.  
8 Geographically, a large portion of oil and gas wastewater in the United States is reported to be  
9 generated in the western part of the country, including contributions from both conventional and  
10 unconventional resources. For some states, estimates of hydraulic fracturing wastewater volumes  
11 can be made using publicly available production or waste data. Annual estimates compiled in this  
12 way range from hundreds of millions to billions of gallons of wastewater generated per state per  
13 year. Direct comparisons among these state data are problematic, however, because of a great deal  
14 of variability in state data collection, including differences in the years for which data are available,  
15 and challenges in definitively identifying wells that have been hydraulically fractured (to  
16 distinguish hydraulic fracturing wastewater from that generated from wells that are not  
17 hydraulically fractured). Within a given state, however, estimated volumes in areas where  
18 hydraulic fracturing is practiced extensively have generally increased over the last several years,  
19 along with numbers of wells contributing to total wastewater volumes. For example, the data made  
20 available by PA DEP illustrate that the total volume of wastewater generated correlates generally  
21 with a significant increase in volume of hydrocarbon production and with the number of  
22 production wells. As hydraulic fracturing activities increase and the number of wells increases, the  
23 amount of hydraulic fracturing wastewater generated is likely to increase.

#### 8.7.1.1. Wastewater Management Practices

24 Hydraulic fracturing wastewater is managed in a variety of ways, including disposal through Class  
25 IID wells; minimal treatment and reuse in subsequent fracturing operations; more complete  
26 treatment followed by discharge, disposal, or reuse; evaporation; and other uses such as irrigation  
27 (when the wastewater quality is adequate). Unauthorized discharges of hydraulic fracturing  
28 wastewaters have been documented; such discharges could potentially impact drinking water  
29 resources, but estimates of the frequency of occurrence cannot be developed with the available  
30 data.

31 As of 2015, available information suggests that wastewater management practices involve  
32 extensive use of Class II wells to manage wastewater from most of the major unconventional plays  
33 in the United States, with the notable exception of the Marcellus Shale region in Pennsylvania. More  
34 than 98% of wastewater in the oil and gas industry is estimated to be injected into Class II wells  
35 annually (including wells for enhanced oil recovery and disposal) ([Clark and Veil, 2009](#)). Based on  
36 data compiled from 2012 and 2014, there are about 25,000 Class IID wells in the United States ([U.S.  
37 EPA, 2015q](#)). In particular, large numbers of active injection wells are found in Texas (7,876 or



1 29%), Kansas (5,516 or 20%), Oklahoma (4,622 or 17%), Louisiana (2,448 or 9%), and Illinois  
2 (1,054 or 4%).

3 Use of Class IID wells is likely driven by the availability of Class IID wells within reasonable  
4 transportation distance and the cost of transporting (and injecting) the wastewaters. In the oil and  
5 gas industry, Class IID wells have generally been the most economically favorable wastewater  
6 management practice ([U.S. GAO, 2012](#)). In Pennsylvania, there are only nine Class IID wells as of  
7 February 2015, and a significant growth of gas production using hydraulic fracturing in the  
8 Marcellus is generating increasing amounts of wastewater. Treatment and reuse are becoming  
9 increasingly popular in the Marcellus Shale region and are in more widespread use in comparison  
10 to other oil and gas producing parts of the country.

11 Reuse of hydraulic fracturing wastewater to formulate fracturing fluid in subsequent hydraulic  
12 fracturing jobs varies considerably on a national level, and reliable estimates are not available for  
13 all areas. As of 2014–2015, the greatest amount of reuse occurs in Pennsylvania, where the scarcity  
14 of Class IID wells to receive Marcellus wastewater drives this practice. Recent estimates of  
15 wastewater reuse in Pennsylvania range as high as 90% or more. Waste disposal data from the [PA  
16 DEP \(2015a\)](#) indicate that much of the reuse happens on-site. Operators also report some reuse of  
17 wastewater in other regions such as the Haynesville Shale, the Fayetteville Shale, the Barnett Shale,  
18 and the Eagle Ford Shale, although at much lower volume percentages (about 5 – 20%) compared  
19 with practices in the Marcellus Shale region. Increased reuse and recycling of hydraulic fracturing  
20 wastewaters has the added benefit of providing an additional water supply for hydraulic fracturing  
21 fluid formulation in areas where water scarcity is a concern. If, however, hydraulic fracturing  
22 activity slows, demand for wastewater for reuse will also decrease, and other forms of wastewater  
23 management will be needed.

24 The decision to reuse/recycle depends upon several factors, including the volume and rate of  
25 production of the wastewater and whether these are suitable for water needs for ongoing  
26 fracturing activities in the area. The composition of the water, in particular the TSS and TDS  
27 content, and whether the water quality can be accommodated in the fracturing practices in an area  
28 can also influence reuse, including decisions about what type of pretreatment or treatment may be  
29 needed to make reuse or recycling feasible.

30 Treatment facilities (either centralized waste treatment facilities (CWTs) or systems designed for  
31 on-site use) can be permitted to treat oil and gas wastewaters. Treatment can be followed by  
32 discharge to a surface water body or to a POTW, or the treated effluent may be used for reuse. Most  
33 CWTs treating hydraulic fracturing wastewater are located in Pennsylvania (39 facilities), and a  
34 number of CWTs (11) are located in Ohio. More are under construction or pending approval. Most  
35 are “zero-discharge” and do not have the treatment capacity to reduce TDS; their effluent is reused  
36 for hydraulic fracturing. Specialized on-site, mobile, or semi-mobile treatment facilities can be used  
37 by operators to handle wastewater without the expense of long-distance transportation and can be  
38 customized to produce an effluent that meets the water quality needs of the intended disposal or  
39 reuse plans.

1 Treatment of hydraulic fracturing wastewaters by publicly owned treatment works (POTWs) was  
2 previously practiced in Pennsylvania. POTWs are not designed for the high TDS content of  
3 Marcellus wastewaters, and stricter discharge limits for TDS in Pennsylvania, as well as a positive  
4 response to a request from Pennsylvania DEP that operators stop sending Marcellus wastewater to  
5 POTWs and some CWTs, led to the practice being discontinued in 2011. (Some POTWs in  
6 Pennsylvania still accept oil and gas wastewaters from conventional operations, including  
7 conventional wells that have undergone hydraulic fracturing.)

8 Management plans will necessarily need to change with time as hydraulic fracturing activities in a  
9 region change. The volumes of wastewater also change during the life of a well. The chemical  
10 composition of the wastewater changes during the transition from the flowback period and into the  
11 production phase. In addition, the demand for reused water to support ongoing fracturing activities  
12 will change. Taken in aggregate, these factors may influence costs and choices associated with  
13 hydraulic fracturing wastewater management, especially if Class IID wells are limited in a particular  
14 area for any reason.

#### **8.7.1.2. Treatment and Discharge**

15 One of the most frequently cited concerns regarding hydraulic fracturing wastewater, especially  
16 from shale plays and tight sand plays, is the high TDS content, which poses challenges for  
17 treatment, discharge, and reuse. Conventional treatment processes such as sedimentation, filtration  
18 methods, flotation, chemical precipitation and ion exchange can remove constituents such as oil and  
19 grease, major cations, metals, and TSS. Because these processes do not remove monovalent ions  
20 (e.g., chloride, bromide, sodium), reducing TDS in these high-salinity wastewaters requires more  
21 advanced processes such as reverse osmosis (RO), electrodialysis, and distillation methods.  
22 Distillation methods appear to be the approach of choice for newer CWT facilities that are designed  
23 to lower TDS. RO, while highly effective, does have limits to TDS concentrations (less than  
24 approximately 40,000 mg/L) that it can treat ([Shaffer et al., 2013](#); [Younos and Tulou, 2005](#)).

25 Hydraulic fracturing wastewater discharged from treatment facilities without advanced TDS  
26 removal processes has been shown to cause elevated TDS, bromide, and chloride levels in receiving  
27 waters in Pennsylvania. Existing literature indicates that bromide and chloride are important  
28 wastewater constituents with regard to potential burdens on downstream drinking water  
29 treatment facilities. Bromide in particular is of concern due to the formation of disinfection by-  
30 products (DBPs) during disinfection. Some types of DBPs are regulated under SDWA's Stage 1 and  
31 Stage 2 DBP Rules, but a subset of DBPs, including a number of chlorinated, brominated,  
32 nitrogenous, and iodinated DBPs, are not regulated. Brominated DBPs (and iodinated DBPs) are  
33 more toxic than other species of DBPs. Modeling suggests that very small percentages of hydraulic  
34 fracturing wastewater in a river used as a source for drinking water treatment plants may cause a  
35 notable increase in DBP formation.

36 Radionuclides (in particular radium-226 and radium-228) in some hydraulic fracturing  
37 wastewaters pose concerns for the quality of discharges if they are not adequately treated. Possible  
38 elevated radionuclide content in treatment residuals is also a consideration. In Marcellus Shale gas  
39 production wastewater, radium-226, radium-228, gross alpha, and gross beta are most cited as the

1 radioactive constituents of concern, and concentrations can range up to thousands of pCi/L. Fewer  
2 data exist on uranium content in wastewaters, and data are also limited on radionuclide  
3 concentrations in wastewaters from other unconventional plays. A confounding issue in evaluating  
4 radium concentrations is underestimation when using traditional wet chemical methods with high-  
5 TDS waters. A variety of treatment processes can be used for removal of radium, ranging from  
6 conventional methods such as chemical precipitation and filtration to more advanced and costly  
7 techniques, such as reverse osmosis or distillation (including mechanical vapor recompression).  
8 Whether the effluent from such treatment contains elevated radium, however, will depend upon  
9 influent concentrations as well as treatment removal efficiency.

10 Other potential effects on drinking water resources may result from discharges or spills of  
11 hydraulic fracturing wastewaters containing elevated concentrations of barium and other metals.  
12 Again, the management strategy and treatment choices will affect the likelihood of such impacts.

### 8.7.2. Factors Affecting the Frequency or Severity of Impacts

13 On a regional scale, potential effects on drinking water resources from hydraulic fracturing  
14 wastewater will depend upon the mix of wastewater management strategies used, and potential  
15 impacts may change through time if the quantity of hydraulic fracturing wastewater changes and  
16 strategies to manage the wastewater change. For example, if use of Class IID wells becomes  
17 restricted in parts of the country where they are currently commonly used, the emphasis may shift,  
18 at least locally, from use of Class IID wells and towards the use of treatment and either discharge or  
19 reuse. Although reuse delays the discharge of wastewater by directing it to ongoing fracturing  
20 activities, reuse may ultimately concentrate constituents such as radionuclides (depending upon  
21 the ratio of recycled to new water). If a stream of wastewater or portion of wastewater has been  
22 used for more than one hydraulic fracturing event and is eventually intended for disposal, the  
23 method of disposal will need to be appropriate for the quality of the wastewater.

24 Potential effects on drinking water resources from hydraulic fracturing wastewaters that undergo  
25 treatment depend upon the quality and quantity of discharges to receiving waters (discharge could  
26 occur directly after treatment at a CWT or indirectly after discharge to a POTW). Hydraulic  
27 fracturing wastewater management can consider appropriate levels of treatment and blending so  
28 that the resulting TDS content in a receiving water will not result in formation of DBPs during  
29 subsequent drinking water treatment and will not impair biological treatment processes.

30 The volumes of discharges relative to the receiving water body size are important local factors to  
31 consider in evaluating whether elevated concentrations can be anticipated at downstream drinking  
32 water intakes. Small drinking water systems drawing water from smaller streams in affected areas  
33 would likely face greater challenges in dealing with high bromide and chloride levels in source  
34 waters. Furthermore, other potential impacts on surface water and shallow ground water may exist  
35 due to spills of either untreated wastewater or effluent from zero-discharge CWTs, and there will be  
36 site-specific factors such as distance to a water body or depth to the water table to consider (see  
37 Chapter 5).

1 Results from existing literature and recent PA DEP data suggest that cumulative impacts from  
2 radionuclides may occur in sediments at or near discharge points from facilities that treat and  
3 discharge oil and gas wastewater (or have done so in the past). There may be consequences for  
4 downstream drinking water systems if the sediments are disturbed or entrained due to dredging or  
5 flood events. Similarly, some organic constituents may not be removed during treatment, and  
6 potential effects on receiving waters and sediments will depend upon the properties of the specific  
7 constituents, their concentrations, and the treatment used.

8 The possibility of radionuclides affecting receiving waters and sediments will depend upon the  
9 technologically enhanced naturally occurring radioactive material (TENORM) content of the  
10 wastewater and the treatment processes used. Although radionuclide contamination at drinking  
11 water intakes due to treated hydraulic fracturing fluid has not been detected, a recent PA DEP study  
12 ([PA DEP, 2015b](#)) has revealed radium in effluents from both CWTs handling oil and gas wastewater  
13 and POTWs receiving effluent from such facilities. The concentrations in the CWT effluents were  
14 considerably higher than in the POTW effluents. The site selection criteria for this study included  
15 some Pennsylvania wastewater facilities whose influents include wastewater from unconventional  
16 operations or where radioactivity was measured in the influent, sludges, or effluents (CWTs may  
17 also receive conventional wastewater). In regions where unconventional plays are known to be  
18 enriched in radionuclides, analysis of TENORMs in untreated hydraulic fracturing wastewaters,  
19 selection of appropriate treatment processes, and monitoring of TENORMs in treatment effluent  
20 and receiving waters could help address potential impacts on drinking water resources. Gross alpha  
21 and gross beta measurements or gamma spectroscopic analyses could be used as initial screening  
22 methods for radionuclides. Enrichment of TENORMs in waste products from treatment processes  
23 also requires appropriate management to reduce potential impacts.

24 Other management strategies such as irrigation, road spreading, and evaporation are less  
25 frequently employed for hydraulic fracturing wastewaters. Irrigation or land application may have  
26 potential effects on surface waters depending upon the constituents in the wastewater (e.g., salts  
27 and radionuclides), the distance from the site of application to a receiving water, and whether  
28 stormwater management measures exist that mitigate runoff. Distance to the water table,  
29 precipitation, and the hydrogeologic properties of the soil and sediment will influence whether  
30 migration of these constituents results in contamination of shallow ground water.

### 8.7.3. Uncertainties

31 A full understanding of the practices being used for management of hydraulic fracturing  
32 wastewaters is limited by a lack of available data in a number of areas. It is difficult to assemble a  
33 complete, national- or regional-level picture of wastewater generation and management practices  
34 because the tracking and availability of data vary from state to state. Although some states provide  
35 well-organized and relatively thorough data, not all states make such information available, and it  
36 can be difficult to identify wastewater volumes specifically associated with hydraulic fracturing  
37 activity (as compared to all oil and gas production activities). Such data would be needed to place  
38 hydraulic fracturing wastewater in the broader context of all oil and gas wastewaters. Data are also

1 generally difficult to locate for production volumes, chemical composition, masses, and  
2 management and disposal strategies for residuals.

3 Among management practices, up-to-date information on the volumes of hydraulic fracturing  
4 wastewaters disposed of via underground injection in different states are not uniformly available.  
5 Without this information, it is difficult to assess whether disposal well capacity will become an  
6 issue in areas where hydraulic fracturing activity is expected to increase.

7 Assessment of the potential effects of hydraulic fracturing on drinking water resources is also  
8 limited by relatively few data on effluent quality from CWTs that receive oil and gas wastewaters  
9 (including those associated with hydraulic fracturing) and POTWs that receive CWT effluents. If a  
10 CWT can discharge to surface water (e.g., the CWT has a NPDES permit), some monitoring data may  
11 be available that will provide information on effluent quality, but the list of monitored constituents  
12 may be limited.

13 In evaluating the treatment effectiveness of full scale facilities, relatively few data exist on the  
14 quality of both influents and effluents from treatment facilities, although some manufacturers of  
15 patented CWT systems publicize information on treatment effectiveness. A better understanding of  
16 the pollutant removal capabilities of facilities would be helped by influent and effluent sampling,  
17 timed so that effluent samples are representative of influent samples to the degree possible. There  
18 are limited analyses of influent and effluent samples for a wide range of constituents associated  
19 with hydraulic fracturing fluids and wastewaters (e.g., major cations and anions, radionuclides,  
20 metals, VOCs, SVOCs, diesel range organics (DROs), and total petroleum hydrocarbons (TPH)).  
21 Analyses are needed in which the methods are appropriate for the TDS content of the sample.  
22 Radium in particular needs to be analyzed using a method suitable for high-salt samples, otherwise  
23 concentrations may be underestimated. Continued work towards ensuring that analytical methods  
24 exist for the highly complex matrixes often encountered with oil and gas wastewater would provide  
25 better certainty in the results of chemical analyses.

26 Monitoring of surface waters, even screening with a simple TDS proxy such as conductivity, would  
27 be needed to help assess how often hydraulic fracturing activities (including spills or discharges of  
28 wastewater) affect receiving waters; such data are lacking except for some studies in the Marcellus  
29 Shale region. Existing data are also limited regarding legacy effects, such as accumulation of  
30 contaminants in sediments at discharge points, soil accumulation due to application of de-icing  
31 brines or salts from wastewater treatment, and handling of waste water treatment residuals.

#### 8.7.4. Conclusions

32 Oil and gas operations in the United States generate billions of gallons of wastewater daily; this  
33 includes wastewater associated with hydraulic fracturing activities, although what portion of this  
34 oil and gas wastewater is attributable to hydraulic fracturing operations is difficult to estimate due  
35 to lack of consistent data regarding wastewater volumes. Available information indicates that the  
36 majority of this water is injected into Class IID wells regulated under the Underground Injection  
37 Control (UIC) program, although in some areas of the country, wastewater is reused (either with  
38 or without treatment) for new hydraulic fracturing jobs. In the Marcellus Shale region in

1 Pennsylvania, the majority of wastewater is currently reused. Wastewater may also be treated in a  
2 CWT and discharged to a surface water body or to a POTW, or in certain settings, used for various  
3 other uses (e.g., irrigation) if water quality allows. Impacts on drinking water resources may result  
4 from inadequate treatment prior to discharge or spills. Particular constituents of concern in  
5 wastewater from hydraulic fracturing, especially in the Marcellus Shale region, include bromide and  
6 radionuclides. There is limited information regarding the influents and effluents from facilities that  
7 treat wastewater from hydraulic fracturing operations.

## 8 **Text Box 8-2. Research Questions Revisited.**

### 9 **What are the common treatment and disposal methods for hydraulic fracturing wastewater, and** 10 **where are these methods practiced?**

- 11 • The majority of hydraulic fracturing wastewater in the United States is disposed of via underground  
12 injection wells. As of 2014-2015, most states where hydraulic fracturing occurs have an adequate  
13 number of Class IID injection wells regulated under the Underground Injection Control (UIC) program.  
14 The Marcellus Shale region, especially the northeastern region, is an exception. Wastewater treatment for  
15 reuse is increasing in the Marcellus shale region and may continue to increase in western shale plays as  
16 the practice becomes encouraged and economically favorable.

### 17 **How effective are conventional POTWs and commercial treatment systems in removing organic and** 18 **inorganic contaminants of concern in hydraulic fracturing wastewater?**

- 19 • Publicly owned treatment works (POTWs) using basic treatment processes cannot effectively reduce  
20 elevated total dissolved solids (TDS) concentrations in hydraulic fracturing wastewater. Centralized  
21 waste treatment facilities (CWTs) with advanced treatment processes can remove TDS constituents with  
22 removal efficiencies ranging from 97% to over 99% as demonstrated at facilities that use treatment  
23 processes such as mechanical vapor recompression, distillation, and reverse osmosis (see Table 8-6).  
24 Advanced treatment processes have been shown to remove certain contaminants found in hydraulic  
25 fracturing wastewater (see Table 8-6). Indirect discharge, where wastewater is pretreated by a CWT and  
26 sent to a POTW, may be an effective option for hydraulic fracturing wastewater treatment (with  
27 restrictions on contaminant concentrations in the pretreated wastewater that is sent to a POTW). This  
28 option would require careful planning to ensure that the pretreated wastewater blended with POTW  
29 influent is of appropriate quality and quantity to prevent deleterious effects on biological processes in the  
30 POTW or the pass-through of contaminants.
- 31 • Facilities that treat wastewater for reuse and employ only basic treatment are unable to remove all  
32 contaminants in hydraulic fracturing wastewater. Depending on the water quality requirements for a  
33 particular site, these lower quality treated waters may be of adequate quality for reuse on subsequent  
34 hydraulic fracturing operations (and will be less costly). Some organic compounds (BTEX, some alcohols,  
35 2-butoxyethanol) may not be removed by the processes employed in CWTs if they don't include specific  
36 processes that target these compounds (e.g., distillation, advanced oxidation, adsorption).



1 **What are the potential impacts on drinking water treatment facilities from surface water disposal of**  
2 **treated hydraulic fracturing wastewater?**

- 3 • Inadequate bromide and iodide removal from treated hydraulic fracturing wastewater has the greatest  
4 potential to affect surface water quality and place a burden on downstream drinking water treatment  
5 facilities that use chlorine-based disinfection due to the formation of DBPs. Radionuclides, metals, and  
6 trace organic compounds in effluents from CWTs may also be of concern if present in treated wastewater  
7 or if they accumulate in sediments downstream of discharge points. These constituents have reached  
8 drinking water resources via some discharges, although sampling data for effluents and receiving waters  
9 are limited. As of 2014-2015, there is no evidence that these contaminants have affected drinking water  
10 facilities, but data are lacking for concentrations of these constituents at drinking water intakes in  
11 regions with hydraulic fracturing.

## 8.8. References for Chapter 8

- Alanco. (2012). New subsidiary Alanco Energy Services, Inc. to provide produced water disposal services to natural gas industry. Alanco. [http://www.alanco.com/news\\_040912.asp](http://www.alanco.com/news_040912.asp)
- Alzahrani, S; Mohammad, AW; Hilal, N; Abdullah, P; Jaafar, O. (2013). Comparative study of NF and RO membranes in the treatment of produced water-Part I: Assessing water quality. *Desalination* 315: 18-26. <http://dx.doi.org/10.1016/j.desal.2012.12.004>
- API (American Petroleum Institute). (2000). Overview of exploration and production waste volumes and waste management practices in the United States. [http://www.api.org/environment-health-and-safety/environmental-performance/~/\\_media/Files/EHS/Environmental\\_Performance/ICF-Waste-Survey-of-EandP-Wastes-2000.ashx](http://www.api.org/environment-health-and-safety/environmental-performance/~/_media/Files/EHS/Environmental_Performance/ICF-Waste-Survey-of-EandP-Wastes-2000.ashx)
- Argonne National Laboratory. (2014). Water use and management in the Bakken shale oil play. (DOE Award No.: FWP 49462). Pittsburgh, PA: National Energy Technology Laboratory. <http://www.ipd.anl.gov/anlpubs/2014/05/104645.pdf>
- Bacher, D. (2013). Oil company fined \$60,000 for illegally discharging fracking fluid. Available online at [https://www.indybay.org/newsitems/2013/11/17/18746493.php?show\\_comments=1](https://www.indybay.org/newsitems/2013/11/17/18746493.php?show_comments=1) (accessed March 6, 2015).
- Bair, ES; Digel, RK. (1990). Subsurface transport of inorganic and organic solutes from experimental road spreading of oilfield brine. *Ground Water Monitoring and Remediation* 10: 94-105.
- Banasiak, LJ; Schäfer, AI. (2009). Removal of boron, fluoride and nitrate by electro dialysis in the presence of organic matter. *J Memb Sci* 334: 101-109. <http://dx.doi.org/10.1016/j.memsci.2009.02.020>
- Barbot, E; Vidic, NS; Gregory, KB; Vidic, RD. (2013). Spatial and temporal correlation of water quality parameters of produced waters from Devonian-age shale following hydraulic fracturing. *Environ Sci Technol* 47: 2562-2569.
- Benko, KL; Drewes, JE. (2008). Produced water in the Western United States: Geographical distribution, occurrence, and composition. *Environ Eng Sci* 25: 239-246.
- Blauch, ME; Myers, RR; Moore, TR; Lipinski, BA. (2009). Marcellus shale post-frac flowback waters - where is all the salt coming from and what are the implications? In *Proceedings of the SPE Eastern Regional Meeting*. Richardson, TX: Society of Petroleum Engineers.
- Boschee, P. (2012). Handling produced water from hydraulic fracturing. *Oil and Gas Facilities* 1: 23-26.
- Boschee, P. (2014). Produced and flowback water recycling and reuse: Economics, limitations, and technology. *Oil and Gas Facilities* 3: 16-22.

- [Bowen, ZH; Oelsner, GP; Cade, BS; Gallegos, TJ; Farag, AM; Mott, DN; Potter, CJ; Cinotto, PJ; Clark, ML; Kappel, WM; Kresse, TM; Melcher, CP; Paschke, SS; Susong, DD; Varela, BA](#). (2015). Assessment of surface water chloride and conductivity trends in areas of unconventional oil and gas development-Why existing national data sets cannot tell us what we would like to know. *Water Resour Res* 51: 704-715. <http://dx.doi.org/10.1002/2014WR016382>
- [Boysen, DB; Boysen, JA; Boysen, JE](#). (2002). Creative Strategies for Produced Water Disposal in the Rocky Mountain Region. Paper presented at 9th Annual International Petroleum Environmental Conference, October 2002, Albuquerque, NM.
- [Boysen, JE; Hariju, JA; Shaw, B; Fosdick, M; Grisanti, A; Sorensen, JA](#). (1999). The current status of commercial deployment of the freeze thaw evaporation treatment of produced water. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/52700-MS>
- [Bruff, M; Jikich, SA](#). (2011). Field demonstration of an integrated water treatment technology solution in Marcellus shale. Paper presented at SPE Eastern Regional Meeting, August 17-19, 2011, Columbus, OH.
- [California Department of Conservation](#). (2015). Monthly production and injection databases. statewide production and injection data [Database]. Sacramento, CA: California Department of Conservation, Division of Oil, Gas & Geothermal Resources. Retrieved from [http://www.conservation.ca.gov/dog/prod\\_injection\\_db/Pages/Index.aspx](http://www.conservation.ca.gov/dog/prod_injection_db/Pages/Index.aspx)
- [Camacho, LM, ar; Dumeé, L; Zhang, J; Li, J; Duke, M; Gomez, J; Gray, S](#). (2013). Advances in membrane distillation for water desalination and purification applications. *Water* 5: 94-196. <http://dx.doi.org/10.3390/w5010094>
- [Chapman, EC; Capo, RC; Stewart, BW; Kirby, CS; Hammack, RW; Schroeder, KT; Edenborn, HM](#). (2012). Geochemical and strontium isotope characterization of produced waters from Marcellus Shale natural gas extraction. *Environ Sci Technol* 46: 3545-3553.
- [Chester Engineers](#). (2012). The Pittsburgh water and sewer authority 40 year plan. (PWSA Project No. R-D1.10015-11). Pittsburgh, PA: The Pittsburgh Water and Sewer Authority. [http://apps.pittsburghpa.gov/pwsa/PWSA\\_40-year\\_Plan.pdf](http://apps.pittsburghpa.gov/pwsa/PWSA_40-year_Plan.pdf)
- [Chiado, ED](#). (2014). The impact of shale gas/oil waste on MSW landfill composition and operations. In CL Meehan; JM VanBriesen; F Vahedifard; X Yu; C Quiroga (Eds.), *Shale energy engineering 2014 technical challenges, environmental issues, and public policy* (pp. 412-420). Reston, VA: American Society of Civil Engineers. <http://dx.doi.org/10.1061/9780784413654.044>
- [Clark, CE; Horner, RM; Harto, CB](#). (2013). Life Cycle Water Consumption for Shale Gas and Conventional Natural Gas. *Environ Sci Technol* 47: 11829-11836. <http://dx.doi.org/10.1021/es4013855>
- [Clark, CE; Veil, JA](#). (2009). Produced water volumes and management practices in the United States (pp. 64). (ANL/EVS/R-09/1). Argonne, IL: Argonne National Laboratory. [http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL\\_EVS\\_R09\\_produced\\_water\\_volume\\_report\\_2437.pdf](http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL_EVS_R09_produced_water_volume_report_2437.pdf)
- [COGCC](#) (Colorado Oil and Gas Conservation Commission). (2015). COGIS - all production reports to date. Denver, CO. Retrieved from <http://cogcc.state.co.us/>
- [Colorado Division of Water Resources; Colorado Water Conservation Board; Colorado Oil and Gas Conservation Commission](#). (2014). Water sources and demand for the hydraulic fracturing of oil and gas wells in Colorado from 2010 through 2015 [Fact Sheet]. <http://cewc.colostate.edu/2012/02/water-sources-and-demand-for-the-hydraulic-fracturing-of-oil-and-gas-wells-in-colorado-from-2010-through-2015/>
- [Countess, S; Boardman, G; Hammack, R; Hakala, A; Sharma, S; Parks, J](#). (2014). Evaluating leachability of residual solids from hydraulic fracturing in the Marcellus shale. In *Shale energy engineering 2014: Technical challenges, environmental issues, and public policy*. Reston, VA: American Society of Civil Engineers. <http://dx.doi.org/10.1061/9780784413654.012>

- Cusick, M. (2013). EPA fines western PA treatment plants for Marcellus wastewater violations. Available online at <http://stateimpact.npr.org/pennsylvania/2013/05/24/epa-fines-western-pa-treatment-plants-for-marcellus-wastewater-violations/> (accessed March 6, 2015).
- Dahm, K; Chapman, M. (2014). Produced water treatment primer: Case studies of treatment applications. (S&T Research Project #1617). Denver CO: U.S. Department of the Interior. [http://www.usbr.gov/research/projects/download\\_product.cfm?id=1214](http://www.usbr.gov/research/projects/download_product.cfm?id=1214).
- DOE (U.S. Department of Energy). (2002). Handbook on best management practices and mitigation strategies for coalbed methane in the Montana portion of the Powder River Basin. Tulsa, OK: U.S. Department of Energy, National Energy Technology Laboratory. <http://bogc.dnrc.mt.gov/PDF/BMPHandbookFinal.pdf>
- DOE (U.S. Department of Energy). (2003). Handbook on coalbed methane produced water: Management and beneficial use alternatives. Tulsa, OK: ALL Consulting. [http://www.all-llc.com/publicdownloads/CBM\\_BU\\_Screen.pdf](http://www.all-llc.com/publicdownloads/CBM_BU_Screen.pdf)
- DOE (U.S. Department of Energy). (2004). A white paper describing produced water from production of crude oil, natural gas, and coal bed methane. Lemont, IL: Argonne National Laboratory. [http://seca.doe.gov/technologies/oil-gas/publications/oil\\_pubs/prodwaterpaper.pdf](http://seca.doe.gov/technologies/oil-gas/publications/oil_pubs/prodwaterpaper.pdf)
- DOE (U.S. Department of Energy). (2006). A guide to practical management of produced water from onshore oil and gas operations in the United States. Washington, DC: U.S. Department of Energy, National Petroleum Technology Office. [http://fracfocus.org/sites/default/files/publications/a\\_guide\\_to\\_practical\\_management\\_of\\_produced\\_water\\_from\\_onshore\\_oil\\_and\\_gas\\_operations\\_in\\_the\\_united\\_states.pdf](http://fracfocus.org/sites/default/files/publications/a_guide_to_practical_management_of_produced_water_from_onshore_oil_and_gas_operations_in_the_united_states.pdf)
- Drewes, J; Cath, T; Debroux, J; Veil, J. (2009). An integrated framework for treatment and management of produced water - Technical assessment of produced water treatment technologies (1st ed.). (RPSEA Project 07122-12). Golden, CO: Colorado School of Mines. [http://aqwatec.mines.edu/research/projects/Tech\\_Assessment\\_PW\\_Treatment\\_Tech.pdf](http://aqwatec.mines.edu/research/projects/Tech_Assessment_PW_Treatment_Tech.pdf)
- Duraisamy, RT; Beni, AH; Henni, A. (2013). State of the art treatment of produced water. In W Elshorbagy; RK Chowdhury (Eds.), Water treatment (pp. 199-222). Rijeka, Croatia: InTech. <http://dx.doi.org/10.5772/53478>
- Easton, J. (2014). Optimizing fracking wastewater management. Pollution Engineering January 13.
- EIA (Energy Information Administration). (2014c). Natural gas. U.S. Energy Information Administration: Independent statistics and analysis. Available online at <http://www.eia.gov/naturalgas/>
- Eiceman, GA. (1986). Hazardous organic wastes from natural gas production, processing and distribution: Environmental fates. (WRRRI report, no. 227). New Mexico: Water Resources Research Institute. <http://wrri.nmsu.edu/publish/techrpt/abstracts/abs227.html>
- Engle, MA; Bern, CR; Healy, RW; Sams, JJ; Zupancic, JW; Schroeder, KT. (2011). Tracking solutes and water from subsurface drip irrigation application of coalbed methane produced waters, Powder River Basin, Wyoming. Environmental Geosciences 18: 169-187.
- Entrekin, S; Evans-White, M; Johnson, B; Hagenbuch, E. (2011). Rapid expansion of natural gas development poses a threat to surface waters. Front Ecol Environ 9: 503-511. <http://dx.doi.org/10.1890/110053>
- EPA (Environmental Protection Agency). (2000). Development document for effluent limitations guidelines and standards for the centralized waste treatment industry. (821R00020). Washington, DC: U.S. Environmental Protection Agency.
- Ertel, D; McManus, K; Bogdan, J. (2013). Marcellus wastewater treatment: Case study. In Summary of the technical workshop on wastewater treatment and related modeling (pp. A56-A66). Williamsport, PA: Eureka Resources, LLC. <http://www2.epa.gov/hfstudy/summary-technical-workshop-wastewater-treatment-and-related-modeling>

- [Fakhru'l-Razi, A; Pendashteh, A; Abdullah, LC; Biak, DR; Madaeni, SS; Abidin, ZZ.](#) (2009). Review of technologies for oil and gas produced water treatment [Review]. *J Hazard Mater* 170: 530-551.
- [Ferrar, KJ; Michanowicz, DR; Christen, CL; Mulcahy, N; Malone, SL; Sharma, RK.](#) (2013). Assessment of effluent contaminants from three facilities discharging Marcellus Shale wastewater to surface waters in Pennsylvania. *Environ Sci Technol* 47: 3472-3481.
- [Geiver, L.](#) (2013). Frac water treatment yields positive results for Houston Co. Retrieved from <http://www.thebakken.com/articles/20/frac-water-treatment-yields-positive-results-for-houston-co>
- [Gomes, J; Cocke, D; Das, K; Guttula, M; Tran, D; Beckman, J.](#) (2009). Treatment of produced water by electrocoagulation. Shiner, TX: KASELCO, LLC. <http://www.kaselco.com/index.php/library/industry-white-papers>
- [Gonneea, ME; Morris, PJ; Dulaiyova, H; Charette, MA.](#) (2008). New perspectives on radium behavior within a subterranean estuary. *Mar Chem* 109: 250-267. <http://dx.doi.org/10.1016/j.marchem.2007.12.002>
- [Greenhunter](#) (Greenhunter Resources). (2014). Oilfield water management solutions. Available online at <http://www.greenhunterenergy.com/operations/owms.htm>
- [Gregory, KB; Vidic, RD; Dzombak, DA.](#) (2011). Water management challenges associated with the production of shale gas by hydraulic fracturing. *Elements* 7: 181-186.
- [GTI](#) (Gas Technology Institute). (2012). Barnett and Appalachian shale water management and reuse technologies. (Report no. 08122-05.FINAL.1). Sugar Land, TX: Research Partnership to Secure Energy for America, RPSEA. <https://www.netl.doe.gov/file%20library/research/oil-gas/Natural%20Gas/shale%20gas/08122-05-final-report.pdf>
- [Guerra, K; Dahm, K; Dunderf, S.](#) (2011). Oil and gas produced water management and beneficial use in the western United States. (Science and Technology Program Report No. 157). Denver, CO: U.S. Department of the Interior Bureau of Reclamation.
- [Halliburton.](#) (2014). Hydraulic fracturing 101. Available online at [http://www.halliburton.com/public/projects/pubsdata/hydraulic\\_fracturing/fracturing\\_101.html](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/fracturing_101.html)
- [Hamieh, BM; Beckman, JR.](#) (2006). Seawater desalination using Dewvaporation technique: theoretical development and design evolution. *Desalination* 195: 1-13. <http://dx.doi.org/10.1016/j.desal.2005.09.034>
- [Hammer, R; VanBriesen, J.](#) (2012). In frackings wake: New rules are needed to protect our health and environment from contaminated wastewater. New York, NY: Natural Resources Defense Council. <http://www.nrdc.org/energy/files/fracking-wastewater-fullreport.pdf>
- [Hansen, E; Mulvaney, D; Betcher, M.](#) (2013). Water resource reporting and water footprint from Marcellus Shale development in West Virginia and Pennsylvania. Durango, CO: Earthworks Oil & Gas Accountability Project. [http://www.downstreamstrategies.com/documents/reports\\_publication/marcellus\\_wv\\_pa.pdf](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf)
- [Hayes, T.](#) (2009). Sampling and analysis of water streams associated with the development of Marcellus shale gas. Des Plaines, IL: Marcellus Shale Coalition. <http://eidmarcellus.org/wp-content/uploads/2012/11/MSCommission-Report.pdf>
- [Hayes, T; Severin, BF.](#) (2012b). Evaluation of the aqua-pure mechanical vapor recompression system in the treatment of shale gas flowback water - Barnett and Appalachian shale water management and reuse technologies. (08122-05.11). Hayes, T; Severin, BF. <http://barnettshalewater.org/documents/08122-05.11-EvaluationofMVR-3-12-2012.pdf>
- [Hayes, TD; Halldorson, B; Horner, P; Ewing, J; Werline, JR; Severin, BF.](#) (2014). Mechanical vapor recompression for the treatment of shale-gas flowback water. *Oil and Gas Facilities* 3: 54-62.
- [Hladik, ML; Focazio, MJ; Engle, M.](#) (2014). Discharges of produced waters from oil and gas extraction via wastewater treatment plants are sources of disinfection by-products to receiving streams. *Sci Total Environ* 466. <http://dx.doi.org/10.1016/j.scitotenv.2013.08.008>

- Hulme, D. (2005). CBM co-produced water management, disposal, treatment and use. Hulme, D. <http://www.uwyo.edu/haub/ruckelshaus-institute/files/docs/publications/2005-cbm-water-management-hulme.pdf>
- IAEA (International Atomic Energy Agency). (2014). The environmental behaviour of radium: revised edition. Vienna, Austria. [http://www-pub.iaea.org/MTCD/Publications/PDF/trs476\\_web.pdf](http://www-pub.iaea.org/MTCD/Publications/PDF/trs476_web.pdf)
- Igunnu, ET; Chen, GZ. (2014). Produced water treatment technologies. International Journal of Low-Carbon Technologies 9: 157-177. <http://dx.doi.org/10.1093/ijlct/cts049>
- IHS (Global Insight). (2013). Americas new energy future: The unconventional oil and gas revolution and the US economy. Douglas County, Colorado. [http://www.energyxxi.org/sites/default/files/pdf/Americas New Energy Future Phase3.pdf](http://www.energyxxi.org/sites/default/files/pdf/Americas%20New%20Energy%20Future%20Phase3.pdf)
- Kappel, WM; Williams, JH; Szabo, Z. (2013). Water resources and shale gas/oil production in the Appalachian basin critical issues and evolving developments. (Open-File Report 20131137). Troy, NY: U.S. Geological Survey. <http://pubs.usgs.gov/of/2013/1137/pdf/ofr2013-1137.pdf>
- Kargbo, DM; Wilhelm, RG; Campbell, DJ. (2010). Natural gas plays in the Marcellus Shale: Challenges and potential opportunities. Environ Sci Technol 44: 5679-5684. <http://dx.doi.org/10.1021/es903811p>
- Kaushal, SS; Groffman, PM; Likens, GE; Belt, KT; Stack, WP; Kelly, VR; Band, LE; Fisher, GT. (2005). Increased salinization of fresh water in the northeastern United States. PNAS 102: 13517-13520. <http://dx.doi.org/10.1073/pnas.0506414102>
- Kelly, WR. (2008). Long-term trends in chloride concentrations in shallow aquifers near Chicago. Ground Water 46: 772-781. <http://dx.doi.org/10.1111/j.1745-6584.2008.00466.x>
- Kennedy/Jenks Consultants. (2002). Evaluation of technical and economic feasibility of treating oilfield produced water to create a new water resource. [http://www.gwpc.org/sites/default/files/event-sessions/Roger Funston PWC2002\\_0.pdf](http://www.gwpc.org/sites/default/files/event-sessions/Roger_Funston_PWC2002_0.pdf)
- Kharaka, YK; Kakouros, E; Abbott, MM. (2002). Environmental impacts of petroleum production: 1- The fate of inorganic and organic chemicals in produced water from the Osage-Skiatook Petroleum Environmental Research B site, Osage County, OK. 9th International Petroleum Environmental Conference, October 22-25, 2002, Albuquerque, NM.
- Krasner, SW. (2009). The formation and control of emerging disinfection by-products of health concern [Review]. Philos Transact A Math Phys Eng Sci 367: 4077-4095. <http://dx.doi.org/10.1098/rsta.2009.010>
- Kuwayama, Y; Olmstead, S; Krupnick, A. (2015). Water quality and quantity impacts of hydraulic fracturing. Current Sustainable/Renewable Energy Reports 2: 17-24. <http://dx.doi.org/10.1007/s40518-014-0023-4>
- LEau LLC. (2008). Dew vaporation desalination 5,000-gallon-per-day pilot plant. (Desalination and Water Purification Research and Development Program Report No. 120). Denver, CO: Bureau of Reclamation, U.S. Department of the Interior. <http://www.usbr.gov/research/AWT/reportpdfs/report120.pdf>
- LeBas, R; Lord, P; Luna, D; Shahan, T. (2013). Development and use of high-TDS recycled produced water for crosslinked-gel-based hydraulic fracturing. In 2013 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/163824-MS>
- Lefebvre, O; Moletta, R. (2006). Treatment of organic pollution in industrial saline wastewater: a literature review [Review]. Water Res 40: 3671-3682. <http://dx.doi.org/10.1016/j.watres.2006.08.027>
- Linarić, M; Markić, M; Sipos, L. (2013). High salinity wastewater treatment. Water Sci Technol 68: 1400-1405. <http://dx.doi.org/10.2166/wst.2013.376>
- Lutz, BD; Lewis, AN; Doyle, MW. (2013). Generation, transport, and disposal of wastewater associated with Marcellus Shale gas development. Water Resour Res 49: 647-656.



- [Ma, G; Geza, M; Xu, P.](#) (2014). Review of flowback and produced water management, treatment, and beneficial use for major shale gas development basins. Shale Energy Engineering Conference 2014, Pittsburgh, Pennsylvania, United States.
- [Malone, S; Kelso, M; Auch, T; Edelstein, K; Ferrar, K; Jalbert, K.](#) (2015). Data inconsistencies from states with unconventional oil and gas activity. *J Environ Sci Health A Tox Hazard Subst Environ Eng* 50: 501-510. <http://dx.doi.org/10.1080/10934529.2015.992678>
- [Maloney, KO; Yoxtheimer, DA.](#) (2012). Production and disposal of waste materials from gas and oil extraction from the Marcellus shale play in Pennsylvania. *Environmental Practice* 14: 278-287. <http://dx.doi.org/10.10170S146604661200035X>
- [Mantell, ME.](#) (2013a). Recycling and reuse of produced water to reduce freshwater use in hydraulic fracturing operations. Presentation presented at Water acquisition modeling: Assessing impacts through modeling and other means Technical workshop on wastewater treatment and related modeling, June 4, 2013, Arlington, VA.
- [Matthews, JC; Li, S; Swann, CT; Ericksen, RL.](#) (2006). Incubation with moist top soils enhances solubilization of radium and other components from oilfield scale and sludge: Environmental concerns from Mississippi. *Environmental Geosciences* 13: 43-53.
- [Minnich, K.](#) (2011). A water chemistry perspective on flowback reuse with several case studies. Minnich, K. [http://www2.epa.gov/sites/production/files/documents/10\\_Minnich\\_-\\_Chemistry\\_508.pdf](http://www2.epa.gov/sites/production/files/documents/10_Minnich_-_Chemistry_508.pdf)
- [Morillon, A; Vidalie, JF; Syahnudi, U; Suripno, S; Hadinoto, EK.](#) (2002). Drilling and waste management; SPE 73931. Presentation presented at The SPE International Conference on Health, Safety, and Environment in Oil and Gas Exploration and Production, March 20-22, 2002, Kuala Lumpur, Malaysia.
- [Murray, KE.](#) (2013). State-scale perspective on water use and production associated with oil and gas operations, Oklahoma, U.S. *Environ Sci Technol* 47: 4918-4925. <http://dx.doi.org/10.1021/es4000593>
- [Nelson, AW; May, D; Knight, AW; Eitrheim, ES; Mehrhoff, M; Shannon, R; Litman, R; Schultz, MK.](#) (2014). Matrix complications in the determination of radium levels in hydraulic fracturing flowback water from Marcellus Shale. 1: 204-208. <http://dx.doi.org/10.1021/ez5000379>
- [NETL](#) (National Energy Technology Laboratory). (2014). Evaporation [Fact Sheet]. Pittsburgh, PA: US Department of Energy. <http://www.netl.doe.gov/research/coal/crosscutting/pwmis/tech-desc/evap>
- [Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.](#) (2012). Oil & gas water use in Texas: Update to the 2011 mining water use report. Nicot, JP; Reedy, RC; Costley, RA; Huang, Y. [http://www.twdb.state.tx.us/publications/reports/contracted\\_reports/doc/0904830939\\_2012Update\\_MiningWaterUse.pdf](http://www.twdb.state.tx.us/publications/reports/contracted_reports/doc/0904830939_2012Update_MiningWaterUse.pdf)
- [Nicot, JP; Scanlon, BR.](#) (2012). Water use for shale-gas production in Texas, U.S. *Environ Sci Technol* 46: 3580-3586. <http://dx.doi.org/10.1021/es204602t>
- [Nowak, N; Bradish, J.](#) (2010). High density polyethylene (HDPE) lined produced water evaporation ponds. Presentation presented at 17th International Petroleum and Biofuels Environmental Conference, August 31-September 2, 2010, San Antonio, TX.
- [NPC](#) (National Petroleum Council). (2011a). Management of produced water from oil and gas wells. (Paper #2-17). Washington, DC. [http://www.npc.org/Prudent\\_Development-Topic\\_Papers/2-17\\_Management\\_of\\_Produced\\_Water\\_Paper.pdf](http://www.npc.org/Prudent_Development-Topic_Papers/2-17_Management_of_Produced_Water_Paper.pdf)
- [NRC](#) (National Research Council). (2010). Management and effects of coalbed methane produced water in the western United States. Washington, DC: National Academies Press. [http://www.nap.edu/catalog.php?record\\_id=12915](http://www.nap.edu/catalog.php?record_id=12915)
- [Olmstead, SM; Muehlenbachs, LA; Shih, JS; Chu, Z; Krupnick, AJ.](#) (2013). Shale gas development impacts on surface water quality in Pennsylvania. *PNAS* 110: 4962-4967. <http://dx.doi.org/10.1073/pnas.1213871110>



- [Olsson, O; Weichgrebe, D; Rosenwinkel, KH.](#) (2013). Hydraulic fracturing wastewater in Germany: composition, treatment, concerns. *Environmental Earth Sciences* 70: 3895-3906. <http://dx.doi.org/10.1007/s12665-013-2535-4>
- [Orem, WH; Tatu, CA; Lerch, HE; Rice, CA; Bartos, TT; Bates, AL; Tewalt, S; Corum, MD.](#) (2007). Organic compounds in produced waters from coalbed natural gas wells in the Powder River Basin, Wyoming, USA. *Appl Geochem* 22: 2240-2256. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.010>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2011a). Letter from Pennsylvania Department of the Environment to US EPA Region 3 Administrator Shawn Garvin. Available online at [http://www.epa.gov/region3/marcellus\\_shale?#inforeqsbypadep](http://www.epa.gov/region3/marcellus_shale?#inforeqsbypadep)
- [PA DEP.](#) Road-spreading of brine for dust control and road stabilization, 43 Pa.B. 7377 § 78.70 (2011b). <http://www.pabulletin.com/secure/data/vol43/43-50/2362b.html>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015a). PA DEP oil & gas reporting website, statewide data downloads by reporting period. waste and production files downloaded for Marcellus/unconventional wells, July 2009 December 2014. Harrisburg, PA. Retrieved from <https://www.paoilandgasreporting.state.pa.us/publicreports/Modules/DataExports/DataExports.aspx>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015b). Technologically enhanced naturally occurring radioactive materials (TENORM) study report. Harrisburg, PA. <http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study-Report-Rev.0-01-15-2015.pdf>
- [Parker, KM; Zeng, T; Harkness, J; Vengosh, A; Mitch, WA.](#) (2014). Enhanced formation of disinfection byproducts in shale gas wastewater-impacted drinking water supplies. *Environ Sci Technol* 48: 11161-11169. <http://dx.doi.org/10.1021/es5028184>
- [Pashin, JC; Mcintyre-Redden, MR; Mann, SD; Kopaska-Merkel, DC; Varonka, M; Orem, W.](#) (2014). Relationships between water and gas chemistry in mature coalbed methane reservoirs of the Black Warrior Basin. *Int J Coal Geol* 126: 92-105. <http://dx.doi.org/10.1016/j.coal.2013.10.002>
- [Peraki, M; Ghazanfari, E.](#) (2014). Electrodialysis treatment of flow-back water for environmental protection in shale gas development. In *Shale gas development Shale energy engineering 2014*. Reston, VA: American Society of Civil Engineers. <http://dx.doi.org/10.1061/9780784413654.008>
- [Plumlee, MH; Debroux, JF; Taffler, D; Graydon, JW; Mayer, X; Dahm, KG; Hancock, NT; Guerra, KL; Xu, P; Drewes, JE; Cath, TY.](#) (2014). Coalbed methane produced water screening tool for treatment technology and beneficial use. 5: 22-34. <http://dx.doi.org/10.1016/j.juogr.2013.12.002>
- [Porcelli, D; Kim, CK; Martin, P; Moore, WS; Phaneuf, M.](#) (2014). Properties of radium. In *The environmental behaviour of radium: revised edition*. Vienna, Austria: International Atomic Energy Agency. [http://www-pub.iaea.org/MTCD/Publications/PDF/trs476\\_web.pdf](http://www-pub.iaea.org/MTCD/Publications/PDF/trs476_web.pdf)
- [Purestream](#) (Purestream Services). (2013). Purestream services will begin commercial operations to treat Eagle Ford Shale produced and frac flow-back water in Gonzalez County, Texas. Retrieved from <http://purestreamtechnology.com/index.php/component/content/article/72-press-releases/206-purestream-services-will-begin-commercial-operations-to-treat-eagle-ford-shale-produced-and-frac-flow-back-water-in-gonzalez-county-texas>
- [Rahm, BG; Bates, JT; Bertoia, LR; Galford, AE; Yoxthimer, DA; Riha, SJ.](#) (2013). Wastewater management and Marcellus Shale gas development: trends, drivers, and planning implications. *J Environ Manage* 120: 105-113. <http://dx.doi.org/10.1016/j.jenvman.2013.02.029>
- [Rahm, BG; Riha, SJ.](#) (2014). Evolving shale gas management: water resource risks, impacts, and lessons learned [Review]. *Environ Sci Process Impacts* 16: 1400-1412. <http://dx.doi.org/10.1039/c4em00018h>
- [Ramirez, P.](#) (2002). Oil field produced water discharges into wetlands in Wyoming. (97-6- 6F34). Cheyenne, WY: U.S. Fish and Wildlife Service. <http://www.fws.gov/mountain-prairie/contaminants/papers/r6718c02.pdf>

- [Rassenfoss, S.](#) (2011). From flowback to fracturing: Water recycling grows in the Marcellus shale. *J Pet Tech* 63: 48-51.
- [Resnikoff, M; Alexandrova, E; Travers, J.](#) (2010). Radioactivity in Marcellus shale: Report prepared for Residents for the Preservation of Lowman and Chemung (RFPLC). New York, NY: Radioactive Waste Management Associates.
- [Rich, AL; Crosby, EC.](#) (2013). Analysis of reserve pit sludge from unconventional natural gas hydraulic fracturing and drilling operations for the presence of technologically enhanced naturally occurring radioactive material (TENORM). *New Solutions: A Journal of Environmental and Occupational Health Policy* 23: 117-135. <http://dx.doi.org/10.2190/NS.23.1.h>
- [Richardson, SD; Plewa, MJ; Wagner, ED; Schoeny, R; Demarini, DM.](#) (2007). Occurrence, genotoxicity, and carcinogenicity of regulated and emerging disinfection by-products in drinking water: A review and roadmap for research [Review]. *Mutat Res* 636: 178-242. <http://dx.doi.org/10.1016/j.mrrev.2007.09.00>
- [Rowan, EL; Engle, MA; Kirby, CS; Kraemer, TF.](#) (2011). Radium content of oil- and gas-field produced waters in the northern Appalachian Basin (USA): Summary and discussion of data. (Scientific Investigations Report 201115135). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2011/5135/>
- [Rozell, DJ; Reaven, SJ.](#) (2012). Water pollution risk associated with natural gas extraction from the Marcellus Shale. *Risk Anal* 32: 13821393. <http://dx.doi.org/10.1111/j.1539-6924.2011.01757.x>
- [Rushton, L; Castaneda, C.](#) (2014). Drilling into hydraulic fracturing and the associated wastewater management issues. Washington, WD: Paul Hastings, LLP. <http://www.paulhastings.com/docs/default-source/PDFs/stay-current-hydraulic-fracturing-wastewater-management.pdf>
- [Schmidt, CW.](#) (2013). Estimating wastewater impacts from fracking. *Environ Health Perspect* 121: A117. <http://dx.doi.org/10.1289/ehp.121-a117>
- [Schubert, J; Rosenmeier, J; Zatezalo, M.](#) (2014). A review of NORM/TENORM in wastes and waters associated with Marcellus shale gas development and production. In CL Meehan; JM Vanbriesen; F Vahedifard; X Yu; C Quiroga (Eds.), *Shale energy engineering 2014: technical challenges, environmental issues, and public policy* (pp. 492-501). Reston, VA: American Society of Civil Engineers. <http://dx.doi.org/10.1061/9780784413654.052>
- [Shafer, L.](#) (2011). Water recycling and purification in the Pinedale anticline field: results from the anticline disposal project. In 2011 SPE Americas E&P health, safety, security & environmental conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/141448-MS>
- [Shaffer, DL; Arias Chavez, LH; Ben-Sasson, M; Romero-Vargas Castrillón, S; Yip, NY; Elimelech, M.](#) (2013). Desalination and reuse of high-salinity shale gas produced water: drivers, technologies, and future directions. *Environ Sci Technol* 47: 9569-9583.
- [Silva, JM; Matis, H; Kostedt, WL; Watkins, V.](#) (2012). Produced water pretreatment for water recovery and salt production. (08122-36). Niskayuna, NY: Research Partnership to Secure Energy for America. [http://www.rpsea.org/media/files/project/18621900/08122-36-FR-Pretreatment Water Mgt Frac Water Reuse Salt-01-26-12.pdf](http://www.rpsea.org/media/files/project/18621900/08122-36-FR-Pretreatment%20Water%20Mgt%20Frac%20Water%20Reuse%20Salt-01-26-12.pdf)
- [Sionix](#) (Sionix Corporation). (2011). Sionix to build Bakken water treatment plant. Retrieved from [http://www.rigzone.com/news/article\\_pf.asp?a\\_id=110613](http://www.rigzone.com/news/article_pf.asp?a_id=110613)
- [Sirivedhin, T; Dallbauman, L.](#) (2004). Organic matrix in produced water from the Osage-Skiatook petroleum environmental research site, Osage county, Oklahoma. *Chemosphere* 57: 463-469.
- [Skalak, KJ; Engle, MA; Rowan, EL; Jolly, GD; Conko, KM; Benthem, AJ; Kraemer, TF.](#) (2014). Surface disposal of produced waters in western and southwestern Pennsylvania: Potential for accumulation of alkali-earth elements in sediments. *Int J Coal Geol* 126: 162-170. <http://dx.doi.org/10.1016/j.coal.2013.12.001>

- [Slutz, J; Anderson, J; Broderick, R; Horner, P.](#) (2012). Key shale gas water management strategies: An economic assessment tool. Paper presented at International Conference on Health, Safety and Environment in Oil and Gas Exploration and Production, September 11-13, 2012, Perth, Australia.
- [Soeder, DJ; Kappel, WM.](#) (2009). Water resources and natural gas production from the Marcellus shale [Fact Sheet] (pp. 6). (U.S. Geological Survey, Fact Sheet 20093032). Soeder, DJ; Kappel, WM. <http://pubs.usgs.gov/fs/2009/3032/pdf/FS2009-3032.pdf>
- [States, S; Cyprych, G; Stoner, M; Wydra, F; Kuchta, J; Monnell, J; Casson, L.](#) (2013). Marcellus Shale drilling and brominated THMs in Pittsburgh, Pa., drinking water. *J Am Water Works Assoc* 105: E432-E448. <http://dx.doi.org/10.5942/jawwa.2013.105.0093>
- [Stewart, DR.](#) (2013b). Treatment for beneficial use of produced water and hydraulic fracturing flowback water. Presentation presented at US EPA Technical Workshop on Wastewater Treatment and Related Modeling For Hydraulic Fracturing, April 18, 2013, Research Triangle Park, NC.
- [Sumi, L.](#) (2004). Pit pollution: Background on the issues, with a New Mexico case study. Washington, DC: Earthworks: Oil and Gas Accountability Project. <http://www.earthworksaction.org/files/publications/PitReport.pdf>
- [Swann, C; Matthews, J; Ericksen, R; Kuszaul, J.](#) (2004). Evaluations of radionuclides of uranium, thorium, and radium with produced fluids, precipitates, and sludges from oil, gas, and oilfield brine injections wells. (DE-FG26-02NT 15227). Washington, D.C.: U.S. Department of Energy. [http://www.olemiss.edu/depts/mmri/programs/norm\\_final.pdf](http://www.olemiss.edu/depts/mmri/programs/norm_final.pdf)
- [Tiemann, M; Folger, P; Carter, NT.](#) (2014). Shale energy technology assessment: Current and emerging water practices. Washington, DC: Congressional Research Service. <http://nationalaglawcenter.org/wp-content/uploads/assets/crs/R43635.pdf>
- [Titler, RV; Curry, P.](#) (2011). Chemical analysis of major constituents and trace contaminants of rock salt. Harrisburg, PA: Pennsylvania Department of Environmental Protection. <http://files.dep.state.pa.us/water/Wastewater%20Management/WastewaterPortalFiles/Rock%20Salt%20Paper%20final%20052711.pdf>
- [U.S. Department of Justice.](#) (2014). Company owner sentenced to more than two years in prison for dumping fracking waste in Mahoning River tributary. Available online at <http://www.justice.gov/usao/ohn/news/2014/05auglupo.html> (accessed March 4, 2015).
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2006). National Primary Drinking Water Regulations: Stage 2 Disinfectants and Disinfection Byproducts Rule. <http://water.epa.gov/lawsregs/rulesregs/sdwa/stage2/>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014f). Minimizing and managing potential impacts of injection-induced seismicity from class II disposal wells: Practical approaches [EPA Report]. Washington, D.C. <http://www.epa.gov/r5water/uic/ntwg/pdfs/induced-seismicity-201502.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015d). DMR spreadsheet Pennsylvania wastewater treatment plants per Region 3 Information Request. Data provided by request. Washington , D.C.: Region 3, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015e). Effluent data from Pennsylvania wastewater treatment plants per Region 3 Information Request. Data provided by request. Washington, D.C.: Region 3, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015f). EPA Enforcement and Compliance History. Online: Effluent Charts: SEECO-Judsonia Water Reuse Recycling Facility. Available online at <http://echo.epa.gov/effluent-charts#AR0052051>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015h). Key documents about mid-Atlantic oil and gas extraction. Available online at [http://www.epa.gov/region3/marcellus\\_shale/#aoinfoww](http://www.epa.gov/region3/marcellus_shale/#aoinfoww) (accessed May 7, 2015).

- [U.S. EPA. National primary drinking water regulations public notification rule and consumer confidence report rule health effects language.](#) (parts 141.201, and 141.151), (U.S. Government Publishing Office 2015i). <http://www.ecfr.gov/cgi-bin/text-idx?SID=4d25ec04bc44e54b1efdf307855f3185&node=pt40.23.141&rgn=div5>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015p). Sources contributing bromide and inorganic species to drinking water intakes on the Allegheny river in western Pennsylvania [EPA Report]. (EPA/600/R-14/430). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015q). Technical development document for proposed effluent limitation guidelines and standards for oil and gas extraction. (EPA-821-R-15-003). Washington, D.C. <http://water.epa.gov/scitech/wastetech/guide/oilandgas/unconv.cfm>
- [U.S. GAO](#) (U.S. Government Accountability Office). (2012). Energy-water nexus: Information on the quantity, quality, and management of water produced during oil and gas production. (GAO-12-156). Washington, D.C. <http://www.gao.gov/products/GAO-12-156>
- [USGS](#) (U.S. Geological Survey). (2013c). National Water Information System (NWIS) [Database]. Retrieved from <http://waterdata.usgs.gov/nwis>
- [USGS](#) (U.S. Geological Survey). (2014e). U.S. Geological Survey national produced waters geochemical database v2.0 (PROVISIONAL). Available online at <http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsofEnergyProductionandUse/ProducedWaters.aspx#3822349-data>
- [Van Voast, WA.](#) (2003). Geochemical signature of formation waters associated with coalbed methane. AAPG Bulletin 87: 667-676.
- [Veil, JA.](#) (2011). Water management practices used by Fayetteville shale gas producers. (ANL/EVS/R-11/5). Washington, DC: U.S. Department of Energy, National Energy Technology Laboratory. <http://www.ipd.anl.gov/anlpubs/2011/06/70192.pdf>
- [Veil, JA; Puder, MG; Elcock, D; Redweik, RJ.](#) (2004). A white paper describing produced water from production of crude oil, natural gas, and coalbed methane. Lemont, IL: Argonne National Laboratory.
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A.](#) (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. Environ Sci Technol 48: 36-52. <http://dx.doi.org/10.1021/es405118y>
- [Vidic, RD; Brantley, SL; Vandenbossche, JM; Yoxheimer, D; Abad, JD.](#) (2013). Impact of shale gas development on regional water quality [Review]. Science 340: 1235009. <http://dx.doi.org/10.1126/science.1235009>
- [Volz, CD; Ferrar, K; Michanowicz, D; Christen, C; Kearney, S; Kelso, M; Malone, S.](#) (2011). Contaminant Characterization of Effluent from Pennsylvania Brine Treatment Inc., Josephine Facility Being Released into Blacklick Creek, Indiana County, Pennsylvania: Implications for Disposal of Oil and Gas Flowback Fluids from Brine Treatment Plants [Standard]. Volz, CD; Ferrar, K; Michanowicz, D; Christen, C; Kearney, S; Kelso, M; Malone, S. <http://www2.epa.gov/hfstudy/contaminant-characterization-effluent-pennsylvania-brine-treatment-inc-josephine-facility>
- [Walsh, JM.](#) (2013). Water management for hydraulic fracturing in unconventional resources Part 1. Oil and Gas Facilities 2.
- [Walter, GR; Benke, RR; Pickett, DA.](#) (2012). Effect of biogas generation on radon emissions from landfills receiving radium-bearing waste from shale gas development. J Air Waste Manag Assoc 62: 1040-1049. <http://dx.doi.org/10.1080/10962247.2012.696084>
- [Warner, NR; Christie, CA; Jackson, RB; Vengosh, A.](#) (2013a). Impacts of shale gas wastewater disposal on water quality in western Pennsylvania. Environ Sci Technol 47: 11849-11857. <http://dx.doi.org/10.1021/es402165b>

- [Warner, NR; Kresse, TM; Hays, PD; Down, A; Karr, ID; Jackson, RB; Vengosh, A.](#) (2013b). Geochemical and isotopic variations in shallow groundwater in areas of the Fayetteville Shale development, north-central Arkansas. *Appl Geochem* 35: 207-220.
- [Water Research Foundation.](#) (2010). Assessment of inorganics accumulation in drinking water system scales and sediments. Denver, CO. <http://www.waterrf.org/PublicReportLibrary/3118.pdf>
- [Weaver, JW; Xu, J; Mravik, SC.](#) (In Press) Scenario analysis of the impact on drinking water intakes from bromide in the discharge of treated oil and gas waste water. *J Environ Eng.*
- [Webb, CH; Nagghappan, L; Smart, G; Hoblitzell, J; Franks, R.](#) (2009). Desalination of oilfield-produced water at the San Ardo water reclamation facility, Ca. In SPE Western regional meeting 2009. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/121520-MS>
- [Wendel, K.](#) (2011). Wastewater technologies critical for continued growth of Marcellus. Available online at <http://www.ogfi.com/articles/print/volume-8/issue-11/features/wastewater-technologies-critical-for.html> (accessed March 9, 2015).
- [Wess, J; Ahlers, H; Dobson, S.](#) (1998). Concise International Chemical Assessment Document 10: 2-Butoxyethanol. World Health Organization. [http://www.who.int/ipcs/publications/cicad/cicad\\_10\\_revised.pdf](http://www.who.int/ipcs/publications/cicad/cicad_10_revised.pdf)
- [West Virginia DEP](#) (West Virginia Department of Environmental Protection). (2011). Memorandum of agreement from the Division of Water and Waste Management to the Division of Highway: WVDOH/WVDEP Salt brine from gas wells agreement. Available online at <http://www.dep.wv.gov/WWE/Documents/WVDOHWVDEP%20Salt%20Brine%20Agreement.pdf>
- [Wilson, JM; Van Briesen, JM.](#) (2013). Source water changes and energy extraction activities in the Monongahela River, 2009-2012. *Environ Sci Technol* 47: 12575-12582. <http://dx.doi.org/10.1021/es402437n>
- [Wilson, JM; Vanbriesen, JM.](#) (2012). Oil and gas produced water management and surface drinking water sources in Pennsylvania. *Environmental Practice* 14: 288-300.
- [Wolfe, D; Graham, G.](#) (2002). Water rights and beneficial use of produced water in Colorado. Denver, CO: American Water Resources Association. [http://www.gwpc.org/sites/default/files/event-sessions/Dick Wolfe PWC02 0.pdf](http://www.gwpc.org/sites/default/files/event-sessions/Dick%20Wolfe%20PWC02%200.pdf)
- [Xu, P; Drewes, JE; Heil, D.](#) (2008). Beneficial use of co-produced water through membrane treatment: Technical-economic assessment. *Desalination* 225: 139-155. <http://dx.doi.org/10.1016/j.desal.2007.04.093>
- [Younos, T; Tulou, KE.](#) (2005). Overview of desalination techniques. *Journal of Contemporary Water Research & Education* 132: 3-10. <http://dx.doi.org/10.1111/j.1936-704X.2005.mp132001002.x>
- [Zhang, T; Gregory, K; Hammack, RW; Vidic, RD.](#) (2014b). Co-precipitation of radium with barium and strontium sulfate and its impact on the fate of radium during treatment of produced water from unconventional gas extraction. *Environ Sci Technol* 48: 4596-4603. <http://dx.doi.org/10.1021/es405168b>

## Chapter 9

---

# Identification and Hazard Evaluation of Chemicals across the Hydraulic Fracturing Water Cycle

---

*This document is a draft for review purposes only and does not constitute Agency policy.*



## 9. Identification and Hazard Evaluation of Chemicals across the Hydraulic Fracturing Water Cycle

### 9.1. Introduction

1 Chapters 4 through 8 of this assessment each present a stage of the hydraulic fracturing water cycle  
2 and the mechanisms by which activities in those stages produce potential impacts on drinking  
3 water resources. In contrast, this chapter presents and integrates what is known about chemicals  
4 across stages of the hydraulic fracturing water cycle (i.e., used in hydraulic fracturing fluids and  
5 detected in hydraulic fracturing wastewater). The discussion is focused on available information  
6 about (1) chronic toxicity values—specifically, the available noncancer oral reference values (RfVs)  
7 and cancer oral slope factors (OSFs)—of chemicals that could occur in drinking water resources;  
8 and (2) properties of chemicals that could affect their occurrence in drinking water resources (see  
9 Chapters 5 and 7).<sup>1,2</sup> To the extent that information was available to do so, knowledge of  
10 toxicological and chemical properties was combined to illustrate an approach that may provide  
11 preliminary insights about the relative hazard potential that chemicals could pose to drinking water  
12 resources.

13 Risk assessment and risk management decisions will be informed by the scientific information on  
14 the toxicity of chemicals in hydraulic fracturing fluid and wastewater, which recent authors note is  
15 incomplete ([Goldstein et al., 2014](#)). The U.S. House of Representatives' Committee on Energy and  
16 Commerce Minority Staff released a report in 2011 noting that more than 650 products (i.e.,  
17 chemical mixtures) used in hydraulic fracturing contain 29 chemicals that are either known or  
18 possible human carcinogens or are currently regulated under the Safe Drinking Water Act ([House  
19 of Representatives, 2011](#)). However, that report did not characterize the potential toxicity of many  
20 of the other compounds known to occur in hydraulic fracturing fluids or wastewater. More recently,  
21 [Kahrilas et al. \(2015\)](#) reviewed the toxicity and physicochemical properties of biocides used in  
22 hydraulic fracturing. [Stringfellow et al. \(2014\)](#) examined the toxicity and physicochemical  
23 properties of several classes of chemicals that are reportedly used in hydraulic fracturing; however,  
24 this study only reported acute toxicity (from lethal doses), which may differ from the effects of low-  
25 dose, chronic exposure to these chemicals. [Wattenberg et al. \(In Press\)](#) assessed the acute and  
26 chronic toxicity data that was available for 168 chemicals from the FracFocus database that had at  
27 least 25 reports of use in North Dakota. The authors found that 113 of these chemicals had some  
28 health hazard data available, but determined that there were significant data gaps, particularly with  
29 regards to what is known about the potential chronic toxicity of these chemicals. Overall, available

---

<sup>1</sup> A reference value (RfV) is an estimate of an exposure for a given duration to the human population (including susceptible subgroups) that is likely to be without an appreciable risk of adverse health effects over a lifetime. RfV is a generic term not specific to a given route of exposure. In the context of this chapter, the term RfV refers to reference values for noncancer effects occurring via the oral route of exposure and for chronic durations, except where noted. Source: IRIS Glossary ([U.S. EPA, 2011d](#)).

<sup>2</sup> An oral slope factor (OSF) is an upper-bound, approximating a 95% confidence limit, on the increased cancer risk from a lifetime oral exposure to an agent. This estimate, usually expressed in units of proportion (of a population) affected per mg/kg day, is generally reserved for use in the low dose region of the dose response relationship, that is, for exposures corresponding to risks less than 1 in 100.

1 information indicates that there may be hundreds of chemicals associated with the hydraulic  
2 fracturing water cycle for which toxicological data is limited or unavailable.

3 Furthermore, the potential public health impact of hydraulic fracturing processes is not well  
4 understood ([Finkel et al., 2013](#); [Colborn et al., 2011](#)). Potential public health implications are  
5 highlighted in the recent studies by [McKenzie et al. \(2014\)](#) and [Kassotis et al. \(2014\)](#), but as of early  
6 2015, there is a lack of published, peer-reviewed epidemiological or toxicological studies that have  
7 examined health effects resulting from water contamination due to hydraulic fracturing. However,  
8 numerous authors have noted that with the recent increase in hydraulic fracturing operations there  
9 may be an increasing potential for significant public health and environmental impacts via ground  
10 and surface water contamination ([Goldstein et al., 2014](#); [Finkel et al., 2013](#); [Korfmacher et al., 2013](#);  
11 [Weinhold, 2012](#)).

12 This chapter provides a compilation of the chemicals used or released during the fracturing  
13 process, and information about their potential health effects. The data are presented in this chapter  
14 as follows.

15 Section 9.2 discusses how ten information sources, including the EPA's analysis of the FracFocus  
16 database ([U.S. EPA, 2015a](#)), were used to create a list of chemicals used in or detected in various  
17 stages of the hydraulic fracturing water cycle. This chemical list was initially presented in the EPA's  
18 2012 interim progress report ([U.S. EPA, 2012f](#)), and has been updated in this assessment with  
19 additional chemicals from FracFocus. The consolidated chemical list includes chemicals that are  
20 reportedly added to hydraulic fracturing fluids in the chemical mixing stage, as well as fracturing  
21 fluid chemicals, formation chemicals, or their reaction products that may be carried in flowback or  
22 produced water. Although over half of the chemicals cited on this list are listed in the EPA  
23 FracFocus database, this chapter is not meant to be interpreted as a hazard evaluation of the  
24 chemicals listed in the EPA FracFocus database alone.

25 Section 9.3 provides an overview of the methods that were used for gathering information on  
26 toxicity and physicochemical properties for all chemicals that were identified in Section 9.2, and  
27 outlines the number of chemicals that had available data on these properties. For toxicological data,  
28 the primary focus is on peer-reviewed, selected chronic oral RfVs and OSFs. This section also  
29 discusses additional potential sources of toxicity information: estimates of toxicity predicted using  
30 Quantitative Structure Activity Relationship (QSAR) modeling, or toxicological information  
31 available on the EPA's Aggregated Computational Toxicology Resource (ACToR) database. This  
32 chapter is focused on potential human health hazards of chemicals for the oral route of exposure  
33 (drinking water); therefore, the toxicological properties and physicochemical ranking metrics  
34 described herein (see below) do not necessarily apply to other routes of exposure, such as  
35 inhalation or dermal exposure. In addition, this analysis is focused on individual chemicals rather  
36 than mixtures of chemicals used as additives. Furthermore, the propensity for a chemical to pose a  
37 physical hazard (e.g. the flammability and explosiveness of stray gas methane) are not considered  
38 here.

1 Many chemicals reported in hydraulic fracturing were identified as being of interest in previous  
2 chapters of this report. This includes the most frequently used chemicals in hydraulic fracturing  
3 fluid (Chapter 5), the most and least mobile chemicals in hydraulic fracturing fluid (Chapter 5), and  
4 inorganic chemicals and pesticides that may be detected in flowback and produced water (Chapter  
5 7). The available selected chronic oral RfVs and OSFs for these chemicals are summarized in Section  
6 9.4.

7 Section 9.5 describes the hazard identification and hazard evaluation of chemicals for which data  
8 was available on toxicity, occurrence, and physicochemical properties.<sup>1,2</sup> For hazard identification,  
9 the selected chronic oral RfVs and OSFs and health effects for these chemicals are presented and  
10 summarized. To illustrate one approach to integrate toxicity, occurrence and physicochemical  
11 properties data to generate a hazard potential score, a multicriteria decision analysis (MCDA)  
12 framework was developed. In this context, occurrence and physicochemical property data were  
13 used as metrics to estimate the likelihood that a chemical could impact drinking water resources.  
14 Chemicals considered in these hazard evaluations include a subset of chemicals from the FracFocus  
15 database, as well as a subset of chemicals that have been detected in flowback and produced water.

16 In general, characterizing chemicals and their properties on a national scale is challenging and that  
17 the use and occurrence of chemicals is likely to differ between geological basins and possibly on a  
18 well-to-well basis (see Chapters 5 and 7). Therefore, for the protection of public health at the  
19 community level, chemical hazard evaluations may be most useful to conduct on a regional or site-  
20 specific scale. This level of analysis is outside the scope of this report; however, the methods of  
21 hazard evaluation presented here can also be applied on a regional or site-specific scale in order to  
22 identify chemicals that may present the greatest potential human health hazard.

## 9.2. Identification of Chemicals Associated with the Hydraulic Fracturing Water Cycle

23 As the initial step towards developing a hazard evaluation, the EPA compiled a list of chemicals that  
24 are used in or released by hydraulic fracturing operations across the country ([U.S. EPA, 2012f](#)). Ten  
25 sources of information (described in Appendix A) were used to develop this list. This consolidated  
26 list was used to compile two sublists: (1) a list of chemicals known to be used in hydraulic  
27 fracturing fluids, and (2) a list of chemicals that are reported to have been detected in hydraulic  
28 fracturing flowback and produced water. It is likely that, as industry practices change, chemicals  
29 may be used or detected that are not included on these lists. In addition, those chemicals that are  
30 considered proprietary and identified as confidential business information (CBI) by well operators  
31 are not listed or considered.

---

<sup>1</sup> Hazard identification is a process for determining if a chemical or a microbe can cause adverse health effects in humans and what those effects might be. See Terms of Environment at:

[http://iaspub.epa.gov/sor\\_internet/registry/termreg/searchandretrieve/termsandacronyms/search.do](http://iaspub.epa.gov/sor_internet/registry/termreg/searchandretrieve/termsandacronyms/search.do).

<sup>2</sup> Hazard evaluation is a component of risk assessment that involves gathering and evaluating data on the types of health injuries or diseases (e.g., cancer) that may be produced by a chemical and on the conditions of exposure under which such health effects are produced. See Terms of Environment at:

[http://iaspub.epa.gov/sor\\_internet/registry/termreg/searchandretrieve/termsandacronyms/search.do](http://iaspub.epa.gov/sor_internet/registry/termreg/searchandretrieve/termsandacronyms/search.do).

1 In total, the EPA identified 1,173 chemicals as being used in hydraulic fracturing fluid and/or  
2 detected in flowback and produced water. The complete list of chemicals and associated data is  
3 available in Appendices A and B.<sup>1</sup>

### 9.2.1. Chemicals Used in Hydraulic Fracturing Fluids

4 Of the 1,173 total chemicals, the EPA identified 1,076 chemicals as being used in hydraulic  
5 fracturing fluids. Of these, 692 chemicals were listed in the FracFocus database, and therefore had  
6 information available in order to calculate their nationwide frequency of use (U.S. EPA, 2015a).<sup>2</sup>  
7 Frequency of use for individual chemicals ranged from low (481 chemicals on the list were used in  
8 less than 1% of wells nationwide) to very high (methanol was used in 73% of wells nationwide).  
9 Furthermore, only 32 chemicals (excluding water, quartz, and sodium chloride) were reported in at  
10 least 10% of the disclosures nationwide (see Section 5.4 and Table 5-2). As noted previously, the  
11 FracFocus database does not list or consider those chemicals identified as CBI. The EPA determined  
12 that approximately 70% of the disclosures in the FracFocus database contain at least one CBI  
13 chemical, and for those disclosures, the average number of CBI chemicals per disclosure was five  
14 (see Section 5.4, Text Box 5-3). Additionally, as noted previously, approximately 35% of FracFocus  
15 ingredient records were not able to be assigned standardized chemical names. These ingredient  
16 records were excluded from the EPA's analysis (see Section 5.10).

### 9.2.2. Chemicals Detected in Flowback and Produced Water

17 Of the 1,173 total chemicals, 134 were identified as having been detected in flowback or produced  
18 water. Included among these chemicals are naturally occurring organic compounds, metals,  
19 radionuclides, and pesticides. As reported in Chapter 7, concentration data in flowback or produced  
20 water are available for 75 of these 134 chemicals (see Appendix E), including inorganic  
21 contributors to salinity (Tables E-4 and E-5), metals (Tables E-6 and E-7), radioactive constituents  
22 (Table E-8), and organic constituents (Tables E-9, E-10, and E-11). For these chemicals with  
23 concentration data, the measured concentrations spanned several orders of magnitude. For  
24 instance, for organic chemicals in produced water from the Marcellus shale formation (Table E-10),  
25 average or median measured concentrations ranged from 2.7 µg/L for N-nitrosodiphenylamine to  
26 400 µg/L for carbon disulfide. According to the sources listed in Appendix A, 37 of the total 134  
27 chemicals in flowback and produced water were also identified as being used in hydraulic  
28 fracturing fluid.

## 9.3. Toxicological and Physicochemical Properties of Hydraulic Fracturing Chemicals

29 Toxicological and physicochemical data were collected as available for each of the chemicals  
30 identified in Appendix A. The criteria used to identify and select toxicity values, RfVs and OSFs  
31 (Section 9.3.1), and the method used to generate physicochemical property data (Section 9.3.2) are  
32 discussed below. A summary of the available data for these chemicals follows in Section 9.3.3. Other

---

<sup>1</sup> The list of 1,173 chemicals was finalized as of this 2015 draft assessment. There may be chemicals present in flowback and produced water that are not included on this list.

<sup>2</sup> The FracFocus frequency of use data presented in this chapter is based on 35,957 well disclosures.

1 possible sources of toxicological information, including QSAR-approaches and the EPA’s ACToR  
2 database, are discussed in Section 9.3.4.

### 9.3.1. Selection of Toxicity Values: Reference Values (RfVs) and Oral Slope Factors (OSFs)

3 Toxicity information spans a wide range with respect to extent, quality and reliability. Toxicological  
4 data may include assessments from various sources including state, national, international, private  
5 and academic organizations as well as toxicity information which has not been formalized into an  
6 assessment and may be found in the scientific literature and databases including results from  
7 guideline tests, high throughput screening assays, alternative assays, and QSAR models. The  
8 sources of toxicity values – specifically, chronic oral RfVs and OSFs – selected for the purposes of  
9 this chapter are based on criteria developed specifically for this report. For many of the chemicals  
10 used in hydraulic fracturing or found in flowback or produced water there may be relevant  
11 information, including cancer and noncancer-related information, from one or more sources that  
12 were not evaluated in this chapter.

13 The sources of RfVs and OSFs selected for the purposes of this chapter met the following key  
14 criteria: 1) the body or organization generating or producing the peer-reviewed RfVs, peer-  
15 reviewed OSFs, or peer-reviewed qualitative assessment must be a governmental or  
16 intergovernmental body; 2) the data source must include peer-reviewed RfVs, peer-reviewed OSFs,  
17 or peer reviewed qualitative assessments; 3) the RfVs, OSFs, or qualitative assessments must be  
18 based on peer-reviewed scientific data; 4) the RfVs, OSFs, or qualitative assessments must be  
19 focused on protection of the general public; and 5) the body generating the RfVs, OSFs, or  
20 qualitative assessments must be free of conflicts of interest with respect to the chemicals for which  
21 it derives reference values or qualitative assessments. More detail on these criteria for selection  
22 and inclusion of data sources, as well as the full list of data sources that were considered for this  
23 study, are available in Appendix G.

24 RfVs and OSFs available from the EPA IRIS, the EPA PPRTV program, ATSDR, and the EPA HHBP  
25 program all met the criteria for selection and inclusion as a data source (see Table 9-1). An attempt  
26 was made to identify and acquire RfVs and OSFs from all 50 states, but only the peer-reviewed state  
27 RfVs and OSFs from California met the stringent selection criteria and were included because of the  
28 state’s extensive peer review process.<sup>1</sup> One international source for RfVs, the World Health  
29 Organization’s (WHO) International Programme on Chemical Safety (IPCS) Concise International  
30 Chemical Assessment Documents (CICAD), also met the selection criteria. The International Agency  
31 for Research on Cancer (IARC) and U.S. National Toxicology Program (NTP) Report on Carcinogens  
32 also met the criteria and were used as additional sources for qualitative cancer classifications.

**Table 9-1. Sources of selected toxicity RfVs and OSFs.**

Source	Website
--------	---------

<sup>1</sup> State RfVs and OSFs are also publicly available from Alabama, Texas, Hawaii, and Florida, but they did not meet the criteria for consideration as sources for RfVs and OSFs in this report. See Appendix G for details.

Source	Website
EPA Integrated Risk Information System (IRIS)	<a href="http://cfpub.epa.gov/ncea/iris/index.cfm?fuseaction=iris.showSubstanceList">http://cfpub.epa.gov/ncea/iris/index.cfm?fuseaction=iris.showSubstanceList</a>
Human Health Benchmarks for Pesticides (HHBP)	<a href="http://iaspub.epa.gov/apex/pesticides/f?p=HHBP:home">http://iaspub.epa.gov/apex/pesticides/f?p=HHBP:home</a>
EPA Provisional Peer-Reviewed Toxicity Value (PPRTV) database	<a href="http://hhpprtv.ornl.gov/index.html">http://hhpprtv.ornl.gov/index.html</a>
Agency for Toxic Substances and Disease Registry (ATSDR) Minimum Risk Levels	<a href="http://www.atsdr.cdc.gov/toxprofiles/index.asp#bookmark05">http://www.atsdr.cdc.gov/toxprofiles/index.asp#bookmark05</a>
State of California Toxicity Criteria Database	<a href="http://www.oehha.org/tcdb/index.asp">http://www.oehha.org/tcdb/index.asp</a>
International Programme on Chemical Safety (IPCS) Concise International Chemical Assessment Documents (CICAD)	<a href="http://www.who.int/ipcs/publications/cicad/en/">http://www.who.int/ipcs/publications/cicad/en/</a>

1 EPA generally applies federal RfVs and OSFs for use in human health risk assessments. Therefore,  
 2 for the purpose of hazard evaluation and making comparisons between chemicals in this chapter,  
 3 only federal chronic oral RfVs and OSFs from the EPA IRIS, the EPA PPRTV program, ATSDR, and  
 4 the EPA HHBP program were used. Furthermore, when a chemical had an RfV and/or OSF from  
 5 more than one federal source, a modification of the EPA Office of Solid Waste and Emergency  
 6 Response (OSWER) Directive 9285.7-53 tiered hierarchy of toxicity values was applied to  
 7 determine which value to use. A single RfV and/or OSF was selected from the sources in this order:  
 8 IRIS, HHBP, PPRTV, and ATSDR.<sup>1</sup> The RfVs considered from these sources included noncancer  
 9 reference doses (RfDs) from the IRIS, PPRTV, and HHBP programs, and oral minimum risk levels  
 10 (MRLs) from ATSDR.<sup>2,3</sup>

11 Because there are relatively few OSFs available compared to RfVs, OSFs were excluded from  
 12 discussion in this chapter; however, all available OSFs are reported in Appendix G. The EPA  
 13 drinking water maximum contaminant levels (MCLs) were also excluded from this analysis because  
 14 they are treatment-based. MCLs are set as close to maximum containment level goal (MCLG) values  
 15 as feasible. However, MCL and MCLG values are still reported in Appendix G for the sake of  
 16 completeness.

<sup>1</sup>The OSWER hierarchy indicates that sources should be used in this order: IRIS, PPRTV, and then other values. In this report, this hierarchy was followed, but HHBP values were used in lieu of an IRIS value for a few chemicals. See Appendix G for details.

<sup>2</sup>A RfD is an estimate (with uncertainty spanning perhaps an order of magnitude) of a daily oral exposure to the human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime. For the complete definition see Appendix G.

<sup>3</sup>An MRL is an estimate of daily human exposure to a hazardous substance at or below which the substance is unlikely to pose a measurable risk of harmful (adverse), noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of harmful (adverse) health effects. Chronic MRL: Duration of exposure is 365 days or longer.




**9.3.2. Physicochemical Properties**

1 As presented in Chapter 5, EPI Suite™ software was used to generate data on the physicochemical  
 2 properties of chemicals on the consolidated list. EPI Suite™ provides an estimation of  
 3 physicochemical properties based upon chemical structure, and will additionally provide  
 4 empirically measured values for these properties when they are available for a given chemical. For  
 5 more details on the software and on the use of physicochemical properties for fate and transport  
 6 estimation, see Chapter 5.

**9.3.3. Summary of Selected Toxicological and Physicochemical Property Data for Hydraulic Fracturing Chemicals**

7 Figure 9-1 summarizes the availability of selected RfVs and OSFs and physicochemical data for the  
 8 1,173 hydraulic fracturing chemicals identified by the EPA.

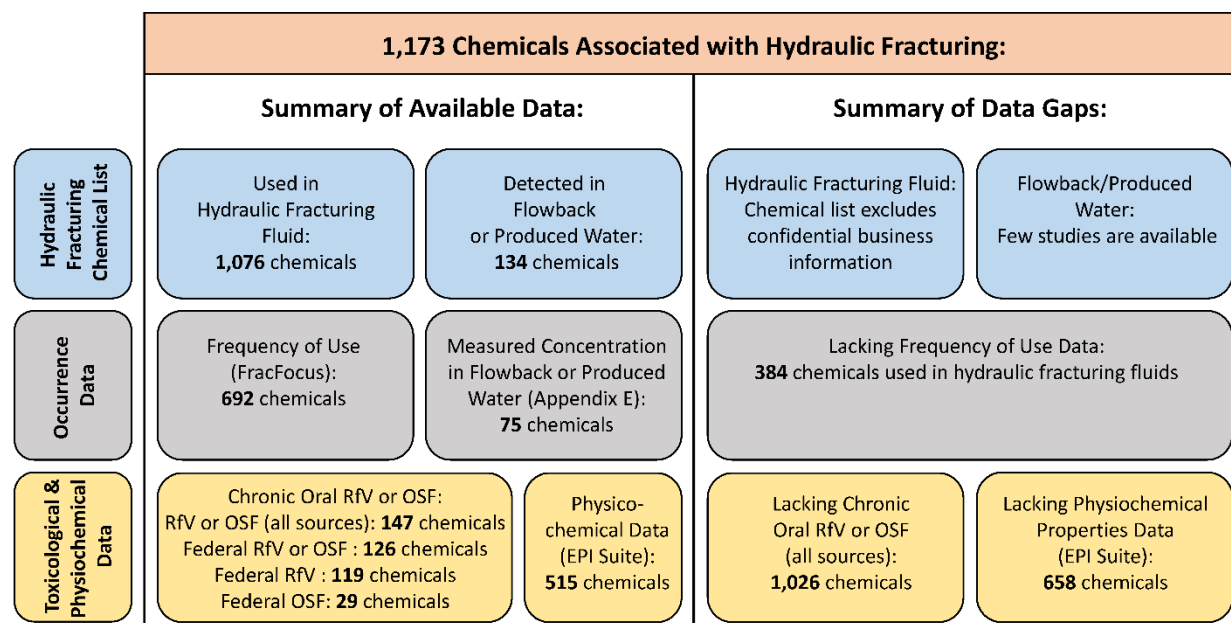

**Figure 9-1. Overall representation of the selected RfVs and OSFs, occurrence data, and physicochemical data available for the 1,173 hydraulic fracturing chemicals identified by the EPA.**

9 Of the 1,173 chemicals identified by the EPA, only 147 (13%) have federal, or state, or international  
 10 chronic oral RfVs and/or OSFs from sources listed in Table 9-1. Therefore, chronic RfVs and/or  
 11 OSFs from the selected sources are lacking for 87% of chemicals that the EPA has identified as  
 12 associated with hydraulic fracturing. All available chronic RfVs and OSFs from the sources listed in  
 13 Table 9-1 are tabulated in Appendix G. Chronic RfVs and OSFs for chemicals used in hydraulic  
 14 fracturing fluids are listed in Tables G-1a through G-1c, and chronic RfVs and OSFs for chemicals

1 reported in hydraulic fracturing flowback and produced water are listed in Tables G-2a through G-  
2 2c.

3 From the U.S. federal sources that were considered here, the availability of chronic RfVs and OSFs  
4 can be summarized as follows. Of the 1,173 chemicals on the consolidated list, a total of  
5 126 chemicals have federal chronic RfVs and/or OSFs. Of these 126 chemicals, 119 have federal  
6 chronic RfVs, and 29 have federal OSFs (see Figure 9-1). 22 chemicals have both a federal chronic  
7 RfV and a federal OSF, while 7 have a federal OSF only.

8 Overall, when chemicals in hydraulic fracturing fluid and chemicals in flowback are considered  
9 separately, the availability of chronic RfVs and OSFs can be summarized as follows:

- 10 • For the 1,076 chemicals used in hydraulic fracturing fluid, chronic RfVs from all of the  
11 selected federal, state, and international sources were available for 90 chemicals (8.4%).  
12 From the federal sources alone, chronic RfVs were available for 73 (6.8%), and OSFs were  
13 available for 15 (1.4%).
- 14 • For the 134 chemicals reported in flowback and produced water, chronic RfVs from all of  
15 the selected federal, state, and international sources were available for 83 chemicals (62%).  
16 From the federal sources alone, chronic RfVs were available for 70 chemicals (52%), and  
17 OSFs were available for 20 (15%).

18 The IRIS database was the most abundant source of the federal chronic RfVs and OSFs. IRIS had  
19 available RfDs for 77 of the total 1,173 chemicals, and OSFs for 27 chemicals. Of the other federal  
20 data sources, the PPRTV database had RfDs for 33 chemicals, and OSFs for 2 chemicals; the HHBP  
21 database had RfDs for 11 chemicals, but did not have available OSFs for any of the chemicals; and  
22 the ATSDR database had chronic oral MRLs for 27 chemicals.

23 In addition to these chronic values, many of the chemicals also have less-than-chronic federal oral  
24 RfVs. Subchronic or acute federal RfVs were identified for 91 chemicals on the consolidated list,  
25 including 55 chemicals used in hydraulic fracturing fluid (Table G-1d), and 56 chemicals reported in  
26 flowback or produced water (Table G-2d). There were 8 chemicals that had less-than-chronic RfVs  
27 but lacked a chronic RfV. All of these less-than-chronic RfVs were found on the PPRTV or ATSDR  
28 databases; the IRIS database did not have less-than-chronic RfVs for any of these chemicals. These  
29 values are not discussed in this report, but are provided in Appendix G as supporting information.

30 From the total list of 1,173 chemicals associated with hydraulic fracturing, EPI Suite™ was able to  
31 generate data on physicochemical properties for 515 (44%) of the chemicals (see Appendix A). The  
32 remaining 658 chemicals lacked the structural information necessary to generate an estimate.

#### 9.3.4. Additional Sources of Toxicity Information

33 Because the majority of chemicals identified in this report do not have RfVs and/or OSFs from the  
34 selected sources, it is likely that risk assessors at the local and regional level may turn to alternative  
35 sources of toxicity information. This section discusses other publicly accessible sources of  
36 toxicological data that are lower on the continuum of quality and reliability in comparison to the

1 selected RfVs and OSFs described above. Because the quality of these data is unknown for most  
2 chemicals, values from these data sources are not included in the hazard evaluation in this report.

#### 9.3.4.1. Estimated Toxicity Using Quantitative Structure Activity Relationships (QSAR)

3 One potential source of toxicological information is QSAR software, which is able to provide  
4 estimates or predictions of toxicity based on chemical structure. QSAR models for toxicity have  
5 been used and evaluated in a number of previous studies published in the peer reviewed literature  
6 ([Rupp et al., 2010](#); [Venkatapathy et al., 2004](#); [Moudgal et al., 2003](#)). A key advantage to QSAR  
7 models is that they are able to rapidly and inexpensively estimate toxicity values for chemicals.  
8 Compared to toxicological studies involving animals or in vitro methods, which have monetary,  
9 time, and ethical considerations associated with them, the QSAR method requires only information  
10 on chemical structure in order to generate a toxicity estimation. These values may be of lower  
11 quality and less reliable than values generated using traditional toxicological methods. However,  
12 because they increase the available pool of toxicity information, QSAR estimates may potentially be  
13 a useful resource for risk assessors that are faced with evaluating potential exposures to data-poor  
14 chemicals.

#### 9.3.4.2. Chemical Data Available from ACToR

15 An additional tool for obtaining toxicological information is the ACToR database.<sup>1</sup> ACToR is a large  
16 data warehouse developed by the EPA to gather and house large and disparate amounts of public  
17 data on chemicals including chemical identity, structure, physicochemical properties, in vitro assay  
18 results, and in vitro toxicology data ([Judson et al., 2009](#)). ACToR contains data on over 500,000  
19 chemicals from over 2,500 sources, covering many domains including hazard, exposure, risk  
20 assessment, risk management, and use. Data in ACToR is organized on several levels of “assays” and  
21 “assay categories”. The information available in ACToR ranges from the federal RfVs and OSFs  
22 discussed in Section 9.3.1, which have undergone extensive peer review, to other toxicity values  
23 and study and test results that have undergone little to no peer review.

24 The ACToR database was searched for information related to the total list of 1,173 chemicals  
25 associated with hydraulic fracturing.<sup>2</sup> For the purposes of this chapter, the database was first  
26 searched for all of the assays and assay categories that had data on these chemicals. This initial  
27 search was then filtered to only include the assay categories that are most relevant to toxicity via  
28 the oral route of exposure (drinking water). These assay categories were assigned into the  
29 following nine data classes: carcinogenicity, dose response values, drinking water criteria,  
30 genotoxicity/mutagenicity, hazard identification, LOAEL/NOAEL, RfD, slope factor, and water  
31 quality criteria. The type of data and examples of the data sources included in these data classes can  
32 be found in the ACToR database documentation.


33 When all assays and assay categories were considered, it was found that all but 28 of the total 1,173  
34 chemicals had available data on ACToR. When only the relevant assays and assay categories were  
35 considered, 642 (55%) of the chemicals were found to have data on ACToR. The fraction of

---

<sup>1</sup> The ACToR database is available at: <http://actor.epa.gov>.

<sup>2</sup> The ACToR database was queried for the total list of 1,173 chemicals on April 1, 2015.

1 chemicals that had at least one data point in each of the nine ACToR data classes is shown in Figure  
2 9-2. As can be seen in Figure 9-2, about half of the chemicals had some information on water quality  
3 criteria, while fewer chemicals had information on the other classes of data.

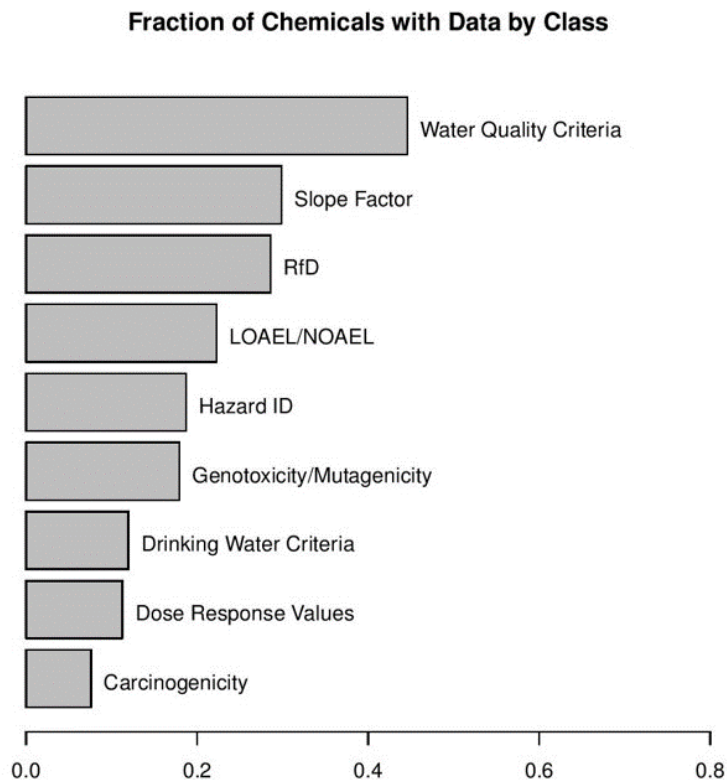

**Figure 9-2. Fraction of chemicals with at least one data point in each ACToR data class.**

4 Focusing on the 1,026 chemicals that lacked a chronic RfV and/or OSF from the selected sources  
5 described in Section 9.3.1, 497 (48%) of these chemicals had available data on ACToR. Because  
6 ACToR has a significant amount of data on potential chemical hazards, including for some data-poor  
7 chemicals, ACToR might help to fill data gaps in the ongoing effort to understand potential hazards  
8 of hydraulic fracturing chemicals. Since the quality of the non-peer reviewed values is not known,  
9 these data are not considered in the hazard evaluation.

#### 9.4. Hazard Identification of Reported Hydraulic Fracturing Chemicals

10 This section focuses on chemicals that were identified as being of particular interest in previous  
11 chapters of this report, or which otherwise may be of particular interest to risk assessors. Federal  
12 RfVs are identified for these chemicals as available.

### 9.4.1. Selection of Additional Chemicals for Hazard Identification

- Four subsets of chemicals were identified as being of interest in Chapter 5 (Chemical Mixing) and Chapter 7 (Flowback and Produced water):
1. Chapter 5: The most frequently used chemicals in hydraulic fracturing fluid, defined as chemicals being reported to the FracFocus database in at least 10% of well disclosures ([U.S. EPA, 2015a](#)).
  2. Chapter 5: The top 20 most and least mobile chemicals from the EPA’s analysis of the FracFocus database ([U.S. EPA, 2015a](#)), as determined based on the octanol-water partition coefficient ( $K_{ow}$ ) from EPI Suite™.
  3. Chapter 7: Inorganic chemicals that may be returned to the surface in flowback and produced water. This includes metals, inorganic ions, and naturally occurring radioactive material (NORM).
  4. Pesticides occurring in flowback and produced water.

The hazard identification for these four subsets of chemicals is presented below.

### 9.4.2. Hazard Identification Results

#### 9.4.2.1. Most Frequently Used Chemicals in Hydraulic Fracturing Fluid (FracFocus)

Chapter 5 listed 35 chemicals that are reported to the FracFocus database in at least 10% of well disclosures nationwide ([U.S. EPA, 2015a](#)) (Table 5-2). For 32 of these chemicals (water, quartz, and sodium chloride were excluded from this analysis), only 7 chemicals (22%) have a federal chronic RfV, as shown in Table 9-2. None of these 32 chemicals have available OSFs for cancer. For this subset of chemicals, methanol was reported to be the most frequently used chemical in the FracFocus analysis, followed by hydrotreated light petroleum distillates and hydrochloric acid, all of which were reported in greater than 60% of disclosures. Ethylene glycol, isopropanol, and peroxydisulfuric acid-diammonium salt are the only 3 additional chemicals to have been used in greater than 40% of disclosures.

**Table 9-2. List of the most frequently used chemicals in hydraulic fracturing fluids, with their respective federal chronic RfVs where available.**

Chemicals are ordered in the table, from high to low, based on their frequency of use from FracFocus. Includes all chemicals reported to FracFocus in at least 10% of well disclosures, excluding water, quartz, and sodium chloride.

Chemical	CASRN	RfV	Source
		Chronic RfD (mg/kg-day)	
Methanol	67-56-1	2	IRIS
Distillates, petroleum, hydrotreated light	64742-47-8	--	--
Hydrochloric acid	7647-01-0	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical	CASRN	RfV	Source
		Chronic RfD (mg/kg-day)	
Ethylene glycol	107-21-1	2	IRIS
Isopropanol	67-63-0	--	
Peroxydisulfuric acid, diammonium salt	7727-54-0	--	--
Guar gum	9000-30-0	--	--
Sodium hydroxide	1310-73-2	--	--
Propargyl alcohol	107-19-7	0.002	IRIS
Glutaraldehyde	111-30-8	--	--
Ethanol	64-17-5	--	--
Potassium hydroxide	1310-58-3	--	--
Acetic acid	64-19-7	--	--
Citric acid	77-92-9	--	--
2-Butoxyethanol	111-76-2	0.1	IRIS
Solvent naphtha, petroleum, heavy arom.	64742-94-5	--	--
Naphthalene	91-20-3	0.02	IRIS
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	--	--
Choline chloride	67-48-1	--	--
Phenolic resin	9003-35-4	--	--
Methenamine	100-97-0	--	--
Carbonic acid, dipotassium salt	584-08-7	--	--
1,2,4-Trimethylbenzene	95-63-6	--	--
Quaternary ammonium compounds, benzyl-C12-16-alkyldimethyl, chlorides	68424-85-1	--	--
Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy (mixture)	127087-87-0	--	--
Formic acid	64-18-6	0.9	PPRTV
Sodium chlorite	7758-19-2	0.03	IRIS
Nonyl phenol ethoxylate	9016-45-9	--	--
Tetrakis(hydroxymethyl)phosphonium sulfate	55566-30-8	--	--
Polyethylene glycol	25322-68-3	--	--
Ammonium chloride	12125-02-9	--	--
Sodium persulfate	7775-27-1	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*



**9.4.2.2. Most and Least Mobile Chemicals Used in Hydraulic Fracturing Fluid (FracFocus)**

Chapter 5 lists the 20 most mobile chemicals (Table 5-7) and 20 least mobile chemicals (Table 5-8) from the EPA's analysis of the FracFocus database ([U.S. EPA, 2015a](#)). For these lists, mobility was determined based on  $K_{ow}$ . For the 20 most mobile chemicals, no federal chronic RfVs or OSFs were available (see Table 9-3). Similarly, for the 20 least mobile chemicals, only one chemical—di(2-ethylhexyl) phthalate—had a federal chronic RfV available (see Table 9-4).

**Table 9-3. List of the 20 most mobile chemicals used in hydraulic fracturing fluid, with their respective federal chronic RfVs where available.**

Chemicals are ordered in the table by lowest estimated log  $K_{ow}$ . None of these chemicals had federal chronic RfVs available.

Chemical	CASRN	Log $K_{ow}$ (unitless)	RfV	
			Chronic RfD (mg/kg-day)	Source
1,2-Ethanediaminium, N,N'-bis[2-[bis(2-hydroxyethyl)methylammonio]ethyl]-N,N'-bis(2-hydroxyethyl)-N,N'-dimethyl-, tetrachloride	138879-94-4	-23.19	--	--
Phosphonic acid, [[[phosphonomethyl]imino]bis[2,1-ethanediylnitrilobis(methylene)]]tetrakis-	15827-60-8	-9.72	--	--
Phosphonic acid, [[[phosphonomethyl]imino]bis[2,1-ethanediylnitrilobis(methylene)]]tetrakis-, sodium salt	22042-96-2	-9.72	--	--
Phosphonic acid, [[[phosphonomethyl]imino]bis[2,1-ethanediylnitrilobis(methylene)]]tetrakis-, ammonium salt (1:x)	70714-66-8	-9.72	--	--
Phosphonic acid, (((2-[(2-hydroxyethyl)(phosphonomethyl)amino]ethyl)imino]bis(methylene))bis-, compd. with 2-aminoethanol	129828-36-0	-6.73	--	--
2-Hydroxy-N,N-bis(2-hydroxyethyl)-N-methylethanaminium chloride	7006-59-9	-6.7	--	--
N-(3-Chloroallyl)hexaminium chloride	4080-31-3	-5.92	--	--
3,5,7-Triazatricyclo(3.3.1.1 <sup>3,7</sup> )decane, 1-(3-chloro-2-propenyl)-, chloride, (Z)-	51229-78-8	-5.92	--	--
(2,3-dihydroxypropyl)trimethylammonium chloride	34004-36-9	-5.8	--	--
Phosphonic acid, [[[phosphonomethyl]imino]bis[6,1-hexanediylnitrilobis(methylene)]]tetrakis-	34690-00-1	-5.79	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical	CASRN	Log $K_{ow}$ (unitless)	RfV	Source
			Chronic RfD (mg/kg-day)	
[Nitrilotris(methylene)]tris-phosphonic acid pentasodium salt	2235-43-0	-5.45	--	--
Aminotrimethylene phosphonic acid	6419-19-8	-5.45	--	--
Choline chloride	67-48-1	-5.16	--	--
Choline bicarbonate	78-73-9	-5.16	--	--
alpha-Lactose monohydrate	5989-81-1	-5.12	--	--
Lactose	63-42-3	-5.12	--	--
Tetrakis(hydroxymethyl)phosphonium sulfate	55566-30-8	-5.03	--	--
Disodium ethylenediaminediacetate	38011-25-5	-4.76	--	--
Nitrilotriacetamide	4862-18-4	-4.75	--	--
1,3,5-Triazine-1,3,5(2H,4H,6H)-triethanol	4719-04-4	-4.67	--	--

**Table 9-4. List of the 20 least mobile chemicals used in hydraulic fracturing fluid, with their respective federal chronic RfVs where available.**

Chemicals are ordered in the table by highest estimated log  $K_{ow}$ .

Chemical	CASRN	Log $K_{ow}$ (unitless)	RfV	Source
			Chronic RfD (mg/kg-day)	

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical	CASRN	Log $K_{ow}$ (unitless)	RfV	Source
			Chronic RfD (mg/kg-day)	
Sorbitan, tri-(9Z)-9-octadecenoate	26266-58-0	22.56	--	--
Fatty acids, C18-unsatd., dimers	61788-89-4	14.6	--	--
Sorbitan sesquioleate	8007-43-0	14.32	--	--
Tributyltetradecylphosphonium chloride	81741-28-8	11.22	--	--
Sodium bis(tridecyl) sulfobutanedioate	2673-22-5	11.15	--	--
1-Eicosene	3452-07-1	10.03	--	--
D&C Red 28	18472-87-2	9.62	--	--
C.I. Solvent Red 26	4477-79-6	9.27	--	--
1-Octadecene	112-88-9	9.04	--	--
Alkenes, C>10 .alpha.-	64743-02-8	8.55	--	--
Diocetyl phthalate	117-84-0	8.54	--	--
Benzene, C10-16-alkyl derivs.	68648-87-3	8.43	--	--
Di(2-ethylhexyl) phthalate	117-81-7	8.39	0.02	IRIS
1-Octadecanamine, N,N-dimethyl-	124-28-7	8.39	--	--
N,N-dimethyloctadecylamine hydrochloride	1613-17-8	8.39	--	--
Butyryl trihexyl citrate	82469-79-2	8.21	--	--
1-Hexadecene	629-73-2	8.06	--	--
Benzo(g,h,i)perylene	191-24-2	7.98	--	--
Dodecylbenzene	123-01-3	7.94	--	--
Isopropanolamine dodecylbenzene	42504-46-1	7.94	--	--

#### 9.4.2.3. Flowback and Produced Water: Inorganics and NORM

1 In addition to a number of volatile and semi-volatile organic compounds presented below, Chapter  
2 7 also discusses the appearance of inorganic constituents such as metals, inorganic ions, and  
3 naturally occurring radioactive material (NORM) in flowback and produced water. A number of  
4 metals detected in flowback and produced water that appear on the EPA's consolidated list and are  
5 noted in Chapter 7 have federal RfVs and/or OSFs listed in Appendix G (Table G-2). These metals  
6 and inorganic ions include: iron, boron, chromium, zinc, arsenic, manganese, cadmium, and  
7 strontium. These metals have oral RfVs based on a number of health effects including:  
8 neurotoxicity, developmental and liver toxicity, hyperpigmentation and keratosis of the skin, and  
9 decrements in blood copper status and enzyme activity. Chromium (VI) is classified as a known

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 human carcinogen by IARC and NTP, while arsenic is classified as known human carcinogen by the  
2 EPA, IARC, and NTP. Radionuclides, such as radium-226, radium-228, and uranium-238, which are  
3 naturally occurring in the formation may also return to the surface within produced water. Each of  
4 these radionuclides is classified as a known human carcinogen by the EPA and IARC.

#### 9.4.2.4. Flowback and Produced Water: Pesticides

5 Lastly, it should be noted that a number of pesticides appear in the tables presented in Appendix G.  
6 These chemicals were reported as having been detected in analyses of hydraulic fracturing  
7 flowback and produced waters by several of the 10 sources cited in Appendix A; however, there is  
8 much uncertainty about why they were detected. They could have migrated to the shale formation  
9 or to the rock surrounding the shale formation, or they could have migrated into source waters  
10 used by the hydraulic fracturing operation. It is also possible that these are laboratory  
11 contaminants.

## 9.5. Hazard Identification and Hazard Evaluation of Selected Subsets of Hydraulic Fracturing Chemicals

12 As described in Section 9.4, the majority of chemicals identified in the previous chapters of this  
13 report do not have RfVs and/or OSFs from the sources meeting the criteria described in Section  
14 9.3.1. This lack of data creates a challenge for hazard evaluation, because the potential human  
15 health effects of these chemicals are difficult to determine. On the other hand, other chemicals  
16 identified by the EPA have more data available, including chronic RfVs, data on occurrence, and  
17 data on physicochemical properties. This section focuses on the hazard evaluation of these subsets  
18 of chemicals that had data available.

19 When considering the hazard evaluation of chemicals in drinking water, it is important to  
20 remember that toxicity is contingent upon exposure. All chemicals, including pure water, may be  
21 toxic if they are ingested in large enough quantities. Therefore, in addition to data on health effects,  
22 hazard evaluations must also consider data on potential chemical exposure. In the context of the  
23 hazard evaluation presented in this section, chemical occurrence and physicochemical property  
24 data were used as metrics to estimate the likelihood that the chemical could reach and impact  
25 drinking water resources.

26 For the selected subsets of chemicals that had data available, this section discusses the known  
27 toxicological properties based on selected RfVs (hazard identification), and then illustrates one  
28 possible method for combining toxicity and exposure potential information for a more data-  
29 informed hazard evaluation. Additionally, this section presents a summary of chemicals that have  
30 occurrence data across multiple stages of the hydraulic fracturing water cycle.

### 9.5.1. Selection of Chemicals for Hazard Evaluation

31 From the overall list of 1,173 chemicals identified in this assessment, subsets of chemicals were  
32 selected for hazard evaluation if they met the following criteria:

- 33 1. Had a federal chronic oral RfV;

1           2. Had available data on frequency of use (in hydraulic fracturing fluids) or measured  
2           concentrations (in flowback and produced water); and

3           3. Had available data on physicochemical properties.

4 These criteria were selected for hazard evaluation for the following reasons:

5           1. Federal RfVs generally undergo more extensive independent peer review compared to  
6           other sources of RfVs. Additionally, as described above, there are many more chemicals  
7           with federal chronic RfVs than chemicals with federal OSFs. Therefore, although OSFs are  
8           discussed in the hazard evaluation, chronic RfVs were selected for illustrative purposes of  
9           making comparisons between chemicals.

10          2. Data on frequency of use (in hydraulic fracturing fluids) or measured concentration (in  
11          flowback or produced water) provide a metric to help assess the likelihood of chemical  
12          occurrence in the hydraulic fracturing water cycle. Chemicals that are used more  
13          frequently in hydraulic fracturing fluid have a greater likelihood of accidental release or  
14          dissemination due to the fact that they are present at a greater number of wells  
15          nationwide. Likewise, chemicals that occur at higher concentrations in flowback or  
16          produced water may result in greater exposures. Frequency of detection in flowback or  
17          produced water would also be a useful metric for this evaluation, but this information was  
18          not available for these chemicals.

19          3. Information on physicochemical properties enables the estimation of chemical persistence  
20          and mobility in the environment. This is discussed in more detail in Section 9.5.2 below.

21 For chemicals that are used in hydraulic fracturing fluids, the FracFocus database was the only  
22 source with reliable information on the frequency of use ([U.S. EPA, 2015a](#)). For chemicals found in  
23 flowback or produced water, data on measured concentration were only available for the 75  
24 chemicals presented in Appendix E. Therefore, hazard evaluations were only conducted on  
25 chemicals included in these two data sources. While the other data sources listed in Appendix A  
26 provide useful information on the diversity of chemicals that may occur in the hydraulic fracturing  
27 water cycle, hazard evaluation could not be conducted on these sources in the absence of data on  
28 frequency of use or measured concentration.

29 Overall, 37 chemicals used in hydraulic fracturing fluid and 23 chemicals detected in flowback and  
30 produced water met the selection criteria for hazard evaluation (see Figure 9-3).

1,076 chemicals used in hydraulic fracturing fluid:

134 chemicals detected in flowback and produced water:

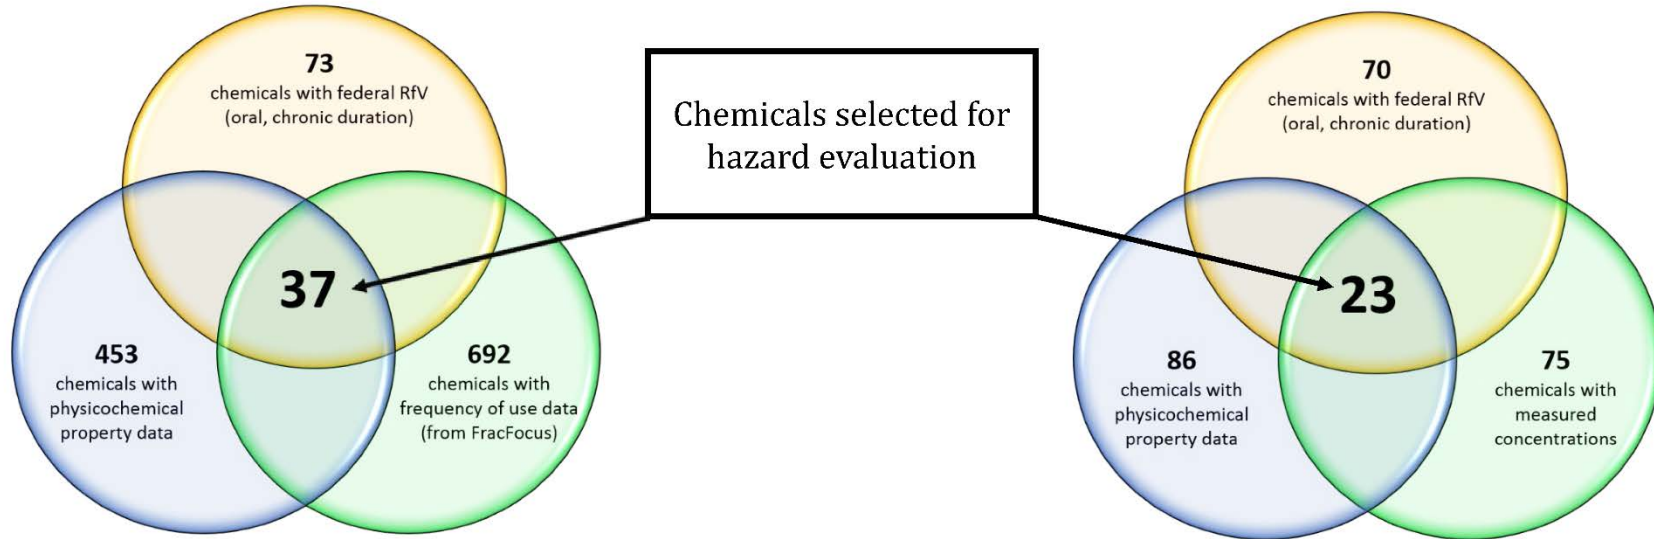


Figure 9-3. The two subsets of chemicals selected for hazard evaluation included 37 chemicals used in hydraulic fracturing fluid, and 23 chemicals detected in flowback or produced water.



### 9.5.2. Multi Criteria Decision Analysis (MCDA) Framework for Hazard Evaluation: Integrating Toxicity, Occurrence, and Physicochemical Data

1 Integration or combining of various types of data may provide insights on those chemicals that may  
2 be of greater concern than other chemicals to drinking water resources. For the purpose of this  
3 chapter, a structured but flexible Multi Criteria Decision Analysis (MCDA) approach was developed  
4 to integrate factors related to hydraulic fracturing such as chemical toxicity, occurrence, and  
5 physicochemical data. The approach described here is for illustrative purposes only, in order to  
6 demonstrate how combining of information may be informative. Alternative frameworks may be  
7 considered by risk assessors for similar analyses.


8 In this illustration, a MCDA framework was developed and applied to each list of chemicals  
9 identified in Section 9.5.1 and depicted in Figure 9-3 (37 chemicals used in hydraulic fracturing  
10 fluids, and 23 chemicals detected in flowback or produced water). The MCDA framework serves to  
11 place the toxicity of these chemicals in the context of factors that may increase the likelihood of  
12 impacting drinking water resources. In essence, this analysis serves to illustrate the circumstances  
13 under which drinking water resources may be affected.

14 MCDA is a well-established analysis tool that is used to transparently integrate multiple lines of  
15 evidence to support decision-making. For example, MCDA has been adapted as a method of  
16 selecting an optimal cleanup plan for a contaminated site ([Linkov et al., 2011](#)), and as a method of  
17 integrating chemical hazard data across multiple studies ([Hristozov et al., 2014](#)). The MCDA  
18 framework employed here is based on the method by [Mitchell et al. \(2013b\)](#), who developed a  
19 protocol for ranking chemical exposure potential by integrating data on physicochemical properties  
20 and commercial use. This method is similar to approaches used by the petroleum industry to  
21 quantitatively rank the potential hazards of hydraulic fracturing chemicals (see Section 5.9).  
22 Moreover, the underlying philosophy of this approach is similar to that of the EPA's Design for the  
23 Environment (DfE) Program. The DfE's Alternatives Assessment Criteria for Hazard Evaluation ([U.S.  
24 EPA, 2011a](#)) was developed as a tool for evaluating and differentiating among chemical hazards  
25 based on toxicity and physicochemical properties. Recently, this criteria and framework have been  
26 applied in the Alternatives Assessment for the Flame Retardant Decabromodiphenyl Ether  
27 (DecaBDE) and Flame Retardant Alternatives for Hexabromocyclododecane (HBCD) ([U.S. EPA,  
28 2014a, d](#)). Aspects of MCDA methods and the DfE's Program for Alternatives Assessment are  
29 evident in the National Research Council (NRC)'s "A Framework to Guide Selection of Chemical  
30 Alternatives" document ([NRC, 2014](#)).

31 The methodology used to illustrate a hazard evaluation MCDA for hydraulic fracturing is outlined  
32 below, and schematic of the model is shown in Figure 9-4. Under the MCDA framework, each  
33 chemical was assigned three scores:

- 34 1. A toxicity score;
- 35 2. An occurrence score; and
- 36 3. A physicochemical properties score.

1 The three normalized scores were summed to develop a total composite hazard potential score for  
2 each chemical. These scores serve as a relative ranking and a means of making comparisons across  
3 chemicals. These scores are not intended to define whether or not a chemical will present a human  
4 health hazard, or indicate that one chemical is safer than another. Rather, the scores serve as a  
5 qualitative metric to identify chemicals that may be more likely to present an impact to drinking  
6 water resources, given available data on chemical properties and occurrence.

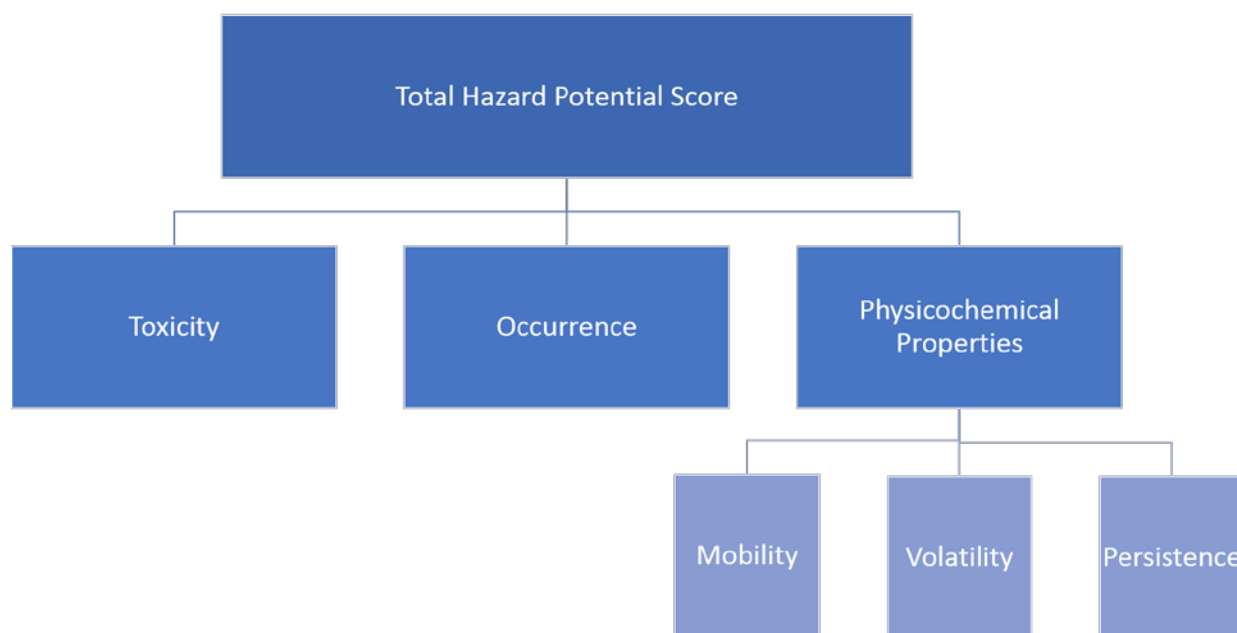

**Figure 9-4. Overview of the MCDA framework applied to the hazard evaluations.**

#### 9.5.2.1. Toxicity Score

7 The toxicity score was based upon the federal chronic RfV, which was determined from peer  
8 reviewed sources as described in Section 9.3.1. Within each dataset (chemicals used in hydraulic  
9 fracturing fluids, or chemicals detected in flowback and produced water), toxicity was ranked based  
10 on quartiles, with each chemical assigned a toxicity score of 1 to 4 (see thresholds outlined in Table  
11 9-5). Note that chemicals in the lowest quartile received the highest toxicity score as these  
12 chemicals have lower RfVs than for other chemicals.

#### 9.5.2.2. Occurrence Score

13 This score was based on the frequency or concentration at which chemicals were reported within  
14 the hydraulic fracturing water cycle. For chemicals used in hydraulic fracturing fluids, the  
15 occurrence score was based on the nationwide number of well disclosures for each chemical from  
16 the FracFocus database. For chemicals that were detected in hydraulic fracturing flowback and  
17 produced water, the occurrence score was based on the average or median measured concentration  
18 reported in Appendix E. If the measured concentration of a chemical was reported by multiple

1 studies in Appendix E, the highest of these reported average or median concentrations was used for  
2 this calculation. Note that these two metrics of chemical occurrence—frequency of use, and  
3 concentration—cannot be directly compared to one another. Therefore, FracFocus chemicals and  
4 flowback and produced water chemicals were considered separately for this MCDA hazard  
5 evaluation. Within each dataset (chemicals used in hydraulic fracturing fluids, or chemicals  
6 detected in flowback and produced water), chemical occurrence was ranked based on quartiles,  
7 with each chemical assigned an occurrence score of 1 to 4, as shown in Table 9-5.

### 9.5.2.3. Physicochemical Properties Score

8 This score was based upon inherent physicochemical properties which affect the likelihood that a  
9 chemical will reach and impact drinking water resources. The thresholds chosen for ranking  
10 physicochemical properties, shown in Table 9-5, are based on previously published thresholds used  
11 in the DfE Alternatives Assessment Criteria for Hazard Evaluation ([U.S. EPA, 2011a](#)), the EPA Office  
12 of Pollution Prevention and Toxics Pollution Prevention (P2) Framework ([U.S. EPA, 2005](#)), and  
13 [Mitchell et al. \(2013b\)](#). When refining EPI Suite™ physicochemical properties data for input into  
14 this MCDA, empirically measured values were always used when available. If multiple estimated  
15 values were available, the most conservative value (i.e., the value resulting in the highest score  
16 according to Table 9-5) was used.

17 The total physicochemical properties score for each chemical was based upon three subcriteria:  
18 mobility in water, volatility, and persistence. Chemical mobility in water was assessed based upon  
19 three physicochemical properties: the octanol-water partition coefficient ( $K_{ow}$ ), the organic carbon-  
20 water partition coefficient ( $K_{oc}$ ), and aqueous solubility. Chemical volatility was assessed based on  
21 the Henry's law constant, which describes partitioning of a chemical between water and air.  
22 Chemical persistence was assessed based on estimated half-life in water, which describes how long  
23 a chemical will persist in water before it is transformed or degraded. Details on the evaluation and  
24 physicochemical score calculation are provided in the Chapter Annex, Section 9.8.1. For each  
25 chemical, the mobility score, volatility score, and persistence score (each on a scale of 1 to 4) were  
26 summed to calculate a total physicochemical score.

### 9.5.2.4. Final MCDA Score Calculations

27 Each raw score (toxicity, occurrence, or physicochemical properties), calculated as described above,  
28 was standardized by scaling to the highest and lowest raw score within the set of chemicals. The  
29 following equation was used:

$$30 \quad S_{x\_final} = (S_x - S_{min}) / (S_{max} - S_{min})$$

31 in which  $S_x$  is the raw score for a particular chemical  $x$ ,  $S_{max}$  is the highest observed raw score within  
32 the set of chemicals, and  $S_{min}$  is the lowest observed raw score within the set of chemicals.  $S_{x\_final}$  is  
33 the standardized score for chemical  $x$ . Each standardized score (toxicity, occurrence, or  
34 physicochemical properties) falls on a scale of 0 to 1. These standardized toxicity, occurrence, and  
35 physicochemical properties scores were summed to calculate a total hazard potential score for each  
36 chemical. The total hazard potential scores fell on a scale of 0 to 3, with higher scores indicating

- 1 chemicals that are predicted to be more likely to affect drinking water resources. An example of  
 2 MCDA score calculation can be found in the Annex, Section 9.8.2.
- 3 In the MCDA approach illustrated in this chapter, each factor (toxicity, occurrence, physicochemical  
 4 properties) was given equal weight in the calculation of the final hazard potential score. This was  
 5 done in order to prevent subjectivity and avoid biasing the results based on any individual variable  
 6 that was considered in this analysis. This approach is adaptable, however. Risk assessors may  
 7 choose to apply alternative weights that place more or less emphasis on the various factors being  
 8 considered, in order to reflect expert judgement of a variable's relative importance. This MCDA  
 9 approach may also be adapted to include other variables of interest, such as carcinogenic potential,  
 10 which were not considered in the MCDA approach illustrated in this chapter.

**Table 9-5. Thresholds used for developing the toxicity score, occurrence score, and physicochemical properties score in this MCDA framework.**

Score	1	2	3	4
<b>Toxicity Score</b>				
<b>Chronic RfV (federal)</b>	>3 <sup>rd</sup> quartile	>2 <sup>nd</sup> quartile to ≤3 <sup>rd</sup> quartile	>1 <sup>st</sup> quartile to ≤2 <sup>nd</sup> quartile	≤1 <sup>st</sup> quartile
<b>Occurrence Score</b>				
<b>Percentage of wells nationwide</b>	<1 <sup>st</sup> quartile	≥1 <sup>st</sup> quartile to <2 <sup>nd</sup> quartile	≥2 <sup>nd</sup> quartile to <3 <sup>rd</sup> quartile	≥3 <sup>rd</sup> quartile
<b>Concentration (µg/L)</b>	<1 <sup>st</sup> quartile	≥1 <sup>st</sup> quartile to <2 <sup>nd</sup> quartile	≥2 <sup>nd</sup> quartile to <3 <sup>rd</sup> quartile	≥3 <sup>rd</sup> quartile
<b>Physicochemical Properties Score</b>				
<b>Mobility score:</b>				
<b>Log <math>K_{OW}</math></b>	>5	>3 to 5	>2 to 3	≤2
<b>Log <math>K_{OC}</math></b>	>4.4	>3.4 to 4.4	>2.4 to 3.4	≤2.4
<b>Aqueous solubility (mg/L)</b>	<0.1	≥0.1 to <100	≥100 to <1000	≥1000
<b>Volatility score:</b>				
<b>Henry's law constant</b>	>10 <sup>-1</sup>	>10 <sup>-3</sup> to ≤10 <sup>-1</sup>	>10 <sup>-5</sup> to ≤10 <sup>-3</sup>	≤10 <sup>-5</sup>
<b>Persistence score:</b>				
<b>Half-life in water (days)</b>	<16	≥16 to <60	≥60 to <180	≥180

*This document is a draft for review purposes only and does not constitute Agency policy.*

### 9.5.3. Hazard Evaluation Results

1 Discussed below are the results of the hazard evaluations for each subset of chemicals identified in  
2 Section 9.5.1. For each subset of chemicals selected for hazard evaluation, the information  
3 presented includes: the available federal chronic oral RfV (hazard identification), followed by  
4 highlights of MCDA analyses (hazard evaluation).

5 For this MCDA illustration, the calculated toxicity scores, occurrence scores, physicochemical  
6 properties scores, and total hazard potential scores are provided for chemicals used in hydraulic  
7 fracturing fluids and chemicals detected in flowback/produced water, respectively. These  
8 individual scores make it possible to visualize the extent to which the total hazard potential ranking  
9 of each chemical is driven by each of the variables considered in the MCDA.

#### 9.5.3.1. Hazard Identification: Chemical Used in Hydraulic Fracturing Fluid

10 As discussed above, a total of 37 chemicals used in hydraulic fracturing fluids were identified for  
11 hazard evaluation using the selection criteria described in Section 9.5.1. Some of the chemicals  
12 represented include the BTEX chemicals (benzene, toluene, ethylbenzene, xylenes) as well as  
13 naphthalene, acrylamide, phenol, 1,2-propylene glycol, ethylene glycol, 2-butoxyethanol, ethyl  
14 acetate, and methanol.

15 These chemicals along with their primary noncancer toxicological properties, including the point-  
16 of-departure (POD), total product of uncertainty factors applied, the federal chronic RfV, and the  
17 health effect basis for the RfV, are shown in Table 9-6.<sup>1,2</sup> As seen in Table 9-6, all of these chemicals  
18 had RfDs available from IRIS, PPRTV, or HHBP. These chemicals induce a variety of adverse  
19 outcomes including immune system effects, changes in body weight, changes in blood chemistry,  
20 cardiotoxicity, neurotoxicity, liver and kidney toxicity, and reproductive and developmental  
21 toxicity. The RfD values within this suite of chemicals range from 0.001–20 mg/kg-day, with (E)-  
22 crotonaldehyde having the lowest RfD (0.001 mg/kg-day) and 1,2-propylene glycol having the  
23 highest (20 mg/kg-day).

24 Comparison of RfVs among a set of chemicals requires a more thorough examination. For instance,  
25 to derive the final chronic RfD for a given chemical, a number of UFs may be applied to the POD.  
26 Briefly, UFs are applied to account for 5 areas of uncertainty: 1) intraspecies variability; 2)

---

<sup>1</sup> The point-of-departure (POD) is the dose-response point that marks the beginning of a low-dose extrapolation. This point can be the lower bound on dose for an estimated incidence or a change in response level from a dose-response model or a NOAEL or LOAEL for an observed incidence, or change in level of response. See <http://www.epa.gov/iris/> for more information.

<sup>2</sup> An uncertainty factor is one of several (generally 10-fold) default factors used in operationally deriving the RfV from experimental data. The factors are intended to account for (1) variation in susceptibility among the members of the human population (i.e., inter-individual or intraspecies variability); (2) uncertainty in extrapolating animal data to humans (i.e., interspecies uncertainty); (3) uncertainty in extrapolating from data obtained in a study with less-than-lifetime exposure (i.e., extrapolating from subchronic to chronic exposure); (4) uncertainty in extrapolating from a LOAEL rather than from a NOAEL; and (5) uncertainty associated with extrapolation when the database is incomplete. See the IRIS Glossary at: <http://www.epa.gov/iris/> for more information.

1 interspecies uncertainty; 3) extrapolation from a subchronic study; 4) extrapolating from a NOAEL;  
 2 and 5) an incomplete database. A UF of 1, 3 ( $10^{0.5}$ ), or 10 can be applied for any of these areas of  
 3 uncertainty depending upon the amount and/or type data available. The maximum total UF that  
 4 can be applied is 3,000; RfDs are not derived for chemicals that invoke the application of a total UF  
 5 >3,000 or involves the application of the full 10-fold UF in four or more areas of uncertainty ([U.S.  
 6 EPA, 2002a](#)). Therefore, those chemicals with a lower total uncertainty factor generally have more  
 7 reliable and robust health effect information. For example, although (E)-crotonaldehyde has the  
 8 lowest RfD, chemicals such as acrylamide, benzene, and dichloromethane have RfDs within a factor  
 9 of 10 (0.002–0.006 mg/kg-day) but with much less uncertainty reflected in their values. All three  
 10 latter chemicals have large data sets with reproducible effects, and dose estimated based on  
 11 physiologically based pharmacokinetic models (for acrylamide and dichloromethane) or have  
 12 available human health effect data (for benzene). Thus, a chemical with a low RfD may reflect high  
 13 uncertainty in the value and not necessarily be the most toxic.

14 Although only federal RfVs are considered in this hazard evaluation, eight of these chemicals also  
 15 have federal OSFs. These include acrylamide, benzyl chloride, 1,4-dioxane, 1,3-dichloropropene,  
 16 benzene, epichlorohydrin, aniline, and dichloromethane. Of these chemicals, acrylamide is the most  
 17 potent carcinogen. Acrylamide has an OSF of 0.5 per mg/kg-day and is classified as a likely human  
 18 carcinogen in IRIS ([U.S. EPA, 2010](#)). Benzene is the only chemical listed as a known human  
 19 carcinogen and has a calculated OSF of 0.015 mg/kg-day ([U.S. EPA, 2002b](#)). The OSF values for each  
 20 of these chemicals can be found in Appendix G.

**Table 9-6. Toxicological properties of the 37 chemicals used in hydraulic fracturing fluid that were identified for hazard evaluation and MCDA analysis.**

Chemicals are ranked, from low to high, based on their respective federal chronic RfVs.

Chemical	CASRN	Point of departure (mg/kg-day)	Total uncertainty factor	RfV	Noncancer effect	Source
				Chronic RfD (mg/kg-day)		
<b>(E)-Crotonaldehyde</b>	123-73-9	3.4	3000	0.001	Forestomach lesions	PPRTV
<b>Benzyl chloride</b>	100-44-7	6.4	3000	0.002	Cardiotoxicity	PPRTV
<b>Propargyl alcohol</b>	107-19-7	5	3000	0.002	Renal and hepatotoxicity	IRIS
<b>Acrylamide</b>	79-06-1	0.053	30	0.002	Degenerative nerve changes	IRIS
<b>Benzene</b>	71-43-2	1.2	300	0.004	Decreased lymphocyte count in humans	IRIS
<b>Epichlorohydrin</b>	106-89-8	6.25	1000	0.006	Decreased fertility	PPRTV

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical	CASRN	Point of departure (mg/kg-day)	Total uncertainty factor	RfV	Noncancer effect	Source
				Chronic RfD (mg/kg-day)		
Dichloromethane	75-09-2	0.19	30	0.006	Hepatic effects	IRIS
Aniline	62-53-3	7	1000	0.007	Splenic effects	PPRTV
2-(Thiocyanomethylthio)benzothiazole	21564-17-0	3.8	300	0.01	Decreased body weight gain; decreased white blood cells (WBC) and plasma alanine aminotransferase (ALT)	HHBP
Furfural	98-01-1	30	3000	0.01	Liver pathology	HHBP
Naphthalene	91-20-3	71	3000	0.02	Decreased mean terminal body weight > 10%	IRIS
2-(2-Butoxyethoxy) ethanol	112-34-5	81	3000	0.03	Changes in red blood cells (RBC)	PPRTV
1,4-Dioxane	123-91-1	9.6	300	0.03	Liver and kidney toxicity	IRIS
Bisphenol A	80-05-7	50	1000	0.05	Reduced mean body weight	IRIS
1,3-Dichloropropene	542-75-6	3.4	100	0.03	Chronic irritation	IRIS
Toluene	108-88-3	238	3000	0.08	Increased absolute kidney weight	IRIS
Ethylenediamine	107-15-3	9	100	0.09	Liver and kidney toxicity	PPRTV
Ethylbenzene	100-41-4	97.1	1000	0.1	Liver and kidney toxicity; histopathology	IRIS
2-Butoxyethanol (EGBE)	111-76-2	1.4	10	0.1	Hemosiderin deposition in liver (inhalation study)	IRIS
Acetophenone	98-86-2	423	3000	0.1	General toxicity; NO LOAEL identified	IRIS
Didecyldimethyl ammonium chloride	7173-51-5	10	100	0.1	Clinical signs; decreased total cholesterol levels	HHBP

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical	CASRN	Point of departure (mg/kg-day)	Total uncertainty factor	RfV	Noncancer effect	Source
				Chronic RfD (mg/kg-day)		
Cumene	98-82-8	110	1000	0.1	Increased average kidney weight in female rats	IRIS
N,N-Dimethylformamide	68-12-2	96	1000	0.1	Increase in ALT and liver weight	PPRTV
1-Butanol	71-36-3	125	1000	0.1	Hypoactivity and ataxia	IRIS
Xylenes	1330-20-7	179	1000	0.2	Decreased body weight; increased mortality	IRIS
Formaldehyde	50-00-0	15	100	0.2	Decreased weight gain	IRIS
Phenol	108-95-2	93	300	0.3	Decreased maternal weight gain; developmental toxicity	IRIS
2-Methyl-1-propanol (Isobutanol)	78-83-1	316	1000	0.3	Hypoactivity and ataxia	IRIS
Acetone	67-64-1	900	1000	0.9	Nephropathy	IRIS
Ethyl acetate	141-78-6	900	1000	0.9	Mortality and body weight loss	IRIS
Formic acid	64-18-6	277	300	0.9	Reproductive effects	PPRTV
Dodecylbenzenesulfonic acid	27176-87-0	50	100	0.5	Decreased pup weight; kidney pathology	HHBP
Ethylene glycol	107-21-1	200	100	2	Kidney toxicity; chronic nephritis	IRIS
Hexanedioic acid	124-04-9	470	300	2	Decreased body weight	PPRTV
Methanol	67-56-1	43.1 mg/L <sup>a</sup>	100	2	Extra cervical ribs; developmental toxicity	IRIS
Benzoic acid	65-85-0	4.4	1	4	No adverse effects observed in humans	IRIS
1,2-Propylene glycol	57-55-6	5200	300	20	Reduced red blood cell counts and hyperglycemia	PPRTV

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical	CASRN	Point of departure (mg/kg-day)	Total uncertainty factor	RfV	Noncancer effect	Source
				Chronic RfD (mg/kg-day)		

<sup>a</sup> POD based on internal methanol blood concentration using a PBPK model.

### 9.5.3.2. MCDA Results: Chemical Used in Hydraulic Fracturing Fluid

- 1 The hazard potential scores of the selected 37 chemicals used in hydraulic fracturing fluid are presented in Table 9-7.
- 2

**Table 9-7. MCDA results for 37 chemicals used in hydraulic fracturing fluid.**

Chemicals are ranked, from high to low, based on total hazard potential score. See section 9.5.2 for details on the calculation.

Chemical	CASRN	Physicochemical properties score	Occurrence score	Toxicity score	Total hazard potential score
Propargyl alcohol	107-19-7	1.00	1.00	1.00	<b>3.00</b>
2-Butoxyethanol (EGBE)	111-76-2	1.00	1.00	0.67	<b>2.67</b>
N,N-Dimethylformamide	68-12-2	1.00	1.00	0.67	<b>2.67</b>
Acrylamide	79-06-1	1.00	0.67	1.00	<b>2.67</b>
Formaldehyde	50-00-0	1.00	1.00	0.33	<b>2.33</b>
Naphthalene	91-20-3	0.67	1.00	0.67	<b>2.33</b>
Benzyl chloride	100-44-7	0.67	0.67	1.00	<b>2.33</b>
1-Butanol	71-36-3	1.00	0.67	0.67	<b>2.33</b>
Epichlorohydrin	106-89-8	0.67	0.67	1.00	<b>2.33</b>
2-(2-Butoxyethoxy)ethanol	112-34-5	1.00	0.67	0.67	<b>2.33</b>
Methanol	67-56-1	1.00	1.00	0.00	<b>2.00</b>
Ethylene glycol	107-21-1	1.00	1.00	0.00	<b>2.00</b>
Formic acid	64-18-6	1.00	1.00	0.00	<b>2.00</b>
Didecyldimethylammonium chloride	7173-51-5	0.33	1.00	0.67	<b>2.00</b>
1,4-Dioxane	123-91-1	1.00	0.33	0.67	<b>2.00</b>
(E)-Crotonaldehyde	123-73-9	0.67	0.33	1.00	<b>2.00</b>
Aniline	62-53-3	1.00	0.00	1.00	<b>2.00</b>
Furfural	98-01-1	1.00	0.00	1.00	<b>2.00</b>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical	CASRN	Physicochemical properties score	Occurrence score	Toxicity score	Total hazard potential score
1,2-Propylene glycol	57-55-6	1.00	0.67	0.00	<b>1.67</b>
Hexanedioic acid	124-04-9	1.00	0.67	0.00	<b>1.67</b>
Toluene	108-88-3	0.33	0.67	0.67	<b>1.67</b>
Phenol	108-95-2	1.00	0.33	0.33	<b>1.67</b>
2-Methyl-1-propanol (Isobutanol)	78-83-1	1.00	0.33	0.33	<b>1.67</b>
Dichloromethane	75-09-2	0.67	0.00	1.00	<b>1.67</b>
Ethylenediamine	107-15-3	1.00	0.00	0.67	<b>1.67</b>
Bisphenol A	80-05-7	1.00	0.00	0.67	<b>1.67</b>
2-(Thiocyanomethylthio) benzothiazole	21564-17-0	0.67	0.00	1.00	<b>1.67</b>
Benzene	71-43-2	0.67	0.00	1.00	<b>1.67</b>
Dodecylbenzenesulfonic acid	27176-87-0	0.33	1.00	0.00	<b>1.33</b>
Xylenes	1330-20-7	0.33	0.67	0.33	<b>1.33</b>
Ethylbenzene	100-41-4	0.33	0.33	0.67	<b>1.33</b>
Benzoic acid	65-85-0	1.00	0.33	0.00	<b>1.33</b>
Acetophenone	98-86-2	0.67	0.00	0.67	<b>1.33</b>
1,3-Dichloropropene	542-75-6	0.67	0.00	0.67	<b>1.33</b>
Cumene	98-82-8	0.00	0.33	0.67	<b>1.00</b>
Ethyl acetate	141-78-6	0.67	0.33	0.00	<b>1.00</b>
Acetone	67-64-1	0.67	0.33	0.00	<b>1.00</b>

1 Of the chemicals in hydraulic fracturing fluid that were considered in this hazard evaluation,  
2 propargyl alcohol received the highest overall hazard potential score. Propargyl alcohol was used in  
3 33% of wells in the FracFocus database, making it one of the most widely used chemicals that was  
4 considered in this analysis, and it also had one of the lowest RfVs, with an RfD of 0.002 mg/kg-day.  
5 It is also hydrophilic and has relatively low volatility, indicating that it is likely to be readily  
6 transported in water. Given these properties, propargyl alcohol received the highest overall ranking  
7 across all of the metrics that were considered in the hazard evaluation.

8 The other chemicals that fell in the upper quartile in terms of frequency of use received lower  
9 hazard potential scores relative to propargyl alcohol, due to lower estimated toxicity and/or  
10 physicochemical properties that are less conducive to transport in water. Naphthalene, used in 19%  
11 of wells on the FracFocus database, has an RfD of 0.02 mg/kg-day, and is expected to have  
12 somewhat lower transport in water relative to other chemicals because it is moderately  
13 hydrophobic and moderately volatile. Methanol (RfD of 2 mg/kg-day), ethylene glycol (RfD of 2

1 mg/kg-day), 2-butoxyethanol (RfD of 0.1 mg/kg-day), formic acid (RfD of 0.9 mg/kg-day), N,N-  
2 dimethylformamide (RfD of 0.1 mg/kg-day), and formaldehyde (RfD of 0.2 mg/kg-day)—which  
3 were used in 73%, 47%, 23%, 11%, 9%, and 7% of wells in the FracFocus database, respectively—  
4 are all expected to be highly mobile in water and have low volatility, but have higher RfVs  
5 compared to many of the other chemicals in the assessment. Didecyldimethylammonium chloride  
6 (RfD of 0.1 mg/kg-day), used in 8% of wells, is expected to have reduced mobility in water due to its  
7 more hydrophobic properties.

8 In addition to propargyl alcohol, the other most toxic chemicals (occurring in the lowest quartile of  
9 RfVs) received moderate to high hazard potential scores overall. Acrylamide (RfD of 0.002 mg/kg-  
10 day) is used in only 1% of wells, but has physicochemical properties that are very conducive to  
11 transport in water, and therefore received one of the highest overall hazard potential scores. Benzyl  
12 chloride (RfD of 0.002 mg/kg-day) and epichlorohydrin (RfD of 0.006 mg/kg-day) are used in 6%  
13 and 1% of wells, respectively, but scored slightly lower than acrylamide with regards to their  
14 physicochemical properties. Other chemicals, including (E)-crotonaldehyde (RfD of 0.001 mg/kg-  
15 day), benzene (RfD of 0.004 mg/kg-day), dichloromethane (RfD of 0.006 mg/kg-day), aniline (RfD  
16 of 0.007 mg/kg-day), furfural (RfD of 0.01 mg/kg-day), and 2-(Thiocyanomethylthio)benzothiazole  
17 (RfD of 0.01 mg/kg-day), received lower overall scores because they are used more infrequently  
18 (each in less than 0.1% of wells in the FracFocus database).

### 9.5.3.3. Hazard Identification: Chemicals Detected in Flowback and Produced Water

19 As discussed above, a total of 23 chemicals detected in flowback and produced water were  
20 identified for hazard evaluation using the selection criteria described in Section 9.5.1. Of these 23  
21 chemicals, 10 chemicals overlap with the hazard evaluation of chemicals used in hydraulic  
22 fracturing fluids. Because of this overlap, many of the effects noted in each hazard evaluation are  
23 similar.

24 These chemicals, along with their POD, total products of uncertainty factors applied, federal chronic  
25 RfVs, and the health effect bases for the RfVs, are shown in Table 9-8. As seen in Table 9-8, all of  
26 these chemicals had RfDs available from IRIS, PPRTV, or HHBP. These chemicals induce a variety of  
27 adverse outcomes, including immune system effects, changes in body weight, changes in blood  
28 chemistry, pulmonary toxicity, neurotoxicity, liver and kidney toxicity, and reproductive and  
29 developmental toxicity. The RfD values within this suite of chemicals range from 0.001–0.9 mg/kg-  
30 day, with pyridine having the lowest RfD and acetone having the highest RfD. For this subset of  
31 chemicals, 88% have an RfD within 2 orders of magnitude of each other and 78% have RfDs within  
32 a factor of 10 (range of 0.01–0.1 mg/kg-day). Some of these chemicals include chloroform,  
33 naphthalene, 1,4-dioxane, toluene, cumene, and ethylbenzene.

34 Although only federal RfVs are considered in this hazard evaluation, 2 of these chemicals—benzene  
35 and 1,4-dioxane—also have federal OSFs. These chemicals are also included in the hazard  
36 evaluation of chemicals used in hydraulic fracturing fluids, discussed above. 1,4-dioxane is a more  
37 potent carcinogen compared to benzene. The OSF for 1,4-dioxane is 0.1 per mg/kg-day and is  
38 classified as likely to be a human carcinogen by IRIS ([U.S. EPA, 2013f](#)).

**Table 9-8. Toxicological properties of the 23 chemicals detected in flowback and produced water that were identified for hazard evaluation and MCDA analysis.**

Chemicals are ranked, from low to high, based on their respective federal chronic RfVs. Chemicals in *italics* are also included in the hazard evaluation of chemicals used in hydraulic fracturing fluids.

Chemical	CASRN	Point of departure (mg/kg-day)	Total uncertainty factors	RfV	Non-cancer effect	Source
				Chronic RfD (mg/kg-day)		
<b>Pyridine</b>	110-86-1	1	1000	0.001	Increased liver weight	IRIS
<b>2-Methylnaphthalene</b>	91-57-6	3.5	1000	0.004	Pulmonary alveolar proteinosis	IRIS
<i>Benzene</i>	71-43-2	1.2	300	0.004	Decreased lymphocyte count in humans	IRIS
<b>Chloroform</b>	67-66-3	12.9	1000	0.01	Fatty cyst formation in the liver; elevated SGPT(or ALT)	IRIS
<i>Naphthalene</i>	91-20-3	71	3,000	0.02	Decreased mean terminal body weight > 10%	IRIS
<b>Di(2-ethylhexyl) phthalate</b>	117-81-7	19	1000	0.02	Increased relative liver weight	IRIS
<b>2,4-Dimethylphenol</b>	105-67-9	50	3000	0.02	Clinical signs; hematological changes	IRIS
<b>Pyrene</b>	129-00-0	75	3000	0.03	Kidney effects	IRIS
<i>1,4-Dioxane</i>	123-91-1	9.6	300	0.03	Liver and kidney toxicity	IRIS
<b>Fluorene</b>	86-73-7	125	3000	0.04	Decreased RBC, packed cell volume and hemoglobin	IRIS
<b>Fluoranthene</b>	206-44-0	125	3000	0.04	Nephropathy; increased liver weights; hematological alterations	IRIS
<b>2-Methylphenol (o-Cresol)</b>	95-48-7	50	1000	0.05	Decreased body weights and neurotoxicity	IRIS
<i>Toluene</i>	108-88-3	238	3000	0.08	Increased absolute kidney weight	IRIS
<b>Carbon disulfide</b>	75-15-0	11	100	0.1	Fetal toxicity and malformations	IRIS

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical	CASRN	Point of departure (mg/kg-day)	Total uncertainty factors	RfV	Non-cancer effect	Source
				Chronic RfD (mg/kg-day)		
<i>Cumene</i>	98-82-8	110	1000	0.1	increased average kidney weight in female rats	IRIS
<b>Benzyl alcohol</b>	100-51-6	143	1000	0.1	Effects on survival, growth, and tissue histopathology	PPRTV
<b>Dibutyl phthalate</b>	84-74-2	125	1000	0.1	Increased mortality	IRIS
<i>Ethylbenzene</i>	100-41-4	97.1	1000	0.1	liver and kidney toxicity; histopathology	IRIS
<i>Acetophenone</i>	98-86-2	423	3000	0.1	General toxicity; no LOAEL identified	IRIS
<b>Diphenylamine</b>	122-39-4	10	100	0.1	Alterations in clinical chemistry; increased kidney, liver, and spleen weights	HHBP
<i>Xylenes</i>	1330-20-7	179	1000	0.2	Decreased body weight; increased mortality	IRIS
<i>Phenol</i>	108-95-2	93	300	0.3	Decreased maternal weight gain; developmental toxicity	IRIS
<i>Acetone</i>	67-64-1	900	1000	0.9	Nephropathy	IRIS

#### 9.5.3.4. MCDA Results: Flowback and Produced Water

- 1 The hazard potential scores of the selected 23 chemicals detected in flowback and produced water
- 2 are presented in Table 9-9.

**Table 9-9. MCDA results for 23 chemicals in hydraulic fracturing flowback and produced water.**

Chemicals are ranked, from high to low, based on total hazard potential score. See Section 9.5.2 for details on the calculation.

Chemical	CASRN	Physicochemical properties score	Occurrence score	Toxicity score	Total hazard potential score
<b>Benzene</b>	71-43-2	0.75	1.00	1.00	<b>2.75</b>
<b>Pyridine</b>	110-86-1	0.75	1.00	1.00	<b>2.75</b>
<b>Naphthalene</b>	91-20-3	0.75	0.67	1.00	<b>2.42</b>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical	CASRN	Physicochemical properties score	Occurrence score	Toxicity score	Total hazard potential score
<b>2,4-Dimethylphenol</b>	105-67-9	1.00	0.33	1.00	<b>2.33</b>
<b>2-Methylnaphthalene</b>	91-57-6	0.25	1.00	1.00	<b>2.25</b>
<b>Chloroform</b>	67-66-3	0.75	0.33	1.00	<b>2.08</b>
<b>2-Methylphenol</b>	95-48-7	1.00	0.33	0.67	<b>2.00</b>
<b>Benzyl alcohol</b>	100-51-6	1.00	0.67	0.33	<b>2.00</b>
<b>Bis(2-Ethylhexyl) Phthalate</b>	117-81-7	0.25	0.67	1.00	<b>1.92</b>
<b>Carbon Disulfide</b>	75-15-0	0.50	1.00	0.33	<b>1.83</b>
<b>Toluene</b>	108-88-3	0.50	1.00	0.33	<b>1.83</b>
<b>Acetone</b>	67-64-1	0.75	0.67	0.00	<b>1.42</b>
<b>Pyrene</b>	129-00-0	0.75	0.00	0.67	<b>1.42</b>
<b>Di-n-butyl Phthalate</b>	84-74-2	0.75	0.33	0.33	<b>1.42</b>
<b>1,4-Dioxane</b>	123-91-1	1.00	0.00	0.67	<b>1.67</b>
<b>Fluoranthene</b>	206-44-0	1.00	0.00	0.67	<b>1.67</b>
<b>Xylenes</b>	1330-20-7	0.50	1.00	0.00	<b>1.50</b>
<b>Ethylbenzene</b>	100-41-4	0.50	0.33	0.33	<b>1.17</b>
<b>Phenol</b>	108-95-2	1.00	0.67	0.00	<b>1.67</b>
<b>Diphenylamine</b>	122-39-4	1.00	0.00	0.33	<b>1.33</b>
<b>Isopropylbenzene</b>	98-82-8	0.25	0.67	0.33	<b>1.25</b>
<b>Acetophenone</b>	98-86-2	0.75	0.00	0.33	<b>1.08</b>
<b>Fluorene</b>	86-73-7	0.00	0.00	0.67	<b>0.67</b>

1 The highest total hazard potential scores for chemicals in flowback and produced water went to  
2 benzene and pyridine, followed closely by naphthalene. These three chemicals all have RfVs that fell  
3 in the lowest (most toxic) quartile relative to other chemicals in the hazard evaluation (RfDs of  
4 0.004, 0.001, and 0.02 mg/kg-day, respectively). Benzene fell in the upper quartile of observed  
5 chemical concentrations (with a maximum reported average concentration of 680 µg/l; Barnett  
6 shale produced water, Table E-9), while pyridine and naphthalene fell in the second highest quartile  
7 (with maximum reported average concentrations of 413 and 238 µg/l, respectively; Barnett shale  
8 produced water, Table E-10). These three chemicals only scored moderately in terms of their  
9 physicochemical properties, however, as all three are expected to have somewhat lower transport  
10 in water compared to other chemicals in the assessment. 2-Methylnaphthalene also fell in the  
11 lowest quartile in terms of toxicity (RfD of 0.004 mg/kg-day) and the highest quartile in terms of  
12 concentration (average of 1,362 µg/l; Barnett shale produced water, Table E-10), but received a  
13 slightly lower score than these chemicals with regards to physicochemical properties.

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 Other chemicals occurring in the upper quartile of flowback and produced water concentrations  
2 include toluene (average of 760 µg/l; Barnett shale produced water, Table E-9), xylenes (average of  
3 360 µg/l; Barnett shale produced water, Table E-9), and carbon disulfide (median of 400 µg/l;  
4 Marcellus shale produced water, Table E-10). These chemicals all received moderate hazard  
5 potential scores, as all have higher RfDs (lower toxicity) relative to many of the other chemicals in  
6 the hazard evaluation, and are all expected to have moderate transport in water relative to the  
7 other chemicals.

8 Other chemicals with RfVs that fell in the lowest (most toxic) quartile in flowback and produced  
9 water include chloroform (RfD of 0.01 mg/kg-day), di(2-ethylhexyl)phthalate (RfD of 0.02 mg/kg-  
10 day), and 2,4,-dimethylphenol (RfD of 0.02 mg/kg-day). Of these, di(2-ethylhexyl)phthalate was  
11 detected at moderately high concentrations relative to other chemicals in the assessment (average  
12 of 210 µg/l; Barnett shale produced water, Table E-10), but is expected to have reduced mobility in  
13 water due primarily to its more hydrophobic properties. The rest are expected to have moderate to  
14 high transport in water, but were detected at relatively lower average concentrations compared to  
15 other chemicals in the assessment.

#### 9.5.4. Summary of Chemicals Detected in Multiple Stages of the Hydraulic Fracturing Water Cycle

16 A number of chemicals with federal chronic RfVs that are used in hydraulic fracturing fluids were  
17 also found to be present in flowback and produced water stages of the hydraulic fracturing water  
18 cycle. The use of a chemical in hydraulic fracturing fluids, and subsequent presence in later stages  
19 of the hydraulic fracturing water cycle, is of particular interest in demonstrating which chemicals in  
20 this dataset may be mixed, injected, and then detected downstream in the water cycle. This section  
21 focuses on that group of chemicals.

22 Based on the available information in our datasets, 23 chemicals overall had federal chronic RfVs  
23 and were identified as being used in hydraulic fracturing fluids and detected in the  
24 flowback/produced water stage of the hydraulic fracturing water cycle. These chemicals are shown  
25 in Table 9-10. 10 of these chemicals were included in both the hazard evaluation of hydraulic  
26 fracturing fluids (see Table 9-6 and Table 9-7) and the flowback and produced water hazard  
27 evaluation (see Table 9-8 and Table 9-9). This means that these 10 chemicals had both frequency of  
28 use data from FracFocus and a reported measured concentration in flowback and produced water  
29 from Chapter 7 (Appendix E). These 10 chemicals included all of the BTEX chemicals, as well as  
30 naphthalene, 1,4 dioxane, acetone, acetophenone, cumene, and phenol. The chemicals of this group  
31 with the lowest chronic oral RfVs were benzene, naphthalene, and 1,4-dioxane. These chemicals all  
32 have RfDs within an order of magnitude of each other and are known or likely human carcinogens.  
33 The next chemical of this group—toluene—has an RfD 20 times greater than benzene. Overall,  
34 benzene was the most toxic of the chemicals listed in Table 9-10.

**Table 9-10. List of the 23 chemicals with federal chronic RfVs identified to be used in hydraulic fracturing fluids and detected in the flowback/produced water stage of the hydraulic fracturing water cycle.**

Chemical	CASRN	Used in hydraulic fracturing fluids?	FracFocus frequency of use data?	Detected in flowback or produced water?	Physicochemical properties data available?	In hazard evaluation? <sup>a</sup>
<b>1,4-Dioxane</b>	123-91-1	Y	Y	Y	Y	FF+FB
<b>Acetone</b>	67-64-1	Y	Y	Y	Y	FF+FB
<b>Acetophenone</b>	98-86-2	Y	Y	Y	Y	FF+FB
<b>Benzene</b>	71-43-2	Y	Y	Y	Y	FF+FB
<b>Cumene</b>	98-82-8	Y	Y	Y	Y	FF+FB
<b>Ethylbenzene</b>	100-41-4	Y	Y	Y	Y	FF+FB
<b>Naphthalene</b>	91-20-3	Y	Y	Y	Y	FF+FB
<b>Phenol</b>	108-95-2	Y	Y	Y	Y	FF+FB
<b>Toluene</b>	108-88-3	Y	Y	Y	Y	FF+FB
<b>Xylenes</b>	1330-20-7	Y	Y	Y	Y	FF+FB
<b>1,2-Propylene glycol</b>	57-55-6	Y	Y	Y	Y	FF
<b>Dichloromethane</b>	75-09-2	Y	Y	Y	Y	FF
<b>Ethylene glycol</b>	107-21-1	Y	Y	Y	Y	FF
<b>Formic acid</b>	64-18-6	Y	Y	Y	Y	FF
<b>Methanol</b>	67-56-1	Y	Y	Y	Y	FF
<b>Aluminum</b>	7429-90-5	Y	Y	Y	--	No
<b>Iron</b>	7439-89-6	Y	Y	Y	--	No
<b>Di(2-ethylhexyl) phthalate</b>	117-81-7	Y	--	Y	Y	FB
<b>Acrolein</b>	107-02-8	Y	--	Y	Y	No
<b>Arsenic</b>	7440-38-2	Y	--	Y	--	No
<b>Chlorine</b>	7782-50-5	Y	--	Y	--	No
<b>Chromium (III)</b>	16065-83-1	Y	--	Y	--	No
<b>Chromium (VI)</b>	18540-29-9	Y	--	Y	--	No
<b>Zinc</b>	7440-66-6	Y	--	Y	--	No

<sup>a</sup> FF+FB: chemical in both the hydraulic fracturing fluid and flowback/produced water hazard evaluations; FF or FB: chemical in either the hydraulic fracturing fluid or flowback/produced water hazard evaluations. A dash indicates data for chemical not available.

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 An additional 6 chemicals were included in either the hazard evaluation of hydraulic fracturing  
2 fluids (see Table 9-6 and Table 9-7) or the flowback and produced water hazard evaluation (see  
3 Table 9-8 and Table 9-9), but not both. These chemicals were reported to be have been used in  
4 hydraulic fracturing fluids and detected in flowback/produced water, but lacked the occurrence  
5 data (frequency of use or a measured concentration) to support inclusion in both of these hazard  
6 evaluations. The remaining 8 chemicals reported to have been used in hydraulic fracturing fluids or  
7 detected in flowback/produced water were not included in either of the hazard evaluations  
8 presented above because they lacked one or more of the inclusion criteria. These chemicals include  
9 acrolein as well as several metals. Arsenic and acrolein have the lowest RfDs by an order of  
10 magnitude and arsenic is classified as a known human carcinogen by the EPA, IARC, and NTP.  
11 Chromium (VI) is also classified as a known human carcinogen by IARC and NTP.

## 9.6. Synthesis

12 The overall objective of this chapter was to identify and provide information on the toxicological  
13 properties of chemicals used in hydraulic fracturing and of hydraulic fracturing wastewater  
14 constituents, and to evaluate the potential hazard of these chemicals to drinking water resources.  
15 Toward this end, the EPA developed a comprehensive list of 1,173 chemicals with reported  
16 occurrence in the hydraulic fracturing water cycle, separating them into subsets based on whether  
17 they were reported to have been used in hydraulic fracturing fluids or detected in flowback and  
18 produced water. First, for each of these chemicals, RfVs and OSFs from selected federal, state, and  
19 international sources were collected when available. Second, for subsets of chemicals that were  
20 identified as being of interest in previous chapters of this report, federal chronic RfVs were used to  
21 conduct an initial identification of the potential human health hazards inherent to these chemicals.  
22 Finally, for other subsets of chemicals that had data available, an approach for a more data-  
23 informed hazard evaluation was illustrated by integrating data on federal chronic RfVs, occurrence,  
24 and physicochemical properties using an MCDA framework.

### 9.6.1. Summary of Findings

25 Across the industrial landscape, thousands of chemicals are used commercially that lack toxicity  
26 data ([Judson et al., 2009](#)). Similarly, major knowledge gaps exist regarding the toxicity of most  
27 chemicals used in hydraulic fracturing fluids or detected in flowback/produced water, impeding the  
28 assessment of human health risks associated with drinking water resources affected by hydraulic  
29 fracturing.

30 Of the 1,076 chemicals used in hydraulic fracturing fluids, chronic RfVs and/or OSFs from all of the  
31 selected federal, state, or international sources were available for 90 chemicals (8.4%). From the  
32 federal sources alone, chronic oral RfVs were available for 73 chemicals (6.8%), and OSFs were  
33 available for 15 (1.4%). Potential hazards associated with these chemicals include carcinogenesis,  
34 immune system effects, changes in body weight, changes in blood chemistry, cardiotoxicity,  
35 neurotoxicity, liver and kidney toxicity, and reproductive and developmental toxicity.

36 Of the 134 chemicals that are reported to have been detected in hydraulic fracturing flowback or  
37 produced water, chronic RfVs and/or OSFs from all of the selected federal, state, or international

1 sources were available for 83 chemicals (62%). From the federal sources alone, chronic RfVs were  
2 available for 70 chemicals (52%), and OSFs were available for 20 (15%). Potential hazards  
3 associated with these chemicals include carcinogenesis, immune system effects, changes in body  
4 weight, changes in blood chemistry, pulmonary toxicity, neurotoxicity, liver and kidney toxicity, and  
5 reproductive and developmental toxicity.

6 Of the chemicals included in the hazard evaluations, benzene is the only one of these chemicals with  
7 an OSF that is classified as a known human carcinogen, while acrylamide was found to be the most  
8 potent likely human carcinogen. Several other chemicals, including 1,4-dioxane, dichloromethane,  
9 naphthalene, and ethylbenzene are also classified as possible, probable, or likely human  
10 carcinogens.

11 Toxicity information spans a wide range with respect to extent, quality and reliability. The sources  
12 of RfVs and OSFs selected for the purposes of this chapter are based on criteria developed  
13 specifically for this report. For the total 1,173 chemicals identified on the EPA's list, federal, state,  
14 and international chronic RfVs and/or OSFs that met stringent selection criteria were available for  
15 147 (13%) of the chemicals. Several of the RfVs from selected sources were derived using UFs of up  
16 to several orders of magnitude, indicating uncertainty when comparing chemicals for potential  
17 toxicity and identifying the chemicals that may be more likely to present a human health hazard.  
18 For many of the chemicals used in hydraulic fracturing or found in flowback or produced water  
19 there may be relevant information, including cancer and noncancer-related information, from one  
20 or more sources that were not evaluated in this chapter. In instances where toxicity data is not  
21 available from selected sources, risk assessors may need to draw from alternative sources of hazard  
22 information. The chapter discusses two available resources for consideration when RfVs and/or  
23 OSFs are not available: QSAR-predicted toxicity data, and toxicity data from the EPA's ACToR  
24 database. Oral toxicity data was available on ACToR for 642 (55%) of the chemicals. The  
25 information available in the ACToR data warehouse ranges from the federal RfVs discussed in  
26 Section 9.3.1, which have undergone extensive peer review, to RfVs and study and test results that  
27 have undergone little to no peer review.

28 When considering the potential impact of chemicals on drinking water resources and human health,  
29 it is important to consider exposure as well as toxicological properties. The majority of chemicals  
30 identified in this report lacked the necessary data to conduct such an assessment. However,  
31 integrating data on toxicity, occurrence, and physicochemical properties using an MCDA framework  
32 enabled a more data-informed hazard evaluation on some chemicals. This analysis highlighted  
33 several chemicals that may be more likely than others to reach drinking water and create a  
34 toxicological hazard. In hydraulic fracturing fluid, an example is propargyl alcohol. It was among the  
35 chemicals with the lowest RfVs considered in this hazard evaluation, was used in 33% of wells in  
36 the FracFocus database, and is water soluble with low volatility. In flowback and produced water,  
37 examples of such chemicals include benzene, pyridine, and naphthalene. These chemicals were also  
38 among those with the lowest RfVs considered in this hazard evaluation, are expected to be  
39 relatively mobile in water, and were present at relatively high average concentrations in flowback.



### 9.6.2. Factors Affecting the Frequency or Severity of Impacts

1 When assessing chemical hazards, there are multiple pieces of information that could be taken into  
2 account. This includes knowledge of the chemicals used at a given well site, the toxicological and  
3 physicochemical properties of these chemicals, the amount of fluid being used and recovered, the  
4 likelihood of well integrity failures, and the likelihood of spills and other unintentional releases.  
5 These topics were previously discussed in Chapters 5 through 8 of this report. Because of the large  
6 volumes of fluid being injected, even chemicals representing a small percentage of the total fluid by  
7 mass may pose a potential for exposure in the event of a spill or leak.

8 Overall, contamination of drinking water resources depends on site-, chemical-, and fluid-specific  
9 factors ([Goldstein et al., 2014](#)), and the exact mixture and concentrations of chemicals at a site will  
10 depend upon the geology and the company's preferences. Therefore, potential hazard and risk  
11 considerations are best made on a site-specific, well-specific basis. While the MCDA results in this  
12 chapter illustrate an approach to evaluate the relative hazards of these chemicals at the national  
13 level, a site-specific hazard evaluation would be necessary in order to identify chemicals of concern  
14 at the local level.

15 For example, consider (E)-crotonaldehyde, which is one of the more toxic chemicals considered in  
16 the hazard evaluation of hydraulic fracturing fluids. (E)-crotonaldehyde is reportedly used in only  
17 0.06% of wells in the FracFocus database, based on the EPA's analysis. If the FracFocus database  
18 represents a fair sample of all of the wells across the country, then the likelihood of (E)-  
19 crotonaldehyde contamination on a nationwide scale is limited. However, this in no way diminishes  
20 the likelihood of (E)-crotonaldehyde contamination at well sites where this chemical is used.  
21 Therefore, potential exposures to more toxic but infrequently used chemicals are more of a local  
22 issue, rather than a national one.

23 This is in contrast with methanol, which was reported in 73% of wells in the FracFocus database.  
24 Methanol is soluble and relatively mobile in water, but has a higher RfV relative to other chemicals  
25 in the hazard evaluation. Therefore, when considering chemical usage on a nationwide basis,  
26 methanol may be expected to have a higher exposure potential compared to other chemicals, with a  
27 moderate overall hazard potential due to its relatively high RfV.

### 9.6.3. Uncertainties

28 There are several notable uncertainties in the chemical and toxicological data that limit a  
29 comprehensive assessment of the potential health impacts of hydraulic fracturing on drinking  
30 water resources.

31 For the purposes of this chapter, the lack of RfVs and OSFs from the sources meeting stringent  
32 selection criteria is the most significant data gap. For instance, of the 32 chemicals (excluding  
33 water, quartz, and sodium chloride) that are used in  $\geq 10\%$  of wells nationwide according to  
34 FracFocus, federal chronic RfVs were only available for 7 chemicals. Without these reliable and peer  
35 reviewed data, comprehensive hazard evaluation and hazard identification of chemicals is difficult,  
36 and the ability to consider the potential cumulative effects of exposure to chemical mixtures in

---

1 hydraulic fracturing fluid, flowback, or produced water is limited. Consequently, potential impacts  
2 on drinking water resources and human health may not be assessed adequately.

3 Another major uncertainty lies in the total list of chemicals that was compiled for this chapter. As  
4 discussed in Section 5.1.3, information is lacking on the chemicals that are used in hydraulic  
5 fracturing fluid formulation. CBI chemicals, which were present in approximately 70% of well  
6 records on the FracFocus database, were excluded from the EPA's analysis. The analysis also  
7 excluded ingredient records that were not able to be assigned standardized chemical names, which  
8 resulted in approximately 35% of FracFocus ingredient records being excluded from the report.  
9 This lack of data limits the ability to more completely assess the impact of chemicals that are  
10 potentially used with great frequency. Moreover, there may be a regional bias in the EPA's analysis  
11 of FracFocus, as 78% of chemical disclosures in the FracFocus database came from five states, and  
12 47% were from Texas. Despite these limitations, the FracFocus database remains the most  
13 complete source for tracking hydraulic fracturing chemical usage in the United States, and therefore  
14 was the best available source for the hazard evaluation in this chapter. Although the sources used to  
15 compile the chemical list represented the best available data at the time of this study, it is possible  
16 that some of these chemicals are no longer used at all, and many of these chemicals may only be  
17 used infrequently. Therefore, it may be possible that significantly fewer than 1,076 chemicals are  
18 currently used in abundance. Consequently, having a better understanding of the chemicals and  
19 formulations, including those that are CBI, along with their frequency of use and volumes, would  
20 greatly benefit risk assessment and risk management decisions.

21 Additionally, the list of flowback and produced water chemicals identified in this chapter is almost  
22 certainly incomplete. Few studies to date have examined the chemical composition of flowback and  
23 produced water, and the hazard evaluation in this chapter relied on data from the relatively small  
24 number of studies that are presented in Appendix E of this assessment. As discussed in Chapter 7,  
25 chemicals and their metabolites may go undetected simply because they were not included in the  
26 analytical methodology. Additionally, chemical analysis of flowback and produced water may be  
27 challenging, because high levels of dissolved solids in flowback and wastewater can interfere with  
28 chemical detection. As a result, it is likely that there are chemicals of concern in flowback and  
29 produced water that have not been detected or reported.

30 Finally, when considering the MCDA framework that was used to illustrate an approach for hazard  
31 evaluation, it should be noted that the physicochemical variables were chosen specifically to reflect  
32 chemical mobility and persistence in water. While this framework draws attention towards those  
33 chemicals that are most likely to be carried in water, it does not attempt to address the numerous  
34 other physicochemical variables that may affect chemical exposure. For instance, as discussed in  
35 Chapter 5, hydrophobic chemicals may act as long-term sources of pollution by sorbing to soils or  
36 sediments. Additionally, volatile chemicals that dissipate into the air have the potential to pose air  
37 pollution hazards, which are not considered in this drinking water assessment; or could potentially  
38 be deposited in bodies of water that are distant from the hydraulic fracturing site. Furthermore, as  
39 discussed in Chapter 5, chemical fate and transport will be influenced by environmental and site-  
40 specific conditions. The fate of a chemical in a chemical mixture will be also influenced by the other

---

1 chemicals that are present in the mixture, and the relative concentrations of each. Although the  
2 assessment of these various scenarios is outside the scope of this report, the potential hazards  
3 associated with hydrophobic or volatile chemicals should not be discounted when interpreting the  
4 results of this hazard evaluation. It should be emphasized that the MCDA framework illustrated in  
5 this chapter represents just one method that can be used to integrate chemical data for hazard  
6 evaluation, and is readily adaptable to include different variables, different weights for the  
7 variables, and site-specific considerations.

#### 9.6.4. Conclusions

8 The EPA has identified 1,173 chemicals used or detected in the hydraulic fracturing water cycle.  
9 Toxicity-based chronic RfVs and/or OSFs from sources meeting selection criteria are not available  
10 for the large majority (87%) of these chemicals. In addition, 56% of these chemicals do not have  
11 physicochemical property data. Furthermore, 36% of the chemicals used in hydraulic fracturing  
12 fluids lack data on their nationwide frequency of use, and very few studies have analyzed the  
13 chemical composition of flowback and produced water. Given the large number of chemicals used  
14 or detected in various stages of the hydraulic fracturing water cycle, as well as the large number of  
15 hydraulic fracturing wells nationwide, this missing chemical information represents a significant  
16 data gap. Because of these large data gaps for drinking water resources, it remains challenging to  
17 fully understand the toxicity and potential health impacts for single chemicals as well as mixtures of  
18 chemicals associated with hydraulic fracturing processes. This chapter provides an initial overall  
19 assessment of the potential human health effects associated with hydraulic fracturing on a  
20 nationwide basis. It also provides tools that may support risk assessment and risk management  
21 decision making at the local and regional level.

22 The toxicological data, occurrence data, and physicochemical data compiled in this report provide a  
23 resource for assessing the potential hazards associated with chemicals in the hydraulic fracturing  
24 water cycle. Additionally, the MCDA framework presented herein illustrates one method for  
25 integrating these data for hazard evaluation. While the analysis in this chapter is constrained to the  
26 assessment of chemicals on a nationwide scale, this approach is readily adaptable for use on a  
27 regional or site-specific basis.

28 This collection of data provides a tool to inform decisions about protection of drinking water  
29 resources. Agencies may use these results to prioritize chemicals for hazard assessment or for  
30 determining future research priorities. Industry may use this information to prioritize chemicals for  
31 replacement with less toxic, persistent, and mobile alternatives. A summary of the findings related  
32 to the overall objective of this chapter and the research questions is presented in Text Box 9-1.

**Text Box 9-1. Research Questions Revisited.****1 What are the toxicological properties of hydraulic fracturing fluid chemical additives?**

- 2 • In a nationwide assessment, the EPA identified 1,076 chemicals that are used in hydraulic fracturing  
3 fluids. This does not include chemicals classified as CBI, which the FracFocus database indicates are used  
4 in more than 70% of wells. Chronic RfVs and/or OSFs from selected federal, state, and international  
5 sources were available for 90 (8.4%) of these chemicals. From the federal sources alone, chronic RfVs  
6 were available for 73 chemicals (6.8%), and OSFs were available for 15 chemicals (1.4%). RfVs and OSFs  
7 were not available for the majority of chemicals that are used in hydraulic fracturing fluid, representing a  
8 significant data gap with regards to hazard identification. Of the chemicals that have selected RfVs, health  
9 effects include the potential for carcinogenesis, immune system effects, changes in body weight, changes  
10 in blood chemistry, cardiotoxicity, neurotoxicity, liver and kidney toxicity, and reproductive and  
11 developmental toxicity.
- 12 • When considering the hazard evaluation of these chemicals on a nationwide scale, chemicals such as  
13 propargyl alcohol stand out for their relatively lower RfVs, high frequency of use, and expected transport  
14 and mobility in water. However, the FracFocus database indicates that most chemicals are used  
15 infrequently on a nationwide scale; therefore, potential exposures to the majority of these chemicals are  
16 more likely to be a local issue, rather than a national one. Accordingly, potential hazard and risk  
17 considerations for hydraulic fracturing fluid chemical additives are best made on a site-specific, well-  
18 specific basis.

**19 What are the toxicological properties of hydraulic fracturing wastewater constituents?**

- 20 • This assessment identified 134 chemicals that are reported to have been detected in hydraulic fracturing  
21 flowback or produced water. These include chemicals that are added to hydraulic fracturing fluids during  
22 the chemical mixing stage, as well as naturally occurring organic chemicals, metals, naturally occurring  
23 radioactive material, and other subterranean chemicals that may be mobilized by the hydraulic fracturing  
24 process. Chronic RfVs and/or OSFs from selected federal, state, and international sources were available  
25 for 83 (62%) of these chemicals. From the federal sources alone, chronic RfVs were available for 70  
26 chemicals (52%), and OSFs were available for 20 chemicals (15%). Of the chemicals that had selected  
27 RfVs, health effects include the potential for carcinogenesis, immune system effects, changes in body  
28 weight, changes in blood chemistry, pulmonary toxicity, neurotoxicity, liver and kidney toxicity, and  
29 reproductive and developmental toxicity.
- 30 • In a hazard evaluation of flowback and produced water data, chemicals such as benzene, pyridine, and  
31 naphthalene stood out for their relatively lower RfVs, high average concentrations, and expected  
32 transport and mobility in water. However, the chemicals present in flowback and produced water are  
33 likely to vary on a regional and well-specific basis as a result of geological differences as well as  
34 differences between hydraulic fracturing fluid formulations. Therefore, potential hazard and risk  
35 considerations are best made on a site-specific basis.

## 9.7. References for Chapter 9

- [Colborn, T; Kwiatkowski, C; Schultz, K; Bachran, M.](#) (2011). Natural gas operations from a public health perspective. *Hum Ecol Risk Assess* 17: 1039-1056. <http://dx.doi.org/10.1080/10807039.2011.605662>
- [Finkel, M; Hays, J; Law, A.](#) (2013). The shale gas boom and the need for rational policy. *Am J Public Health* 103: 1161-1163. <http://dx.doi.org/10.2105/AJPH.2013.301285>
- [Goldstein, BD; Brooks, BW; Cohen, SD; Gates, AE; Honeycutt, ME; Morris, JB; Orme-Zavaleta, J; Penning, TM; Snawder, J.](#) (2014). The role of toxicological science in meeting the challenges and opportunities of hydraulic fracturing. *Toxicol Sci* 139: 271-283. <http://dx.doi.org/10.1093/toxsci/kfu061>
- [House of Representatives](#) (U.S. House of Representatives). (2011). Chemicals used in hydraulic fracturing. Washington, D.C.: U.S. House of Representatives, Committee on Energy and Commerce, Minority Staff. <http://democrats.energycommerce.house.gov/sites/default/files/documents/Hydraulic-Fracturing-Chemicals-2011-4-18.pdf>
- [Hristozov, DR; Zabeo, A; Foran, C; Isigonis, P; Critto, A; Marcomini, A; Linkov, I.](#) (2014). A weight of evidence approach for hazard screening of engineered nanomaterials. *Nanotoxicology* 8: 72-87. <http://dx.doi.org/10.3109/17435390.2012.750695>
- [Judson, R; Richard, A; Dix, DJ; Houck, K; Martin, M; Kavlock, R; Dellarco, V; Henry, T; Holderman, T; Sayre, P; Tan, S; Carpenter, T; Smith, E.](#) (2009). The toxicity data landscape for environmental chemicals [Review]. *Environ Health Perspect* 117: 685-695. <http://dx.doi.org/10.1289/ehp.0800168>
- [Kahrilas, GA; Blotevogel, J; Stewart, PS; Borch, T.](#) (2015). Biocides in hydraulic fracturing fluids: a critical review of their usage, mobility, degradation, and toxicity. *Environ Sci Technol* 49: 16-32. <http://dx.doi.org/10.1021/es503724k>
- [Kassotis, CD; Tillitt, DE; Wade Davis, J; Hormann, AM; Nagel, SC.](#) (2014). Estrogen and androgen receptor activities of hydraulic fracturing chemicals and surface and ground water in a drilling-dense region. *Endocrinology* 155: 897-907. <http://dx.doi.org/10.1210/en.2013-1697>
- [Korfmacher, KS; Jones, WA; Malone, SL; Vinci, LF.](#) (2013). Public health and high volume hydraulic fracturing. *New Solutions: A Journal of Environmental and Occupational Health Policy* 23: 13-31. <http://dx.doi.org/10.2190/NS.23.1.c>
- [Linkov, I; Welle, P; Loney, D; Tkachuk, A; Canis, L; Kim, JB; Bridges, T.](#) (2011). Use of multicriteria decision analysis to support weight of evidence evaluation. *Risk Anal* 31: 1211-1225. <http://dx.doi.org/10.1111/j.1539-6924.2011.01585.x>
- [McKenzie, LM; Guo, R; Witter, RZ; Savitz, DA; Newman, L; Adgate, JL.](#) (2014). Birth outcomes and maternal residential proximity to natural gas development in rural Colorado. *Environ Health Perspect* 122: 412-417. <http://dx.doi.org/10.1289/ehp.1306722>
- [Mitchell, J; Pabon, P; Collier, ZA; Egeghy, PP; Cohen-Hubal, E; Linkov, I; Vallero, DA.](#) (2013b). A decision analytic approach to exposure-based chemical prioritization. *PLoS ONE* 8: e70911. <http://dx.doi.org/1371/journal.pone.0070911>
- [Moudgal, CJ; Venkatapathy, R; Choudhury, H; Bruce, RM; Lipscomb, JC.](#) (2003). Application of QSTRs in the selection of a surrogate toxicity value for chemical of concern. *Environ Sci Technol* 37: 5228-5235.
- [NRC](#) (National Research Council). (2014). A framework to guide selection of chemical alternatives. Washington, D.C.: The National Academies Press. <http://www.nap.edu/catalog/18872/a-framework-to-guide-selection-of-chemical-alternatives>
- [Rupp, B; Appel, KE; Gundert-Remy, U.](#) (2010). Chronic oral LOAEL prediction by using a commercially available computational QSAR tool. *Arch Toxicol* 84: 681-688. <http://dx.doi.org/10.1007/s00204-010-0532-x>

- [Stringfellow, WT; Domen, JK; Camarillo, MK; Sandelin, WL; Borglin, S.](#) (2014). Physical, chemical, and biological characteristics of compounds used in hydraulic fracturing. *J Hazard Mater* 275: 37-54. <http://dx.doi.org/10.1016/j.jhazmat.2014.04.040>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2002a). A review of the reference dose and reference concentration processes. (EPA/630/P-02/002F). Washington, DC: U.S. Environmental Protection Agency, Risk Assessment Forum. <http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=51717>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2002b). Toxicological review of benzene (noncancerous effects) [EPA Report]. (EPA/635/R-02/001F). Washington, DC.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2005). Pollution prevention (P2) framework [EPA Report]. (EPA-748-B-04-001). Washington, DC: Office of Pollution Prevention and Toxics. <http://www.epa.gov/oppt/sf/pubs/p2frame-june05a2.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2010). Toxicological review of acrylamide (CAS No. 79-06-1) in support of summary information on the Integrated Risk Information System (IRIS) [EPA Report]. (EPA/635/R-07/008F). Washington, DC.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011a). Design for the Environment program alternatives assessment criteria for hazard evaluation (version 2.0). Washington, D.C. <http://www2.epa.gov/saferchoice/alternatives-assessment-criteria-hazard-evaluation>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011d). Terminology services (TS): Vocabulary catalog - IRIS glossary. Available online at [http://ofmpub.epa.gov/sor\\_internet/registry/termreg/searchandretrieve/glossariesandkeywordlists/search.do?details=&glossaryName=IRIS%20Glossary](http://ofmpub.epa.gov/sor_internet/registry/termreg/searchandretrieve/glossariesandkeywordlists/search.do?details=&glossaryName=IRIS%20Glossary) (accessed May 21, 2015).
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012f). Study of the potential impacts of hydraulic fracturing on drinking water resources: Progress report. (EPA/601/R-12/011). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://nepis.epa.gov/exe/ZyPURL.cgi?Dockey=P100FH8M.txt>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013f). Toxicological review of 1,4-Dioxane (with inhalation update) (CAS No. 123-91-1) in support of summary information on the Integrated Risk Information System (IRIS) [EPA Report]. (EPA-635/R-11/003-F). Washington, DC.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014a). Alternatives assessment for the flame retardant decabromodiphenyl ether (DecaBDE). Washington, D.C. <http://www2.epa.gov/saferchoice/partnership-evaluate-flame-retardant-alternatives-decabde-publications>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014d). Flame retardant alternatives for hexabromocyclododecane (HBCD) [EPA Report]. (EPA/740/R-14/001). Washington, D.C. <http://www2.epa.gov/saferchoice/partnership-evaluate-flame-retardant-alternatives-hbcd-publications>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- [Venkatapathy, R; Moudgal, CJ; Bruce, RM.](#) (2004). Assessment of the oral rat chronic lowest observed adverse effect level model in TOPKAT, a QSAR software package for toxicity prediction. *J chem inf comput sci* 44: 1623-1629. <http://dx.doi.org/10.1021/ci049903s>
- [Wattenberg, EV; Bielicki, JM; Suchomel, AE; Sweet, JT; Vold, EM; Ramachandran, G.](#) (In Press) Assessment of the acute and chronic health hazards of hydraulic fracturing fluids. *J Occup Environ Hyg.* <http://dx.doi.org/10.1080/15459624.2015.1029612>



---

Weinhold, B. (2012). The future of fracking: new rules target air emissions for cleaner natural gas production. Environ Health Perspect 120: a272-a279. <http://dx.doi.org/10.1289/ehp.120-a272>

## 9.8. Annex

### 9.8.1. Calculation of Physicochemical Property Scores (MCDA Hazard Evaluation)

1 Section 9.5.2 describes how physicochemical properties scores were based on three subcriteria:  
2 mobility, volatility, and persistence. These subcriteria scores were calculated as follows:

3 *Mobility score:* Chemical mobility in water was assessed based upon three physicochemical  
4 properties: the octanol-water partition coefficient ( $K_{ow}$ ), the organic carbon-water partition  
5 coefficient ( $K_{oc}$ ), and aqueous solubility.  $K_{ow}$  and aqueous solubility were previously discussed in  
6 Section 5.8.3.  $K_{oc}$  is a partitioning coefficient that measures the amount of chemical that is adsorbed  
7 onto soil organic carbon per the amount of chemical that is dissolved in water. Like  $K_{ow}$ ,  $K_{oc}$  is  
8 typically reported as a base-10 logarithm ( $\log K_{oc}$ ). From EPI Suite™,  $K_{oc}$  was estimated using the  
9 MCI Method. Chemicals with low  $K_{ow}$  and  $K_{oc}$  values are hydrophilic, and thus are more likely to  
10 move with water rather than sorbing to soils or sediments. Chemicals with high aqueous solubility  
11 are also more likely to move with water. Therefore, chemicals with low  $K_{ow}$ , low  $K_{oc}$ , or high aqueous  
12 solubility were ranked as having greater potential to affect drinking water resources. Using the  
13 thresholds designated in Table 9-5, each of these properties was assigned a score of 1-4. The  
14 highest of these three scores was designated as the mobility score for each chemical.

15 *Volatility score:* Chemical volatility was assessed based on the Henry's law constant, which was  
16 previously discussed in Section 5.8.3. Chemicals with low Henry's law constants are less likely to  
17 leave water via volatilization, and were therefore ranked as having greater potential to impact  
18 drinking water. Using the thresholds designated in Table 9-5, the Henry's law constant for each  
19 chemical was assigned a score of 1-4. This value was designated as the volatility score for each  
20 chemical.

21 *Persistence score:* Chemical persistence was assessed based on estimated half-life in water, which  
22 describes how long a chemical will persist in water before it is transformed or degraded. From EPI  
23 Suite™, half-life in water was estimated using the Level III Fugacity model. Chemicals with longer  
24 half-lives are more persistent, and were therefore ranked as having greater potential to affect  
25 drinking water. Using the thresholds designated in Table 9-5, the half-life of each chemical was  
26 assigned a score of 1-4. This value was designated as the persistence score for each chemical.

27 For each chemical, the mobility score, volatility score, and persistence score (each on a scale of 1 to  
28 4) were summed to calculate a total physicochemical score. The total scores were then  
29 standardized by scaling to the highest and lowest scores observed in the subset of chemicals, using  
30 the equation described in Section 9.5.2.4.

### 9.8.2. Example of MCDA Score Calculation

1 For an example of how the MCDA scores were calculated, consider benzene. This demonstrates how  
2 the MCDA score was calculated for benzene in the hazard evaluation of chemicals used in hydraulic  
3 fracturing fluids:

- 4
- 5 • With regards to toxicity (Appendix G), benzene was found to have a federal RfD of 0.004  
6 mg/kg-day (source: IRIS). Within the entire set of chemicals in this hazard evaluation,  
7 federal RfDs ranged from 0.001 mg/kg-day [(E)-crotonaldehyde] to 20 mg/kg-day (1,2-  
8 propylene glycol). The RfD of benzene fell in the lowest (most toxic) quartile of these  
9 scores, and therefore was given a toxicity score of 4. When the results were standardized  
10 to the highest score (4) and lowest score (1) within the set of chemicals, benzene was  
11 calculated to have a toxicity score of 1, as follows:

$$1 = (4 - 1) / (4 - 1)$$

- 12
- 13 • Benzene was used in 0.0056% of wells nationwide ([U.S. EPA, 2015a](#)). This usage frequency  
14 falls in the lowest quartile of chemicals, and therefore benzene was given an occurrence  
15 score of 1. When the results were standardized to the highest score (4) and lowest score  
16 (1) within the set of chemicals, benzene was calculated to have an occurrence score of 0, as  
17 follows:

$$0 = (1 - 1) / (4 - 1)$$

- 18
- 19 • Based on physicochemical properties, benzene received a mobility score of 4 ( $\log K_{ow} =$   
20  $2.13$ ;  $\log K_{oc} = 1.75$ ; solubility = 2000 mg/l), a volatility score of 2 (Henry's law constant =  
21  $0.00555$ ), and a persistence score of 2 (half-life in water = 37.5 days). These scores sum to  
22 a total physicochemical properties score of 8. Within the entire set of chemicals in this  
23 hazard evaluation, several chemicals received total scores of 9, which was the highest  
24 observed score. Cumene received a total score of 6, which was the lowest observed score.  
25 When the results were standardized to the high score (9) and low score (6) using the  
26 equation above, benzene was calculated to have a physicochemical properties score of  
27 0.67 as follows:

$$0.67 = (8 - 6) / (9 - 6)$$

28 To calculate the total hazard potential score for benzene, the physicochemical properties score,  
29 toxicity score, and occurrence score were summed for a total of 1.67. These results can be seen in  
30 Table 9-7, which shows the MCDA results for chemicals used in hydraulic fracturing fluid.

# Chapter 10

---

## Synthesis

## 10. Synthesis

1 In this assessment, we examined the potential for hydraulic fracturing for oil and natural gas to  
2 change the quality or quantity of drinking water resources, and identified factors that affect the  
3 frequency or severity of potential impacts. Drinking water resources are defined broadly in this  
4 report as any body of ground water or surface water that now serves, or in the future could serve,  
5 as a source of drinking water for public or private use. We assessed potential effects on drinking  
6 water resources from both routine operations and potential accidents. Impacts were defined as any  
7 change in the quality or quantity of drinking water resources. Where possible, we identified the  
8 mechanisms responsible or potentially responsible for any impacts. For example, a spill of  
9 hydraulic fracturing fluid is a mechanism by which drinking water resources could be impacted.

10 We did this by following water through the hydraulic fracturing water cycle: (1) the withdrawal of  
11 ground or surface water needed for hydraulic fracturing fluids; (2) the mixing of water, chemicals,  
12 and proppant on the well pad to create the hydraulic fracturing fluid; (3) the injection of hydraulic  
13 fracturing fluids into the well to fracture the geologic formation; (4) the management of flowback  
14 and produced water, both on the well pad and in transit for reuse, treatment, or disposal; and (5)  
15 the reuse, treatment and discharge, or disposal of hydraulic fracturing wastewater.

16 In this chapter, we summarize major findings of the assessment, organized by each stage of the  
17 hydraulic fracturing water cycle (Section 10.1); highlight key uncertainties related to these major  
18 findings (Section 10.2); and discuss the assessment’s overall conclusions (Section 10.3) and  
19 potential uses (Section 10.4).

### 10.1. Major Findings

20 From our assessment, we conclude there are above and below ground mechanisms by which  
21 hydraulic fracturing activities have the potential to impact drinking water resources. These  
22 mechanisms include water withdrawals in times of, or in areas with, low water availability; spills of  
23 hydraulic fracturing fluids and produced water; fracturing directly into underground drinking  
24 water resources; below ground migration of liquids and gases; and inadequate treatment and  
25 discharge of wastewater.

26 We did not find evidence that these mechanisms have led to widespread, systemic impacts on  
27 drinking water resources in the United States. Of the potential mechanisms identified in this report,  
28 we found specific instances where one or more mechanisms led to impacts on drinking water  
29 resources, including contamination of drinking water wells. The number of identified cases,  
30 however, was small compared to the number of hydraulically fractured wells.

31 This finding could reflect a rarity of effects on drinking water resources, but may also be due to  
32 other limiting factors. These factors include: insufficient pre- and post-fracturing data on the quality  
33 of drinking water resources; the paucity of long-term systematic studies; the presence of other  
34 sources of contamination precluding a definitive link between hydraulic fracturing activities and an  
35 impact; and the inaccessibility of some information on hydraulic fracturing activities and potential  
36 impacts.

1 Below, we provide a synopsis of the assessment’s key findings, organized according to each stage of  
2 the hydraulic fracturing water cycle. We provide answers to the research questions presented in  
3 the Study Plan and Chapter 1. Results from Chapter 9 (Hazard Evaluation and Identification of  
4 Chemicals across the Hydraulic Fracturing Water Cycle) are included in the Chemical Mixing and  
5 the Flowback and Produced Water sections. While some citations are provided here, individual  
6 chapters can be consulted for additional detail and citations.

### 10.1.1. Water Acquisition (Chapter 4)

7 Water is a major component of nearly all hydraulic fracturing operations. It typically makes up  
8 almost 90% or more of the fluid injected into a well, and each hydraulically fractured well requires  
9 thousands to millions of gallons of water. Cumulatively, hydraulic fracturing activities in the United  
10 States used on average 44 billion gal of water a year in 2011 and 2012, according to the EPA’s  
11 analysis of FracFocus 1.0 disclosures. Although this represents less than 1% of total annual water  
12 use and consumption at this scale, water withdrawals could potentially impact the quantity and  
13 quality of drinking water resources at more local scales.

#### **Research Questions: Water Acquisition**


- **What are the types of water used for hydraulic fracturing?**

14 Water for hydraulic fracturing typically comes from surface water, ground water, or reused  
15 hydraulic fracturing wastewater. Hydraulic fracturing operations in the eastern United States  
16 generally rely on surface water, while operations in the more semi-arid to arid western states  
17 generally use mixed supplies of surface and ground water. In the Marcellus Shale in Pennsylvania,  
18 for example, most water used for hydraulic fracturing originates from surface water, whereas  
19 surface and ground water are used in approximately equal proportions in the Barnett Shale in  
20 Texas (see Figure 10-1a,b). In areas that lack available surface water (e.g., western Texas), ground  
21 water supplies most of the water needed for hydraulic fracturing.

22 Across the United States, the vast majority of water used in hydraulic fracturing is fresh, although  
23 operators also make use of lower-quality water, including reused hydraulic fracturing wastewater.  
24 Based on available data, the median reuse of hydraulic fracturing wastewater as a percentage of  
25 injected volumes is 5% nationally, with the percentage varying by location.<sup>1</sup> Available data on reuse  
26 trends indicate increased reuse of wastewater over time in both Pennsylvania and West Virginia.  
27 Reuse as a percentage of injected volumes is lower in other areas, including regions with more  
28 water stress, likely because of the availability of disposal wells. For example, reused wastewater is  
29 approximately 18% of injected volumes in the Marcellus Shale in Pennsylvania’s Susquehanna  
30 River Basin, whereas it is approximately 5% in the Barnett Shale in Texas (see Figure 10-1a,b).

---

<sup>1</sup> Reused wastewater as a percentage of injected volumes differs from the percentage of wastewater that is managed through reuse, as opposed to other wastewater management options. For example, in the Marcellus Shale in Pennsylvania, approximately 18% of injected water is reused produced water, while approximately 70% or more of wastewater is managed through reuse (see Figure 10-1a).

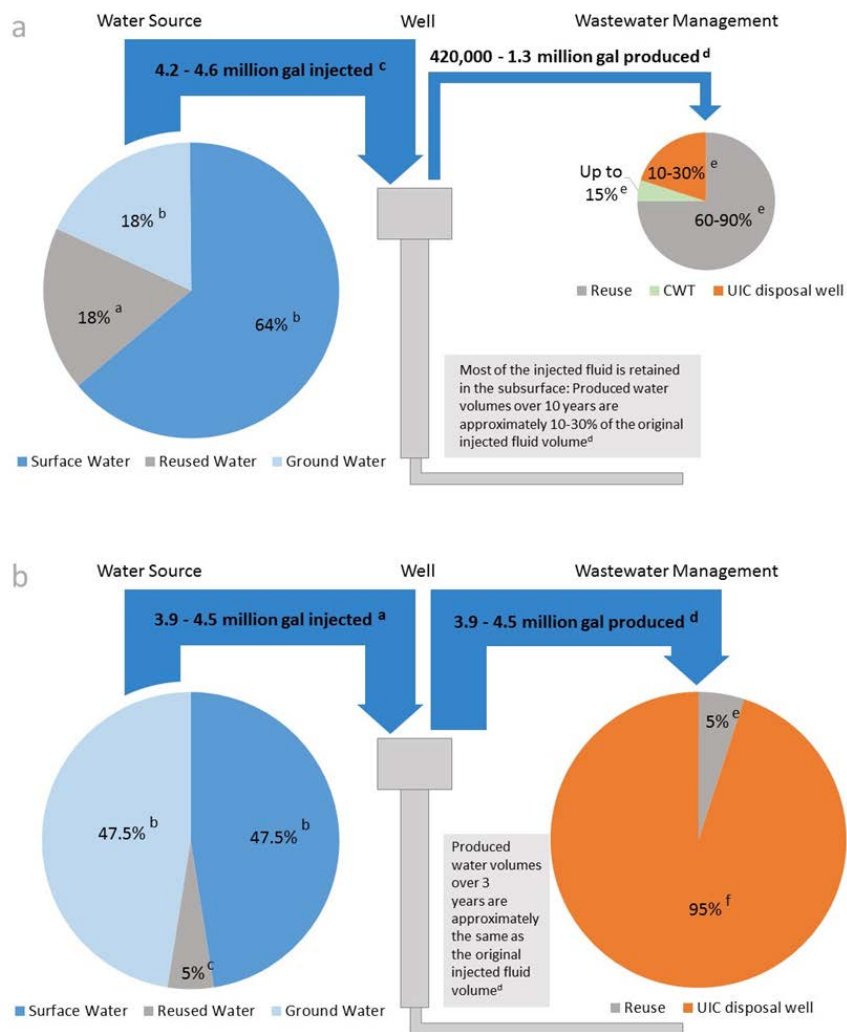

**Figure 10-1. Water budgets representative of practices in the Marcellus Shale in the Susquehanna River Basin in Pennsylvania (a) and the Barnett Shale in Texas (b).**

Pie size and arrow thickness represent the relative volume of water as it flows through the hydraulic fracturing water cycle. Wastewater going to a centralized waste treatment (CWT) facility may be either discharged to surface water or reused. Wastewater going to an underground injection control (UIC) well is disposed of below ground. These examples represent typical water management practices as depicted for the most recent time period reviewed by this assessment. They do not represent any specific well. Sources for 10-1a: (a) Table 4-1 (Hansen et al., 2013); (b) Table 4-3 (U.S. EPA, 2015c); (c) Appendix Table B-5 (Hansen et al., 2013); (d) Table 7-2 (Ziemkiewicz et al., 2014)—Note: produced water value from the West Virginia portion of the Marcellus; it provided the longest-term measurement of produced water volumes; (e) Figure 8-4 (PA DEP, 2015a) and Table 8-5 (Ma et al., 2014; Shaffer et al., 2013). Sources for 10-1b: (a) Appendix Table B-5 (U.S. EPA, 2015a; Nicot et al., 2012; Nicot et al., 2011); (b) Table 4-3 (Nicot et al., 2014); (c) Table 4-1 (Nicot et al., 2012); (d) Table 7-2 (Nicot et al., 2014); (e) Table 8-5 (Nicot et al., 2012); (f) Calculated by subtracting reuse values from 100% (see Table 8-5).



- **How much water is used per well?**

1 The national median volume of water used per hydraulically fractured well is approximately 1.5  
2 million gal (5.7 million L), according to the EPA’s analysis of FracFocus 1.0 disclosures. This  
3 estimate likely represents a wide variety of fractured well types, including vertical wells that  
4 generally use much less water per well than horizontal wells. Thus, published estimates for  
5 horizontal shale gas wells are typically higher (e.g., approximately 4 million gal ([Vengosh et al.,  
6 2014](#))). There is also wide variation within and among states and basins in the median water  
7 volumes used per well, from more than 5 million gal (19 million L) in Arkansas, Louisiana and West  
8 Virginia to less than 1 million gal (3.8 million L) in California, New Mexico, and Utah, among others.  
9 This variation results from several factors, including well length, formation geology, and fracturing  
10 fluid formulation.

- **How might cumulative water withdrawals for hydraulic fracturing affect drinking water quantity?**

11 Cumulatively, hydraulic fracturing uses billions of gallons of water each year at the national and  
12 state scales, and even in some counties. As noted above, hydraulic fracturing water use and  
13 consumption are generally less than 1% of total annual water use and consumption at these scales.  
14 However, there are a few counties in the United States where these percentages are higher. For  
15 2011 and 2012, annual hydraulic fracturing water use was 10% or more compared to 2010 total  
16 annual water use in 6.5% of counties with FracFocus 1.0 disclosures analyzed by the EPA, 30% or  
17 more in 2.2% of counties, and 50% or more in 1.0% of counties. Consumption estimates followed  
18 the same general pattern. For these counties, hydraulic fracturing is a relatively large user and  
19 consumer of water.

20 High fracturing water use or consumption alone does not necessarily result in impacts to drinking  
21 water resources. Rather, impacts result from the combination of water use/consumption and water  
22 availability at local scales. In our survey of published literature, we did not find a case where  
23 hydraulic fracturing water use or consumption alone caused a drinking water well or stream to run  
24 dry. This could indicate an absence of effects or a lack of documentation in the literature we  
25 reviewed. Additionally, water availability is rarely impacted by just one use or factor alone. In  
26 Louisiana, for example, the state requested hydraulic fracturing operations switch from ground to  
27 surface water, due to concerns that ground water withdrawals for fracturing could, in combination  
28 with other uses, adversely affect drinking water supplies.

29 The potential for impacts to drinking water resources from hydraulic fracturing water withdrawals  
30 is highest in areas with relatively high fracturing water use and low water availability. Southern  
31 and western Texas are two locations where hydraulic fracturing water use, low water availability,  
32 drought, and reliance on declining ground water has the potential to affect the quantity of drinking  
33 water resources. Any impacts are likely to be realized locally within these areas. In a detailed case  
34 study of southern Texas, [Scanlon et al. \(2014\)](#) observed generally adequate water supplies for  
35 hydraulic fracturing, except in specific locations. They found excessive drawdown of local ground  
36 water in a small proportion (approximately 6% of the area) of the Eagle Ford Shale. They suggested

1 water management, particularly a shift towards brackish water use, could minimize potential future  
2 impacts to fresh water resources.

3 The potential for impacts to drinking water quantity due to hydraulic fracturing water use appears  
4 to be lower—but not eliminated—in other areas of the United States. Future problems could arise if  
5 hydraulic fracturing increases substantially in areas with low water availability, or in times of water  
6 shortages. In detailed case studies in western Colorado and northeastern Pennsylvania, the EPA did  
7 not find current impacts, but did conclude that streams could be vulnerable to water withdrawals  
8 from hydraulic fracturing. In northeast Pennsylvania, water management, such as minimum stream  
9 flow requirements, limits the potential for impacts, especially in small streams. In western North  
10 Dakota, ground water is limited, but the industry may have sufficient supplies of surface water from  
11 the Missouri River system. These location-specific examples emphasize the need to focus on  
12 regional and local dynamics when considering potential impacts of hydraulic fracturing water  
13 acquisition on drinking water resources.

- ***What are the possible impacts of water withdrawals for hydraulic fracturing on water quality?***

14 Water withdrawals for hydraulic fracturing, similar to all water withdrawals, have the potential to  
15 alter the quality of drinking water resources. Ground water withdrawals exceeding natural  
16 recharge rates decrease water storage in aquifers, potentially mobilizing contaminants or allowing  
17 the infiltration of lower quality water from the land surface or adjacent formations. Withdrawals  
18 could also decrease ground water discharge to streams, potentially affecting surface water quality.  
19 Areas with large amounts of sustained ground water pumping are most likely to experience  
20 impacts, particularly drought-prone regions with limited ground water recharge.

21 Surface water withdrawals also have the potential to affect water quality. Withdrawals may lower  
22 water levels and alter stream flow, potentially decreasing a stream’s capacity to dilute  
23 contaminants. Case studies by the EPA show that streams can be vulnerable to changes in water  
24 quality due to water withdrawals, particularly smaller streams and during periods of low flow.  
25 Management of the rate and timing of surface water withdrawals has been shown to help mitigate  
26 potential impacts of hydraulic fracturing withdrawals on water quality.

### **10.1.2. Chemical Mixing (Chapter 5)**

27 Hydraulic fracturing fluids are developed to perform specific functions, including: create and  
28 extend fractures, transport proppant, and place proppant in the fractures. The fluid generally  
29 consists of three parts: (1) the base fluid, which is the largest constituent by volume and is typically  
30 water; (2) the additives, which can be a single chemical or a mixture of chemicals; and (3) the  
31 proppant. Additives are chosen to serve a specific purpose (e.g., adjust pH, increase viscosity, limit  
32 bacterial growth). Chemicals generally comprise a small percentage (typically 2% or less) of the  
33 overall injected fluid volume. Because over one million gallons of fluid are typically injected per  
34 well, thousands of gallons of chemicals can be potentially stored on-site and used during hydraulic  
35 fracturing activities.

36 On-site storage, mixing, and pumping of chemicals and hydraulic fracturing fluids have the potential  
37 to result in accidental releases, such as spills or leaks. Potential impacts to drinking water resources

- 1 from spills of hydraulic fracturing fluids and chemicals depend on the characteristics of the spills,
- 2 and the fate, transport, and the toxicity of chemicals spilled.

### **Research Questions: Chemical Mixing**

- ***What is currently known about the frequency, severity, and causes of spills of hydraulic fracturing fluids and additives?***

3 The frequency of on-site spills from hydraulic fracturing could be estimated for two states, but not  
4 for operations nationally or for other areas. Frequency estimates from data and literature ranged  
5 from one spill for every 100 wells in Colorado to between approximately 0.4 and 12.2 spills for  
6 every 100 wells in Pennsylvania.<sup>1</sup> These estimates include spills of hydraulic fracturing fluids and  
7 chemicals, and produced water reported in state databases. Available data generally precluded  
8 estimates of hydraulic fracturing fluid and/or chemical spill rates separately from estimates of an  
9 overall spill frequency. It is unknown whether these spill estimates are representative of national  
10 occurrences. If the estimates are representative, the number of spills nationally could range from  
11 approximately 100 to 3,700 spills annually, assuming 25,000 to 30,000 new wells are fractured per  
12 year.

13 The EPA characterized volumes and causes of hydraulic fracturing-related spills identified from  
14 selected state and industry data sources. The spills occurred between January 2006 and April 2012  
15 in 11 states and included 151 cases in which fracturing fluids or chemicals spilled on or near a well  
16 pad. Due to the methods used for the EPA's characterization of spills, these cases were likely a  
17 subset of all fracturing fluid and chemical spills during the study's time period. The reported  
18 volume of fracturing fluids or chemicals spilled ranged from 5 gal to more than 19,000 gal (19 to  
19 72,000 L), with a median volume of 420 gal (1,600 L) per spill. Spill causes included equipment  
20 failure, human error, failure of container integrity, and other causes (e.g., weather and vandalism).  
21 The most common cause was equipment failure, specifically blowout preventer failure, corrosion,  
22 and failed valves. More than 30% of the 151 fracturing fluid or chemical spills were from fluid  
23 storage units (e.g., tanks, totes, and trailers).

- ***What are the identities and volumes of chemicals used in hydraulic fracturing fluids, and how might this composition vary at a given site and across the country?***

24 In this assessment, we identified a list of 1,076 chemicals used in hydraulic fracturing fluids. This is  
25 a cumulative list over multiple wells and years. These chemicals include acids, alcohols, aromatic  
26 hydrocarbons, bases, hydrocarbon mixtures, polysaccharides, and surfactants. According to the  
27 EPA's analysis of disclosures to FracFocus 1.0, the number of unique chemicals per well ranged  
28 from 4 to 28, with a median of 14 unique chemicals per well.

29 Our analysis indicates that chemical use varies and that no single chemical is used at all well sites  
30 across the country, although several chemicals are widely used. Methanol, hydrotreated light

---

<sup>1</sup> Spill frequency estimates are for a given number of wells over a given period of time. These are not annual estimates nor are they for the lifetime of a well.

1 petroleum distillates, and hydrochloric acid were reported as used in 65% or more of wells,  
2 according to FracFocus 1.0 disclosures analyzed by the EPA. Only 32 chemicals, excluding water,  
3 quartz, and sodium chloride, were used in more than 10% of wells according to the EPA’s analysis  
4 of FracFocus disclosures. The composition of hydraulic fracturing fluids varies by state, by well, and  
5 within the same service company and geologic formation. This variability likely results from several  
6 factors, including the geology of the formation, the availability and cost of different chemicals, and  
7 operator preference.

8 Estimates from the EPA’s database developed from FracFocus 1.0 suggest median volumes of  
9 individual chemicals injected per well range from a few gallons to thousands of gallons, with an  
10 overall median of 650 gal (2,500 L) per chemical per well. Based on this overall median and  
11 assuming 14 unique chemicals are used per well, an estimated 9,100 gal (34,000 L) of chemicals  
12 may be injected per well. Given that the number of chemicals per well ranges from 4 to 28, the  
13 estimated volume of chemicals injected per well may range from approximately 2,600 to 18,000 gal  
14 (9,800 to 69,000 L).

- ***What are the chemical, physical, and toxicological properties of hydraulic fracturing chemical additives?***

15 Measured or estimated physicochemical properties were obtained for 453 chemicals of the total  
16 1,076 chemicals reported in hydraulic fracturing fluids. We could not estimate physicochemical  
17 properties for the inorganic chemicals or mixtures. The 453 chemicals have a wide range of  
18 physicochemical properties.

19 Properties affecting the likelihood of a spilled chemical reaching and impacting a drinking water  
20 resource, include: mobility, solubility, and volatility. Of the 453 chemicals for which  
21 physicochemical properties were available, 18 of the top 20 most mobile ones were reported in the  
22 EPA’s FracFocus 1.0 database for 2% or less of wells. Choline chloride and tetrakis (hydroxymethyl)  
23 phosphonium were exceptions and were reported in 14% and 11% of wells, respectively. These  
24 two chemicals appear to be relatively more common, and, if spilled, would move quickly through  
25 the environment with the flow of water. The majority of the 453 chemicals associate strongly with  
26 soils and organic materials, suggesting the potential for these chemicals to persist in the  
27 environment as long-term contaminants. Many of the 453 chemicals fully dissolve in water, but  
28 their aqueous solubility varies greatly. Few of the chemicals volatilize, and thus a large proportion  
29 of most hydraulic fracturing chemicals tend to remain in water.

30 Oral reference values and oral slope factors meeting the criteria used in this assessment were not  
31 available for the majority of chemicals used in hydraulic fracturing fluids, representing a significant  
32 data gap for hazard identification.<sup>1,2</sup> Reference values and oral slope factors are important for

---

<sup>1</sup> A reference value is an estimate of an exposure to the human population (including susceptible subgroups) for a given duration that is likely to be without an appreciable risk of adverse health effects over a lifetime. Reference value is a generic term not specific to a given route of exposure.

<sup>2</sup> An oral slope factor is an upper-bound, approximating 95% confidence limit, on the increased cancer risk from a lifetime oral exposure to an agent.

1 understanding the potential human health effects resulting from exposure to a chemical. Chronic  
2 oral reference values and/or oral slope factors from selected federal, state, and international  
3 sources were available for 90 (8%) of the 1,076 chemicals used in hydraulic fracturing fluids. From  
4 U.S. federal sources alone, chronic oral reference values were available for 73 chemicals (7%) of the  
5 1,076 chemicals, and oral slope factors were available for 15 chemicals (1%). Of the 32 chemicals  
6 reported as used in at least 10% of wells in the EPA’s FracFocus database (excluding water, quartz,  
7 and sodium chloride), seven (21%) have a federal chronic oral reference value. Oral reference  
8 values and oral slope factors are a key component of the risk assessment process, although  
9 comprehensive risk assessments that characterize the health risk associated with exposure to these  
10 chemicals are not available.

11 Of the chemicals that had values available, the health endpoints associated with those values  
12 include the potential for carcinogenesis, immune system effects, changes in body weight, changes in  
13 blood chemistry, cardiotoxicity, neurotoxicity, liver and kidney toxicity, and reproductive and  
14 developmental toxicity. However, it is important to note that evaluating any potential risk to human  
15 populations would require knowledge of the specific chemicals that are present at a particular site,  
16 whether or not humans are exposed to those chemicals and, if so, at what levels and for what  
17 duration, and the toxicity of the chemicals. Since most chemicals are used infrequently on a  
18 nationwide basis, potential exposure is likely to be a local or regional issue, rather than a national  
19 issue. Accordingly, consideration of hazards and risks associated with these chemical additives  
20 would be most useful on a site-specific basis and is beyond the scope of this assessment.

- ***If spills occur, how might hydraulic fracturing chemical additives contaminate drinking water resources?***

21 There are several mechanisms by which a spill can potentially contaminate drinking water  
22 resources. These include overland flow to nearby surface water, soil contamination and eventual  
23 transport to surface water, and infiltration and contamination of underlying ground water. Of the  
24 151 spills characterized by the EPA, fluids reached surface water in 13 (9% of 151) cases and soil in  
25 97 (64%) cases. None of the spills of hydraulic fracturing fluid were reported to have reached  
26 ground water. This could be due to an absence of impact; however, it can take several years for  
27 spilled fluids to infiltrate soil and leach into ground water. Thus, it may not be immediately  
28 apparent whether a spill has reached ground water or not.

29 Based on the relative importance of each of these mechanisms, impacts have the potential to occur  
30 quickly, be delayed short or long periods, or have a continual effect over time. In Kentucky, for  
31 example, a spill impacted a surface water body relatively quickly when hydraulic fracturing fluid  
32 entered a creek, significantly reducing the water’s pH and increasing its conductivity ([Papoulias  
33 and Velasco, 2013](#)).

### **10.1.3. Well Injection (Chapter 6)**

34 Hydraulic fracturing fluids are injected into oil or gas wells under high pressures. The fluids flow  
35 through the well (commonly thousands of feet below the surface) into the production zone (i.e., the

1 geologic formation being fractured) where the fluid injection pressures are sufficient to create  
2 fractures in the rock.

3 There are two major subsurface mechanisms by which the injection of fluid and the creation and  
4 propagation of fractures can lead to contamination of drinking water resources: (1) the unintended  
5 movement of liquids or gases out of the production well or along the outside of the production well  
6 into a drinking water resource via deficiencies in the well's casing or cement, and (2) the  
7 unintended movement of liquids or gases from the production zone through subsurface geologic  
8 formations into a drinking water resource. Combinations of these two mechanisms are also  
9 possible.

### **Research Questions: Well Injection**

- **How effective are current well construction practices at containing fluids- both liquids and gases - before, during, and after fracturing?**

10 Production wells are constructed to access and convey hydrocarbons from the formations in which  
11 they are found to the surface, and to isolate fluid-bearing zones (containing oil, gas, or water) from  
12 each other. Typically, multiple casings are emplaced and cemented along the wellbore to protect  
13 and isolate the oil and/or natural gas from the formations it must travel through to reach the  
14 surface.

15 Below ground drinking water resources are often separated from the production well using casing  
16 and cement. Cemented surface casing, in particular, is an important well construction feature for  
17 isolating drinking water resources from liquids and gases that may move through the subsurface. A  
18 limited risk modeling study of selected injection wells in the Williston Basin in North Dakota  
19 suggests that the risk of aquifer contamination from leaks inside the well to the drinking water  
20 resource decreases by a factor of approximately one thousand when surface casing extends below  
21 the bottom of the drinking water resource ([Michie and Koch, 1991](#)). Most wells used in hydraulic  
22 fracturing operations have casing and a layer of cement to protect drinking water resources, but  
23 there are exceptions: a survey conducted by the EPA of oil and gas production wells hydraulically  
24 fractured by nine oil and gas service companies in 2009 and 2010 estimated that at least 3% of the  
25 wells (600 out of 23,000 wells) did not have cement across a portion of the casing installed through  
26 the protected ground water resource identified by well operators. The absence of cement does not  
27 in and of itself lead to an impact. However, it does reduce the overall number of casing and cement  
28 barriers fluids must travel through to reach ground water resources.

29 Impacts to drinking water resources from subsurface liquid and gas movement may occur if casing  
30 or cement are inadequately designed or constructed, or fail. There are several examples of these  
31 occurrences in hydraulically fractured wells that have or may have resulted in impacts to drinking  
32 water resources. In one example, an inner string of casing burst during hydraulic fracturing, which  
33 resulted in a release of fluids on the land surface and possibly into the aquifer near Killdeer, North  
34 Dakota. The EPA found that, based on the data analysis performed for the study, the only potential  
35 source consistent with conditions observed in two impacted monitoring wells was the blowout that



1 occurred during hydraulic fracturing ([U.S. EPA, 2015j](#)). In other examples, inadequately cemented  
2 casing has contributed to impacts to drinking water resources. In Bainbridge, Ohio, inadequately  
3 cemented casing in a hydraulically fractured well contributed to the buildup of natural gas and high  
4 pressures along the outside of a production well. This ultimately resulted in movement of natural  
5 gas into local drinking water aquifers ([Bair et al., 2010](#); [ODNR, 2008](#)). In the Mamm Creek gas field  
6 in Colorado, inadequate cement placement in a production well allowed methane and benzene to  
7 migrate along the production well and through natural faults and fractures to drinking water  
8 resources ([Science Based Solutions LLC, 2014](#); [Crescent, 2011](#); [COGCC, 2004](#)). These cases illustrate  
9 how construction issues, sustained casing pressure, and the presence of natural faults and fractures  
10 can work together to create pathways for fluids to migrate toward drinking water resources.

11 Fracturing older wells may also increase the potential for impacts to drinking water resources via  
12 movement of liquids and gases from the inside of the production well or along the outside of the  
13 production well to ground water resources. The EPA estimated that 6% of 23,000 oil and gas  
14 production wells were drilled more than 10 years before being hydraulically fractured in 2009 or  
15 2010. Although new wells can be designed to withstand the stresses associated with hydraulic  
16 fracturing operations, older wells may not have been built or tested to the same specifications and  
17 their reuse for this purpose could be of concern. Moreover, aging and use of the well can contribute  
18 to casing degradation, which can be accelerated by exposure to corrosive chemicals such as  
19 hydrogen sulfide, carbonic acid, and brines.

- ***Can subsurface migration of fluids- both liquids and gases- to drinking water resources occur, and what local geologic or artificial features might allow this?***

20 Physical separation between the production zone and drinking water resources can help protect  
21 drinking water. Many hydraulic fracturing operations target deep formations such as the Marcellus  
22 Shale or the Haynesville Shale (Louisiana/Texas), where the vertical distance between the base of  
23 drinking water resources and the top of the shale formation may be a mile or greater. Numerical  
24 modeling and microseismic studies based on a Marcellus Shale-like environment suggest that  
25 fractures created during hydraulic fracturing are unlikely to extend upward from these deep  
26 formations into shallow drinking water aquifers.

27 Not all hydraulic fracturing is performed in zones that are deep below drinking water resources.  
28 For example, operations in the Antrim Shale (Michigan) and the New Albany Shale  
29 (Illinois/Indiana/Kentucky) take place at shallower depths (100 to 1,900 ft or 30 to 579 m), with  
30 less vertical separation between the formation and drinking water resources ([NETL, 2013](#); [GWPC  
31 and ALL Consulting, 2009](#)). The EPA's survey of oil and gas production wells hydraulically fractured  
32 by nine service companies in 2009 and 2010 estimated that 20% of 23,000 wells had less than  
33 2,000 ft (610 m) of measured distance between the point of shallowest hydraulic fracturing and the  
34 base of the protected ground water resources reported by well operators.

35 There are also places in the subsurface where oil and gas resources and drinking water resources  
36 co-exist in the same formation. Evidence indicates that hydraulic fracturing occurs within these  
37 formations. This results in the introduction of fracturing fluids into formations that may currently  
38 serve, or in the future could serve, as a source of drinking water for public or private use. According

1 to the data examined, the overall frequency of occurrence of this practice appears to be low, with  
2 the activity generally concentrated in some areas in the western United States. The practice of  
3 injecting fracturing fluids into a formation that also contains a drinking water resource directly  
4 affects the quality of that water, since some of the fluid likely remains in the formation following  
5 hydraulic fracturing. Hydraulic fracturing in a drinking water resource is a concern in the short-  
6 term (should there be people currently using these zones as a drinking water supply) and the long-  
7 term (if drought or other conditions necessitate the future use of these zones for drinking water).

8 Liquid and gas movement from the production zone to underground drinking water resources may  
9 also occur via other production wells or injection wells near hydraulic fracturing operations.  
10 Fractures created during hydraulic fracturing can intersect nearby wells or their fracture networks,  
11 resulting in the flow of fluids into those wells. These well communications, or “frac hits,” are more  
12 likely to occur if wells are close to each other or on the same well pad. In the Woodford Shale in  
13 Oklahoma, the likelihood of well communication was less than 10% between wells more than 4,000  
14 ft (1,219 m) apart, but rose to nearly 50% between wells less than 1,000 ft (305 m) apart ([Ajani and  
15 Kelkar, 2012](#)). If an offset well is not able to withstand the stresses applied during the hydraulic  
16 fracturing of a neighboring well, well components may fail, which could result in a release of fluids  
17 at the surface from the offset well. The EPA identified incidents in which surface spills of hydraulic  
18 fracturing-related fluids were attributed to well communication events.

19 Older or inactive wells—including oil and gas wells, injection wells, or drinking water wells—near  
20 the hydraulic fracturing operation may pose an even greater potential for impacts. A study in  
21 Oklahoma found that older wells were more likely to be negatively affected by the stresses applied  
22 by hydraulic fracturing in neighboring wells ([Ajani and Kelkar, 2012](#)). In some cases, inactive wells  
23 in the vicinity of hydraulic fracturing activities may not have been plugged properly—many wells  
24 plugged before the 1950s were done so with little or no cement. The Interstate Oil and Gas Compact  
25 Commission estimates that over one million wells may have been drilled in the United States prior  
26 to a formal regulatory system being in place, and the status and location of many of these wells are  
27 unknown ([IOGCC, 2008](#)). State programs exist to plug identified inactive wells, and work is on-  
28 going to identify and address such wells.

#### 10.1.4. Flowback and Produced Water (Chapter 7)

29 Water, of variable quality, is a byproduct of oil and gas production. After hydraulic fracturing, the  
30 injection pressure is released and water flows back from the well. Initially this water is similar to  
31 the hydraulic fracturing fluid, but as time goes on the composition is affected by the characteristics  
32 of the formation and possible reactions between the formation and the fracturing fluid. Water  
33 initially produced from the well after hydraulic fracturing is sometimes called flowback in the  
34 literature, and the term appears in this assessment. However, hydraulic fracturing fluids and any  
35 formation water returning to the surface are often referred to collectively as produced water. This  
36 definition of produced water is used in this assessment.

37 The amount of produced water varies, but typically averages 10% to 25% of injected volumes,  
38 depending upon the amount of time since fracturing and the particular well (see Figure 10-1a).  
39 However, there are exceptions to this, such as in the Barnett Shale in Texas where the total volume

1 of produced water can equal or exceed the injected volume of hydraulic fracturing fluid (see Figure  
2 10-1b). Flow rates are generally high initially, and then decrease over time throughout oil or gas  
3 production.

4 Impacts on drinking water resources have the potential to occur if produced water is spilled and  
5 enters surface water or ground water. Environmental transport of chemical constituents in  
6 produced water depends on the characteristics of the spill (e.g., volume and duration), the  
7 composition of spilled fluids, and the characteristics of the surrounding environment.

### **Research Questions: Flowback and Produced Water**

- ***What is currently known about the frequency, severity, and causes of spills of flowback and produced water?***

8 Surface spills of produced water from hydraulically fractured wells have occurred. As noted in the  
9 Chemical Mixing section above, the frequency of on-site spills from hydraulic fracturing activities  
10 could be estimated for two states, but not nationally. Estimates of spill frequencies at hydraulic  
11 fracturing sites in Colorado and Pennsylvania, including spills of produced water, ranged from  
12 approximately 0.4 to 12.2 spills per 100 wells. Available data generally precluded estimates of  
13 produced water spill rates separately from estimates of overall spill frequency. Away from the well,  
14 produced water spills from pipelines and truck transport also have the potential to impact drinking  
15 water resources.

16 The EPA characterized spill volumes and causes for 225 cases in which produced water spilled on  
17 or near a well pad. These spills occurred between January 2006 and April 2012 in 11 states. The  
18 median reported volume per produced water spill was 990 gallons (3,750 L), more than double that  
19 for spills of hydraulic fracturing fluids and chemicals. The causes of produced water spills were  
20 reported as human error, equipment failure, container integrity failure, miscellaneous causes (e.g.,  
21 well communication), and unknown causes. Most of the total volume spilled (74%) for all 225 cases  
22 combined was caused by a failure of container integrity.

- ***What is the composition of hydraulic fracturing flowback and produced water, and what factors might influence this composition?***

23 A combination of factors influence the composition of produced water, including: the composition  
24 of injected hydraulic fracturing fluids, the type of formation fractured, subsurface processes, and  
25 residence time. The initial chemical composition of produced water primarily reflects the chemistry  
26 of the injected fluids. At later times, the chemical composition of produced water reflects the  
27 geochemistry of the fractured formation.

28 Produced water varies in quality from fresh to highly saline, and can contain high levels of major  
29 anions and cations, metals, organics, and naturally occurring radionuclides. Produced water from  
30 shale and tight gas formations typically contains high levels of total dissolved solids (TDS) and ionic  
31 constituents (e.g., bromide, calcium, chloride, iron, potassium, manganese, magnesium, and  
32 sodium). Produced water also may contain metals (e.g., barium, cadmium, chromium, lead, and

1 mercury), and organic compounds such as benzene. Produced water from coalbed methane  
2 typically has much lower TDS levels compared to other produced water types, particularly if the  
3 coalbed was deposited under fresh water conditions.

4 We identified 134 chemicals that have been detected in hydraulic fracturing produced water. These  
5 include chemicals added during the chemical mixing stage, as well as naturally occurring organic  
6 chemicals and radionuclides, metals, and other constituents of subsurface rock formations  
7 mobilized by the hydraulic fracturing process. Data on measured chemical concentrations in  
8 produced water were available for 75 of these 134 chemicals.

9 Most of the available data on produced water content are for shale and coalbed methane  
10 formations, while less data are available for tight formations, such as sandstones. The composition  
11 of produced water must be determined through sampling and analysis, both of which have  
12 limitations—the former due to challenges in accessing production equipment, and the latter due to  
13 difficulties identifying target analytes before analysis and the lack of appropriate analytical  
14 methods. Most current data are for inorganic chemicals, while less data exist for organic chemicals.  
15 Many more organic chemicals were reported as used in hydraulic fracturing fluid than have been  
16 identified in produced water. The difference may be due to analytical limitations, limited study  
17 scopes, and undocumented subsurface reactions.

- ***What are the chemical, physical, and toxicological properties of hydraulic fracturing flowback and produced water constituents?***

18 The identified constituents of produced water include inorganic chemicals (cations and anions, i.e.,  
19 metals, metalloids, non-metals, and radioactive materials), organic chemicals and compounds, and  
20 unidentified materials measured as total organic carbon and dissolved organic carbon. Some  
21 constituents are readily transported with water (i.e., chloride and bromide), while others depend  
22 strongly on the geochemical conditions in the receiving water body (i.e., radium and barium), and  
23 assessment of their transport is based on site-specific factors. We were able to obtain actual or  
24 estimated physicochemical properties for 86 (64%) of the 134 chemicals identified in produced  
25 water.

26 As in the case of chemicals in hydraulic fracturing fluid, chemical properties that affect the  
27 likelihood of an organic chemical in produced water reaching and impacting drinking water  
28 resources include: mobility, solubility, and volatility. In general, physicochemical properties suggest  
29 that organic chemicals in produced water tend to be less mobile in the environment. Consequently,  
30 if spilled, these chemicals may remain in soils or sediments near spill sites. Low mobility may result  
31 in smaller dissolved contaminant plumes in ground water, although these chemicals can be  
32 transported with sediments in surface water or small particles in ground water. Organic chemical  
33 properties vary with salinity, and effects depend on the nature of the chemical.

34 Oral reference values and/or oral slope factors from selected federal, state, and international  
35 sources were available for 83 (62%) of the 134 chemicals detected in produced water. From U.S.  
36 federal sources alone, chronic oral reference values were available for 70 (52%) of the 134  
37 chemicals, and oral slope factors were available for 20 chemicals (15%). Of the chemicals that had

1 values available, noted health effects include the potential for carcinogenesis, immune system  
2 effects, changes in body weight, changes in blood chemistry, pulmonary toxicity, neurotoxicity, liver  
3 and kidney toxicity, and reproductive and developmental toxicity. As noted above, evaluating any  
4 potential risk to human populations would require knowledge of the specific chemicals that are  
5 present at a particular site, whether or not humans are exposed to those chemicals and, if so, at  
6 what levels and for what duration, and the toxicity of the chemicals. The chemicals present in  
7 produced water can vary based on the formation and specific well, due to differences in fracturing  
8 fluid formulation and formation geology. Accordingly, consideration of hazards and risks associated  
9 with these chemicals would be most useful on a site-specific basis and is beyond the scope of this  
10 assessment. .

- ***If spills occur, how might hydraulic fracturing flowback and produced water contaminate drinking water resources?***

11 Impacts to drinking water resources from spills or releases of produced water depend on the  
12 volume, timing, and composition of the produced water. Impacts are more likely the greater the  
13 volume of the spill, the longer the duration of the release, and the higher the concentration of  
14 produced water constituents (i.e., salts, naturally occurring radioactive material, and metals).

15 The EPA characterization of hydraulic fracturing-related spills found that 8% of the 225 produced  
16 water spills included in the study reached surface water or ground water. These spills tended to be  
17 of greater volume than spills that did not reach a water body. A well blowout in Bradford County,  
18 Pennsylvania spilled an estimated 10,000 gal (38,000 L) of produced water into a tributary of  
19 Towanda Creek, a state-designated trout fishery. The largest volume spill identified in this  
20 assessment occurred in North Dakota, where approximately 2.9 million gal (11 million L) of  
21 produced water spilled from a broken pipeline and impacted surface and ground water.

22 Chronic releases can and do occur from produced water disposed in unlined pits or impoundments,  
23 and can have long-term impacts. Ground water impacts may persist longer than surface water  
24 impacts because of lower flow rates and decreased mixing. Plumes from unlined pits used for  
25 produced water have been shown to persist for long periods and extend to nearby surface water  
26 bodies.

### **10.1.5. Wastewater Management and Waste Disposal (Chapter 8)**

27 Hydraulic fracturing generates large volumes of produced water that require management. In this  
28 section we refer to produced water and any other waters generated onsite by the single term  
29 “wastewater.” [Clark and Veil \(2009\)](#) estimated that in 2007 approximately one million active oil  
30 and gas wells in the United States generated 2.4 billion gal per day (9.1 billion L per day) of  
31 wastewater. There is currently no reliable way to estimate what fraction of this total volume can be  
32 attributed to hydraulically fractured wells. Wastewater volumes in a region can increase sharply as  
33 hydraulic fracturing activity increases.

34 Wastewater management and disposal could affect drinking water resources through multiple  
35 mechanisms including: inadequate treatment of wastewater prior to discharge to a receiving water,  
36 accidental releases during transport or leakage from wastewater storage pits, unpermitted

1 discharges, migration of constituents in wastewaters following land application, inappropriate  
2 management of residual materials from treatment, or accumulation of wastewater constituents in  
3 sediments near outfalls of centralized waste treatment facilities (CWTs) or publicly owned  
4 treatment works (POTWs) that have treated hydraulic fracturing wastewater. The scope of this  
5 assessment excludes potential impacts to drinking water from the disposal of hydraulic fracturing  
6 wastewater in underground injection control (UIC) wells.

### **Research Questions: Wastewater Management and Waste Disposal**

- **What are the common treatment and disposal methods for hydraulic fracturing wastewater, and where are these methods practiced?**

7 Hydraulic fracturing wastewater is managed using several options including disposal in UIC wells  
8 (also called disposal wells); through evaporation ponds; treatment at CWTs, followed by reuse or  
9 by discharge to either surface waters or POTWs; reuse with minimal or no treatment; and land  
10 application or road spreading. Treatment of hydraulic fracturing wastewater by POTWs was used in  
11 the past in Pennsylvania. This decreased sharply following new state-level requirements and a  
12 request by the Pennsylvania Department of Environmental Protection (PA DEP) for well operators  
13 to stop sending Marcellus Shale wastewater to POTWs (and 15 CWTs) discharging to surface  
14 waters.

15 Wastewater management decisions are generally based on the availability and associated costs  
16 (including transportation) of disposal or treatment facilities. A survey of state agencies found that,  
17 in 2007, more than 98% of produced water from the oil and gas industry was managed via  
18 underground injection ([Clark and Veil, 2009](#)). Available information suggests that disposal wells are  
19 also the primary management practice for hydraulic fracturing wastewater in most regions in the  
20 United States (e.g., the Barnett Shale; see Figure 10-1b). The Marcellus Shale region is a notable  
21 exception, where most wastewater is reused because of the small number of disposal wells in  
22 Pennsylvania (see Figure 10-1a). Although this assessment does not address potential effects on  
23 drinking water resources from the use of disposal wells, any changes in cost of disposal or  
24 availability of disposal wells would likely influence wastewater management decisions.

25 Wastewater from some hydraulic fracturing operations is sent to CWTs, which may discharge  
26 treated wastewater to surface waters, POTWs, or back to well operators for reuse in other  
27 hydraulic fracturing operations. Available data indicate that the use of CWTs for treating hydraulic  
28 fracturing wastewater is greater in the Marcellus Shale region than other parts of the country. Most  
29 of the CWTs accepting hydraulic fracturing wastewater in Pennsylvania cannot significantly reduce  
30 TDS, and many of these facilities provide treated wastewater to well operators for reuse and do not  
31 currently discharge treated wastewater to surface water.

32 Reuse of wastewater for subsequent hydraulic fracturing operations may require no treatment,  
33 minimal treatment, or more extensive treatment. Operators reuse a substantial amount (ca. 70–  
34 90%) of Marcellus Shale wastewater in Pennsylvania (see Figure 10-1a). Lesser amounts of reuse



1 occur in other areas (e.g., the Barnett Shale; see Figure 10-1b). In certain formations, such as the  
2 Bakken Shale in North Dakota, there is currently no indication of appreciable reuse.

3 In some cases, wastewater is used for land applications such as irrigation or road spreading for  
4 deicing or dust suppression. Land application has the potential to introduce wastewater  
5 constituents to surface water and ground water due to runoff and migration of brines. Studies of  
6 road spreading of conventional oil and gas brines have found elevated levels of metals in soils and  
7 chloride in ground water.

- ***How effective are conventional POTWs and commercial treatment systems in removing organic and inorganic contaminants of concern in hydraulic fracturing wastewater?***

8 Publicly owned treatment works using basic treatment processes are not designed to effectively  
9 reduce TDS concentrations in highly saline hydraulic fracturing wastewater—although specific  
10 constituents or constituents groups can be removed (e.g., metals, oil, and grease by chemical  
11 precipitation or other processes). In some cases, wastewater treated at CWTs may be sent to a  
12 POTW for additional treatment and discharge. It is blended with POTW influent to prevent  
13 detrimental effects on biological processes in the POTW that aid in the treatment of wastewater.

14 Centralized waste treatment facilities with advanced wastewater treatment options, such as  
15 reverse osmosis, thermal distillation, or mechanical vapor recompression, reduce TDS  
16 concentrations and can treat contaminants currently known to be in hydraulic fracturing  
17 wastewater. However, there are limited data on the composition of hydraulic fracturing  
18 wastewater, particularly for organic constituents. It is unknown whether advanced treatment  
19 systems are effective at removing constituents that are generally not tested for.

- ***What are the potential impacts from surface water disposal of treated hydraulic fracturing wastewater on drinking water treatment facilities?***

20 Potential impacts to drinking water resources may occur if hydraulic fracturing wastewater is  
21 inadequately treated and discharged to surface water. Inadequately treated hydraulic fracturing  
22 wastewater may increase concentrations of TDS, bromide, chloride, and iodide in receiving waters.  
23 In particular, bromide and iodide are precursors of disinfection byproducts (DBPs) that can form in  
24 the presence of organic carbon in drinking water treatment plants or wastewater treatment plants.  
25 Drinking water treatment plants are required to monitor for certain types of DBPs, because some  
26 are toxic and can cause cancer.

27 Radionuclides can also be found in inadequately treated hydraulic fracturing wastewater from  
28 certain shales, such as the Marcellus. A recent study by the [PA DEP \(2015b\)](#) found elevated radium  
29 concentrations in the tens to thousands of picocuries per liter and gross alpha and gross beta in the  
30 hundreds to thousands of picocuries per liter in effluent samples from some CWTs receiving oil and  
31 gas wastewater. Radium, gross alpha, and gross beta were also detected in effluents from POTWs  
32 receiving oil and gas wastewater (mainly as effluent from CWTs), though at lower concentrations  
33 than from the CWTs. Research in Pennsylvania also indicates the accumulation of radium in  
34 sediments and soils affected by the outfalls of some treatment plants that have handled oil and gas  
35 wastewater, including Marcellus Shale wastewater, and other wastewaters ([PA DEP, 2015b](#);

1 [Warner et al., 2013a](#)). Mobilization of radium from sediments and potential impacts on downstream  
2 water quality depend upon how strongly the radium has sorbed to sediments. Impacts may also  
3 occur if sediment is resuspended (e.g., following storm events). There is no evidence of radionuclide  
4 contamination in drinking water intakes due to inadequately treated hydraulic fracturing  
5 wastewater.

6 Hydraulic fracturing wastewaters contain other constituents such as barium, boron, and heavy  
7 metals. Barium in particular has been documented in some shale gas produced waters. Little data  
8 exist on metal and organic compound concentrations in untreated and treated wastewaters in  
9 order to evaluate whether treatment is effective, and whether there are potential downstream  
10 effects on drinking water resources when wastewater is treated and discharged.

## 10.2.Key Data Limitations and Uncertainties

11 This assessment used available data and literature to examine the potential impacts of hydraulic  
12 fracturing for oil and gas on drinking water resources nationally. As part of this effort, we identified  
13 data limitations and uncertainties associated with current information on hydraulic fracturing and  
14 its potential to affect drinking water resources. In particular, data limitations preclude a  
15 determination of the frequency of impacts with any certainty. There is a high degree of uncertainty  
16 about whether the relatively few instances of impacts noted in this report are the result of a rarity  
17 of effects or a lack of data. These limitations and uncertainties are discussed in brief below.

### 10.2.1. Limitations in monitoring data and chemical information

18 While many activities conducted as part of the hydraulic fracturing water cycle take place above  
19 ground, hydraulic fracturing itself occurs below ground and is not directly observable. Additionally,  
20 potential mechanisms identified in this assessment may result in impacts to drinking water  
21 resources that are below ground (e.g., spilled fluids leaching into ground water). Because of this,  
22 monitoring data are needed before, during, and after hydraulic fracturing to characterize the status  
23 of the well being fractured and the presence, migration, or transformation of chemicals in the  
24 subsurface. These data can include results from mechanical integrity tests performed on  
25 hydraulically fractured oil and gas production wells and data on local water quality collected pre-  
26 and post-hydraulic fracturing. In particular, baseline data on local water quality is needed to  
27 quantify changes to drinking water resources and to provide insights into whether nearby  
28 hydraulic fracturing activities may have caused any detected changes. The limited amount of data  
29 collected before and during hydraulic fracturing activities reduces the ability to determine whether  
30 hydraulic fracturing affected drinking water resources in cases of alleged contamination.

31 Water quality testing for hydraulic fracturing-related chemicals is routinely conducted for a small  
32 subset of chemicals reportedly used in hydraulic fracturing fluids or detected in produced water.  
33 Public water systems regularly test for selected contaminants under the National Primary Drinking  
34 Water Regulations. Approximately 6% of the 1,173 chemicals in Table A-2 and Table A-4 are

1 routinely tested for under these regulations.<sup>1</sup> Private water wells are usually tested less often and  
2 for fewer potential contaminants than public water supplies (USGS, 2014c). Since chemical use  
3 varies widely across the country, testing for any particular chemical may or may not be appropriate  
4 for detecting potential impacts on a drinking water resource from a nearby hydraulic fracturing  
5 operation. Furthermore, the concentration, mobility, and detectability (as determined by the lowest  
6 concentration that an analytical method is able to determine a chemical's presence) of chemicals  
7 used in or produced by hydraulic fracturing operations will affect whether or not it would be  
8 identified in a drinking water resource in the event of its release into the environment.

9 Information (identity, frequency of use, physicochemical and toxicological properties, etc.) on the  
10 chemicals associated with the hydraulic fracturing water cycle is not complete and limits  
11 understanding of potential impacts on drinking water resources. Well operators identified one or  
12 more chemicals as confidential in approximately 70% of wells reported to FracFocus 1.0 and  
13 analyzed by the EPA (U.S. EPA, 2015a). Additionally, chemicals found in flowback and produced  
14 water (see Table A-4) were identified for a limited number of geographic locations and formations.  
15 These characterization studies are constrained by available methods for detecting organic and  
16 inorganic compounds in flowback and produced water. The identity of hydraulic fracturing-related  
17 chemicals is necessary to understand their chemical, physical, and toxicological properties, which  
18 determine how they might move through the environment to drinking water resources and any  
19 resulting effects. Knowing their identities would also help inform what chemicals to test for in the  
20 event of suspected drinking water impacts and, in the case of wastewater, may help predict  
21 whether current treatment systems are effective at removing them.

22 Peer reviewed toxicity data for known hydraulic fracturing-related chemicals is very limited. Of the  
23 1,173 hydraulic fracturing-related chemicals identified in Appendix A, 147 have chronic oral  
24 reference values and/or oral slope factors from the sources that met the selection criteria for  
25 inclusion in this assessment. Because the majority of chemicals identified in this report do not have  
26 chronic oral reference values and/or oral slope factors, risk assessors at the local and regional level  
27 may need to use alternative sources of toxicity information that could introduce greater  
28 uncertainties. It also makes an assessment of potential cumulative effects of exposure to chemical  
29 mixtures in hydraulic fracturing fluid, flowback, or produced water difficult.

---

<sup>1</sup> We identified 73 chemicals that are reported to be used in hydraulic fracturing fluids (see Table A-2) or that have been detected in produced water (see Table A-4) that are tested for as part of the contaminant monitoring conducted for 40 different drinking water standards under the National Primary Drinking Water Regulations (NPDWR). For inorganic chemicals regulated under the NPDWR, we identified the chemical or element itself, its regulated ion (as applicable), or other more complex forms on the list of hydraulic fracturing-related chemicals. For regulated organic chemicals, we identified only the chemical itself on the list of hydraulic fracturing-related chemicals with three exceptions: (1) we identified all four trihalomethanes that comprise total trihalomethanes, (2) we identified two of the five regulated chlorinated/brominated haloacetic acids as their sodium salts, and (3) we identified a subset of polychlorinated biphenyls (PCBs) as Aroclor 1248. Although various forms of petroleum distillates are used in hydraulic fracturing fluids and may contain BTEX or benzo(a)pyrene (the regulated entities that can occur naturally in petroleum distillates), we did not include them in our count of 73 chemicals.

### 10.2.2. Other Contributing Limitations

1 We found other limitations that hamper our ability to assess the potential impacts of hydraulic  
2 fracturing on drinking water resources nationally. These include the number and location of  
3 hydraulically fractured wells, the location of drinking water resources, and information on industry  
4 practices and any changes that may take place in practices in the coming years. Our estimates of the  
5 number of fractured wells are based on an evaluation of several commercial and public sources and  
6 a number of assumptions. This lack of a definitive well count particularly contributes to  
7 uncertainties regarding total water use or total wastewater volume estimates, and would limit any  
8 kind of cumulative impact assessment.

9 There are also some fundamental gaps in our understanding of drinking water resources, including  
10 where they are located in relation to hydraulic fracturing operations and which might be most  
11 vulnerable to impacts from hydraulic fracturing activities. Improving our assessment of potential  
12 drinking water impacts requires better information, particularly about private drinking water well  
13 locations and the depths of drinking water resources in relation to the hydraulically fractured  
14 formations and well construction features (e.g., casing and cement). This information would allow  
15 us to better assess whether subsurface drinking water resources are isolated from hydraulically  
16 fractured oil and gas production wells.

17 Finally, this assessment summarizes available information on industry practices with respect to the  
18 hydraulic fracturing water cycle. While some information on hydraulic fracturing activities is  
19 available for many areas of the United States, specific data on water withdrawals for hydraulic  
20 fracturing, volumes of flowback and produced water generated, and the disposal or reuse of  
21 wastewaters is needed to better characterize potential impacts of hydraulic fracturing on drinking  
22 water resources. Additionally, industry practices are rapidly changing (e.g., the number of wells  
23 fractured, the location of activities, and the chemicals used), and it is unclear how changes in  
24 industry practices could affect potential drinking water impacts in the future. Consideration of  
25 future development scenarios was not a part of this assessment, but such an evaluation could help  
26 establish potential short- and long-term impacts to drinking water resources and how to assess  
27 them.

### 10.3. Conclusions

28 Through this national-level assessment, we have identified potential mechanisms by which  
29 hydraulic fracturing could affect drinking water resources. Above ground mechanisms can affect  
30 surface and ground water resources and include water withdrawals at times or in locations of low  
31 water availability, spills of hydraulic fracturing fluid and chemicals or produced water, and  
32 inadequate treatment and discharge of hydraulic fracturing wastewater. Below ground mechanisms  
33 include movement of liquids and gases via the production well into underground drinking water  
34 resources and movement of liquids and gases from the fracture zone to these resources via  
35 pathways in subsurface rock formations.

36 We did not find evidence that these mechanisms have led to widespread, systemic impacts on  
37 drinking water resources in the United States. Of the potential mechanisms identified in this report,

1 we found specific instances where one or more of these mechanisms led to impacts on drinking  
2 water resources, including contamination of drinking water wells. The cases occurred during both  
3 routine activities and accidents and have resulted in impacts to surface or ground water. Spills of  
4 hydraulic fracturing fluid and produced water in certain cases have reached drinking water  
5 resources, both surface and ground water. Discharge of treated hydraulic fracturing wastewater has  
6 increased contaminant concentrations in receiving surface waters. Below ground movement of  
7 fluids, including gas, most likely via the production well, have contaminated drinking water  
8 resources. In some cases, hydraulic fracturing fluids have also been directly injected into drinking  
9 water resources, as defined in this assessment, to produce oil or gas that co-exists in those  
10 formations.

11 The number of identified cases where drinking water resources were impacted are small relative to  
12 the number of hydraulically fractured wells. This could reflect a rarity of effects on drinking water  
13 resources, or may be an underestimate as a result of several factors. There is insufficient pre- and  
14 post-hydraulic fracturing data on the quality of drinking water resources. This inhibits a  
15 determination of the frequency of impacts. Other limiting factors include the presence of other  
16 causes of contamination, the short duration of existing studies, and inaccessible information related  
17 to hydraulic fracturing activities.

#### 10.4. Use of the Assessment

18 The practice of hydraulic fracturing is simultaneously expanding and changing rapidly. Over 60% of  
19 new oil and gas wells are likely to be hydraulically fractured, and this percentage may be over 90%  
20 in some locations. Economic forces are likely to cause short term volatility in the number of wells  
21 drilled and fractured, yet hydraulic fracturing is expected to continue to expand and drive an  
22 increase in domestic oil and gas production in coming decades ([EIA, 2014a](#)).<sup>1</sup> As a result, hydraulic  
23 fracturing will likely increase in existing locations, while also potentially expanding to new areas.

24 This state-of-the-science assessment contributes to the understanding of the potential impacts of  
25 hydraulic fracturing on drinking water resources and the factors that may influence those impacts.  
26 The findings in this assessment can be used by federal, state, tribal, and local officials; industry; and  
27 the public to better understand and address any vulnerabilities of drinking water resources to  
28 hydraulic fracturing activities. This assessment can also be used to help facilitate and inform  
29 dialogue among interested stakeholders, and support future efforts, including: providing context to  
30 site-specific exposure or risk assessments, local and regional public health assessments, and to  
31 assessments of cumulative impacts of hydraulic fracturing on drinking water resources over time  
32 or over defined geographic areas of interest.

33 We hope the identification of limitations and uncertainties will promote greater attention to these  
34 areas through pre- and post- hydraulic fracturing monitoring programs and by researchers. We also

---

<sup>1</sup> In their reference case projections, the U.S. Energy Information Administration (EIA) forecasts that U.S. gas production by 2035 will have increased 50% over 2012 levels. Crude oil production is projected to increase almost 40% above current levels by 2025, before declining in subsequent decades ([EIA, 2014a](#)).

- 1 hope it will lead to greater dissemination of data in forms accessible by a wide-range of researchers
- 2 and audiences.
- 3 Finally, and most importantly, this assessment advances the scientific basis for decisions by federal,
- 4 state, tribal, and local officials; industry; and the public, on how best to protect drinking water
- 5 resources now and in the future.

## 10.5. References for Chapter 10

- [Ajani, A; Kelkar, M.](#) (2012). Interference study in shale plays. Paper presented at SPE Hydraulic Fracturing Technology Conference, February 6-8, 2012, The Woodlands, TX.
- [Bair, ES; Freeman, DC; Senko, JM.](#) (2010). Subsurface gas invasion Bainbridge Township, Geauga County, Ohio. (Expert Panel Technical Report). Columbus, OH: Ohio Department of Natural Resources. <http://oilandgas.ohiodnr.gov/resources/investigations-reports-violations-reforms#THR>
- [Clark, CE; Veil, JA.](#) (2009). Produced water volumes and management practices in the United States (pp. 64). (ANL/EVS/R-09/1). Argonne, IL: Argonne National Laboratory. [http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL\\_EVS\\_R09\\_produced\\_water\\_volume\\_report\\_2437.pdf](http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL_EVS_R09_produced_water_volume_report_2437.pdf)
- [Crescent](#) (Crescent Consulting, LLC). (2011). East Mamm creek project drilling and cementing study. Oklahoma City, OK. <http://cogcc.state.co.us/Library/PiceanceBasin/EastMammCreek/ReportFinal.pdf>
- [EIA](#) (Energy Information Administration). (2014a). Annual energy outlook 2014 with projections to 2040. (DOE/EIA-0383(2014)). Washington, D.C.: U.S. Energy Information Administration. [http://www.eia.gov/forecasts/aeo/pdf/0383\(2014\).pdf](http://www.eia.gov/forecasts/aeo/pdf/0383(2014).pdf)
- [GWPC and ALL Consulting](#) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>
- [Hansen, E; Mulvaney, D; Betcher, M.](#) (2013). Water resource reporting and water footprint from Marcellus Shale development in West Virginia and Pennsylvania. Durango, CO: Earthworks Oil & Gas Accountability Project. [http://www.downstreamstrategies.com/documents/reports\\_publication/marcellus\\_wv\\_pa.pdf](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf)
- [IOGCC](#) (Interstate Oil and Gas Compact Commission). (2008). Protecting our country's resources: The states' case, orphaned well plugging initiative. Oklahoma City, OK: Interstate Oil and Gas Compact Commission (IOGCC). <http://iogcc.myshopify.com/products/protecting-our-countrys-resources-the-states-case-orphaned-well-plugging-initiative-2008>
- [Ma, G; Geza, M; Xu, P.](#) (2014). Review of flowback and produced water management, treatment, and beneficial use for major shale gas development basins. Shale Energy Engineering Conference 2014, Pittsburgh, Pennsylvania, United States.
- [Michie, TW; Koch, CA.](#) (1991). Evaluation of injection-well risk management in the Williston Basin. J Pet Tech 43: 737-741. <http://dx.doi.org/10.2118/20693-PA>
- [NETL](#) (National Energy Technology Laboratory). (2013). Modern shale gas development in the United States: An update. Pittsburgh, PA: U.S. Department of Energy. National Energy Technology Laboratory. <http://www.netl.doe.gov/File%20Library/Research/Oil-Gas/shale-gas-primer-update-2013.pdf>



- [Nicot, JP; Hebel, AK; Ritter, SM; Walden, S; Baier, R; Galusky, P; Beach, J; Kyle, R; Symank, L; Breton, C.](#) (2011). Current and projected water use in the Texas mining and oil and gas industry - Final Report. (TWDB Contract No. 0904830939). Nicot, JP; Hebel, AK; Ritter, SM; Walden, S; Baier, R; Galusky, P; Beach, J; Kyle, R; Symank, L; Breton, C.  
[http://www.twdb.texas.gov/publications/reports/contracted\\_reports/doc/0904830939\\_MiningWaterUse.pdf](http://www.twdb.texas.gov/publications/reports/contracted_reports/doc/0904830939_MiningWaterUse.pdf)
- [Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.](#) (2012). Oil & gas water use in Texas: Update to the 2011 mining water use report. Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.  
[http://www.twdb.state.tx.us/publications/reports/contracted\\_reports/doc/0904830939\\_2012Update\\_MiningWaterUse.pdf](http://www.twdb.state.tx.us/publications/reports/contracted_reports/doc/0904830939_2012Update_MiningWaterUse.pdf)
- [Nicot, JP; Scanlon, BR; Reedy, RC; Costley, RA.](#) (2014). Source and fate of hydraulic fracturing water in the Barnett Shale: a historical perspective. *Environ Sci Technol* 48: 2464-2471.  
<http://dx.doi.org/10.1021/es404050r>
- [ODNR, DMRM.](#) (Ohio Department of Natural Resources, Division of Mineral Resources Management). (2008). Report on the investigation of the natural gas invasion of aquifers in Bainbridge Township of Geauga County, Ohio. Columbus, OH: ODNR.  
<http://oilandgas.ohiodnr.gov/portals/oilgas/pdf/bainbridge/report.pdf>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015a). PA DEP oil & gas reporting website, statewide data downloads by reporting period. waste and production files downloaded for Marcellus/unconventional wells, July 2009 December 2014. Harrisburg, PA. Retrieved from  
<https://www.paoilandgasreporting.state.pa.us/publicreports/Modules/DataExports/DataExports.aspx>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015b). Technologically enhanced naturally occurring radioactive materials (TENORM) study report. Harrisburg, PA.  
[http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study\\_Report\\_Rev\\_0\\_01-15-2015.pdf](http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study_Report_Rev_0_01-15-2015.pdf)
- [Papoulias, DM; Velasco, AL.](#) (2013). Histopathological analysis of fish from Acorn Fork Creek, Kentucky, exposed to hydraulic fracturing fluid releases. *Southeastern Naturalist* 12: 92-111.
- [Scanlon, BR; Reedy, RC; Nicot, JP.](#) (2014). Will water scarcity in semiarid regions limit hydraulic fracturing of shale plays? *Environmental Research Letters* 9. <http://dx.doi.org/10.1088/1748-9326/9/12/124011>
- [Science Based Solutions LLC.](#) (2014). Summary of hydrogeology investigations in the Mamm Creek field area, Garfield County. Laramie, Wyoming. <http://www.garfield-county.com/oil-gas/documents/Summary-Hydrogeologic-Studies-Mamm%20Creek-Area-Feb-10-2014.pdf>
- [Shaffer, DL; Arias Chavez, LH; Ben-Sasson, M; Romero-Vargas Castrillón, S; Yip, NY; Elimelech, M.](#) (2013). Desalination and reuse of high-salinity shale gas produced water: drivers, technologies, and future directions. *Environ Sci Technol* 47: 9569-9583.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014c). Drinking water contaminants. Available online at <http://water.epa.gov/drink/contaminants/>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.  
<http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015b). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Project database [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development.  
<http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocus-1-disclosures>

- 
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015c). Case study analysis of the impacts of water acquisition for hydraulic fracturing on local water availability [EPA Report]. (EPA/600/R-14/179). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015j). Retrospective case study in Killdeer, North Dakota: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/103). Washington, D.C.
- [USGS](#) (U.S. Geological Survey). (2014c). The quality of our nations waters water quality in principal aquifers of the United States, 19912010. (Circular 1360). Reston, VA. <http://dx.doi.org/10.3133/cir1360>
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A](#). (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. Environ Sci Technol 48: 36-52. <http://dx.doi.org/10.1021/es405118y>
- [Warner, NR; Christie, CA; Jackson, RB; Vengosh, A](#). (2013a). Impacts of shale gas wastewater disposal on water quality in western Pennsylvania. Environ Sci Technol 47: 11849-11857. <http://dx.doi.org/10.1021/es402165b>
- [Ziemkiewicz, P; Quaranta, JD; Mccawley, M](#). (2014). Practical measures for reducing the risk of environmental contamination in shale energy production. Environ Sci Process Impacts 16: 1692-1699. <http://dx.doi.org/10.1039/c3em00510k>

## References for All Chapters

- [Abou-Sayed, IS; Sorrell, MA; Foster, RA; Atwood, EL; Youngblood, DR.](#) (2011). Haynesville shale development program: From vertical to horizontal. Paper presented at North American Unconventional Gas Conference and Exhibition, June 14-16, 2011, The Woodlands, TX.
- [Abriola, LM; Pinder, GE.](#) (1985a). A multiphase approach to the modeling of porous-media contamination by organic-compounds .2. Numerical-simulation. *Water Resour Res* 21: 19-26.
- [Abriola, LM; Pinder, GE.](#) (1985b). A multiphase approach to the modeling of porous media contamination by organic compounds: 1. Equation development. *Water Resour Res* 21: 11-18.  
<http://dx.doi.org/10.1029/WR021i001p00011>
- [Adachi, J; Siebrits, E; Peirce, A; Desroches, J.](#) (2007). Computer simulation of hydraulic fractures. *International Journal of Rock Mechanics and Mining Sciences* 44: 739-757.  
<http://dx.doi.org/10.1016/j.ijrmms.2006.11.006>
- [Ajani, A; Kelkar, M.](#) (2012). Interference study in shale plays. Paper presented at SPE Hydraulic Fracturing Technology Conference, February 6-8, 2012, The Woodlands, TX.
- [Al-Ghazal, M; Al-Driweesh, S; Al-Shammari, F.](#) (2013). First successful application of an environment friendly fracturing fluid during on-the-fly proppant fracturing. Paper presented at International Petroleum Technology Conference, March, 26-28, 2013, Beijing, China.
- [Alanco.](#) (2012). New subsidiary Alanco Energy Services, Inc. to provide produced water disposal services to natural gas industry. Alanco. [http://www.alanco.com/news\\_040912.asp](http://www.alanco.com/news_040912.asp)
- [Ali, M; Taoutaou, S; Shafqat, AU; Salehapour, A; Noor, S.](#) (2009). The use of self healing cement to ensure long term zonal isolation for HPHT wells subject to hydraulic fracturing operations in Pakistan. Paper presented at International Petroleum Technology Conference, December 7-9, 2009, Doha, Qatar.
- [Ali, SA; Clark, WJ; Moore, WR; Dribus, JR.](#) (2010). Diagenesis and reservoir quality. *Oilfield Rev* 22: 14-27.
- [ALL Consulting](#) (ALL Consulting, LLC). (2004). Coal bed methane primer: New source of natural gas and environmental implications. Tulsa, OK: U.S. Department of Energy, National Petroleum Technology Center.  
<http://bogc.dnrc.mt.gov/PDF/Web%20Version.pdf>
- [ALL Consulting](#) (ALL Consulting, LLC). (2012). The modern practices of hydraulic fracturing: A focus on Canadian resources. Tulsa, Oklahoma: ALL Consulting LLC.
- [Allen, TE.](#) (2013). Pregel blender prototype designed to reduce cost and environmental problems. (SPE-27708-MS). Allen, TE. <http://dx.doi.org/10.2118/27708-MS>
- [Alley, B; Beebe, A; Rodgers, I; Castle, JW.](#) (2011). Chemical and physical characterization of produced waters from conventional and unconventional fossil fuel resources. *Chemosphere* 85: 74-82.  
<http://dx.doi.org/10.1016/j.chemosphere.2011.05.043>
- [Allison, D; Folds, DS; Harless, DJ; Howell, M; Vargus, GW; Stipetich, A.](#) (2009). Optimizing openhole completion techniques for horizontal foam-drilled wells. Paper presented at SPE Eastern Regional Meeting, September 23-25, 2009, Charleston, WV.
- [Alvarez-Cohen, L; Speitel, GE.](#) (2001). Kinetics of aerobic cometabolism of chlorinated solvents. *Biodegradation* 12: 105-126. <http://dx.doi.org/10.1023/A:1012075322466>
- [Alzahrani, S; Mohammad, AW; Hilal, N; Abdullah, P; Jaafar, O.](#) (2013). Comparative study of NF and RO membranes in the treatment of produced water-Part I: Assessing water quality. *Desalination* 315: 18-26.  
<http://dx.doi.org/10.1016/j.desal.2012.12.004>

- [AMEC, Hinckley, HDR](#), (AMEC Environment & Infrastructure, Inc, Hinckley Consulting, HDR Engineering, Inc). (2014). Hydrogeologic study of the Laramie County control area. Prepared for the Wyoming State Engineers Office. Cheyenne, WY: Wyoming State Engineer's Office. <http://seo.wyo.gov/seo/files/Final%20Draft%20Corrected%20Stamped.pdf?attredirects=0&d=1>
- [Aminto, A; Olson, MS](#). (2012). Four-compartment partition model of hazardous components in hydraulic fracturing fluid additives. Journal of Natural Gas Science & Engineering 7: 16-21. <http://dx.doi.org/DOI:10.1016/j.jngse.2012.03.006>
- [ANRC](#) (Arkansas Natural Resources Commission). (2014). Non-riparian water use certification. Available online at <http://anrc.ark.org/divisions/water-resources-management/non-riparian-water-use-certification-program/>
- [API](#) (American Petroleum Institute). (2000). Overview of exploration and production waste volumes and waste management practices in the United States. [http://www.api.org/environment-health-and-safety/environmental-performance/~media/Files/EHS/Environmental Performance/ICF-Waste-Survey-of-EandP-Wastes-2000.ashx](http://www.api.org/environment-health-and-safety/environmental-performance/~media/Files/EHS/Environmental%20Performance/ICF-Waste-Survey-of-EandP-Wastes-2000.ashx)
- [API](#) (American Petroleum Institute). (2005). Modeling study of produced water release scenarios. (Publication Number 4734). Washington, D.C.: API Publishing Services. [http://www.api.org/~media/files/ehs/environmental\\_performance/4734.pdf?la=en](http://www.api.org/~media/files/ehs/environmental_performance/4734.pdf?la=en)
- [API](#) (American Petroleum Institute). (2010a). Isolating potential flow zones during well construction [Standard] (1st ed.). (RP 65-2). Washington, DC: API Publishing Services. <http://www.techstreet.com/products/preview/1695866>
- [API](#) (American Petroleum Institute). (2010b). Water management associated with hydraulic fracturing. Washington, D.C.: API Publishing Services. [http://www.api.org/~media/Files/Policy/Exploration/HF2\\_e1.pdf](http://www.api.org/~media/Files/Policy/Exploration/HF2_e1.pdf)
- [API](#) (American Petroleum Institute). (2011). Practices for mitigating surface impacts associated with hydraulic fracturing. Washington, DC: API Publishing Services. [http://www.shalegas.energy.gov/resources/HF3\\_e7.pdf](http://www.shalegas.energy.gov/resources/HF3_e7.pdf)
- [Argonne National Laboratory](#). (2014). Water use and management in the Bakken shale oil play. (DOE Award No.: FWP 49462). Pittsburgh, PA: National Energy Technology Laboratory. <http://www.ipd.anl.gov/anlpubs/2014/05/104645.pdf>
- [Arkadakskiy, S.; Rostron, BJ](#). (2012a). Stable isotope geochemistry helps in reducing out-of-zone hydraulic fracturing and unwanted brine production from the Bakken Reservoir. Available online at [http://isobrine.com/wp-content/uploads/2013/04/Arkadakskiy\\_Rostron\\_20121.pdf](http://isobrine.com/wp-content/uploads/2013/04/Arkadakskiy_Rostron_20121.pdf)
- [Arkadakskiy, S; Rostron, B](#). (2012b). Stable isotope geochemistry helps in reducing out-of-zone hydraulic fracturing and unwanted brine production from the Bakken Reservoir. Available online at <http://isobrine.com/resources/>
- [Arkadakskiy, S; Rostron, B](#). (2013a). Tracking out-of-zone hydraulic fracturing in the Bakken with naturally occurring tracers. Paper presented at GeoConvention 2013: Integration Canadian Society of Petroleum Geologists, May 6-10, 2013, Calgary, AB, Canada.
- [Arkadakskiy, S; Rostron, B](#). (2013b). Tracking out-of-zone hydraulic fracturing in the Bakken with naturally occurring tracers. Paper presented at GeoConvention 2013: Integration, May 6-10, 2013, Calgary, Alberta.
- [Arthur, JD; Bohm, B; Cornue, D](#). (2009a). Environmental considerations of modern shale gas development. Paper presented at SPE Annual Technical Conference and Exhibition, October 4-7, 2009, New Orleans, LA.
- [Arthur, JD; Bohm, B; Coughlin, BJ; Layne, M](#). (2009b). Evaluating the environmental implications of hydraulic fracturing in shale gas reservoirs. Paper presented at SPE Americas E&P Environmental and Safety Conference, March 23-25, 2009, San Antonio, TX.

- [Arthur, JD; Bohm, B; Layne, M.](#) (2008). Hydraulic fracturing considerations for natural gas wells of the Marcellus shale. Paper presented at The Ground Water Protection Council Annual Forum, September 21-24, 2008, Cincinnati, OH.
- [Arthur, JD; Layne, MA; Hochheiser, HW; Arthur, R.](#) (2014). Spatial and statistical analysis of hydraulic fracturing activities in U.S. shale plays and the effectiveness of the FracFocus chemical disclosure system. In 2014 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168640-MS>
- [ATSDR](#) (Agency for Toxic Substances and Disease Registry). (2005). Public health assessment guidance manual (Update). Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service. <http://www.atsdr.cdc.gov/hac/PHAManual/toc.html>
- [ATSDR](#) (Agency for Toxic Substances and Disease Registry). (2013). Health consultation: Chesapeake ATGAS 2H well site, Leroy Hill Road, Leroy, Leroy Township, Bradford County, PA. Atlanta, GA: ATSDR, Division of Community Health Investigations. [http://www.atsdr.cdc.gov/HAC/pha/ChesapeakeATGASWellSite/ChesapeakeATGASWellSiteHC10282013\\_508.pdf](http://www.atsdr.cdc.gov/HAC/pha/ChesapeakeATGASWellSite/ChesapeakeATGASWellSiteHC10282013_508.pdf)
- [AWWA](#) (American Water Works Association). (2013). Water and hydraulic fracturing: A white paper from the American Water Works Association. Denver, CO. <http://www.awwa.org/Portals/0/files/legreg/documents/AWWAFrackingReport.pdf>
- [AWWA](#) (American Water Works Association). (1999). Residential end uses of water. In PW Mayer; WB DeOreo (Eds.). Denver, CO: AWWA Research Foundation and American Water Works Association. [http://www.waterrf.org/PublicReportLibrary/RFR90781\\_1999\\_241A.pdf](http://www.waterrf.org/PublicReportLibrary/RFR90781_1999_241A.pdf)
- [Ayala, S; Barber, T; Dessinges, MN; Frey, M; Horkowitz, J; Leugemors, E; Pessin, J; Way, CH; Badry, R; Kholy, IE; Galt, A; Hjellesnet, M; Sock, D.](#) (2006). Improving oilfield service efficiency. Houston, TX: Schlumberger Limited. [http://www.slb.com/~media/Files/resources/oilfield\\_review/ors06/aut06/improving\\_oilfield\\_service\\_efficiency.pdf](http://www.slb.com/~media/Files/resources/oilfield_review/ors06/aut06/improving_oilfield_service_efficiency.pdf)
- [Bacher, D.](#) (2013). Oil company fined \$60,000 for illegally discharging fracking fluid. Available online at [https://www.indybay.org/newsitems/2013/11/17/18746493.php?show\\_comments=1](https://www.indybay.org/newsitems/2013/11/17/18746493.php?show_comments=1) (accessed March 6, 2015).
- [Bachu, S; Bennion, DB.](#) (2009). Experimental assessment of brine and/or CO2 leakage through well cements at reservoir conditions. Int J Greenhouse Gas Control 3: 494-501. <http://dx.doi.org/10.1016/j.ijggc.2008.11.002>
- [Bair, ES; Digel, RK.](#) (1990). Subsurface transport of inorganic and organic solutes from experimental road spreading of oilfield brine. Ground Water Monitoring and Remediation 10: 94-105.
- [Bair, ES; Freeman, DC; Senko, JM.](#) (2010). Subsurface gas invasion Bainbridge Township, Geauga County, Ohio. (Expert Panel Technical Report). Columbus, OH: Ohio Department of Natural Resources. <http://oilandgas.ohiodnr.gov/resources/investigations-reports-violations-reforms#THR>
- [Baker Hughes.](#) (2014a). Baker Hughes green chemicals program overview. Available online
- [Baker Hughes.](#) (2014b). Well count. U.S. onshore well count [Database]. Houston, TX: Baker Hughes, Inc. Retrieved from <http://phx.corporate-ir.net/phoenix.zhtml?c=79687&p=irol-wellcountus>
- [Baldassare, F.](#) (2011). The origin of some natural gases in Permian through Devonian Age systems in the Appalachian Basin and the relationship to incidents of stray gas migration. Presentation presented at Technical workshop for hydraulic fracturing study, chemical and analytical methods, February 24-25, 2011, Arlington, VA.



- [Baldassare, FJ; McCaffrey, MA; Harper, JA](#). (2014). A geochemical context for stray gas investigations in the northern Appalachian Basin: Implications of analyses of natural gases from Neogene-through Devonian-age strata. AAPG Bulletin 98: 341-372. <http://dx.doi.org/10.1306/06111312178>
- [Banasiak, LJ; Schäfer, AI](#). (2009). Removal of boron, fluoride and nitrate by electro dialysis in the presence of organic matter. J Memb Sci 334: 101-109. <http://dx.doi.org/10.1016/j.memsci.2009.02.020>
- [Barati, R; Liang, JT](#). (2014). A review of fracturing fluid systems used for hydraulic fracturing of oil and gas wells. J Appl Polymer Sci Online pub. <http://dx.doi.org/10.1002/app.40735>
- [Barbot, E; Vidic, NS; Gregory, KB; Vidic, RD](#). (2013). Spatial and temporal correlation of water quality parameters of produced waters from Devonian-age shale following hydraulic fracturing. Environ Sci Technol 47: 2562-2569.
- [Barker, JF; Fritz, P](#). (1981). Carbon isotope fractionation during microbial methane oxidation. Nature 293: 289-291. <http://dx.doi.org/10.1038/293289a0>
- [Barnes, T](#). (2010). 2 drillers fined for Pennsylvania gas well blowout. Available online at <http://www.post-gazette.com/news/environment/2010/07/14/2-drillers-fined-for-Pennsylvania-gas-well-blowout/stories/201007140241> (accessed March 3, 2015).
- [Bartos, TT; Hallberg, LL](#). (2011). Generalized potentiometric surface, estimated depth to water, and estimated saturated thickness of the high plains aquifer system, March-June 2009, Laramie County, Wyoming. Available online at <http://pubs.usgs.gov/sim/3180/>
- [Beckwith, R](#). (2011). Proppants: Where in the world. J Pet Tech 63: 36-41.
- [Bene, PG; Harden, B; Griffin, SW; Nicot, JP](#). (2007). Northern Trinity/Woodbine aquifer groundwater availability model: Assessment of groundwater use in the Northern Trinity aquifer due to urban growth and Barnett shale development. (TWDB Contract Number: 0604830613). Austin, TX: R. W. Harden & Associates, Inc. [http://www.twdb.state.tx.us/groundwater/models/gam/trnt\\_n/TRNT\\_N\\_Barnett\\_Shale\\_Report.pdf](http://www.twdb.state.tx.us/groundwater/models/gam/trnt_n/TRNT_N_Barnett_Shale_Report.pdf)
- [Benko, KL; Drewes, JE](#). (2008). Produced water in the Western United States: Geographical distribution, occurrence, and composition. Environ Eng Sci 25: 239-246.
- [Benotti, MJ; Stanford, BD; Snyder, SA](#). (2010). Impact of drought on wastewater contaminants in an urban water supply. J Environ Qual 39: 1196-1200.
- [Bertoncello, A; Wallace, J; Honarpour, MM; Kabir, C; Blyton, CA](#). (2014). Imbibition and water blockage in unconventional reservoirs: Well management implications during flowback and early production. SPE Journal 17.
- [Bethke, CM; Yeakel, S](#). (2014). The geochemists workbench. Release 10.0. GWB essentials guide (Version Release 10.0). Champaign, IL: Aqueous Solutions, LLC. Retrieved from <http://www.gwb.com/pdf/GWB10/GWBessentials.pdf>
- [Bibby, KJ; Brantley, SL; Reible, DD; Linden, KG; Mouser, PJ; Gregory, KB; Ellis, BR; Vidic, RD](#). (2013). Suggested reporting parameters for investigations of wastewater from unconventional shale gas extraction. Environ Sci Technol 47: 13220-13221. <http://dx.doi.org/10.1021/es404960z>
- [Bishop, RE](#). (2013). Historical analysis of oil and gas well plugging in New York: Is the regulatory system working? New Solutions: A Journal of Environmental and Occupational Health Policy 23: 103-116. <http://dx.doi.org/10.2190/NS.23.1.g>
- [BJ Services Company](#). (2009). BJ fracturing manual 2.0. service company confidential business information document (Revision No. 1 ed. ed.). Houston, TX.
- [Blauch, ME](#). (2010). Developing effective and environmentally suitable fracturing fluids using hydraulic fracturing flowback waters. Paper presented at SPE Unconventional Gas Conference, February 23-25, 2010, Pittsburgh, PA.



- [Blauch, ME; Myers, RR; Moore, TR; Lipinski, BA](#). (2009). Marcellus shale post-frac flowback waters - where is all the salt coming from and what are the implications? In Proceedings of the SPE Eastern Regional Meeting. Richardson, TX: Society of Petroleum Engineers.
- [BLM](#) (Bureau of Land Management). (2013a). Abandoned mine lands: A new legacy. Washington, DC: U.S. Department of the Interior, Bureau of Land Management. [http://www.blm.gov/pgdata/etc/medialib/blm/wo/MINERALS\\_REALTY\\_AND\\_RESOURCE\\_PROTECTION/\\_aml/aml\\_documents.Par.81686.File.dat/AML\\_NewLegacy.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/wo/MINERALS_REALTY_AND_RESOURCE_PROTECTION/_aml/aml_documents.Par.81686.File.dat/AML_NewLegacy.pdf)
- [BLM](#) (Bureau of Land Management). (2013b). Hydraulic fracturing white paper, appendix e. Casper, WY: Bureau of Land Management, Wyoming State Office. <http://www.blm.gov/pgdata/etc/medialib/blm/wy/information/NEPA/og/2014/02feb.Par.49324.File.dat/v1AppE.pdf>
- [Blondes, MS; Gans, KD; Thordsen, JJ; Reidy, ME; Thomas, B; Engle, MA; Kharaka, YK; Rowan, EL](#). (2014). Data: U.S. Geological Survey National Produced Waters Geochemical Database v2.0 (Provisional) [Database]: U.S. Geological Survey :: USGS. Retrieved from <http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsofEnergyProductionandUse/ProducedWaters.aspx#3822349-data>
- [Boghici, R](#). (2009). Water quality in the Carrizo-Wilcox aquifer, 1990-2006. (Report 372). Austin, TX: Texas Water Development Board. [http://www.twdb.texas.gov/publications/reports/numbered\\_reports/doc/R372Carrizo-Wilcox.pdf](http://www.twdb.texas.gov/publications/reports/numbered_reports/doc/R372Carrizo-Wilcox.pdf)
- [Borrirukwisitsak, S; Keenan, HE; Gauchotte-Lindsay, C](#). (2012). Effects of salinity, pH and temperature on the octanol-water partition coefficient of bisphenol A. IJESD 3: 460-464. <http://dx.doi.org/10.7763/IJESD.2012.V3.267>
- [Boschee, P](#). (2012). Handling produced water from hydraulic fracturing. Oil and Gas Facilities 1: 23-26.
- [Boschee, P](#). (2014). Produced and flowback water recycling and reuse: Economics, limitations, and technology. Oil and Gas Facilities 3: 16-22.
- [Bosworth, S; El-Sayed, HS; Ismail, G; Ohmer, H; Stracke, M; West, C; Retnanto, A](#). (1998). Key issues in multilateral technology. Oilfield Rev 10: 14-28.
- [Bouchard, D; Cornaton, F; Höhener, P; Hunkeler, D](#). (2011). Analytical modelling of stable isotope fractionation of volatile organic compounds in the unsaturated zone. J Contam Hydrol 119: 44-54. <http://dx.doi.org/10.1016/j.jconhyd.2010.09.006>
- [Bouska, V](#). (1981). Geochemistry of coal. New York, NY: Elsevier.
- [Bowen, ZH; Oelsner, GP; Cade, BS; Gallegos, TJ; Farag, AM; Mott, DN; Potter, CJ; Cinotto, PJ; Clark, ML; Kappel, WM; Kresse, TM; Melcher, CP; Paschke, SS; Susong, DD; Varela, BA](#). (2015). Assessment of surface water chloride and conductivity trends in areas of unconventional oil and gas development-Why existing national data sets cannot tell us what we would like to know. Water Resour Res 51: 704-715. <http://dx.doi.org/10.1002/2014WR016382>
- [Boyd, D; Al-Kubti, S; Khedr, OH; Khan, N; Al-Nayadi, K; Degouy, D; Elkadi, A; Kindi, ZA](#). (2006). Reliability of cement bond log interpretations compared to physical communication tests between formations. Paper presented at Abu Dhabi International Petroleum Exhibition and Conference, November 5-8, 2006, Abu Dhabi, UAE.
- [Boyer, CM; Glenn, SA; Claypool, BR; Weida, SD; Adams, JD; Huck, DR; Stidham, JE](#). (2005). Application of viscoelastic fracturing fluids in Appalachian Basin reservoirs (SPE 98068 ed.). Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/98068-MS>
- [Boyer, EW; Swistock, BR; Clark, J; Madden, M; Rizzo, DE](#). (2011). The impact of Marcellus gas drilling on rural drinking water supplies. Harrisburg, PA: The Center for Rural Pennsylvania. <http://www.iogawv.com/Resources/Docs/Marcellus-drinking-water-2011.pdf>

- [Boysen, DB; Boysen, JA; Boysen, JE.](#) (2002). Creative Strategies for Produced Water Disposal in the Rocky Mountain Region. Paper presented at 9th Annual International Petroleum Environmental Conference, October 2002, Albuquerque, NM.
- [Boysen, JE; Harju, JA; Shaw, B; Fosdick, M; Grisanti, A; Sorensen, JA.](#) (1999). The current status of commercial deployment of the freeze thaw evaporation treatment of produced water. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/52700-MS>
- [Brannon, HD; Daulton, DJ; Hudson, HG; Jordan, AK.](#) (2011). Progression toward implementation of environmentally responsible fracturing processes (SPE-147534-MS ed.). Denver, CO: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/147534-MS>
- [Brannon, HD; Daulton, DJ; Post, MA; Hudson, HG; Jordan, AK.](#) (2012). The quest to exclusive use of environmentally responsible fracturing products and systems. Richardson, TX: Society of Petroleum Engineers. <http://www.onepetro.org/mslib/app/Preview.do?paperNumber=SPE-152068-MS&societyCode=SPE>
- [Brannon, HD; Kendrick, DE; Luckey, E; Stipetich, A.](#) (2009). Multistage Fracturing of Horizontal Shale Gas Wells Using >90% Foam Provides Improved Production. In 2009 SPE Eastern regional meeting: limitless potential/formidable challenges (SPE 124767 ed.). Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/124767-MS>
- [Brannon, HD; Pearson, CM.](#) (2007). Proppants and fracture conductivity. In Modern fracturing - enhancing natural gas production (1st ed.). Houston, TX: Energy Tribune Publishing, Inc.
- [Brantley, SL; Yoxtheimer, D; Arjmand, S; Grieve, P; Vidic, R; Pollak, J; Llewellyn, GT; Abad, J; Simon, C.](#) (2014). Water resource impacts during unconventional shale gas development: The Pennsylvania experience. Int J Coal Geol 126: 140-156. <http://dx.doi.org/10.1016/j.coal.2013.12.017>
- [Breit, GN.](#) (2002). USGS Produced waters database. Available online at <http://energy.cr.usgs.gov/prov/prodwat/>
- [Brinck, EL; Frost, CD.](#) (2007). Detecting infiltration and impacts of introduced water using strontium isotopes. Ground Water 45: 554-568. <http://dx.doi.org/10.1111/j.1745-6584.2007.00345.x>
- [Brown, DG; Jaffé, PR.](#) (2001). Effects of nonionic surfactants on bacterial transport through porous media. Environ Sci Technol 35: 3877-3883. <http://dx.doi.org/10.1021/es010577w>
- [Brown, HD; Grijalva, VE; Raymer, LL.](#) (1970). New developments in sonic wave train display and analysis in cased holes. (SPWLA-1970-F). Brown, HD; Grijalva, VE; Raymer, LL. <https://www.onepetro.org/conference-paper/SPWLA-1970-F>
- [Browne, DJ; BD, L.](#) (1999). The development of a rapid hydration on-the-fly crosslinked water fracturing fluid. Paper presented at CSPG and Petroleum Society Joint Convention, Digging Deeper, Finding a Better Bottom Line, June 14 18, 1999, Calgary, Canada.
- [Bruffatto, C; Cochran, J; Conn, L; El-Zeghaty, SZA, A; Fraboulet, B; Griffin, T; James, S; Munk, T; Justus, F; Levine, JR; Montgomery, C; Murphy, D; Pfeiffer, J; Pornpoch, T; Rishmani, L.](#) (2003). From mud to cement - Building gas wells. Oilfield Rev 15: 62-76.
- [Bruff, M; Jikich, SA.](#) (2011). Field demonstration of an integrated water treatment technology solution in Marcellus shale. Paper presented at SPE Eastern Regional Meeting, August 17-19, 2011, Columbus, OH.
- [Byrnes, AP.](#) (2011). Role of induced and natural imbibition in frac fluid transport and fate in gas shales. Presentation presented at Technical Workshops for Hydraulic Fracturing Study: Fate & Transport, March 28-29, 2011, Arlington, VA.

- [California Department of Conservation](#). (2015). Monthly production and injection databases. statewide production and injection data [Database]. Sacramento, CA: California Department of Conservation, Division of Oil, Gas & Geothermal Resources. Retrieved from [http://www.conservation.ca.gov/dog/prod\\_injection\\_db/Pages/Index.aspx](http://www.conservation.ca.gov/dog/prod_injection_db/Pages/Index.aspx)
- [California Department of Water Resources](#). (2015). California state water project overview. Available online at <http://www.water.ca.gov/swp/> (accessed February 20, 2015).
- [Calvert, DG; Smith, DK](#). (1994). Issues and techniques of plugging and abandonment of oil and gas wells. Paper presented at SPE Annual Technical Conference and Exhibition, September 25-28, 1994, New Orleans, LA.
- [Camacho, LM, ar; Dumeé, L; Zhang, J; Li, J; Duke, M; Gomez, J; Gray, S](#). (2013). Advances in membrane distillation for water desalination and purification applications. *Water* 5: 94-196. <http://dx.doi.org/10.3390/w5010094>
- [Caniglia, J](#). (2014). Youngstown contractor sentenced to 28 months for dumping fracking waste. Available online at [http://www.cleveland.com/court-justice/index.ssf/2014/08/youngstown\\_contractor\\_sentence.html](http://www.cleveland.com/court-justice/index.ssf/2014/08/youngstown_contractor_sentence.html) (accessed March 12, 2015).
- [Carter, KE; Hammack, RW; Hakala, JA](#). (2013). Hydraulic Fracturing and Organic Compounds - Uses, Disposal and Challenges. SPE Eastern Regional Meeting, Pittsburgh, Pennsylvania, USA.
- [Castle, SL; Thomas, BF; Reager, JT; Rodell, M; Swenson, SC; Famiglietti, JS](#). (2014). Groundwater depletion during drought threatens future water security of the Colorado River Basin. *Geophys Res Lett* 41: 5904-5911. <http://dx.doi.org/10.1002/2014GL061055>
- [CCST](#) (California Council on Science and Technology). (2014). Advanced well stimulation technologies in California: An independent review of scientific and technical information. Sacramento, CA. <http://ccst.us/publications/2014/2014wst.pdf>
- [CCST](#) (California Council on Science and Technology). (2015). An independent scientific assessment of well stimulation in California, Volume 1: Well stimulation technologies and their past, present, and potential future use in California. Sacramento, CA. <http://www.ccst.us/publications/2015/2015SB4-v1.pdf>
- [Ceres](#) (Coalition for Environmentally Responsible Economies). (2014). Hydraulic fracturing & water stress: water demand by the numbers. Boston, Massachusetts. <https://www.ceres.org/issues/water/shale-energy/shale-and-water-maps/hydraulic-fracturing-water-stress-water-demand-by-the-numbers>
- [Chapman, EC; Capo, RC; Stewart, BW; Kirby, CS; Hammack, RW; Schroeder, KT; Edenborn, HM](#). (2012). Geochemical and strontium isotope characterization of produced waters from Marcellus Shale natural gas extraction. *Environ Sci Technol* 46: 3545-3553.
- [Chaudhuri, S; Ale, S](#). (2013). Characterization of groundwater resources in the Trinity and Woodbine aquifers in Texas. *Sci Total Environ* 452: 333-348. <http://dx.doi.org/10.1016/j.scitotenv.2013.02.081>
- [Chaudhuri, S; Ale, S](#). (2014a). Long term (1960-2010) trends in groundwater contamination and salinization in the Ogallala aquifer in Texas. *J Hydrol* 513: 376-390. <http://dx.doi.org/10.1016/j.jhydrol.2014.03.033>
- [Chaudhuri, S; Ale, S](#). (2014b). Temporal evolution of depth-stratified groundwater salinity in municipal wells in the major aquifers in Texas, USA. *Sci Total Environ* 472: 370-380. <http://dx.doi.org/10.1016/j.scitotenv.2013.10.120>
- [ChemicalBook](#) (ChemicalBook Inc.). (2010). Sorbitan trioleate. Available online at [http://www.chemicalbook.com/chemicalproductproperty\\_en\\_cb4677178.htm](http://www.chemicalbook.com/chemicalproductproperty_en_cb4677178.htm) (accessed April 6, 2015).
- [Chester Engineers](#). (2012). The Pittsburgh water and sewer authority 40 year plan. (PWSA Project No. R-D1.10015-11). Pittsburgh, PA: The Pittsburgh Water and Sewer Authority. [http://apps.pittsburghpa.gov/pwsa/PWSA\\_40-year\\_Plan.pdf](http://apps.pittsburghpa.gov/pwsa/PWSA_40-year_Plan.pdf)

- [Chiado, ED.](#) (2014). The impact of shale gas/oil waste on MSW landfill composition and operations. In CL Meehan; JM VanBriesen; F Vahedifard; X Yu; C Quiroga (Eds.), *Shale energy engineering 2014 technical challenges, environmental issues, and public policy* (pp. 412-420). Reston, VA: American Society of Civil Engineers. <http://dx.doi.org/10.1061/9780784413654.044>
- [Ciezobka, J; Salehi, I.](#) (2013). Controlled hydraulic fracturing of naturally fractured shales: A case study in the Marcellus Shale examining how to identify and exploit natural fractures. (SPE-164524-MS). Ciezobka, J; Salehi, I. <http://dx.doi.org/10.2118/164524-MS>
- [Cipolla, C; Weng, X; Mack, M; Ganguly, U; Gu, H; Kresse, O; Cohen, C.](#) (2011). Integrating microseismic mapping and complex fracture modeling to characterize hydraulic fracture complexity. Paper presented at SPE Hydraulic Fracturing Technology Conference, January 24-26, 2011, The Woodlands, TX.
- [Clark, CE; Horner, RM; Harto, CB.](#) (2013). Life Cycle Water Consumption for Shale Gas and Conventional Natural Gas. *Environ Sci Technol* 47: 11829-11836. <http://dx.doi.org/10.1021/es4013855>
- [Clark, CE; Veil, JA.](#) (2009). Produced water volumes and management practices in the United States (pp. 64). (ANL/EVS/R-09/1). Argonne, IL: Argonne National Laboratory. [http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL\\_EVS\\_R09\\_produced\\_water\\_volume\\_report\\_2437.pdf](http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL_EVS_R09_produced_water_volume_report_2437.pdf)
- [Cluff, M; Hartsock, A; Macrae, J; Carter, K; Mouser, PJ.](#) (2014). Temporal changes in microbial ecology and geochemistry in produced water from hydraulically fractured Marcellus Shale Gas Wells. *Environ Sci Technol* 48: 6508-6517. <http://dx.doi.org/10.1021/es501173p>
- [COGCC. Colorado Oil and Gas Conservation Commission Order No. 1V-276.](#) (2004). <https://cogcc.state.co.us/orders/orders/1v/276.html>
- [COGCC](#) (Colorado Oil and Gas Conservation Commission). (2014). Risk-based inspections: Strategies to address environmental risk associated with oil and gas operations. (OGCC2014PROJECT #7948). Denver, CO.
- [COGCC](#) (Colorado Oil and Gas Conservation Commission). (2015). COGIS - all production reports to date. Denver, CO. Retrieved from <http://cogcc.state.co.us/>
- [Cohen, HA; Parratt, T; Andrews, CB.](#) (2013). Comments on 'Potential contaminant pathways from hydraulically fractured shale to aquifers' [Comment]. *Ground Water* 51: 317-319; discussion 319-321. <http://dx.doi.org/10.1111/gwat.12015>
- [Colborn, T; Kwiatkowski, C; Schultz, K; Bachran, M.](#) (2011). Natural gas operations from a public health perspective. *Hum Ecol Risk Assess* 17: 1039-1056. <http://dx.doi.org/10.1080/10807039.2011.605662>
- [Coleman, N.](#) (2011). Produced formation water sample results from shale plays. Presentation presented at Technical Workshops for the Hydraulic Fracturing Study: Chemical & Analytical Methods, February 24-25, 2011, Arlington, VA.
- [Colorado Division of Water Resources; Colorado Water Conservation Board; Colorado Oil and Gas Conservation Commission.](#) (2014). Water sources and demand for the hydraulic fracturing of oil and gas wells in Colorado from 2010 through 2015 [Fact Sheet]. <http://cewc.colostate.edu/2012/02/water-sources-and-demand-for-the-hydraulic-fracturing-of-oil-and-gas-wells-in-colorado-from-2010-through-2015/>
- [Considine, T; Watson, R; Considine, N; and Martin, J.](#) (2012). Environmental impacts during Marcellus shale gas drilling: Causes, impacts, and remedies. (Report 2012-1). Buffalo, NY: Shale Resources and Society Institute. <http://cce.cornell.edu/EnergyClimateChange/NaturalGasDev/Documents/UBSRSI-Environmental%20Impact%20Report%202012.pdf>
- [Cooley, H; Gleick, PH; Wolff, G.](#) (2006). Desalination, with a grain of salt: A California perspective. Oakland, CA: Pacific Institute for Studies in Development, Environment, and Security. [http://www.pacinst.org/wp-content/uploads/2013/02/desalination\\_report3.pdf](http://www.pacinst.org/wp-content/uploads/2013/02/desalination_report3.pdf)

- [Corseuil, HX; Kaipper, BI; Fernandes, M.](#) (2004). Cosolvency effect in subsurface systems contaminated with petroleum hydrocarbons and ethanol. *Water Res* 38: 1449-1456.  
<http://dx.doi.org/10.1016/j.watres.2003.12.015>
- [Corseuil, HX; Monier, AL; Fernandes, M; Schneider, MR; Nunes, CC; Do Rosario, M; Alvarez, PJ.](#) (2011). BTEX plume dynamics following an ethanol blend release: geochemical footprint and thermodynamic constraints on natural attenuation. *Environ Sci Technol* 45: 3422-3429.  
<http://dx.doi.org/10.1021/es104055q>
- [Coulter, GR; Gross, BC; Benton, EG; Thomson, CL.](#) (2006). Barnett shale hybrid fracs - One operator's design, application, and results. Richardson, TX: Society of Petroleum Engineers.  
<http://dx.doi.org/10.2118/102063-MS>
- [Council of Canadian Academies.](#) (2014). Environmental impacts of shale gas extraction in Canada. Ottawa, Ontario.  
[http://www.scienceadvice.ca/uploads/eng/assessments%20and%20publications%20and%20news%20releases/Shale%20gas/ShaleGas\\_fullreportEN.pdf](http://www.scienceadvice.ca/uploads/eng/assessments%20and%20publications%20and%20news%20releases/Shale%20gas/ShaleGas_fullreportEN.pdf)
- [Countess, S; Boardman, G; Hammack, R; Hakala, A; Sharma, S; Parks, J.](#) (2014). Evaluating leachability of residual solids from hydraulic fracturing in the Marcellus shale. In *Shale energy engineering 2014: Technical challenges, environmental issues, and public policy*. Reston, VA: American Society of Civil Engineers. <http://dx.doi.org/10.1061/9780784413654.012>
- [Craig, MS; Wendte, SS; Buchwalter, JL.](#) (2012). Barnett shale horizontal restimulations: A case study of 13 wells. SPE Americas unconventional resources conference, June 5-7, 2012, Pittsburgh, PA.
- [Crescent](#) (Crescent Consulting, LLC). (2011). East Mamm creek project drilling and cementing study. Oklahoma City, OK. <http://cogcc.state.co.us/Library/PiceanceBasin/EastMammCreek/ReportFinal.pdf>
- [Crook, R.](#) (2008). Cementing: Cementing horizontal wells. Halliburton.
- [Curtice, RJ; Salas, WDJ; Paterniti, ML.](#) (2009). To gel or not to gel? In 2009 SPE annual technical conference & exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/124125-MS>
- [Cusick, M.](#) (2013). EPA fines western PA treatment plants for Marcellus wastewater violations. Available online at <http://stateimpact.npr.org/pennsylvania/2013/05/24/epa-fines-western-pa-treatment-plants-for-marcellus-wastewater-violations/> (accessed March 6, 2015).
- [Dahi Taleghani, A; Ahmadi, M; Olson, JE.](#) (2013). Secondary fractures and their potential impacts on hydraulic fractures efficiency. In *AP In Bunger; J McLennan; R Jeffrey (Eds.), Effective and sustainable hydraulic fracturing*. Croatia: InTech. <http://dx.doi.org/10.5772/56360>
- [Dahi Taleghani, A; Olson, JE.](#) (2009). Numerical modeling of multi-stranded hydraulic fracture propagation: Accounting for the interaction between induced and natural fractures. In 2009 SPE Annual Technical Conference and Exhibition. Richardson, TX: Society of Petroleum Engineers.  
<http://dx.doi.org/10.2118/124884-MS>
- [Dahm, K; Chapman, M.](#) (2014). Produced water treatment primer: Case studies of treatment applications. (S&T Research Project #1617). Denver CO: U.S. Department of the Interior.  
[http://www.usbr.gov/research/projects/download\\_product.cfm?id=1214](http://www.usbr.gov/research/projects/download_product.cfm?id=1214).
- [Dahm, KG; Guerra, KL; Xu, P; Drewes, JE.](#) (2011). Composite geochemical database for coalbed methane produced water quality in the Rocky Mountain region. *Environ Sci Technol* 45: 7655-7663.  
<http://dx.doi.org/10.1021/es201021n>
- [Dake, LP.](#) (1978). *Fundamentals of reservoir engineering*. Boston, MA: Elsevier.  
<http://www.ing.unp.edu.ar/asignaturas/reservorios/Fundamentals%20of%20Reservoir%20Engineering%20%28L.P.%20Dake%29.pdf>



- [Daneshy, AA.](#) (2009). Factors controlling the vertical growth of hydraulic fractures. (SPE-118789-MS). Daneshy, AA. <http://dx.doi.org/10.2118/118789-MS>
- [Darrah, TH; Vengosh, A; Jackson, RB; Warner, NR; Poreda, RJ.](#) (2014). Noble gases identify the mechanisms of fugitive gas contamination in drinking-water wells overlying the Marcellus and Barnett Shales. PNAS 111: 14076-14081. <http://dx.doi.org/10.1073/pnas.1322107111>
- [Daulton, D; Post, M; McMahon, J; Kuc, B; Ake, C; Hughes, B; Hill, D.](#) (2012). Global chemical evaluation process review to qualify regulatory and environmental characteristics for oilfield chemical products. Paper presented at SPE Annual Technical Conference and Exhibition, October 8-10, 2012, San Antonio, TX.
- [Davies, RJ; Almond, S; Ward, RS; Jackson, RB; Adams, C; Worrall, F; Herringshaw, LG; Gluyas, JG; Whitehead, MA.](#) (2014). Oil and gas wells and their integrity: Implications for shale and unconventional resource exploitation. Marine and Petroleum Geology 56: 239-254. <http://dx.doi.org/10.1016/j.marpetgeo.2014.03.001>
- [Davies, RJ; Foulger, GR; Mathias, S; Moss, J; Hustoft, S; Newport, L.](#) (2013). Reply: Davies et al. (2012), Hydraulic fractures: How far can they go? Marine and Petroleum Geology 43: 519-521. <http://dx.doi.org/10.1016/j.marpetgeo.2013.02.001>
- [Davies, RJ; Mathias, SA; Moss, J; Hustoft, S; Newport, L.](#) (2012). Hydraulic fractures: How far can they go? Marine and Petroleum Geology 37: 1-6. <http://dx.doi.org/10.1016/j.marpetgeo.2012.04.001>
- [Davis, JP; Struchtemeyer, CG; Elshahed, MS.](#) (2012). Bacterial communities associated with production facilities of two newly drilled thermogenic natural gas wells in the Barnett Shale (Texas, USA). Microb Ecol 64: 942-954. <http://dx.doi.org/10.1007/s00248-012-0073-3>
- [De Pater, CI; Baisch, S.](#) (2011). Geomechanical study of the Bowland shale seismicity: Synthesis report. Nottingham, England: British Geological Survey. <https://www.bucknell.edu/script/environmentalcenter/marcellus/default.aspx?articleid=MF08SXMW82CV1MQAXK7ZINIPP>
- [DeArmond, PD; DiGoregorio, AL.](#) (2013a). Characterization of liquid chromatography-tandem mass spectrometry method for the determination of acrylamide in complex environmental samples. Anal Bioanal Chem 405: 4159-4166. <http://dx.doi.org/10.1007/s00216-013-6822-4>
- [DeArmond, PD; DiGoregorio, AL.](#) (2013b). Rapid liquid chromatography-tandem mass spectrometry-based method for the analysis of alcohol ethoxylates and alkylphenol ethoxylates in environmental samples. J Chromatogr A 1305: 154-163. <http://dx.doi.org/10.1016/j.chroma.2013.07.017>
- [Dehghanpour, H; Lan, Q; Saeed, Y; Fei, H; Qi, Z.](#) (2013). Spontaneous imbibition of brine and oil in gas shales: Effect of water adsorption and resulting microfractures. Energy Fuels 27: 3039-3049. <http://dx.doi.org/10.1021/ef4002814>
- [Dehghanpour, H; Zubair, HA; Chhabra, A; Ullah, A.](#) (2012). Liquid intake of organic shales. Energy Fuels 26: 5750-5758. <http://dx.doi.org/10.1021/ef3009794>
- [Demorest, DL; Wallace, ES.](#) (1992). Radiochemical determination of norm in produced water utilizing wet chemistry separation followed by radiochemical analysis. In JP Ray; Engelhardt; Fr (Eds.), Produced water: Technological/environmental issues and solutions (pp. 257-266). New York, NY: Plenum Press. [http://dx.doi.org/10.1007/978-1-4615-2902-6\\_21](http://dx.doi.org/10.1007/978-1-4615-2902-6_21)
- [DOE](#) (U.S. Department of Energy). (2002). Handbook on best management practices and mitigation strategies for coalbed methane in the Montana portion of the Powder River Basin. Tulsa, OK: U.S. Department of Energy, National Energy Technology Laboratory. <http://bogc.dnrc.mt.gov/PDF/BMPHandbookFinal.pdf>
- [DOE](#) (U.S. Department of Energy). (2003). Handbook on coalbed methane produced water: Management and beneficial use alternatives. Tulsa, OK: ALL Consulting. [http://www.all-llc.com/publicdownloads/CBM\\_BU\\_Screen.pdf](http://www.all-llc.com/publicdownloads/CBM_BU_Screen.pdf)



- [DOE](#) (U.S. Department of Energy). (2004). A white paper describing produced water from production of crude oil, natural gas, and coal bed methane. Lemont, IL: Argonne National Laboratory.  
[http://seca.doe.gov/technologies/oil-gas/publications/oil\\_pubs/prodwaterpaper.pdf](http://seca.doe.gov/technologies/oil-gas/publications/oil_pubs/prodwaterpaper.pdf)
- [DOE](#) (U.S. Department of Energy). (2006). A guide to practical management of produced water from onshore oil and gas operations in the United States. Washington, DC: U.S. Department of Energy, National Petroleum Technology Office.  
[http://fracfocus.org/sites/default/files/publications/a\\_guide\\_to\\_practical\\_management\\_of\\_produced\\_water\\_from\\_onshore\\_oil\\_and\\_gas\\_operations\\_in\\_the\\_united\\_states.pdf](http://fracfocus.org/sites/default/files/publications/a_guide_to_practical_management_of_produced_water_from_onshore_oil_and_gas_operations_in_the_united_states.pdf)
- [DOE](#) (U.S. Department of Energy). (2011a). A comparative study of the Mississippian Barnett shale, Fort Worth basin, and Devonian Marcellus shale, Appalachian basin. (DOE/NETL-2011/1478).  
<http://www.netl.doe.gov/technologies/oil-gas/publications/brochures/DOE-NETL-2011-1478%20Marcellus-Barnett.pdf>
- [DOE](#) (U.S. Department of Energy). (2011b). Shale gas Applying technology to solve americas energy challenges. Available online at <http://groundwork.iogcc.org/topics-index/shale-gas/topic-resources/shale-gas-applying-technology-to-solve-americas-energy-challe>
- [Domenico, PA; Schwartz, FW.](#) (1997). Physical and chemical hydrology. In Physical and chemical hydrogeology (2nd ed.). Hoboken, NJ: Wiley.
- [Dresel, PE; Rose, AW.](#) (2010). Chemistry and origin of oil and gas well brines in western Pennsylvania (pp. 48). (Open-File Report OFOG 1001.0). Harrisburg, PA: Pennsylvania Geological Survey, 4th ser.  
<http://www.marcellus.psu.edu/resources/PDFs/brines.pdf>
- [Drewes, J; Cath, T; Debroux, J; Veil, J.](#) (2009). An integrated framework for treatment and management of produced water - Technical assessment of produced water treatment technologies (1st ed.). (RPSEA Project 07122-12). Golden, CO: Colorado School of Mines.  
[http://aqwatec.mines.edu/research/projects/Tech\\_Assessment\\_PW\\_Treatment\\_Tech.pdf](http://aqwatec.mines.edu/research/projects/Tech_Assessment_PW_Treatment_Tech.pdf)
- [DrillingInfo, Inc.](#) (2012). DI Desktop August 2012 download [Database]. Austin, TX. Retrieved from <http://info.drillinginfo.com/>
- [DrillingInfo, Inc.](#) (2014a). DI Desktop June 2014 download [Database]. Austin, TX: DrillingInfo. Retrieved from <http://info.drillinginfo.com/>
- [DrillingInfo, Inc.](#) (2014b). DrillingInfo Inc. DI Desktop raw data feed [Database].
- [Drohan, PJ; Brittingham, M.](#) (2012). Topographic and soil constraints to shale-gas development in the northcentral Appalachians. Soil Sci Soc Am J 76: 1696-1706. <http://dx.doi.org/10.2136/sssaj2012.0087>
- [Duraismy, RT; Beni, AH; Henni, A.](#) (2013). State of the art treatment of produced water. In W Elshorbagy; RK Chowdhury (Eds.), Water treatment (pp. 199-222). Rijeka, Croatia: InTech.  
<http://dx.doi.org/10.5772/53478>
- [Dusseault, MB; Gray, MN; Nawrocki, PA.](#) (2000). Why oilwells leak: Cement behavior and long-term consequences. Paper presented at SPE International Oil and Gas Conference and Exhibition in China, November 7-10, 2000, Beijing, China.
- [Dutta, R; Lee, C. -H; Odumabo, S; Ye, P; Walker, SC; Karpyn, ZT; Ayala, LF.](#) (2014). Experimental investigation of fracturing-fluid migration caused by spontaneous imbibition in fractured low-permeability sands. SPE Reserv Eval Engin 17: 74-81.
- [Easton, J.](#) (2014). Optimizing fracking wastewater management. Pollution Engineering January 13.
- [Eberhard, M.](#) (2011). Fracture design and stimulation - monitoring. Presentation presented at Technical Workshops for the Hydraulic Fracturing Study: Well Construction & Operations, March 10-11, 2011, Arlington, VA.

- [Economides, MJ; Hill, A, d; Ehlig-Economides, C; Zhu, D.](#) (2013). Petroleum production systems. In Petroleum production systems (2nd ed.). Englewood Cliffs, NJ: Prentice Hall.
- [Economides, MJ; Mikhailov, DN; Nikolaevskiy, VN.](#) (2007). On the problem of fluid leakoff during hydraulic fracturing. *Transport in Porous Media* 67: 487-499. <http://dx.doi.org/10.1007/s11242-006-9038-7>
- [EERC](#) (Energy and Environmental Research Center, University of North Dakota). (2010). Bakken water opportunities assessment phase 1. (2010-EERC-04-03). Grand Forks, ND: Energy and Environmental Research Center. <http://www.undeerc.org/bakken/pdfs/FracWaterPhaseIreport.pdf>
- [EERC](#) (Energy and Environmental Research Center, University of North Dakota). (2011). Bakken water opportunities assessment phase 2: evaluation of brackish groundwater treatment for use in hydraulic fracturing of the Bakken Play, North Dakota. (2011-EERC-12-05). Grand Forks, ND: Energy and Environmental Research Center. <http://www.undeerc.org/Water/pdf/BakkenWaterOppPhase2.pdf>
- [EERC](#) (Energy and Environmental Research Center, University of North Dakota). (2013). BakkenSmart: water [Fact Sheet]. Grand Forks, ND: Energy and Environmental Research Center. <http://www.undeerc.org/bakken/pdfs/NDIC-NDPC-Water-Fact-Sheet.pdf>
- [EIA](#) (Energy Information Administration). (2011a). Review of emerging resources: U.S. shale gas and shale oil plays. United States Department of Energy. <http://www.eia.gov/analysis/studies/usshalegas/>
- [EIA](#) (Energy Information Administration). (2011b). Shale gas and oil plays, lower 48 States [Map]. Available online at [http://www.eia.gov/pub/oil\\_gas/natural\\_gas/analysis\\_publications/maps/maps.htm](http://www.eia.gov/pub/oil_gas/natural_gas/analysis_publications/maps/maps.htm)
- [EIA](#) (Energy Information Administration). (2012a). Formation crosswalk. Washington, DC: U.S. Energy Information Administration.
- [EIA](#) (Energy Information Administration). (2012b). Today in energy: Geology and technology drive estimates of technically recoverable resources. Washington, DC: U.S. Energy Information Administration. <http://www.eia.gov/todayinenergy/detail.cfm?id=7190>
- [EIA](#) (Energy Information Administration). (2012c). What is shale gas and why is it important? [December 5]. Washington, DC: U.S. Energy Information Administration. [http://www.eia.gov/energy\\_in\\_brief/article/about\\_shale\\_gas.cfm](http://www.eia.gov/energy_in_brief/article/about_shale_gas.cfm)
- [EIA](#) (Energy Information Administration). (2013a). Analysis & projections: AEO2014 early release overview. Release date: December 16, 2013. Washington, DC: U.S. Energy Information Administration. [http://www.eia.gov/forecasts/aeo/er/executive\\_summary.cfm](http://www.eia.gov/forecasts/aeo/er/executive_summary.cfm)
- [EIA](#) (Energy Information Administration). (2013b). Annual energy outlook 2013 with projections to 2040. (DOE/EIA-0383). Washington, DC: U.S. Energy Information Administration. [http://www.eia.gov/forecasts/archive/aeo13/pdf/0383\(2013\).pdf](http://www.eia.gov/forecasts/archive/aeo13/pdf/0383(2013).pdf)
- [EIA](#) (Energy Information Administration). (2013c). Technically recoverable shale oil and shale gas resources: an assessment of 137 shale formations in 41 countries outside the United States (pp. 730). Washington, D.C.: Energy Information Administration, U.S. Department of Energy. <http://www.eia.gov/analysis/studies/worldshalegas/>
- [EIA](#) (Energy Information Administration). (2013d). U.S. field production of crude oil. Release date: September 27, 2014. Washington, DC: U.S. Energy Information Administration. <http://www.eia.gov/dnav/pet/hist/LeafHandler.ashx?n=pet&s=mcrfps1&f=a>
- [EIA](#) (Energy Information Administration). (2014a). Annual energy outlook 2014 with projections to 2040. (DOE/EIA-0383(2014)). Washington, D.C.: U.S. Energy Information Administration. [http://www.eia.gov/forecasts/aeo/pdf/0383\(2014\).pdf](http://www.eia.gov/forecasts/aeo/pdf/0383(2014).pdf)

- [EIA](#) (Energy Information Administration). (2014b). Natural gas. U.S. crude oil and natural gas proved reserves. With data for 2012. Table 2. Principal tight oil plays: oil production and proved reserves, 2011-12. Release date: April 10, 2014. Washington, DC: U.S. Energy Information Administration. <http://www.eia.gov/naturalgas/crudeoilreserves/>
- [EIA](#) (Energy Information Administration). (2014c). Natural gas. U.S. Energy Information Administration: Independent statistics and analysis. Available online at <http://www.eia.gov/naturalgas/>
- [EIA](#) (Energy Information Administration). (2014d). Natural gas. U.S. natural gas gross withdrawals. Washington, DC: U.S. Energy Information Administration. [http://www.eia.gov/dnav/ng/ng\\_prod\\_sum\\_a\\_EPG0\\_FGW\\_mmcf\\_a.htm](http://www.eia.gov/dnav/ng/ng_prod_sum_a_EPG0_FGW_mmcf_a.htm)
- [EIA](#) (Energy Information Administration). (2014e). Natural gas: Natural gas prices [Database]. Washington, DC: U.S. Energy Information Administration. Retrieved from [http://www.eia.gov/dnav/ng/ng\\_pri\\_sum\\_dcu\\_nus\\_a.htm](http://www.eia.gov/dnav/ng/ng_pri_sum_dcu_nus_a.htm)
- [EIA](#) (Energy Information Administration). (2014f). October 2014 month energy review. (DOE/EIA-0035(2014/10)). Washington, D.C.: U.S. Energy Information Administration. <http://www.eia.gov/totalenergy/data/monthly/archive/00351410.pdf>
- [EIA](#) (Energy Information Administration). (2014g). Petroleum & other liquids. Crude oil and natural gas drilling activity. Washington, DC: U.S. Energy Information Administration. [http://www.eia.gov/dnav/pet/pet\\_crd\\_drill\\_s1\\_a.htm](http://www.eia.gov/dnav/pet/pet_crd_drill_s1_a.htm)
- [EIA](#) (Energy Information Administration). (2014h). Today in energy: Tight oil production pushes U.S. crude supply to over 10% of world total. Washington, DC: U.S. Energy Information Administration. <http://www.eia.gov/todayinenergy/detail.cfm?id=15571>.
- [EIA](#) (Energy Information Administration). (2015a). Glossary. Available online at <http://www.eia.gov/tools/glossary/>
- [EIA](#) (Energy Information Administration). (2015b). Lower 48 states shale plays. Available online at [http://www.eia.gov/oil\\_gas/rpd/shale\\_gas.pdf](http://www.eia.gov/oil_gas/rpd/shale_gas.pdf)
- [Eiceman, GA.](#) (1986). Hazardous organic wastes from natural gas production, processing and distribution: Environmental fates. (WRRRI report, no. 227). New Mexico: Water Resources Research Institute. <http://wrri.nmsu.edu/publish/techrpt/abstracts/abs227.html>
- [Eisner, L; Fischer, T; Le Calvez, JH.](#) (2006). Detection of repeated hydraulic fracturing (out-of-zone growth) by microseismic monitoring. *The Leading Edge* (Tulsa) 25: 548-554. <http://dx.doi.org/10.1190/1.2202655>
- [Elbel, J; Britt, L.](#) (2000). Fracture treatment design. In MJ Economides; KG Nolte (Eds.), *Reservoir stimulation* (3rd ed.). New York, NY: John Wiley & Sons.
- [Ely, JW.](#) (1989). Chapter 7: Fracturing fluids and additives. In JL Gidley; SA Holditch; DE Nierode; RW Veatch Jr (Eds.), *Recent advances in hydraulic fracturing* (pp. 131-146). Richardson, TX: Society of Petroleum Engineers.
- [Enform.](#) (2013). Interim industry recommended practice 24: fracture stimulation: Interwellbore communication 3/27/2013 (1.0 ed.). (IRP 24). Calgary, Alberta: Enform Canada. [http://www.enform.ca/safety\\_resources/publications/PublicationDetails.aspx?a=29&type=irp](http://www.enform.ca/safety_resources/publications/PublicationDetails.aspx?a=29&type=irp)
- [Engelder, T.](#) (2012). Capillary tension and imbibition sequester frack fluid in Marcellus gas shale [Letter]. *PNAS* 109: E3625; author reply E3626. <http://dx.doi.org/10.1073/pnas.1216133110>
- [Engle, MA; Bern, CR; Healy, RW; Sams, JJ; Zupancic, JW; Schroeder, KT.](#) (2011). Tracking solutes and water from subsurface drip irrigation application of coalbed methane-produced waters, Powder River Basin, Wyoming. *Environmental Geosciences* 18: 169-187.

- [Engle, MA; Rowan, EL.](#) (2014). Geochemical evolution of produced waters from hydraulic fracturing of the Marcellus Shale, northern Appalachian Basin: A multivariate compositional data analysis approach. *Int J Coal Geol* 126: 45-56. <http://dx.doi.org/10.1016/j.coal.2013.11.010>
- [Entrekin, S; Evans-White, M; Johnson, B; Hagenbuch, E.](#) (2011). Rapid expansion of natural gas development poses a threat to surface waters. *Front Ecol Environ* 9: 503-511. <http://dx.doi.org/10.1890/110053>
- [Environment Canada.](#) (2004). Threats to Water Availability in Canada. <http://www.ec.gc.ca/inre-nwri/default.asp?lang=En&n=0CD66675-1>
- [EPA](#) (Environmental Protection Agency). (2000). Development document for effluent limitations guidelines and standards for the centralized waste treatment industry. (821R00020). Washington, DC: U.S. Environmental Protection Agency.
- [ERCB](#) (Energy Resource Conservation Board). (2012). Midway Energy Ltd. hydraulic Fracturing incident: Interwellbore communication January 13, 2012. (ERCB Investigation Report, Red Deer Field Centre). Calgary, Alberta: Energy Resources Conservation Board.
- [Ertel, D; McManus, K; Bogdan, J.](#) (2013). Marcellus wastewater treatment: Case study. In Summary of the technical workshop on wastewater treatment and related modeling (pp. A56-A66). Williamsport, PA: Eureka Resources, LLC. <http://www2.epa.gov/hfstudy/summary-technical-workshop-wastewater-treatment-and-related-modeling>
- [ESN Rocky Mountain](#) (Environmental Services Network Rocky Mountain). (2003). Produced gas and water testing of CBM gas wells in the Raton Basin. Golden, CO. [https://cogcc.state.co.us/Library/RatonBasin/ESN%20Final\\_Report.pdf](https://cogcc.state.co.us/Library/RatonBasin/ESN%20Final_Report.pdf)
- [ESRI](#) (Environmental Systems Research Institute Inc.). (2010). US states shapefile. Redlands, California. Retrieved from <http://www.arcgis.com/home/item.html?id=1a6cae723af14f9cae228b133aebc620>
- [Fakhru'l-Razi, A; Pendashteh, A; Abdullah, LC; Biak, DR; Madaeni, SS; Abidin, ZZ.](#) (2009). Review of technologies for oil and gas produced water treatment [Review]. *J Hazard Mater* 170: 530-551.
- [Famiglietti, JS; Lo, M; Ho, SL; Bethune, J; Anderson, KJ; Syed, TH; Swenson, SC; de Linage, CR; Rodell, M.](#) (2011). Satellites measure recent rates of groundwater depletion in California's Central Valley. *Geophys Res Lett* 38: L03403. <http://dx.doi.org/10.1029/2010GL046442>
- [Frag, AM; Harper, DD.](#) (2014). A review of environmental impacts of salts from produced waters on aquatic resources. *Int J Coal Geol* 126: 157-161. <http://dx.doi.org/10.1016/j.coal.2013.12.006>
- [Ferrar, KJ; Michanowicz, DR; Christen, CL; Mulcahy, N; Malone, SL; Sharma, RK.](#) (2013). Assessment of effluent contaminants from three facilities discharging Marcellus Shale wastewater to surface waters in Pennsylvania. *Environ Sci Technol* 47: 3472-3481.
- [Fertl, WH; Chilingar, GV.](#) (1988). Total organic carbon content determined from well logs. *SPE Formation Evaluation* 3: 407-419. <http://dx.doi.org/10.2118/15612-PA>
- [Fink, JK.](#) (2003). Oil field chemicals. In *Oil field chemicals*. Boston, MA: Gulf Professional Publishing.
- [Finkel, M; Hays, J; Law, A.](#) (2013). The shale gas boom and the need for rational policy. *Am J Public Health* 103: 1161-1163. <http://dx.doi.org/10.2105/AJPH.2013.301285>
- [Fisher, JB; Sublette, KL.](#) (2005). Environmental releases from exploration and production operations in Oklahoma: Type, volume, causes, and prevention. *Environmental Geosciences* 12: 89-99. <http://dx.doi.org/10.1306/eg.11160404039>
- [Fisher, K.](#) (2012). Green frac fluid chemistry optimizes well productivity, environmental performance [Magazine]. *The American Oil and Gas Reporter*, March 2012, 4.
- [Fisher, M; Warpinski, N.](#) (2012). Hydraulic fracture height growth: Real data. *S P E Prod Oper* 27: 8-19. <http://dx.doi.org/10.2118/145949-PA>

- [Fisher, RS.](#) (1998). Geologic and geochemical controls on naturally occurring radioactive materials (NORM) in produced water from oil, gas, and geothermal operations. *Environmental Geosciences* 5: 139-150. <http://dx.doi.org/10.1046/j.1526-0984.1998.08018.x>
- [Fitzgerald, DD; McGhee, BF; McGuire, JA.](#) (1985). Guidelines for 90 % accuracy in zone-isolation decisions. *J Pet Tech* 37: 2013-2022. <http://dx.doi.org/10.2118/12141-PA>
- [Fjaer, E; Holt, RM; Horsrud, P; Raaen, AM; Risnes, R.](#) (2008). *Petroleum related rock mechanics* (2nd edition ed.). Amsterdam, The Netherlands: Elsevier.
- [Flewelling, SA; Sharma, M.](#) (2014). Constraints on upward migration of hydraulic fracturing fluid and brine. *Ground Water* 52: 9-19. <http://dx.doi.org/10.1111/gwat.12095>
- [Flewelling, SA; Tymchak, MP; Warpinski, N.](#) (2013). Hydraulic fracture height limits and fault interactions in tight oil and gas formations. *Geophys Res Lett* 40: 3602-3606. <http://dx.doi.org/10.1002/grl.50707>
- [Flournoy, RM; Feaster, JH.](#) (1963). *Field observations on the use of the cement bond log and its application to the evaluation of cementing problems*. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/632-MS>
- [Fountain, JC; Jacobi, RD.](#) (2000). Detection of buried faults and fractures using soil gas analysis. *Environmental and Engineering Geoscience* 6: 201-208. <http://dx.doi.org/10.2113/gseegeosci.6.3.201>
- [Fredd, CN; Olsen, TN; Brenize, G; Quintero, BW; Bui, T; Glenn, S; Boney, CL.](#) (2004). Polymer-free fracturing fluid exhibits improved cleanup for unconventional natural gas well applications. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/91433-MS>
- [Freeze, RA; Cherry, JA.](#) (1979). *Groundwater*. In *Groundwater*. Upper Saddle River, NJ: Prentice Hall.
- [Gassiat, C; Gleeson, T; Lefebvre, R; Mckenzie, J.](#) (2013). Numerical simulation of potential contamination of shallow aquifers over long time scales. *Water Resour Res* 49: 8310-8327. <http://dx.doi.org/10.1002/2013WR014287>
- [Geiver, L.](#) (2013). Frac water treatment yields positive results for Houston Co. Retrieved from <http://www.thebakken.com/articles/20/frac-water-treatment-yields-positive-results-for-houston-co>
- [Georgakakos, A; Fleming, P; Dettinger, M; Peters-Lidard, C; Richmond, TC; Reckhow, K; White, K; Yates, D.](#) (2014). Water resources. In JM Melillo; TC Richmond; GW Yohe (Eds.), *Climate change impacts in the United States* (pp. 69-112). Washington, D.C.: U.S. Global Change Research Program. <http://www.globalchange.gov/ncadac>
- [George, PG; Mace, RE; Petrossian, R.](#) (2011). *Aquifers of Texas*. (Report 380). Austin, TX: Texas Water Development Board. [http://www.twdb.state.tx.us/publications/reports/numbered\\_reports/doc/R380\\_AquifersofTexas.pdf](http://www.twdb.state.tx.us/publications/reports/numbered_reports/doc/R380_AquifersofTexas.pdf)
- [Gidley, JL; Holditch, SA; Nierode, DE; Veatch Jr., RW.](#) (1989). *Recent advances in hydraulic fracturing*. Richardson, TX: Society of Petroleum Engineers.
- [Gilmore, K; Hupp, R; Glathar, I.](#) (2013). Transport of Hydraulic Fracturing Water and Wastes in the Susquehanna River Basin, Pennsylvania. *J Environ Eng* 140: B4013002. [http://dx.doi.org/10.1061/\(ASCE\)EE.1943-7870.0000810](http://dx.doi.org/10.1061/(ASCE)EE.1943-7870.0000810)
- [GNB](#) (Government of New Brunswick). (2013). *Responsible environmental management of oil and natural gas activities in New Brunswick - rules for industry*. New Brunswick, Canada. <http://www2.gnb.ca/content/dam/gnb/Corporate/pdf/ShaleGas/en/RulesforIndustry.pdf>
- [GNB](#) (Government of New Brunswick). (2015). *FAQs hydraulic fracturing (fracking)*. New Brunswick, Canada. [http://www2.gnb.ca/content/dam/gnb/Corporate/pdf/ShaleGas/en/FAQ\\_HydraulicFracturing.pdf](http://www2.gnb.ca/content/dam/gnb/Corporate/pdf/ShaleGas/en/FAQ_HydraulicFracturing.pdf)



- [Goldstein, BD; Brooks, BW; Cohen, SD; Gates, AE; Honeycutt, ME; Morris, JB; Orme-Zavaleta, J; Penning, TM; Snawder, J.](#) (2014). The role of toxicological science in meeting the challenges and opportunities of hydraulic fracturing. *Toxicol Sci* 139: 271-283. <http://dx.doi.org/10.1093/toxsci/kfu061>
- [Gomes, J; Cocke, D; Das, K; Guttula, M; Tran, D; Beckman, J.](#) (2009). Treatment of produced water by electrocoagulation. Shiner, TX: KASELCO, LLC. <http://www.kaselco.com/index.php/library/industry-white-papers>
- [Gonneea, ME; Morris, PJ; Dulaiova, H; Charette, MA.](#) (2008). New perspectives on radium behavior within a subterranean estuary. *Mar Chem* 109: 250-267. <http://dx.doi.org/10.1016/j.marchem.2007.12.002>
- [Goodwin, KJ; Crook, RJ.](#) (1992). Cement sheath stress failure. *S P E Drilling & Completion* 7: 291-296. <http://dx.doi.org/10.2118/20453-PA>
- [Goodwin, S; Carlson, K; Knox, K; Douglas, C; Rein, L.](#) (2014). Water intensity assessment of shale gas resources in the Wattenberg field in northeastern Colorado. *Environ Sci Technol* 48: 5991-5995. <http://dx.doi.org/10.1021/es404675h>
- [Gorody, AW.](#) (2012). Factors affecting the variability of stray gas concentration and composition in groundwater. *Environmental Geosciences* 19: 17-31. <http://dx.doi.org/10.1306/eg.12081111013>
- [Gradient.](#) (2013). National human health risk evaluation for hydraulic fracturing fluid additives. Gradient. [http://www.energy.senate.gov/public/index.cfm/files/serve?File\\_id=53a41a78-c06c-4695-a7be-84225aa7230f](http://www.energy.senate.gov/public/index.cfm/files/serve?File_id=53a41a78-c06c-4695-a7be-84225aa7230f)
- [Greenhunter](#) (Greenhunter Resources). (2014). Oilfield water management solutions. Available online at <http://www.greenhunterenergy.com/operations/owms.htm>
- [Gregory, KB; Vidic, RD; Dzombak, DA.](#) (2011). Water management challenges associated with the production of shale gas by hydraulic fracturing. *Elements* 7: 181-186.
- [Gross, SA; Avens, HJ; Banducci, AM; Sahmel, J; Panko, JM; Tvermoes, BE.](#) (2013). Analysis of BTEX groundwater concentrations from surface spills associated with hydraulic fracturing operations. *J Air Waste Manag Assoc* 63: 424-432. <http://dx.doi.org/10.1080/10962247.2012.759166>
- [GTI](#) (Gas Technology Institute). (2012). Barnett and Appalachian shale water management and reuse technologies. (Report no. 08122-05.FINAL.1). Sugar Land, TX: Research Partnership to Secure Energy for America, RPSEA. <https://www.netl.doe.gov/file%20library/research/oil-gas/Natural%20Gas/shale%20gas/08122-05-final-report.pdf>
- [Gu, H; Siebrits, E.](#) (2008). Effect of formation modulus contrast on hydraulic fracture height containment. *S P E Prod Oper* 23: 170-176. <http://dx.doi.org/10.2118/103822-PA>
- [Gu, M; Mohanty, KK.](#) (2014). Effect of foam quality on effectiveness of hydraulic fracturing in shales. *International Journal of Rock Mechanics and Mining Sciences* 70: 273-285. <http://dx.doi.org/10.1016/j.ijrmms.2014.05.013>
- [Guerra, K; Dahm, K; Dunderf, S.](#) (2011). Oil and gas produced water management and beneficial use in the western United States. (Science and Technology Program Report No. 157). Denver, CO: U.S. Department of the Interior Bureau of Reclamation.
- [Gupta, DVS; Hlidek, BT.](#) (2009). Frac fluid recycling and water conservation: A case history. In 2009 Hydraulic fracturing technology conference. Woodlands, Texas: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/119478-MS>
- [Gupta, DVS; Valkó, P.](#) (2007). Fracturing fluids and formation damage. In M Economides; T Martin (Eds.), *Modern fracturing: enhancing natural gas production* (pp. 227-279). Houston, TX: Energy Tribune Publishing Inc.



- [GWPC](http://www.gwpc.org/sites/default/files/state_oil_and_gas_regulations_designed_to_protect_water_resources_0.pdf) (Groundwater Protection Council). (2009). State oil and natural gas regulations designed to protect water resources. Morgantown, WV: U.S. Department of Energy, National Energy Technology Laboratory. [http://www.gwpc.org/sites/default/files/state\\_oil\\_and\\_gas\\_regulations\\_designed\\_to\\_protect\\_water\\_resources\\_0.pdf](http://www.gwpc.org/sites/default/files/state_oil_and_gas_regulations_designed_to_protect_water_resources_0.pdf)
- [GWPC](http://www.gwpc.org/sites/default/files/files/Oil%20and%20Gas%20Regulation%20Report%20Hyperlinked%20Version%20Final-rfs.pdf) (Groundwater Protection Council). (2014). State oil and natural gas regulations designed to protect water resources. Morgantown, WV: U.S. Department of Energy, National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/files/Oil%20and%20Gas%20Regulation%20Report%20Hyperlinked%20Version%20Final-rfs.pdf>
- [GWPC](http://fracfocus.org/) (Groundwater Protection Council). (2015). FracFocus - chemical disclosure registry. Available online at <http://fracfocus.org/>
- [GWPC and ALL Consulting](http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>
- [GWPC and IOGCC](http://fracfocus.org/hydraulic-fracturing-how-it-works/drilling-risks-safeguards) (Ground Water Protection Council and Interstate Oil and Gas Compact Commission). (2014). Fracturing fluid management. Available online at <http://fracfocus.org/hydraulic-fracturing-how-it-works/drilling-risks-safeguards> (accessed December 12, 2014).
- [H.R. Rep. 111-316. Department of the Interior, Environment, and Related Agencies Appropriation Act, 2010: Conference report](http://www.gpo.gov/fdsys/pkg/CRPT-111hrpt316/pdf/CRPT-111hrpt316.pdf) (to accompany H.R. 2996), (2009). <http://www.gpo.gov/fdsys/pkg/CRPT-111hrpt316/pdf/CRPT-111hrpt316.pdf>
- [Halliburton](http://www.regulations.gov/#!documentDetail;D=EPA-HQ-ORD-2010-0674-1634). (1988). Primer on Hydraulic Fracturing. Provided to EPA on March 2, 2011. Available at Docket ID: EPA-HQ-ORD-2010-0674-1634. (HESI-3031). Halliburton. <http://www.regulations.gov/#!documentDetail;D=EPA-HQ-ORD-2010-0674-1634>
- [Halliburton](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/index.html). (2013). Hydraulic fracturing 101. Available online at [http://www.halliburton.com/public/projects/pubsdata/hydraulic\\_fracturing/index.html](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/index.html)
- [Halliburton](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/fracturing_101.html). (2014). Hydraulic fracturing 101. Available online at [http://www.halliburton.com/public/projects/pubsdata/hydraulic\\_fracturing/fracturing\\_101.html](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/fracturing_101.html)
- [Haluszczak, LO; Rose, AW; Kump, LR](http://dx.doi.org/10.1016/j.apgeochem.2012.10.002). (2013). Geochemical evaluation of flowback brine from Marcellus gas wells in Pennsylvania, USA. *Appl Geochem* 28: 55-61. <http://dx.doi.org/10.1016/j.apgeochem.2012.10.002>
- [Hamieh, BM; Beckman, JR](http://dx.doi.org/10.1016/j.desal.2005.09.034). (2006). Seawater desalination using Dewvaporation technique: theoretical development and design evolution. *Desalination* 195: 1-13. <http://dx.doi.org/10.1016/j.desal.2005.09.034>
- [Hammack, R; Harbert, W; Sharma, S; Stewart, B; Capo, R; Wall, A; Wells, A; Diehl, R; Blaushild, D; Sams, J; Veloski, G](http://www.netl.doe.gov/File%20Library/Research/onsite%20research/publications/NETL-TRS-3-2014_Greene-County-Site_20140915_1_1.pdf). (2014). An evaluation of fracture growth and gas/fluid migration as horizontal Marcellus Shale gas wells are hydraulically fractured in Greene County, Pennsylvania. (NETL-TRS-3-2014). Pittsburgh, PA: U.S. Department of Energy, National Energy Technology Laboratory. [http://www.netl.doe.gov/File%20Library/Research/onsite%20research/publications/NETL-TRS-3-2014\\_Greene-County-Site\\_20140915\\_1\\_1.pdf](http://www.netl.doe.gov/File%20Library/Research/onsite%20research/publications/NETL-TRS-3-2014_Greene-County-Site_20140915_1_1.pdf)
- [Hammer, R; VanBriesen, J](http://www.nrdc.org/energy/files/fracking-wastewater-fullreport.pdf). (2012). In frackings wake: New rules are needed to protect our health and environment from contaminated wastewater. New York, NY: Natural Resources Defense Council. <http://www.nrdc.org/energy/files/fracking-wastewater-fullreport.pdf>
- [Hansen, E; Mulvaney, D; Betcher, M](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf). (2013). Water resource reporting and water footprint from Marcellus Shale development in West Virginia and Pennsylvania. Durango, CO: Earthworks Oil & Gas Accountability Project. [http://www.downstreamstrategies.com/documents/reports\\_publication/marcellus\\_wv\\_pa.pdf](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf)

- [Harms, WM; Yeager, R.](#) (1987). Diesel-based gel concentrate reduces stimulation costs. *Oil and Gas Journal* 85: 37-39.
- [Harrison, SS.](#) (1983). Evaluating system for ground-water contamination hazards due to gas-well drilling on the Glaciated Appalachian Plateau. *Ground Water* 21: 689-700. <http://dx.doi.org/10.1111/j.1745-6584.1983.tb01940.x>
- [Harrison, SS.](#) (1985). Contamination of aquifers by overpressurizing the annulus of oil and gas wells. *Ground Water* 23: 317-324.
- [Hayes, T.](#) (2009). Sampling and analysis of water streams associated with the development of Marcellus shale gas. Des Plaines, IL: Marcellus Shale Coalition. <http://eidmarcellus.org/wp-content/uploads/2012/11/MSCCommission-Report.pdf>
- [Hayes, T.](#) (2011). Characterization of Marcellus and Barnett shale flowback waters and technology development for water reuse. Paper presented at Hydraulic Fracturing Study: March 2011 Technical Workshop on Water Resource Management, March 29-30, 2011, Arlington, VA.
- [Hayes, T; Severin, B.](#) (2012a). Characterization of flowback water from the the Marcellus and the Barnett shale regions. Barnett and Appalachian shale water management and reuse technologies. (08122-05.09; Contract 08122-05). Hayes, T; Severin, B. [http://www.rpsea.org/media/files/project/2146b3a0/08122-05-RT-Characterization\\_Flowback\\_Waters\\_Marcellus\\_Barnett\\_Shale\\_Regions-03-20-12.pdf](http://www.rpsea.org/media/files/project/2146b3a0/08122-05-RT-Characterization_Flowback_Waters_Marcellus_Barnett_Shale_Regions-03-20-12.pdf)
- [Hayes, T; Severin, BF.](#) (2012b). Evaluation of the aqua-pure mechanical vapor recompression system in the treatment of shale gas flowback water - Barnett and Appalachian shale water management and reuse technologies. (08122-05.11). Hayes, T; Severin, BF. <http://barnettshalewater.org/documents/08122-05.11-EvaluationofMVR-3-12-2012.pdf>
- [Hayes, TD; Halldorson, B; Horner, P; Ewing, J; Werline, JR; Severin, BF.](#) (2014). Mechanical vapor recompression for the treatment of shale-gas flowback water. *Oil and Gas Facilities* 3: 54-62.
- [Haymond, D.](#) (1991). The Austin Chalk - An overview. *HGS Bulletin* 33: 27-30, 32, 34.
- [He, Z.](#) (2011). Flow of gas and water in hydraulically fractured shale gas reservoirs. EPA HF Workshop, March 28-29, 2011, Arlington, VA.
- [Healy, RW; Bartos, TT; Rice, CA; Mckinley, MP; Smith, BD.](#) (2011). Groundwater chemistry near an impoundment for produced water, Powder River Basin, Wyoming, USA. *J Hydrol* 403: 37-48. <http://dx.doi.org/10.1016/j.jhydrol.2011.03.042>
- [Healy, RW; Rice, CA; Bartos, TT; Mckinley, MP.](#) (2008). Infiltration from an impoundment for coal-bed natural gas, Powder River Basin, Wyoming: Evolution of water and sediment chemistry. *Water Resour Res* 44: n/a-n/a. <http://dx.doi.org/10.1029/2007wr006396>
- [Heermann, SE; Powers, SE.](#) (1998). Modeling the partitioning of BTEX in water-reformulated gasoline systems containing ethanol. *J Contam Hydrol* 34: 315-341. [http://dx.doi.org/10.1016/S0169-7722\(98\)00099-0](http://dx.doi.org/10.1016/S0169-7722(98)00099-0)
- [Heilweil, VM; Stolp, BJ; Kimball, BA; Susong, DD; Marston, TM; Gardner, PM.](#) (2013). A stream-based methane monitoring approach for evaluating groundwater impacts associated with unconventional gas development. *Ground Water* 51: 511-524. <http://dx.doi.org/10.1111/gwat.12079>
- [Hladik, ML; Focazio, MJ; Engle, M.](#) (2014). Discharges of produced waters from oil and gas extraction via wastewater treatment plants are sources of disinfection by-products to receiving streams. *Sci Total Environ* 466. <http://dx.doi.org/10.1016/j.scitotenv.2013.08.008>
- [Holditch, SA.](#) (2007). Chapter 8: Hydraulic fracturing. In JD Clegg (Ed.), *Petroleum engineering handbook* (pp. IV-323 - IV-366). Richardson, TX: Society of Petroleum Engineers. <http://store.spe.org/Petroleum-Engineering-Handbook-Volume-IV-Production-Operations-Engineering-P61.aspx>

- [Holtsclaw, J; Loveless, D; Saini, R; Fleming, J.](#) (2011). SPE 146832: Environmentally-focused crosslinked gel system results in high retained proppant-pack conductivity. Presentation presented at Society of Petroleum Engineers Annual Conference, November 2, 2011, Denver, CO.
- [Horn, A; Hu, J; Patton, M.](#) (2013). QA/QC of water blending enhances crosslinked gel completions. Available online at <http://content.stockpr.com/hydrozonix/files/downloads/1013HEP-hydrozonix.pdf>
- [Horsey, CA.](#) (1981). Depositional environments of the Pennsylvanian Pottsville Formation in the Black Warrior Basin of Alabama. *Journal of Sedimentary Research* 51: 799-806.  
<http://dx.doi.org/10.1306/212F7DB5-2B24-11D7-8648000102C1865D>
- [House of Representatives](#) (U.S. House of Representatives). (2011). Chemicals used in hydraulic fracturing. Washington, D.C.: U.S. House of Representatives, Committee on Energy and Commerce, Minority Staff. <http://democrats.energycommerce.house.gov/sites/default/files/documents/Hydraulic-Fracturing-Chemicals-2011-4-18.pdf>
- [Houston, N; Blauch, M; Weaver, D; Miller, DS; O'Hara, D.](#) (2009). Fracture-stimulation in the Marcellus shale: Lessons learned in fluid selection and execution. In 2009 SPE eastern regional meeting: limitless potential/formidable challenges. Richardson, TX: Society of Petroleum Engineers.  
<http://dx.doi.org/10.2118/125987-MS>
- [Hristozov, DR; Zabeo, A; Foran, C; Isigonis, P; Critto, A; Marcomini, A; Linkov, I.](#) (2014). A weight of evidence approach for hazard screening of engineered nanomaterials. *Nanotoxicology* 8: 72-87.  
<http://dx.doi.org/10.3109/17435390.2012.750695>
- [Hulme, D.](#) (2005). CBM co-produced water management, disposal, treatment and use. Hulme, D.  
<http://www.uwyo.edu/haub/ruckelshaus-institute/files/docs/publications/2005-cbm-water-management-hulme.pdf>
- [Hunter, JA; Moser, PH.](#) (1990). Ground water availability in Jefferson County, Alabama: geological survey special map 224. Tuscaloosa, AL: Geological Survey of Alabama.  
[http://www.ogb.state.al.us/documents/pubs/onlinepubs/Special\\_Maps/SM224.PDF](http://www.ogb.state.al.us/documents/pubs/onlinepubs/Special_Maps/SM224.PDF)
- [Hyne, NJ.](#) (2012). Nontechnical guide to petroleum geology, exploration, drilling and production. In *Nontechnical guide to petroleum geology, exploration, drilling and production* (3 ed.). Tulsa, OK: PennWell Corporation.
- [IAEA](#) (International Atomic Energy Agency). (2014). The environmental behaviour of radium: revised edition. Vienna, Austria. [http://www-pub.iaea.org/MTCD/Publications/PDF/trs476\\_web.pdf](http://www-pub.iaea.org/MTCD/Publications/PDF/trs476_web.pdf)
- [Igunnu, ET; Chen, GZ.](#) (2014). Produced water treatment technologies. *International Journal of Low-Carbon Technologies* 9: 157-177. <http://dx.doi.org/10.1093/ijlct/cts049>
- [IHS](#) (Global Insight). (2009). Measuring the economic and energy impacts of proposals to regulate hydraulic fracturing. Prepared for American Petroleum Institute. Lexington, MA: IHS Global Insight.  
[http://s3.amazonaws.com/propublica/assets/natural\\_gas/ihs\\_gi\\_hydraulic\\_fracturing\\_task1.pdf](http://s3.amazonaws.com/propublica/assets/natural_gas/ihs_gi_hydraulic_fracturing_task1.pdf)
- [IHS](#) (Global Insight). (2013). Americas new energy future: The unconventional oil and gas revolution and the US economy. Douglas County, Colorado.  
[http://www.energyxxi.org/sites/default/files/pdf/Americas\\_New\\_Energy\\_Future\\_Phase3.pdf](http://www.energyxxi.org/sites/default/files/pdf/Americas_New_Energy_Future_Phase3.pdf)
- [Ingraffea, AR; Wells, MT; Santoro, RL; Shonkoff, SB.](#) (2014). Assessment and risk analysis of casing and cement impairment in oil and gas wells in Pennsylvania, 2000-2012. *PNAS* 111: 1095510960.  
<http://dx.doi.org/10.1073/pnas.1323422111>
- [IOGCC](#) (Interstate Oil and Gas Compact Commission). (2002). States experience with hydraulic fracturing. A survey of the interstate oil and gas compact commission. IOGCC (Interstate Oil and Gas Compact Commission). <http://energyindepth.org/docs/pdf/IOGCC%20Hydraulic%20Fracturing%20Study%202007-2002.pdf>

- [IOGCC](#) (Interstate Oil and Gas Compact Commission). (2008). Protecting our country's resources: The states' case, orphaned well plugging initiative. Oklahoma City, OK: Interstate Oil and Gas Compact Commission (IOGCC). <http://iogcc.myshopify.com/products/protecting-our-countrys-resources-the-states-case-orphaned-well-plugging-initiative-2008>
- [IOGCC](#) (Interstate Oil and Gas Compact Commission). (2015). Groundwork: hydraulic fracturing - state progress. Available online at <http://groundwork.iogcc.ok.gov/topics-index/hydraulic-fracturing/state-progress>
- [IPCC](#) (Intergovernmental Panel on Climate Change). (2007). Climate change 2007: Impacts, adaptation and vulnerability. Cambridge, UK: Cambridge University Press. <http://www.ipcc.ch/ipccreports/ar4-wg2.htm>
- [Irwin, C.](#) (2013). Hydraulic fracturing: A way to go greener? Available online at <http://breakingenergy.com/2013/04/23/hydraulic-fracturing-a-way-to-go-greener/>
- [IUPAC](#) (International Union of Pure and Applied Chemistry). (2014). Gold Book: matrix effect. Available online at <http://goldbook.iupac.org/M03759.html> (accessed April 8, 2015).
- [Jackson, G; Flores, C; Abolo, N; Lawal, H.](#) (2013a). A novel approach to modeling and forecasting frac hits in shale gas wells. Paper presented at EAGE Annual Conference & Exhibition incorporating SPE Europec, June 10-13, 2013, London, UK.
- [Jackson, RB; Carpenter, SR; Dahm, CN; Mcknight, DM; Naiman, RJ; Postel, SL; Running, SW.](#) (2001). Water in a changing world. *Ecol Appl* 11: 1027-1045. [http://dx.doi.org/10.1890/1051-0761\(2001\)011\[1027:WIACW\]2.0.CO;2](http://dx.doi.org/10.1890/1051-0761(2001)011[1027:WIACW]2.0.CO;2)
- [Jackson, RB; Vengosh, A; Darrah, TH; Warner, NR; Down, A; Poreda, RJ; Osborn, SG; Zhao, K; Karr, ID.](#) (2013b). Increased stray gas abundance in a subset of drinking water wells near Marcellus shale gas extraction. *PNAS* 110: 11250-11255. <http://dx.doi.org/10.1073/pnas.1221635110>
- [Jackson, RE; Dusseault, MB.](#) (2014). Gas release mechanisms from energy wellbores. Presentation presented at 48th US Rock Mechanics/Geomechanics Symposium, June 1-4, 2014, Minneapolis, Minnesota.
- [Jackson, RE; Gorody, AW; Mayer, B; Roy, JW; Ryan, MC; Van Stempvoort, DR.](#) (2013c). Groundwater protection and unconventional gas extraction: the critical need for field-based hydrogeological research. *Ground Water* 51: 488-510. <http://dx.doi.org/10.1111/gwat.12074>
- [Jacob, R.](#) (2011). Incident action plan, Franchuk 44-20 SWH incident. Plano, Texas: Denbury Onshore, LLC.
- [Jiang, M; Hendrickson, CT; Vanbriesen, JM.](#) (2014). Life Cycle Water Consumption and Wastewater Generation Impacts of a Marcellus Shale Gas Well. *Environ Sci Technol* 48: 1911-1920. <http://dx.doi.org/10.1021/es4047654>
- [Jones, JR; Britt, LK.](#) (2009). Design and appraisal of hydraulic fractures. In Design and appraisal of hydraulic fractures. Richardson, TX: Society of Petroleum Engineers.
- [Judson, R; Richard, A; Dix, DJ; Houck, K; Martin, M; Kavlock, R; Dellarco, V; Henry, T; Holderman, T; Sayre, P; Tan, S; Carpenter, T; Smith, E.](#) (2009). The toxicity data landscape for environmental chemicals [Review]. *Environ Health Perspect* 117: 685-695. <http://dx.doi.org/10.1289/ehp.0800168>
- [Kahrilas, GA; Blotevogel, J; Stewart, PS; Borch, T.](#) (2015). Biocides in hydraulic fracturing fluids: a critical review of their usage, mobility, degradation, and toxicity. *Environ Sci Technol* 49: 16-32. <http://dx.doi.org/10.1021/es503724k>
- [Kansas Water Office.](#) (2014). How is water used in oil and gas exploration in Kansas? Topeka, KA. [http://www.kwo.org/about\\_us/BACs/KWIF/rpt\\_Hydraulic%20Fracturing\\_KS\\_Water\\_FAQ\\_03082012\\_final.ki.pdf](http://www.kwo.org/about_us/BACs/KWIF/rpt_Hydraulic%20Fracturing_KS_Water_FAQ_03082012_final.ki.pdf)
- [Kappel, WM.](#) (2013). Dissolved methane in groundwater, Upper Delaware River Basin, Pennsylvania and New York (pp. 1-6). (2013-1167). U. S. Geological Survey. <http://pubs.usgs.gov/of/2013/1167/pdf/ofr2013-1167.pdf>

- [Kappel, WM; Nystrom, EA.](#) (2012). Dissolved methane in New York groundwater, 1999-2011. (Open-File Report 2012-1162). Washington, DC: U.S. Geological Survey. <http://pubs.usgs.gov/of/2012/1162/>
- [Kappel, WM; Williams, JH; Szabo, Z.](#) (2013). Water resources and shale gas/oil production in the Appalachian basin critical issues and evolving developments. (Open-File Report 2013-1137). Troy, NY: U.S. Geological Survey. <http://pubs.usgs.gov/of/2013/1137/pdf/ofr2013-1137.pdf>
- [Kargbo, DM; Wilhelm, RG; Campbell, DJ.](#) (2010). Natural gas plays in the Marcellus Shale: Challenges and potential opportunities. Environ Sci Technol 44: 5679-5684. <http://dx.doi.org/10.1021/es903811p>
- [Kassotis, CD; Tillitt, DE; Wade Davis, J; Hormann, AM; Nagel, SC.](#) (2014). Estrogen and androgen receptor activities of hydraulic fracturing chemicals and surface and ground water in a drilling-dense region. Endocrinology 155: 897-907. <http://dx.doi.org/10.1210/en.2013-1697>
- [Kaushal, SS; Groffman, PM; Likens, GE; Belt, KT; Stack, WP; Kelly, VR; Band, LE; Fisher, GT.](#) (2005). Increased salinization of fresh water in the northeastern United States. PNAS 102: 13517-13520. <http://dx.doi.org/10.1073/pnas.0506414102>
- [Kell, S.](#) (2011). State oil and gas agency groundwater investigations and their role in advancing regulatory reforms, a two-state review: Ohio and Texas. Ground Water Protection Council. [http://fracfocus.org/sites/default/files/publications/state\\_oil\\_gas\\_agency\\_groundwater\\_investigations\\_optimized.pdf](http://fracfocus.org/sites/default/files/publications/state_oil_gas_agency_groundwater_investigations_optimized.pdf)
- [Kelly, WR.](#) (2008). Long-term trends in chloride concentrations in shallow aquifers near Chicago. Ground Water 46: 772-781. <http://dx.doi.org/10.1111/j.1745-6584.2008.00466.x>
- [Kennedy/Jenks Consultants.](#) (2002). Evaluation of technical and economic feasibility of treating oilfield produced water to create a new water resource. [http://www.gwpc.org/sites/default/files/event-sessions/Roger\\_Funston\\_PWC2002\\_0.pdf](http://www.gwpc.org/sites/default/files/event-sessions/Roger_Funston_PWC2002_0.pdf)
- [Kenny, JF; Barber, NL; Hutson, SS; Linsey, KS; Lovelace, JK; Maupin, MA.](#) (2009). Estimated use of water in the United States in 2005. (Circular 1344). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/circ/1344/>
- [Kharaka, YK; Kakouros, E; Abbott, MM.](#) (2002). Environmental impacts of petroleum production: 1- The fate of inorganic and organic chemicals in produced water from the Osage-Skiatook Petroleum Environmental Research B site, Osage County, OK. 9th International Petroleum Environmental Conference, October 22-25, 2002, Albuquerque, NM.
- [Kharaka, YK; Kakouros, E; Thordsen, JJ; Ambats, G; Abbott, MM.](#) (2007). Fate and groundwater impacts of produced water releases at OSPER B site, Osage County, Oklahoma. Appl Geochem 22: 2164-2176. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.005>
- [Kim, GH; Wang, JY.](#) (2014). Interpretation of hydraulic fracturing pressure in tight gas formations. Journal of Energy Resources Technology 136: 032903. <http://dx.doi.org/10.1115/1.4026460>
- [Kim, J; Moridis, GJ.](#) (2013). Development of the T+M coupled flowgeomechanical simulator to describe fracture propagation and coupled flowthermalgeomechanical processes in tight/shale gas systems. Computers and Geosciences 60: 184-198. <http://dx.doi.org/10.1016/j.cageo.2013.04.023>
- [Kim, J; Moridis, GJ.](#) (2015). Numerical analysis of fracture propagation during hydraulic fracturing operations in shale gas systems. International Journal of Rock Mechanics and Mining Sciences 76: 127-137.
- [Kim, J; Um, ES; Moridis, GJ.](#) (2014). Fracture propagation, fluid flow, and geomechanics of water-based hydraulic fracturing in shale gas systems and electromagnetic geophysical monitoring of fluid migration. SPE Hydraulic Fracturing Technology Conference, February 4-6, 2014, The Woodlands, Texas.
- [King, G; King, D.](#) (2013). Environmental risk arising from well-construction failure: Differences between barrier and well failure, and estimates of failure frequency across common well types, locations, and well age. S P E Prod Oper 28. <http://dx.doi.org/10.2118/166142-PA>



- [King, GE.](http://dx.doi.org/10.2118/133456-MS) (2010). Thirty years of gas shale fracturing: what have we learned? Society of Petroleum Engineers. <http://dx.doi.org/10.2118/133456-MS>
- [King, GE.](#) (2012). Hydraulic fracturing 101: What every representative, environmentalist, regulator, reporter, investor, university researcher, neighbor and engineer should know about estimating frac risk and improving frac performance in unconventional gas and oil wells. SPE Hydraulic Fracturing Technology Conference, February 6-8, 2012, The Woodlands, TX.
- [Kirksey, J.](#) (2013). Optimizing wellbore integrity in well construction. Presentation presented at North American Wellbore Integrity Workshop, October 16-17, 2013, Denver, CO.
- [Klein, M; Kenealey, G; Makowecki, B.](#) (2012). Comparison of hydraulic fracture fluids in multi-stage fracture stimulated horizontal wells in the Pembina Cardium formation. In 2012 SPE hydrocarbon economics and evaluation symposium. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/162916-MS>
- [Knappe, D; Fireline, JL.](#) (2012). Fracking 101: Shale gas extraction using horizontal drilling and hydraulic fracturing. Presentation presented at NCAWWA-WEA Annual Conference, November 14, 2012, Raleigh, NC.
- [Konikow, LF.](#) (2013a). Groundwater depletion in the United States (1900-2008): U.S. Geological Survey Scientific Investigations Report 2013-5079. Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2013/5079>
- [Konikow, LF.](#) (2013b). Groundwater depletion in the United States (1900-2008). (USGS Scientific Investigations Report 2013). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2013/5079>
- [Konikow, LF; Kendy, E.](#) (2005). Groundwater depletion: A global problem. *Hydrogeo J* 13: 317-320. <http://dx.doi.org/10.1007/s10040-004-0411-8>
- [Korfmacher, KS; Jones, WA; Malone, SL; Vinci, LF.](#) (2013). Public health and high volume hydraulic fracturing. *New Solutions: A Journal of Environmental and Occupational Health Policy* 23: 13-31. <http://dx.doi.org/10.2190/NS.23.1.c>
- [Krasner, SW.](#) (2009). The formation and control of emerging disinfection by-products of health concern [Review]. *Philos Transact A Math Phys Eng Sci* 367: 4077-4095. <http://dx.doi.org/10.1098/rsta.2009.010>
- [Kundert, D; Mullen, M.](#) (2009). Proper evaluation of shale gas reservoirs leads to a more effective hydraulic-fracture stimulation. Paper presented at SPE Rocky Mountain Petroleum Technology Conference, April 14-16, 2009, Denver, CO.
- [Kuthnert, N; Werline, R; Nichols, K.](#) (2012). Water reuse and recycling in the oil and gas industry: Devons water management success. Presentation presented at 2nd Annual Texas Water Reuse Conference, July 20, 2012, Fort Worth, TX.
- [Kuwayama, Y; Olmstead, S; Krupnick, A.](#) (2015). Water quality and quantity impacts of hydraulic fracturing. *Current Sustainable/Renewable Energy Reports* 2: 17-24. <http://dx.doi.org/10.1007/s40518-014-0023-4>
- [LA Ground Water Resources Commission](#) (Louisiana Ground Water Resources Commission). (2012). *Managing Louisiana's Groundwater Resources: An interim report to the Louisiana Legislature*. Baton Rouge, LA: Louisiana Department of Natural Resources. <http://dnr.louisiana.gov/index.cfm?md=pagebuilder&tmp=home&pid=907>
- [Lacazette, A; Geiser, P.](#) (2013). Comment on Davies et al., 2012 Hydraulic fractures: How far can they go? *Marine and Petroleum Geology* 43: 516-518. <http://dx.doi.org/10.1016/j.marpetgeo.2012.12.008>
- [Lange, T; Sauter, M; Heitfeld, M; Schetelig, K; Brosig, K; Jahnke, W; Kissinger, A; Helmig, R; Ebigbo, A; Class, H.](#) (2013). Hydraulic fracturing in unconventional gas reservoirs: risks in the geological system part 1. *Environmental Earth Sciences* 70: 3839-3853. <http://dx.doi.org/10.1007/s12665-013-2803-3>



- [Langmuir, D; Riese, AC.](#) (1985). THE THERMODYNAMIC PROPERTIES OF RADIUM. *Geochim Cosmo Acta* 49: 1593-1601.
- [Laurenzi, JJ; Jersey, GR.](#) (2013). Life cycle greenhouse gas emissions and freshwater consumption of Marcellus shale gas. *Environ Sci Technol* 47: 4896-4903. <http://dx.doi.org/10.1021/es305162w>
- [Lawal, H; Abolo, NU; Jackson, G; Sahai, V; Flores, C.](#) (2014). A quantitative approach to analyze fracture area loss in shale gas reservoirs. SPE Latin America and Caribbean Petroleum Engineering Conference, May 21-23, 2014, Maracaibo, Venezuela.
- [LDEQ](#) (Louisiana Department of Environmental Quality). (2008). Ground water use advisory: Commissioner of conservation recommends wise water use planning in the Haynesville Shale. <http://dnr.louisiana.gov/index.cfm?md=newsroom&tmp=detail&aid=509>
- [LEau LLC.](#) (2008). Dew vaporation desalination 5,000-gallon-per-day pilot plant. (Desalination and Water Purification Research and Development Program Report No. 120). Denver, CO: Bureau of Reclamation, U.S. Department of the Interior. <http://www.usbr.gov/research/AWT/reportpdfs/report120.pdf>
- [LeBas, R; Lord, P; Luna, D; Shahan, T.](#) (2013). Development and use of high-TDS recycled produced water for crosslinked-gel-based hydraulic fracturing. In 2013 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/163824-MS>
- [Lecampion, B; Jeffrey, R; Detournay, E.](#) (2005). Resolving the geometry of hydraulic fractures from tilt measurements. *Pure Appl Geophys* 162: 2433-2452. <http://dx.doi.org/10.1007/s00024-005-2786-4>
- [Lee, DS; Herman, JD; Elsworth, D; Kim, HT; Lee, HS.](#) (2011). A critical evaluation of unconventional gas recovery from the marcellus shale, northeastern United States. *K S C E Journal of Civil Engineering* 15: 679-687. <http://dx.doi.org/10.1007/s12205-011-0008-4>
- [Lee, K; Neff, J.](#) (2011). Produced water: Environmental risks and advances in mitigation technologies. New York, NY: Springer. <http://dx.doi.org/10.1007/978-1-4614-0046-2>
- [Lefebvre, O; Moletta, R.](#) (2006). Treatment of organic pollution in industrial saline wastewater: a literature review [Review]. *Water Res* 40: 3671-3682. <http://dx.doi.org/10.1016/j.watres.2006.08.027>
- [LePage, J; De Wolf, C; Bemelaar, J; Nasr-El-din, HA.](#) (2013). An environmentally friendly stimulation fluid for high-temperature applications. *S P E Journal* 16: 104-110. <http://dx.doi.org/10.2118/121709-PA>
- [Levis, E.](#) (2011). Texas company pays \$93,710 settlement for polluting Clearfield County Creek. Pennsylvania Fish and Boat Commission. <https://www.fish.state.pa.us/newsreleases/2011press/eog-settlement.htm>
- [Linarić, M; Markić, M; Sipos, L.](#) (2013). High salinity wastewater treatment. *Water Sci Technol* 68: 1400-1405. <http://dx.doi.org/10.2166/wst.2013.376>
- [Linkov, I; Welle, P; Loney, D; Tkachuk, A; Canis, L; Kim, JB; Bridges, T.](#) (2011). Use of multicriteria decision analysis to support weight of evidence evaluation. *Risk Anal* 31: 1211-1225. <http://dx.doi.org/10.1111/j.1539-6924.2011.01585.x>
- [Llewellyn, GT.](#) (2014). Evidence and mechanisms for Appalachian Basin brine migration to shallow aquifers in NE Pennsylvania, USA. *Hydrogeo J* 22: 1055-1066. <http://dx.doi.org/10.1007/s10040-014-1125-1>
- [Lowe, T; Potts, M; Wood, D.](#) (2013). A case history of comprehensive hydraulic fracturing monitoring in the Cana Woodford. In 2013 SPE annual technical conference and exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/166295-MS>
- [Lustgarten, A.](#) (2009). Frack fluid spill in Dimock contaminates stream, killing fish. Available online at <http://www.propublica.org/article/frack-fluid-spill-in-dimock-contaminates-stream-killing-fish-921>
- [Lutz, BD; Lewis, AN; Doyle, MW.](#) (2013). Generation, transport, and disposal of wastewater associated with Marcellus Shale gas development. *Water Resour Res* 49: 647-656.

- [Ma, G; Geza, M; Xu, P.](#) (2014). Review of flowback and produced water management, treatment, and beneficial use for major shale gas development basins. Shale Energy Engineering Conference 2014, Pittsburgh, Pennsylvania, United States.
- [MacDonald, RJ; Frantz, JH; Schlotterbeck, ST; Adams, B; Sikorski, D.](#) (2003). An update of recent production responses obtained from Devonian shale and Berea wells stimulated with nitrogen foam (with proppant) vs. nitrogen-only, Pike Co., KY. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/84834-MS>
- [Malone, M; Ely, JW.](#) (2007). Execution of hydraulic fracturing treatments. In M Economides; T Martin (Eds.), Modern fracturing: enhancing natural gas production (pp. 323-360). Houston, TX: ET Publishing.
- [Malone, S; Kelso, M; Auch, T; Edelstein, K; Ferrar, K; Jalbert, K.](#) (2015). Data inconsistencies from states with unconventional oil and gas activity. J Environ Sci Health A Tox Hazard Subst Environ Eng 50: 501-510. <http://dx.doi.org/10.1080/10934529.2015.992678>
- [Maloney, KO; Yoxtheimer, DA.](#) (2012). Production and disposal of waste materials from gas and oil extraction from the Marcellus shale play in Pennsylvania. Environmental Practice 14: 278-287. <http://dx.doi.org/10.1017/S146604661200035X>
- [Mantell, ME.](#) (2011). Produced water reuse and recycling challenges and opportunities across major shale plays. Presentation presented at Hydraulic Fracturing Study: March 2011 Technical Workshop #4 on Water Resources Management, March 29-30, 2011, Arlington, VA.
- [Mantell, ME.](#) (2013a). Recycling and reuse of produced water to reduce freshwater use in hydraulic fracturing operations. Presentation presented at Water acquisition modeling: Assessing impacts through modeling and other means Technical workshop on wastewater treatment and related modeling, June 4, 2013, Arlington, VA.
- [Mantell, ME.](#) (2013b). Recycling and reuse of produced water to reduce freshwater use in hydraulic fracturing operations. In Summary of the technical workshop on water acquisition modeling: Assessing impacts through modeling and other means (pp. A20-A27). Washington, D.C.: U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/summary-technical-workshop-water-acquisition-modeling-assessing-impacts-through-modeling-and>
- [Marshak, S.](#) (2004). Essentials of geology (1st ed.). New York, NY: W.W. Norton and Company.
- [Martin, T; Valko, P.](#) (2007). Hydraulic fracture design for production enhancement. In M Economides; T Martin (Eds.), Modern fracturing enhancing natural gas production. Houston, TX: ET Publishing.
- [Matthews, IC; Li, S; Swann, CT; Ericksen, RL.](#) (2006). Incubation with moist top soils enhances solubilization of radium and other components from oilfield scale and sludge: Environmental concerns from Mississippi. Environmental Geosciences 13: 43-53.
- [Maule, AL; Makey, CM; Benson, EB; Burrows, JJ; Scammell, MK.](#) (2013). Disclosure of hydraulic fracturing fluid chemical additives: analysis of regulations. New Solutions: A Journal of Environmental and Occupational Health Policy 23: 167-187. <http://dx.doi.org/10.2190/NS.23.1.j>
- [Maupin, MA; Kenny, JF; Hutson, SS; Lovelace, JK; Barber, NL; Linsey, KS.](#) (2014). Estimated use of water in the United States in 2010. (USGS Circular 1405). Reston, VA: U.S. Geological Survey. <http://dx.doi.org/10.3133/cir1405>
- [McDaniel, J; Watters, L; Shadravan, A.](#) (2014). Cement sheath durability: Increasing cement sheath integrity to reduce gas migration in the Marcellus Shale Play. In SPE hydraulic fracturing technology conference proceedings. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168650-MS>
- [McElreath, D.](#) (2011). Comparison of hydraulic fracturing fluids composition with produced formation water following fracturing Implications for fate and transport. Presentation presented at Hydraulic Fracturing Study: March 2011 Technical Workshop on Fate and Transport, March 28-29, 2011, Arlington, VA.

- [McIntosh, JC; Walter, LM.](#) (2005). Volumetrically significant recharge of Pleistocene glacial meltwaters into epicratonic basins: Constraints imposed by solute mass balances. *Chem Geol* 222: 292-309. <http://dx.doi.org/10.1016/j.chemgeo.2005.07.010>
- [McIntosh, JC; Walter, LM; Martini, AM.](#) (2002). Pleistocene recharge to midcontinent basins: effects on salinity structure and microbial gas generation. *Geochim Cosmo Acta* 66: 1681-1700. [http://dx.doi.org/10.1016/S0016-7037\(01\)00885-7](http://dx.doi.org/10.1016/S0016-7037(01)00885-7)
- [McKay, SF; King, AJ.](#) (2006). Potential ecological effects of water extraction in small, unregulated streams. *River Research and Applications* 22: 1023-1037. <http://dx.doi.org/10.1002/rra.958>
- [McKenzie, LM; Guo, R; Witter, RZ; Savitz, DA; Newman, L; Adgate, JL.](#) (2014). Birth outcomes and maternal residential proximity to natural gas development in rural Colorado. *Environ Health Perspect* 122: 412-417. <http://dx.doi.org/10.1289/ehp.1306722>
- [MCOR](#) (Marcellus Center for Outreach and Research). (2012). Extent and thickness of Marcellus Shale. University Park, PA: Pennsylvania State University. Retrieved from [http://www.marcellus.psu.edu/images/Marcellus\\_thickness.gif](http://www.marcellus.psu.edu/images/Marcellus_thickness.gif)
- [Methanol Institute.](#) (2013). Methanol safe handling manual. Alexandria, VA. <http://www.methanol.org/Health-And-Safety/Safe-Handling/Methanol-Safe-Hanlding-Manual.aspx>
- [Michie, TW; Koch, CA.](#) (1991). Evaluation of injection-well risk management in the Williston Basin. *J Pet Tech* 43: 737-741. <http://dx.doi.org/10.2118/20693-PA>
- [Minnich, K.](#) (2011). A water chemistry perspective on flowback reuse with several case studies. Minnich, K. [http://www2.epa.gov/sites/production/files/documents/10\\_Minnich\\_-\\_Chemistry\\_508.pdf](http://www2.epa.gov/sites/production/files/documents/10_Minnich_-_Chemistry_508.pdf)
- [Miskimins, JL.](#) (2008). Design and life cycle considerations for unconventional reservoir wells. In 2008 SPE Unconventional Reservoirs Conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/114170-MS>
- [Mitchell, AL; Small, M; Casman, EA.](#) (2013a). Surface water withdrawals for Marcellus Shale gas development: performance of alternative regulatory approaches in the Upper Ohio River Basin. *Environ Sci Technol* 47: 12669-12678. <http://dx.doi.org/10.1021/es403537z>
- [Mitchell, BJ.](#) (1970) Viscosity of foam. (Doctoral Dissertation). The University of Oklahoma,
- [Mitchell, J; Pabon, P; Collier, ZA; Egeghy, PP; Cohen-Hubal, E; Linkov, I; Vallerio, DA.](#) (2013b). A decision analytic approach to exposure-based chemical prioritization. *PLoS ONE* 8: e70911. <http://dx.doi.org/1371/journal.pone.0070911>
- [Molofsky, LJ; Connor, JA; Wylie, AS; Wagner, T; Farhat, SK.](#) (2013). Evaluation of methane sources in groundwater in northeastern Pennsylvania. *Ground Water* 51: 333-349. <http://dx.doi.org/10.1111/gwat.12056>
- [Montana GWIC](#) (Montana Ground Water Information Center). (2009). Coal bed methane powder river basin: Montana Bureau of Mines and Geology Ground Water Information Center. Butte, MT.
- [Montgomery, C.](#) (2013). Fracturing fluid components. In A Bunder; J McLennon; R Jeffrey (Eds.), *Effective and Sustainable Hydraulic Fracturing*. Croatia: InTech. <http://dx.doi.org/10.5772/56422>
- [Montgomery, CT; Smith, MB.](#) (2010). Hydraulic fracturing - History of an enduring technology. *J Pet Tech* 62: 26-32.
- [Morillon, A; Vidalie, JF; Syahnudi, U; Suripno, S; Hadinoto, EK.](#) (2002). Drilling and waste management; SPE 73931. Presentation presented at The SPE International Conference on Health, Safety, and Environment in Oil and Gas Exploration and Production, March 20-22, 2002, Kuala Lumpur, Malaysia.
- [Moudgal, CI; Venkatapathy, R; Choudhury, H; Bruce, RM; Lipscomb, JC.](#) (2003). Application of QSTRs in the selection of a surrogate toxicity value for chemical of concern. *Environ Sci Technol* 37: 5228-5235.

- [Mouser, P; Liu, S; Cluff, M; McHugh, M; Lenhart, J; MacRae, J.](#) (In Press) Biodegradation of hydraulic fracturing fluid organic additives in sediment-groundwater microcosms.
- [Muehlenbachs, L; Spiller, E; Timmins, C.](#) (2012). Shale gas development and property values: Differences across drinking water sources. (NBER Working Paper No. 18390). Cambridge, MA: National Bureau of Economic Research. <http://www.nber.org/papers/w18390>
- [Mukherjee, H; Poe jr., B; Heidt, J; Watson, T; Barree, R.](#) (2000). Effect of pressure depletion on fracture-geometry evolution and production performance. SPE Prod Facil 15: 144-150. <http://dx.doi.org/10.2118/65064-PA>
- [Murali Mohan, A; Hartsock, A; Hammack, RW; Vidic, RD; Gregory, KB.](#) (2013). Microbial communities in flowback water impoundments from hydraulic fracturing for recovery of shale gas. FEMS Microbiol Ecol. <http://dx.doi.org/10.1111/1574-6941.12183>
- [Murdoch, PS; Baron, JS; Miller, TL.](#) (2000). Potential effects of climate change on surface-water quality in North America. J Am Water Resour Assoc 36: 347-366.
- [Murray, KE.](#) (2013). State-scale perspective on water use and production associated with oil and gas operations, Oklahoma, U.S. Environ Sci Technol 47: 4918-4925. <http://dx.doi.org/10.1021/es4000593>
- [Myers, T.](#) (2012a). Author's reply. Ground Water 50: 828-830. <http://dx.doi.org/10.1111/j.1745-6584.2012.00991.x>
- [Myers, T.](#) (2012b). Potential contaminant pathways from hydraulically fractured shale to aquifers. Ground Water 50: 872-882. <http://dx.doi.org/10.1111/j.1745-6584.2012.00933.x>
- [Myers, T.](#) (2013). Author's reply for comments on potential contaminant pathways from hydraulically fractured shale to aquifers' [Comment]. Ground Water 51: 319321. <http://dx.doi.org/10.1111/gwat.12016>
- [National Drought Mitigation Center.](#) (2015). U.S. drought monitor. Available online at <http://droughtmonitor.unl.edu/Home.aspx> (accessed February 27, 2015).
- [Neff, JM.](#) (2002). Bioaccumulation in marine organisms: Effect of contaminants from oil well produced water. Amsterdam: Elsevier.
- [Nelson, AW; May, D; Knight, AW; Eitrheim, ES; Mehrhoff, M; Shannon, R; Litman, R; Schultz, MK.](#) (2014). Matrix complications in the determination of radium levels in hydraulic fracturing flowback water from Marcellus Shale. 1: 204-208. <http://dx.doi.org/10.1021/ez5000379>
- [NETL \(National Energy Technology Laboratory\).](#) (2013). Modern shale gas development in the United States: An update. Pittsburgh, PA: U.S. Department of Energy. National Energy Technology Laboratory. <http://www.netl.doe.gov/File%20Library/Research/Oil-Gas/shale-gas-primer-update-2013.pdf>
- [NETL \(National Energy Technology Laboratory\).](#) (2014). Evaporation [Fact Sheet]. Pittsburgh, PA: US Department of Energy. <http://www.netl.doe.gov/research/coal/crosscutting/pwmmis/tech-desc/evap>
- [New Mexico Bureau of Mines and Mineral Resources.](#) (1994). Coalbed methane in the upper cretaceous fruitland formation, San Juan Basin, New Mexico and Colorado. Socorro, NM: New Mexico Bureau of Mines and Mineral Resources, New Mexico Institute of Mining and Technology. <https://geoinfo.nmt.edu/publications/monographs/bulletins/146/>
- [Newell, R.](#) (2011). Shale gas and the outlook for U.S. natural gas markets and global gas resources. Presentation presented at US EIA presentation at OECD Meetings, June 21, 2011, Paris, France.

- [Nicot, JP; Hebel, AK; Ritter, SM; Walden, S; Baier, R; Galusky, P; Beach, J; Kyle, R; Symank, L; Breton, C.](#) (2011). Current and projected water use in the Texas mining and oil and gas industry - Final Report. (TWDB Contract No. 0904830939). Nicot, JP; Hebel, AK; Ritter, SM; Walden, S; Baier, R; Galusky, P; Beach, J; Kyle, R; Symank, L; Breton, C.  
[http://www.twdb.texas.gov/publications/reports/contracted\\_reports/doc/0904830939\\_MiningWaterUse.pdf](http://www.twdb.texas.gov/publications/reports/contracted_reports/doc/0904830939_MiningWaterUse.pdf)
- [Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.](#) (2012). Oil & gas water use in Texas: Update to the 2011 mining water use report. Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.  
[http://www.twdb.state.tx.us/publications/reports/contracted\\_reports/doc/0904830939\\_2012Update\\_MiningWaterUse.pdf](http://www.twdb.state.tx.us/publications/reports/contracted_reports/doc/0904830939_2012Update_MiningWaterUse.pdf)
- [Nicot, JP; Scanlon, BR.](#) (2012). Water use for shale-gas production in Texas, U.S. Environ Sci Technol 46: 3580-3586. <http://dx.doi.org/10.1021/es204602t>
- [Nicot, JP; Scanlon, BR; Reedy, RC; Costley, RA.](#) (2014). Source and fate of hydraulic fracturing water in the Barnett Shale: a historical perspective. Environ Sci Technol 48: 2464-2471.  
<http://dx.doi.org/10.1021/es404050r>
- [NM OSE](#) (New Mexico Office of the State Engineer). (2013). New Mexico water use by categories 2010. (Technical Report 54). Santa Fe, NM: New Mexico Office of the State Engineer, Water Use and Conservation Bureau.  
<http://www.ose.state.nm.us/Pub/TechnicalReports/TechReport%2054NM%20Water%20Use%20by%20Categories%20.pdf>
- [North Dakota Department of Health.](#) (2015). Oil field environmental incident summary, incident 20150107160242. Available online at  
[http://www.ndhealth.gov/EHS/FOIA/Spills/Summary\\_Reports/20150107160242\\_Summary\\_Report.pdf](http://www.ndhealth.gov/EHS/FOIA/Spills/Summary_Reports/20150107160242_Summary_Report.pdf)
- [North Dakota Department of Mineral Resources.](#) (2013). North Dakota Department of Mineral Resources: Government Finance Interim Committee 12/12/2013. Presentation presented at Department of Mineral Resources: Update on the Status of Oil and Gas Development in the State, 12/12/2013, Bismarck, ND.
- [North Dakota State Water Commission.](#) (2010). Water appropriation requirements, current water use, & water availability for energy industries in North Dakota: a 2010 summary. Bismarck, ND.  
<http://www.swc.nd.gov/4dlink9/4dcgi/GetContentPDF/PB-1800/W&E%20RPT%20FinalR.pdf>
- [North Dakota State Water Commission.](#) (2014). Facts about North Dakota fracking and water use. Bismarck, ND. <http://www.swc.nd.gov/4dlink9/4dcgi/GetContentPDF/PB-2419/Fact%20Sheet.pdf>
- [Nowak, N; Bradish, J.](#) (2010). High density polyethylene (HDPE) lined produced water evaporation ponds. Presentation presented at 17th International Petroleum and Biofuels Environmental Conference, August 31-September 2, 2010, San Antonio, TX.
- [NPC](#) (National Petroleum Council). (2011a). Management of produced water from oil and gas wells. (Paper #2-17). Washington, DC. [http://www.npc.org/Prudent\\_Development-Topic\\_Papers/2-17\\_Management\\_of\\_Produced\\_Water\\_Paper.pdf](http://www.npc.org/Prudent_Development-Topic_Papers/2-17_Management_of_Produced_Water_Paper.pdf)
- [NPC](#) (National Petroleum Council). (2011b). Plugging and abandonment of oil and gas wells. (Paper #2-25). Washington, DC: National Petroleum Council (NPC).
- [NRC](#) (National Research Council). (2010). Management and effects of coalbed methane produced water in the western United States. Washington, DC: National Academies Press.  
[http://www.nap.edu/catalog.php?record\\_id=12915](http://www.nap.edu/catalog.php?record_id=12915)
- [NRC](#) (National Research Council). (2012). Water reuse: Potential for expanding the nations water supply through reuse of municipal wastewater. Committee on the Assessment of Water Reuse as an Approach for Meeting Future Water Supply Need. Washington, DC: The National Academies Press.  
[http://www.nap.edu/openbook.php?record\\_id=13303](http://www.nap.edu/openbook.php?record_id=13303)



- [NRC](#) (National Research Council). (2014). A framework to guide selection of chemical alternatives. Washington, D.C.: The National Academies Press. <http://www.nap.edu/catalog/18872/a-framework-to-guide-selection-of-chemical-alternatives>
- [NSTC](#) (National Science and Technology Council). (2000). Integrated assessment of hypoxia in the Northern Gulf of Mexico. Washington, DC: U.S. National Science and Technology Council, Committee on Environment and Natural Resources. [http://oceanservice.noaa.gov/products/hypox\\_final.pdf](http://oceanservice.noaa.gov/products/hypox_final.pdf)
- [NYSDEC](#) (New York State Department of Environmental Conservation). (2011). Revised draft supplemental generic environmental impact statement (SGEIS) on the oil, gas and solution mining regulatory program: Well permit issuance for horizontal drilling and high-volume hydraulic fracturing to develop the Marcellus shale and other low-permeability gas reservoirs. Albany, NY: NY SDEC. <http://www.dec.ny.gov/energy/75370.html>
- [ODNR, DMRM](#), (Ohio Department of Natural Resources, Division of Mineral Resources Management). (2008). Report on the investigation of the natural gas invasion of aquifers in Bainbridge Township of Geauga County, Ohio. Columbus, OH: ODNR. <http://oilandgas.ohiodnr.gov/portals/oilgas/pdf/bainbridge/report.pdf>
- [Ohio EPA](#) (Ohio Environmental Protection Agency). (2012a). Considerations for public water systems prior to providing raw or treated water to oil and natural gas companies. <http://www.epa.state.oh.us/Portals/0/general%20pdfs/Considerations%20for%20Public%20Water%20Systems%20Prior%20to%20Providing%20Raw%20or%20Treated%20Water%20to%20Oil%20and%20Natural%20Gas%20Companies.pdf>
- [Ohio EPA](#) (Ohio Environmental Protection Agency). (2012b). Ohios regulations: a guide for operators drilling in the Marcellus and Utica Shales. Columbus, OH. <http://www.epa.state.oh.us/Portals/0/general%20pdfs/Ohio%20Regulations%20-%20A%20Guide%20for%20Operators%20Drilling%20in%20the%20Marcellus%20and%20Utica%20Shales.pdf>
- [Oil and Gas Mineral Services](#). (2010). MineralWise: Oil and gas terminology. Available online at <http://www.mineralweb.com/library/oil-and-gas-terms/>
- [Olawoyin, R; Wang, JY; Oyewole, SA](#). (2013). Environmental safety assessment of drilling operations in the Marcellus-shale gas development. S P E Drilling & Completion 28: 212-220. <http://dx.doi.org/10.2118/163095-PA>
- [Olmstead, SM; Muehlenbachs, LA; Shih, JS; Chu, Z; Krupnick, AJ](#). (2013). Shale gas development impacts on surface water quality in Pennsylvania. PNAS 110: 4962-4967. <http://dx.doi.org/10.1073/pnas.1213871110>
- [Olson, JE](#). (2011). Hydraulic fracturing overview. Presentation presented at Summer Institute B: Energy, Climate and Water in the 21st Century, TXESS Revolution, Texas Earth and Space Science Revolution Professional Development for Educators, June, 2011, Austin, TX.
- [Olsson, O; Weichgrebe, D; Rosenwinkel, KH](#). (2013). Hydraulic fracturing wastewater in Germany: composition, treatment, concerns. Environmental Earth Sciences 70: 3895-3906. <http://dx.doi.org/10.1007/s12665-013-2535-4>
- [OMB](#) (U.S. Office of Management and Budget). (2004). Final information quality bulletin for peer review. Washington, DC: US Office of Management and Budget (OMB). <http://www.whitehouse.gov/sites/default/files/omb/assets/omb/memoranda/fy2005/m05-03.pdf>
- [Orem, W; Tatu, C; Varonka, M; Lerch, H; Bates, A; Engle, M; Crosby, L; Mcintosh, J](#). (2014). Organic substances in produced and formation water from unconventional natural gas extraction in coal and shale. Int J Coal Geol 126: 20-31. <http://dx.doi.org/10.1016/j.coal.2014.01.003>



- [Orem, WH; Tatu, CA; Lerch, HE; Rice, CA; Bartos, TT; Bates, AL; Tewalt, S; Corum, MD.](#) (2007). Organic compounds in produced waters from coalbed natural gas wells in the Powder River Basin, Wyoming, USA. *Appl Geochem* 22: 2240-2256. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.010>
- [Osborn, SG; Vengosh, A; Warner, NR; Jackson, RB.](#) (2011). Methane contamination of drinking water accompanying gas-well drilling and hydraulic fracturing. *PNAS* 108: 8172-8176. <http://dx.doi.org/10.1073/pnas.1100682108>
- [OSHA](#) (Occupational Safety & Health Administration). (2014a). Personal communication: email exchanges between Tandy Zitkus, OSHA and Rebecca Daiss, U.S. EPA. Available online
- [OSHA](#) (Occupational Safety & Health Administration). (2014b). Personal communication: phone conversation between Tandy Zitkus, OSHA and Rebecca Daiss, U.S. EPA. Available online
- [OSHA](#) (Occupational Safety & Health Administration). (2015). Oil and gas well drilling and servicing etool: Well completion. Available online at [https://www.osha.gov/SLTC/etools/oilandgas/well\\_completion/well\\_completion.html](https://www.osha.gov/SLTC/etools/oilandgas/well_completion/well_completion.html)
- [Otton, JK; Zielinski, RA; Smith, BD; Abbott, MM.](#) (2007). Geologic controls on movement of produced-water releases at US geological survey research Site A, Skiatook lake, Osage county, Oklahoma. *Appl Geochem* 22: 2138-2154. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.015>
- [OWRB](#) (Oklahoma Water Resources Board). (2014). The Oklahoma comprehensive water plan. Available online at <http://www.owrb.ok.gov/supply/ocwp/ocwp.php>
- [PA DCNR](#) (Pennsylvania Department of Conservation and Natural Resources). (2015). Thermal maturation and petroleum generation. Available online at [http://www.dcnr.state.pa.us/topogeo/econresource/oilandgas/marcellus/sourcerock\\_index/sourcerock\\_maturation/index.htm](http://www.dcnr.state.pa.us/topogeo/econresource/oilandgas/marcellus/sourcerock_index/sourcerock_maturation/index.htm) (accessed April 9, 2015).
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2000). Pennsylvania's plan for addressing problem abandoned wells and orphaned wells. Harrisburg, PA: PADEP.
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2009a). Inspection Report, inspection record #1835041, enforcement record #251134. Harrisburg, PA: Commonwealth of Pennsylvania Department of Environmental Protection, Oil and Gas Management Program.
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2009b). Stray natural gas migration associated with oil and gas wells [draft report]. Harrisburg, PA. [http://www.dep.state.pa.us/dep/subject/advcoun/oil\\_gas/2009/Stray%20Gas%20Migration%20Cases.pdf](http://www.dep.state.pa.us/dep/subject/advcoun/oil_gas/2009/Stray%20Gas%20Migration%20Cases.pdf)
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2010). DEP Fines Atlas Resources for drilling wastewater spill in Washington County. Available online at <http://www.portal.state.pa.us/portal/server.pt/community/newsroom/14287?id=13595&typeid=1> (accessed February 13, 2014).
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2011a). Letter from Pennsylvania Department of the Environment to US EPA Region 3 Administrator Shawn Garvin. Available online at [http://www.epa.gov/region3/marcellus\\_shale?#inforeqsbypadep](http://www.epa.gov/region3/marcellus_shale?#inforeqsbypadep)
- [PA DEP.](#) [Road-spreading of brine for dust control and road stabilization, 43 Pa.B. 7377 § 78.70](#) (2011b). <http://www.pabulletin.com/secure/data/vol43/43-50/2362b.html>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2011c). Surface water sample analytical results from XTO 308 response data from XTO February 3, 2011 CAWP addendum. Indiana, PA: XTO Energy.

- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015a). PA DEP oil & gas reporting website, statewide data downloads by reporting period. waste and production files downloaded for Marcellus/unconventional wells, July 2009 December 2014. Harrisburg, PA. Retrieved from <https://www.paoilandgasreporting.state.pa.us/publicreports/Modules/DataExports/DataExports.aspx>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015b). Technologically enhanced naturally occurring radioactive materials (TENORM) study report. Harrisburg, PA. <http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study Report Rev. 0 01-15-2015.pdf>
- [Palmer, ID; Moschovidis, ZA; Cameron, JR.](#) (2005). Coal failure and consequences for coalbed methane wells. Paper presented at SPE annual technical conference and exhibition, October 9-12, 2005, Dallas, TX.
- [Papoulias, DM; Velasco, AL.](#) (2013). Histopathological analysis of fish from Acorn Fork Creek, Kentucky, exposed to hydraulic fracturing fluid releases. *Southeastern Naturalist* 12: 92-111.
- [Parker, KM; Zeng, T; Harkness, J; Vengosh, A; Mitch, WA.](#) (2014). Enhanced formation of disinfection byproducts in shale gas wastewater-impacted drinking water supplies. *Environ Sci Technol* 48: 11161-11169. <http://dx.doi.org/10.1021/es5028184>
- [Pashin, JC; McIntyre-Redden, MR; Mann, SD; Kopaska-Merkel, DC; Varonka, M; Orem, W.](#) (2014). Relationships between water and gas chemistry in mature coalbed methane reservoirs of the Black Warrior Basin. *Int J Coal Geol* 126: 92-105. <http://dx.doi.org/10.1016/j.coal.2013.10.002>
- [Patel, PS; Robart, CJ; Ruegamer, M; Yang, A.](#) (2014). Analysis of US hydraulic fracturing fluid system and proppant trends. In 2014 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168645-MS>
- [Pattera, P.](#) (2011). DEP shuts down Tri-County Waste Water over illegal dumping. Available online at [http://triblive.com/x/pittsburghtrib/news/regional/s\\_728516.html#axzz3UCvkvM7t](http://triblive.com/x/pittsburghtrib/news/regional/s_728516.html#axzz3UCvkvM7t) (accessed March 12, 2015).
- [Patzek, TW; Male, F; Marder, M.](#) (2013). Gas production in the Barnett Shale obeys a simple scaling theory. *PNAS* 110: 19731-19736. <http://dx.doi.org/10.1073/pnas.1313380110>
- [Pearson, CM; Griffin, L; Wright, CA; Weijers, L.](#) (2013). Breaking up is hard to do: creating hydraulic fracture complexity in the Bakken central basin. In 2013 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/163827-MS>
- [Pearson, K.](#) (2011). Geologic models and evaluation of undiscovered conventional and continuous oil and gas resources Upper Cretaceous Austin Chalk, U.S. Gulf Coast. In US Geological Survey Scientific Investigations Report. (20125159). U.S. Geological Survey. <http://pubs.usgs.gov/sir/2012/5159/>
- [Penttila, B; Heine, L; Craft, E.](#) (2013). Manuscript in preparation assessing the hazard data gap for hydraulic fracturing chemicals. Penttila, B; Heine, L; Craft, E.
- [Peraki, M; Ghazanfari, E.](#) (2014). Electrodialysis treatment of flow-back water for environmental protection in shale gas development. In Shale gas development Shale energy engineering 2014. Reston, VA: American Society of Civil Engineers. <http://dx.doi.org/10.1061/9780784413654.008>
- [Peterman, ZE; Thamke, J; Futa, K; Oliver, T.](#) (2012). Strontium isotope evolution of produced water in the East Poplar Oil Field, Montana. Presentation presented at US Geological Survey AAPG annual convention and exhibition, April 23, 2012, Long Beach, California.
- [Phillips, A.](#) (2014). Frackers spill olympic pools worth of hydrochloric acid in Oklahoma. Available online at <http://thinkprogress.org/climate/2014/07/31/3466283/olympic-pool-sized-hydrochloric-acid-spill-oklahoma/>
- [Pinder, GF; Celia, MA.](#) (2006). Subsurface hydrology. Hoboken, NJ: John Wiley & Sons, Inc. <http://dx.doi.org/10.1002/0470044209>

- Pinder, GF; Gray, WG. (2008). Essentials of multiphase flow and transport in porous media. Hoboken, NJ: John Wiley & Sons.
- Plumlee, MH; Debroux, JF; Taffler, D; Graydon, JW; Mayer, X; Dahm, KG; Hancock, NT; Guerra, KL; Xu, P; Drewes, JE; Cath, TY. (2014). Coalbed methane produced water screening tool for treatment technology and beneficial use. 5: 22-34. <http://dx.doi.org/10.1016/j.juogr.2013.12.002>
- Plummer, M; Wood, T; Huang, H; Guo, L; Reiten, J; Chandler, K; Metesh, I. (2013). Water needs and availability for hydraulic fracturing in the Bakken formation, eastern Montana. Presentation presented at 2013 Technical Workshop, Water Acquisition Modeling: Assessing Impacts Through Modeling and Other Means, June 4, 2013, Arlington, VA.
- Porcelli, D; Kim, CK; Martin, P; Moore, WS; Phaneuf, M. (2014). Properties of radium. In The environmental behaviour of radium: revised edition. Vienna, Austria: International Atomic Energy Agency. [http://www-pub.iaea.org/MTCD/Publications/PDF/trs476\\_web.pdf](http://www-pub.iaea.org/MTCD/Publications/PDF/trs476_web.pdf)
- Powell, B. (2013). Secondary containment: regulations and best management practices in the Appalachian Basin. (AADE-13-FTCE-18). Houston, Texas: American Association of Drilling Engineers.
- Powers, SE; Hunt, CS; Heermann, SE; Corseuil, HX; Rice, D; Alvarez, PJJ. (2001). The transport and fate of ethanol BTEX in groundwater contaminated by gasohol. Environ Sci Technol 31: 79-123. <http://dx.doi.org/10.1080/20016491089181>
- Purestream (Purestream Services). (2013). Purestream services will begin commercial operations to treat Eagle Ford Shale produced and frac flow-back water in Gonzalez County, Texas. Retrieved from <http://purestreamtechnology.com/index.php/component/content/article/72-press-releases/206-purestream-services-will-begin-commercial-operations-to-treat-eagle-ford-shale-produced-and-frac-flow-back-water-in-gonzalez-county-texas>
- Rahm, BG; Bates, JT; Bertoia, LR; Galford, AE; Yoxtheimer, DA; Riha, SJ. (2013). Wastewater management and Marcellus Shale gas development: trends, drivers, and planning implications. J Environ Manage 120: 105-113. <http://dx.doi.org/10.1016/j.jenvman.2013.02.029>
- Rahm, BG; Riha, SJ. (2012). Toward strategic management of shale gas development: Regional, collective impacts on water resources. Environ Sci Pol 17: 12-23. <http://dx.doi.org/10.1016/j.envsci.2011.12.004>
- Rahm, BG; Riha, SJ. (2014). Evolving shale gas management: water resource risks, impacts, and lessons learned [Review]. Environ Sci Process Impacts 16: 1400-1412. <http://dx.doi.org/10.1039/c4em00018h>
- Rahm, BG; Vedachalam, S; Bertoia, LR; Mehta, D; Vanka, VS; Riha, SJ. (2015). Shale gas operator violations in the Marcellus and what they tell us about water resource risks. Energy Policy 82: 1-11. <http://dx.doi.org/10.1016/j.enpol.2015.02.033>
- Ramirez, P. (2002). Oil field produced water discharges into wetlands in Wyoming. (97-6- 6F34). Cheyenne, WY: U.S. Fish and Wildlife Service. <http://www.fws.gov/mountain-prairie/contaminants/papers/r6718c02.pdf>
- Rasa, E; Bekins, BA; Mackay, DM; de Sieyes, NR; Wilson, JT; Feris, KP; Wood, IA; Scow, KM. (2013). Impacts of an ethanol-blended fuel release on groundwater and fate of produced methane: Simulation of field observations. Water Resour Res 49: 4907-4926. <http://dx.doi.org/10.1002/wrcr.20382>
- Rassenfoss, S. (2011). From flowback to fracturing: Water recycling grows in the Marcellus shale. J Pet Tech 63: 48-51.
- Reagan, MT; Moridis, GJ; Johnson, JN; Keen, ND. (2015). Numerical simulation of the environmental impact of hydraulic fracturing of tight/shale gas reservoirs on near-surface groundwater: background, base cases, shallow reservoirs, short-term gas and water transport. Water Resour Res 51: 1-31. <http://dx.doi.org/10.1002/2014WR016086>

- [Renpu, W.](#) (2011). Advanced well completion engineering (Third ed.). Houston, TX: Gulf Professional Publishing.
- [Repetski, JE; Ryder, RT; Weary, DJ; Harris, AG; Trippie, MH.](#) (2008). Thermal maturity patterns (CAI and %Ro) in upper ordovician and devonian rocks of the Appalachian Basin: A major revision of USGS map I917E using new subsurface collections. U.S. Geological Survey. <http://pubs.usgs.gov/sim/3006/SIM3006.pdf>
- [Resnikoff, M; Alexandrova, E; Travers, I.](#) (2010). Radioactivity in Marcellus shale: Report prepared for Residents for the Preservation of Lowman and Chemung (RFPLC). New York, NY: Radioactive Waste Management Associates.
- [Reuters.](#) (2014). UPDATE 2-oil well in North Dakota out of control, leaking. Available online at <http://www.reuters.com/article/2014/02/14/energy-crude-blowout-idUSL2N0LJ15820140214> (accessed March 2, 2015).
- [Révész, KM; Breen, KJ; Baldassare, AJ; Burruss, RC.](#) (2012). Carbon and hydrogen isotopic evidence for the origin of combustible gases in water-supply wells in north-central Pennsylvania. Appl Geochem 27: 361-375. <http://dx.doi.org/10.1016/j.apgeochem.2011.12.002>
- [Reynolds, RR; Kiker, RD.](#) (2003). Produced water and associated issues a manual for the independent operator. (Oklahoma Geological Survey Open-File Report 6-2003). Tulsa, OK: Oklahoma Geological Survey. [http://karl.nrcce.wvu.edu/regional/pww/produced\\_water.pdf](http://karl.nrcce.wvu.edu/regional/pww/produced_water.pdf)
- [Rice, CA.](#) (1999). Waters co-produced with coal-bed methane from the Ferron Sandstone in east central Utah: chemical and isotopic composition, volumes, and impacts of disposal [Abstract]. Geological Society of America Abstracts with Programs 31: A385.
- [Rice, CA; Ellis, MS; Bullock, JH.](#) (2000). Water co-produced with coalbed methane in the Powder River basin, Wyoming: Preliminary compositional data. (Open File-Report 00-372). Denver, CO: U.S. Department of the Interior, U.S. Geological Survey.
- [Rich, AL; Crosby, EC.](#) (2013). Analysis of reserve pit sludge from unconventional natural gas hydraulic fracturing and drilling operations for the presence of technologically enhanced naturally occurring radioactive material (TENORM). New Solutions: A Journal of Environmental and Occupational Health Policy 23: 117-135. <http://dx.doi.org/10.2190/NS.23.1.h>
- [Richardson, SD; Plewa, MJ; Wagner, ED; Schoeny, R; Demarini, DM.](#) (2007). Occurrence, genotoxicity, and carcinogenicity of regulated and emerging disinfection by-products in drinking water: A review and roadmap for research [Review]. Mutat Res 636: 178-242. <http://dx.doi.org/10.1016/j.mrrev.2007.09.00>
- [Rickman, R; Mullen, MJ; Petre, JE; Grieser, WV; Kundert, D.](#) (2008). A practical use of shale petrophysics for stimulation design optimization: all shale plays are not clones of the Barnett shale. In 2008 SPE annual technical conference & exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/115258-MS>
- [Richter, BC; Kreitler, CW.](#) (1993). Geochemical techniques for identifying sources of ground-water salinization. Boca Raton, FL: CRC Press. <http://www.crcpress.com/product/isbn/9781566700009>
- [Rivett, MO; Wealthall, GP; Dearden, RA; McAlary, TA.](#) (2011). Review of unsaturated-zone transport and attenuation of volatile organic compound (VOC) plumes leached from shallow source zones [Review]. J Contam Hydrol 123: 130-156. <http://dx.doi.org/10.1016/j.jconhyd.2010.12.013>
- [Robertson, JO; Chilingar, GV; Khilyuk, LF; Endres, B.](#) (2012). Migration of gas from oil/gas fields. Energy Source Part A 34: 1436-1447. <http://dx.doi.org/10.1080/15567030903077899>
- [Rodvelt, GD; Yeager, VI; Hyatt, MA.](#) (2013). Case history: challenges using ultraviolet light to control bacteria in Marcellus completions. In 2011 SPE eastern regional meeting. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/149445-MS>

- [Rolls, RJ; Leigh, C; Sheldon, F.](#) (2012). Mechanistic effects of low-flow hydrology on riverine ecosystems: ecological principles and consequences of alteration. *Freshwater Science* 31: 1163-1186. <http://dx.doi.org/10.1899/12-002.1>
- [Ross, D; King, G.](#) (2007). Well completions. In MJ Economides; T Martin (Eds.), *Modern fracturing: Enhancing natural gas production* (1 ed., pp. 169-198). Houston, Texas: ET Publishing.
- [Rowan, EL; Engle, MA; Kirby, CS; Kraemer, TF.](#) (2011). Radium content of oil- and gas-field produced waters in the northern Appalachian Basin (USA): Summary and discussion of data. (Scientific Investigations Report 20115135). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2011/5135/>
- [Rowan, EL; Engle, MA; Kraemer, TF; Schroeder, KT; Hammack, RW; Doughten, MW.](#) (2015). Geochemical and isotopic evolution of water produced from Middle Devonian Marcellus shale gas wells, Appalachian basin, Pennsylvania. *AAPG Bulletin* 99: 181-206. <http://dx.doi.org/10.1306/07071413146>
- [Rowe, D; Muehlenbachs, K.](#) (1999). Isotopic fingerprints of shallow gases in the Western Canadian sedimentary basin: tools for remediation of leaking heavy oil wells. *Organic Geochemistry* 30: 861-871. [http://dx.doi.org/10.1016/S0146-6380\(99\)00068-6](http://dx.doi.org/10.1016/S0146-6380(99)00068-6)
- [Roy, SB; Ricci, PF; Summers, KV; Chung, CF; Goldstein, RA.](#) (2005). Evaluation of the sustainability of water withdrawals in the United States, 1995 to 2025. *J Am Water Resour Assoc* 41: 1091-1108.
- [Roychaudhuri, B; Tsotsis, TT; Jessen, K.](#) (2011). An experimental and numerical investigation of spontaneous imbibition in gas shales. Paper presented at SPE Annual Technical Conference and Exhibition, October 30 - November 2, 2011, Denver, Colorado.
- [Rozell, DJ; Reaven, SJ.](#) (2012). Water pollution risk associated with natural gas extraction from the Marcellus Shale. *Risk Anal* 32: 13821393. <http://dx.doi.org/10.1111/j.1539-6924.2011.01757.x>
- [Rupp, B; Appel, KE; Gundert-Remy, U.](#) (2010). Chronic oral LOAEL prediction by using a commercially available computational QSAR tool. *Arch Toxicol* 84: 681-688. <http://dx.doi.org/10.1007/s00204-010-0532-x>
- [Rushing, JA; Newsham, KE; Blasingame, TA.](#) (2013). Rock typing: Keys to understanding productivity in tight gas sands. SPE Unconventional Reservoirs Conference, February 10-12, 2008, Keystone, Colorado, USA.
- [Rushton, L; Castaneda, C.](#) (2014). Drilling into hydraulic fracturing and the associated wastewater management issues. Washington, WD: Paul Hastings, LLP. <http://www.paulhastings.com/docs/default-source/PDFs/stay-current-hydraulic-fracturing-wastewater-management.pdf>
- [Rutledge, JT; Phillips, WS.](#) (2003). Hydraulic stimulation of natural fractures as revealed by induced microearthquakes, Carthage Cotton Valley gas field, east Texas. *Geophysics* 68: 441-452. <http://dx.doi.org/10.1190/1.1567214>
- [Rutqvist, J; Rinaldi, AP; Cappa, F; Moridis, GJ.](#) (2013). Modeling of fault reactivation and induced seismicity during hydraulic fracturing of shale-gas reservoirs. *Journal of Petroleum Science and Engineering* 107: 31-44. <http://dx.doi.org/10.1016/j.petrol.2013.04.023>
- [Rutqvist, J; Rinaldi, AP; Cappa, F; Moridis, GJ.](#) (2015). Modeling of fault activation and seismicity by injection directly into a fault zone associated with hydraulic fracturing of shale-gas reservoirs. *Journal of Petroleum Science and Engineering* 127: 377-386. <http://dx.doi.org/10.1016/j.petrol.2015.01.019>
- [Saba, T; Mohsen, F; Garry, M; Murphy, B; Hilbert, B.](#) (2012). White paper: Methanol use in hydraulic fracturing fluids. (1103844.000 0101 0711 TS26). Maynard, MA: Exponent.
- [Sabins, F.](#) (1990). Problems in cementing horizontal wells. *J Pet Tech* 42: 398-400. <http://dx.doi.org/10.2118/20005-PA>



- [SAIC and GES](#) (SAIC Energy, Environment & Infrastructure, LLC and Groundwater & Environmental Services, Inc). (2011). ATGAS investigation initial site characterization and response, April 19, 2011 to May 2, 2011, ATGAS2H Well Pad, permit no. 37-015-21237, Leroy Township, Bradford County, PA. Harrisburg, Pennsylvania: Chesapeake Appalachia, LLC.  
[http://www.chk.com/news/articles/documents/atgas\\_initial\\_site\\_characterization\\_report\\_final\\_08292011.pdf](http://www.chk.com/news/articles/documents/atgas_initial_site_characterization_report_final_08292011.pdf)
- [Saiers, JE; Barth, E.](#) (2012). Comment on 'Potential contaminant pathways from hydraulically fractured shale aquifers' [Comment]. *Ground Water* 50: 826-828; discussion 828-830. <http://dx.doi.org/10.1111/j.1745-6584.2012.00990.x>
- [Sang, W; Stoof, CR; Zhang, W; Morales, VL; Gao, B; Kay, RW; Liu, L; Zhang, Y; Steenhuis, TS.](#) (2014). Effect of hydrofracking fluid on colloid transport in the unsaturated zone. *Environ Sci Technol* 48: 8266-8274.  
<http://dx.doi.org/10.1021/es501441e>
- [Santa Cruz Biotechnology.](#) (2015). Sorbitane trioleate (CAS 26266-58-0). Available online at <http://www.scbt.com/datasheet-281154-Sorbitane-Trioleate.html> (accessed April 6, 2015).
- [Scanlon, BR; Reedy, RC; Nicot, JP.](#) (2014). Will water scarcity in semiarid regions limit hydraulic fracturing of shale plays? *Environmental Research Letters* 9. <http://dx.doi.org/10.1088/1748-9326/9/12/124011>
- [Schindler, DW.](#) (1997). Widespread effects of climatic warming on freshwater ecosystems in North America. *Hydrolog Process* 11: 1043-1067.
- [Schlegel, ME; McIntosh, JC; Petsch, ST; Orem, WH; Jones, EJP; Martini, AM.](#) (2013). Extent and limits of biodegradation by in situ methanogenic consortia in shale and formation fluids. *Appl Geochem* 28: 172-184. <http://dx.doi.org/10.1016/j.apgeochem.2012.10.008>
- [Schlumberger](#) (Schlumberger Limited). (2006). Fundamentals of formation testing. Sugar Land, Texas.  
[http://www.slb.com/~media/Files/evaluation/books/fundamentals\\_formation\\_testing\\_overview.pdf](http://www.slb.com/~media/Files/evaluation/books/fundamentals_formation_testing_overview.pdf)
- [Schlumberger](#) (Schlumberger Limited). (2014). Schlumberger oilfield glossary. Available online at <http://www.glossary.oilfield.slb.com/>
- [Schlumberger](#) (Schlumberger Limited). (2015). Stimulation. Available online at <http://www.slb.com/services/completions/stimulation.aspx>
- [Schmidley, EB; Smith, BJ.](#) (2011). Personal communication from Schmidley and Smith to DiCello: CAWP Addendum EM Survey & Well Location; XTO Energy, Inc. Marquardt Release. Available online
- [Schmidt, CW.](#) (2013). Estimating wastewater impacts from fracking. *Environ Health Perspect* 121: A117.  
<http://dx.doi.org/10.1289/ehp.121-a117>
- [Schmidt, V; McDonald, DA.](#) (1979). The role of secondary porosity in the course of sandstone diagenesis. In PA Schole; PR Schluger (Eds.), *Aspects of diagenesis : based on symposia sponsored by the Eastern and by the Rocky Mountain Sections, The Society of Economic Paleontologists and Mineralogists* (pp. 175-207). Tulsa, OK: The Society of Economic Paleontologists and Mineralogists (SEPM).  
[http://archives.datapages.com/data/sepm\\_sp/SP26/The\\_Role\\_of\\_Secondary\\_Porosity.html](http://archives.datapages.com/data/sepm_sp/SP26/The_Role_of_Secondary_Porosity.html)
- [Schnoor, JL.](#) (1996). Environmental modeling: Fate and transport of pollutants in water, air, and soil. In *Environmental modeling: Fate and transport of pollutants in water, air, and soil* (1 ed.). Hoboken, NJ: Wiley-Interscience.
- [Schubert, J; Rosenmeier, J; Zatezalo, M.](#) (2014). A review of NORM/TENORM in wastes and waters associated with Marcellus shale gas development and production. In CL Meehan; JM Vanbriesen; F Vahedifard; X Yu; C Quiroga (Eds.), *Shale energy engineering 2014: technical challenges, environmental issues, and public policy* (pp. 492-501). Reston, VA: American Society of Civil Engineers.  
<http://dx.doi.org/10.1061/9780784413654.052>



- [Schwarzenbach, RP; Gschwend, PM; Imboden, DM.](#) (2002). Environmental Organic Chemistry. In Environmental organic chemistry (2 ed.). Hoboken, NJ: John Wiley & Sons, Inc.
- [Science Applications International Corporation.](#) (2010). XTO - Marquardt pad soil and water corrective action workplan. (XTO-EPA0001074). Indiana, PA: XTO Energy.
- [Science Based Solutions LLC.](#) (2014). Summary of hydrogeology investigations in the Mamm Creek field area, Garfield County. Laramie, Wyoming. <http://www.garfield-county.com/oil-gas/documents/Summary-Hydrogeologic-Studies-Mamm%20Creek-Area-Feb-10-2014.pdf>
- [Senior, LA.](#) (2014). A reconnaissance spatial and temporal baseline assessment of methane and inorganic constituents in groundwater in bedrock aquifers, pike county, Pennsylvania, 201213 (pp. i-106). (2014-5117). Senior, LA. <http://pubs.usgs.gov/sir/2014/5117/support/sir2014-5117.pdf>
- [Shafer, L.](#) (2011). Water recycling and purification in the Pinedale anticline field: results from the anticline disposal project. In 2011 SPE Americas E&P health, safety, security & environmental conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/141448-MS>
- [Shaffer, DL; Arias Chavez, LH; Ben-Sasson, M; Romero-Vargas Castrillón, S; Yip, NY; Elimelech, M.](#) (2013). Desalination and reuse of high-salinity shale gas produced water: drivers, technologies, and future directions. Environ Sci Technol 47: 9569-9583.
- [Shapiro, SA; Krüger, OS; Dinske, C; Langenbruch, C.](#) (2011). Magnitudes of induced earthquakes and geometric scales of fluid-stimulated rock volumes. Geophysics 76: WC55-WC63. <http://dx.doi.org/10.1190/geo2010-0349.1>
- [Sharma, S; Bowman, L; Schroeder, K; Hammack, R.](#) (2014a). Assessing changes in gas migration pathways at a hydraulic fracturing site: Example from Greene County, Pennsylvania, USA. Appl Geochem. <http://dx.doi.org/10.1016/j.apgeochem.2014.07.018>
- [Sharma, S; Mulder, ML; Sack, A; Schroeder, K; Hammack, R.](#) (2014b). Isotope approach to assess hydrologic connections during Marcellus Shale drilling. Ground Water 52: 424433. <http://dx.doi.org/10.1111/gwat.12083>
- [Sheng, Z.](#) (2005). An aquifer storage and recovery system with reclaimed wastewater to preserve native groundwater resources in El Paso, Texas. J Environ Manage 75: 367-377. <http://dx.doi.org/10.1016/j.jenvman.2004.10.007>
- [Shires, T; Lev-On, M.](#) (2012). Characterizing pivotal sources of methane emissions from unconventional natural gas production - summary and analysis of API and ANGA survey responses. Washington, DC: American Petroleum Institute. American Natural Gas Alliance.
- [Siegel, DI; Azzolina, NA; Smith, BJ; Perry, AE; Bothun, RL.](#) (In Press) Methane concentrations in water wells unrelated to proximity to existing oil and gas wells in northeastern Pennsylvania. Environ Sci Technol. <http://dx.doi.org/10.1021/es505775c>
- [Silva, JM; Matis, H; Kostedt, WL; Watkins, V.](#) (2012). Produced water pretreatment for water recovery and salt production. (08122-36). Niskayuna, NY: Research Partnership to Secure Energy for America. [http://www.rpsea.org/media/files/project/18621900/08122-36-FR-Pretreatment Water Mgt Frac Water Reuse Salt-01-26-12.pdf](http://www.rpsea.org/media/files/project/18621900/08122-36-FR-Pretreatment%20Water%20Mgt%20Frac%20Water%20Reuse%20Salt-01-26-12.pdf)
- [Šimunek, J; Šejna, M; van Genuchten, MT.](#) (1998). The HYDRUS-1D software package for simulating the one-dimensional movement of water, heat, and multiple solutes in variably-saturated media, Version 2.0, IGWMC-TPS-70. Available online
- [Sionix](#) (Sionix Corporation). (2011). Sionix to build Bakken water treatment plant. Retrieved from [http://www.rigzone.com/news/article\\_pf.asp?a\\_id=110613](http://www.rigzone.com/news/article_pf.asp?a_id=110613)
- [Sirivedhin, T; Dallbauman, L.](#) (2004). Organic matrix in produced water from the Osage-Skiatook petroleum environmental research site, Osage county, Oklahoma. Chemosphere 57: 463-469.

- [Sjolander, SA; Clark, J; Rizzo, D; Turack, J.](#) (2011). Water facts #31: Introduction to hydrofracturing. University Park, PA: Penn State College of Agricultural Sciences - Cooperative Extension. [http://www.shale-gas-information-platform.org/fileadmin/ship/dokumente/introduction\\_to\\_hydrofracturing-2.pdf](http://www.shale-gas-information-platform.org/fileadmin/ship/dokumente/introduction_to_hydrofracturing-2.pdf)
- [Skalak, KJ; Engle, MA; Rowan, EL; Jolly, GD; Conko, KM; Benthem, AJ; Kraemer, TE.](#) (2014). Surface disposal of produced waters in western and southwestern Pennsylvania: Potential for accumulation of alkali-earth elements in sediments. *Int J Coal Geol* 126: 162-170. <http://dx.doi.org/10.1016/j.coal.2013.12.001>
- [Skjerven, T; Lunde, Ø; Perander, M; Williams, B; Farquhar, R; Sinet, J; Sæby, J; Haga, HB; Finnseth, Ø; Johnsen, S.](#) (2011). Norwegian Oil and Gas Association recommended guidelines for well integrity. (117, Revision 4). Norway: Norwegian Oil and Gas Association. <http://www.norskoljeoggass.no/Global/Retningslinjer/Boring/117%20-%20Recommended%20guidelines%20Well%20integrity%20rev4%2006.06.%2011.pdf>
- [Skoumal, RJ; Brudzinski, MR; Currie, BS.](#) (2015). Earthquakes induced by hydraulic fracturing in Poland Township, Ohio. *Seismological Society of America Bulletin* 105: 189-197. <http://dx.doi.org/10.1785/0120140168>
- [Stutz, J; Anderson, J; Broderick, R; Horner, P.](#) (2012). Key shale gas water management strategies: An economic assessment tool. Paper presented at International Conference on Health, Safety and Environment in Oil and Gas Exploration and Production, September 11-13, 2012, Perth, Australia.
- [Smolen, JJ.](#) (2006). Cased hole and production log evaluation. Tulsa, OK: PennWell Books.
- [Soeder, DJ; Kappel, WM.](#) (2009). Water resources and natural gas production from the Marcellus shale [Fact Sheet] (pp. 6). (U.S. Geological Survey, Fact Sheet 20093032). Soeder, DJ; Kappel, WM. <http://pubs.usgs.gov/fs/2009/3032/pdf/FS2009-3032.pdf>
- [Solley, WB; Pierce, RR; Perlman, HA.](#) (1998). Estimated use of water in the United States in 1995. (USGS Circular: 1200). U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/cir1200>
- [Spellman, FR.](#) (2012). Environmental impacts of hydraulic fracturing. In *Environmental impacts of hydraulic fracturing*. Boca Raton, Florida: CRC Press.
- [SRBC](#) (Susquehanna River Basin Commission). (2013). Comprehensive plan for the water resources of the Susquehanna River basin. Harrisburg, PA. <http://www.srbc.net/planning/comprehensiveplan.htm>
- [States, S; Cyprych, G; Stoner, M; Wydra, F; Kuchta, J; Monnell, J; Casson, L.](#) (2013). Marcellus Shale drilling and brominated THMs in Pittsburgh, Pa., drinking water. *J Am Water Works Assoc* 105: E432-E448. <http://dx.doi.org/10.5942/jawwa.2013.105.0093>
- [Stewart, DR.](#) (2013a). Analytical testing for hydraulic fracturing fluid water recovery and reuse. In *Summary of the technical workshop on analytical chemical methods* (pp. B6-B10). Stewart, DR. <http://www2.epa.gov/sites/production/files/documents/analytical-chemical-methods-technical-workshop-summary.pdf>
- [Stewart, DR.](#) (2013b). Treatment for beneficial use of produced water and hydraulic fracturing flowback water. Presentation presented at US EPA Technical Workshop on Wastewater Treatment and Related Modeling For Hydraulic Fracturing, April 18, 2013, Research Triangle Park, NC.
- [Stinger Wellhead Protection, I. nc.](#) (2010). Stinger Wellhead Protection. Houston, TX: Stinger Wellhead Protection, Inc. [http://etdevelopers.com/design-preview/STS/product-catalog/STS\\_Product\\_Catalog\\_2010-SWP.pdf](http://etdevelopers.com/design-preview/STS/product-catalog/STS_Product_Catalog_2010-SWP.pdf)
- [STO](#) (Statoil). (2013). Shale facts: drilling and hydraulic fracturing, how it's done, responsibly. (Global Version, April 2013). Stavanger, Norway. [http://www.statoil.com/no/OurOperations/ExplorationProd/ShaleGas/FactSheets/Downloads/Shale\\_DrillingHydraulicFracturing.pdf](http://www.statoil.com/no/OurOperations/ExplorationProd/ShaleGas/FactSheets/Downloads/Shale_DrillingHydraulicFracturing.pdf)

- [Stringfellow, WT; Domen, JK; Camarillo, MK; Sandelin, WL; Borglin, S.](#) (2014). Physical, chemical, and biological characteristics of compounds used in hydraulic fracturing. *J Hazard Mater* 275: 37-54. <http://dx.doi.org/10.1016/j.jhazmat.2014.04.040>
- [Strong, L; Gould, T; Kasinkas, L; Sadowsky, M; Aksan, A; Wackett, L.](#) (2013). Biodegradation in waters from hydraulic fracturing: chemistry, microbiology, and engineering. *J Environ Eng* 140: B4013001. [http://dx.doi.org/10.1061/\(ASCE\)EE.1943-7870.0000792](http://dx.doi.org/10.1061/(ASCE)EE.1943-7870.0000792)
- [STRONGER](#) (State Review of Oil and Natural Gas Environmental Regulations). (2011a). Louisiana hydraulic fracturing state review. Oklahoma City, OK. <http://www.strongerinc.org/sites/all/themes/stronger02/downloads/Final%20Louisiana%20HF%20Review%203-2011.pdf>
- [STRONGER](#) (State Review of Oil and Natural Gas Environmental Regulations). (2011b). Ohio hydraulic fracturing state review. Oklahoma City, OK. <http://www.strongerinc.org/sites/all/themes/stronger02/downloads/Final%20Report%20of%202011%20OH%20HF%20Review.pdf>
- [STRONGER](#) (State Review of Oil and Natural Gas Environmental Regulations). (2012). Arkansas hydraulic fracturing state review. Oklahoma City, OK. [http://www.aogc.state.ar.us/notices/AR\\_HFR\\_FINAL.pdf](http://www.aogc.state.ar.us/notices/AR_HFR_FINAL.pdf)
- [Sturchio, NC; Banner, JL; Binz, CM; Heraty, LB; Musgrove, M.](#) (2001). Radium geochemistry of ground waters in Paleozoic carbonate aquifers, midcontinent, USA. *Appl Geochem* 16: 109-122.
- [Sumi, L.](#) (2004). Pit pollution: Background on the issues, with a New Mexico case study. Washington, DC: Earthworks: Oil and Gas Accountability Project. <http://www.earthworksaction.org/files/publications/PitReport.pdf>
- [Sun, M; Lowry, GV; Gregory, KB.](#) (2013). Selective oxidation of bromide in wastewater brines from hydraulic fracturing. *Water Res* 47: 3723-3731. <http://dx.doi.org/10.1016/j.watres.2013.04.041>
- [Swann, C; Matthews, J; Ericksen, R; Kuszaul, J.](#) (2004). Evaluations of radionuclides of uranium, thorium, and radium with produced fluids, precipitates, and sludges from oil, gas, and oilfield brine injections wells. (DE-FG26-02NT 15227). Washington, D.C.: U.S. Department of Energy. [http://www.olemiss.edu/depts/mmri/programs/norm\\_final.pdf](http://www.olemiss.edu/depts/mmri/programs/norm_final.pdf)
- [Swanson, VE.](#) (1955). Uranium in marine black shales of the United States. In Contributions to the geology of uranium and thorium by the United States Geological Survey and Atomic Energy Commission for the United Nations International Conference on Peaceful Uses of Atomic Energy, Geneva, Switzerland, 1955 (pp. 451-456). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/pp/0300/report.pdf>
- [SWN](#) (Southwestern Energy). (2011). Frac fluid whats in it? Houston, TX. [http://www.swn.com/operations/documents/frac\\_fluid\\_fact\\_sheet.pdf](http://www.swn.com/operations/documents/frac_fluid_fact_sheet.pdf)
- [SWN](#) (Southwestern Energy). (2014). Field Site Visit at Southwestern Energy. Available online
- [Syed, T; Cutler, T.](#) (2010). Well integrity technical and regulatory considerations for CO2 injection wells. In 2010 SPE international conference on health, safety & environment in oil and gas exploration and production. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/125839-MS>
- [Taylor, A.](#) (2012). Watering the boom in Oklahoma: supplies, demands, and neighbors. Presentation presented at 2012 Kansas Water Issues Forums, February 29-March 1, 2012, Wichita and Hays, Kansas.
- [Taylor, RS; Lestz, RS; Loree, D; Funkhouser, GP; Fyten, G; Attaway, D; Watkins, H.](#) (2006). Optimized CO2 miscible hydrocarbon fracturing fluids. Calgary, Alberta, Canada: Petroleum Society of Canada. <http://dx.doi.org/10.2118/2006-168>
- [The Royal Society and the Royal Academy of Engineering.](#) (2012). Shale gas extraction in the UK: A review of hydraulic fracturing. London. [http://www.raeng.org.uk/news/publications/list/reports/Shale\\_Gas.pdf](http://www.raeng.org.uk/news/publications/list/reports/Shale_Gas.pdf)

- [Thompson, AM.](#) (2010) Induced fracture detection in the Barnett Shale, Ft. Worth Basin, Texas. (Master's Thesis). University of Oklahoma, Norman, OK.
- [Thordsen, JJ.; Kharaka, YK; Ambats, G; Kakouros, E; Abbott, MM.](#) (2007). Geochemical data from produced water contamination investigations: Osage-Skiatook Petroleum Environmental Research (OSPER) sites, Osage County, Oklahoma. (Open-File Report 2007-1055). Reston, VA: United States Geological Survey.
- [Tidwell, VC; Kobos, PH; Malczynski, L, enA; Klise, G; Castillo, CR.](#) (2012). Exploring the water-thermoelectric power nexus. *J Water Resour Plann Manag* 138: 491-501. [http://dx.doi.org/10.1061/\(ASCE\)WR.1943-5452.0000222](http://dx.doi.org/10.1061/(ASCE)WR.1943-5452.0000222)
- [Tidwell, VC; Zemlick, K; Klise, G.](#) (2013). Nationwide water availability data for energy-water modeling. Albuquerque, New Mexico: Sandia National Laboratories. <http://prod.sandia.gov/techlib/access-control.cgi/2013/139968.pdf>
- [Tiemann, M; Folger, P; Carter, NT.](#) (2014). Shale energy technology assessment: Current and emerging water practices. Washington, DC: Congressional Research Service. <http://nationalaglawcenter.org/wp-content/uploads//assets/crs/R43635.pdf>
- [Tilley, BJ; Muehlenbachs, K.](#) (2012). Fingerprinting of gas contaminating groundwater and soil in a petroliferous region, Alberta, Canada. In RD Morrison; G O'Sullivan (Eds.), *Environmental forensics: Proceedings of the 211 INEF Conference* (pp. 115-125). London: RSC Publishing. <http://dx.doi.org/10.1039/9781849734967-00115>
- [TIPRO](#) (Texas Independent Producers and Royalty Owners Association). (2012). Bradenhead pressure management. Austin, TX. [http://www.tipro.org/UserFiles/BHP\\_Guidance\\_Final\\_071812.pdf](http://www.tipro.org/UserFiles/BHP_Guidance_Final_071812.pdf)
- [Titler, RV; Curry, P.](#) (2011). Chemical analysis of major constituents and trace contaminants of rock salt. Harrisburg, PA: Pennsylvania Department of Environmental Protection. <http://files.dep.state.pa.us/water/Wastewater%20Management/WastewaterPortalFiles/Rock%20Salt%20Paper%20final%20052711.pdf>
- [Tudor, EH; Nevison, GW; Allen, S; Pike, B.](#) (2009). Case study of a novel hydraulic fracturing method that maximizes effective hydraulic fracture length. In 2009 SPE annual technical conference & exhibition. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/124480-MS>
- [TWDB](#) (Texas Water Development Board). (2012). Water for Texas 2012 state water plan. Austin, TX. <http://www.twdb.state.tx.us/waterplanning/swp/2012/index.asp>
- [Tyrrell, P.](#) (2012). Water needs for oil & gas well drilling and fracturing. Presentation presented at 85th Annual AWSE Fall Conference, September 23-26, 2012, Omaha, Nebraska.
- [Tyrrell, P.](#) (2013). Wyoming update: water rights for hydraulic fracturing. Presentation presented at Summer 172nd Western States Water Council Meeting, June 24-26, 2013, Casper, Wyoming.
- [U.S. Army Corps of Engineers.](#) (2011). Final Garrison Dam/Lake Sakakawea project, North Dakota surplus water report. Volume 1. Omaha, NE: The U.S. Army Corps of Engineers, Omaha District. <http://www.swc.nd.gov/4dlink9/4dcgi/GetSubContentPDF/PB-2811/Garrison%20Dam%20Lake%20Sakakawea%20Surplus%20Water%20Report.pdf>
- [U.S. Census Bureau.](#) (2010). Special release - census blocks with population and housing unit counts, 2010 TIGER/Line shapefiles [Computer Program]. Suitland, MD: U.S. Census Bureau, Geography Division. Retrieved from <https://www.census.gov/geo/maps-data/data/tiger-line.html>
- [U.S. Census Bureau.](#) (2013a). Annual estimates of the resident population: April 1, 2010 to July 1, 2013. Suitland, MD: U.S. Census Bureau, Population Division. <http://factfinder2.census.gov/faces/tableservices/jsf/pages/productview.xhtml?src=bkmk>

- [U.S. Census Bureau](https://www.census.gov/geo/maps-data/data/cbf/cbf_msa.html). (2013b). Cartographic boundary shapefiles metropolitan and micropolitan statistical areas and related statistical areas (Combined statistical areas, 500k). Suitland, MD. Retrieved from [https://www.census.gov/geo/maps-data/data/cbf/cbf\\_msa.html](https://www.census.gov/geo/maps-data/data/cbf/cbf_msa.html)
- [U.S. Census Bureau](http://www.census.gov/population/metro/). (2013c). Metropolitan and micropolitan statistical areas main. Available online at <http://www.census.gov/population/metro/> (accessed January 12, 2015).
- [U.S. Census Bureau](http://factfinder.census.gov/faces/nav/jsf/pages/index.xhtml). (2014). American FactFinder. Available online at <http://factfinder.census.gov/faces/nav/jsf/pages/index.xhtml>
- [U.S. Department of Justice](http://www.justice.gov/usao/ohn/news/2014/05auglupo.html). (2014). Company owner sentenced to more than two years in prison for dumping fracking waste in Mahoning River tributary. Available online at <http://www.justice.gov/usao/ohn/news/2014/05auglupo.html> (accessed March 4, 2015).
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (1991). Manual of individual and non-public water supply systems [EPA Report]. (EPA 570/9-91-004). Washington, D.C.
- [U.S. EPA](http://www.epa.gov/oswer/riskassessment/datause/parta.htm) (U.S. Environmental Protection Agency). (1992). Guidance for data useability in risk assessment (part A) - final. (Publication 9285.7-09A). Washington, D.C. <http://www.epa.gov/oswer/riskassessment/datause/parta.htm>
- [U.S. EPA](http://www.epa.gov/superfund/health/conmedia/soil/pdfs/part_2.pdf) (U.S. Environmental Protection Agency). (1996). Soil screening guidance: technical background document, part 2 [EPA Report] (2nd ed.). (EPA/540/R-95/128). Washington, DC: U.S. Environmental Protection Agency, Office of Solid Waste and Emergency Response. [http://www.epa.gov/superfund/health/conmedia/soil/pdfs/part\\_2.pdf](http://www.epa.gov/superfund/health/conmedia/soil/pdfs/part_2.pdf)
- [U.S. EPA](http://www4.nau.edu/itep/waste/hazsubmap/docs/OilSpill/EPAUnderstandingOilSpillsAndOilSpillResponse1999.pdf) (U.S. Environmental Protection Agency). (1999). Understanding oil spills and oil spill response [EPA Report]. (EPA 540-K-99-007). Washington, D.C.: U.S. Environmental Protection Agency, Office of Emergency and Remedial Response. <http://www4.nau.edu/itep/waste/hazsubmap/docs/OilSpill/EPAUnderstandingOilSpillsAndOilSpillResponse1999.pdf>
- [U.S. EPA](http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=51717) (U.S. Environmental Protection Agency). (2002a). A review of the reference dose and reference concentration processes. (EPA/630/P-02/002F). Washington, DC: U.S. Environmental Protection Agency, Risk Assessment Forum. <http://cfpub.epa.gov/ncea/cfm/recordisplay.cfm?deid=51717>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2002b). Toxicological review of benzene (noncancerous effects) [EPA Report]. (EPA/635/R-02/001F). Washington, DC.
- [U.S. EPA](http://www.epa.gov/spc/assess.htm) (U.S. Environmental Protection Agency). (2003). A summary of general assessment factors for evaluating the quality of scientific and technical information [EPA Report]. (EPA/100/B-03/001). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://www.epa.gov/spc/assess.htm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2004). Evaluation of impacts to underground sources of drinking water by hydraulic fracturing of coalbed methane reservoirs. (EPA/816/R-04/003). Washington, DC: U.S. Environmental Protection Agency, Office of Solid Waste.
- [U.S. EPA](http://www.epa.gov/oppt/sf/pubs/p2frame-june05a2.pdf) (U.S. Environmental Protection Agency). (2005). Pollution prevention (P2) framework [EPA Report]. (EPA-748-B-04-001). Washington, DC: Office of Pollution Prevention and Toxics. <http://www.epa.gov/oppt/sf/pubs/p2frame-june05a2.pdf>
- [U.S. EPA](http://water.epa.gov/lawsregs/rulesregs/sdwa/stage2/) (U.S. Environmental Protection Agency). (2006). National Primary Drinking Water Regulations: Stage 2 Disinfectants and Disinfection Byproducts Rule. <http://water.epa.gov/lawsregs/rulesregs/sdwa/stage2/>
- [U.S. EPA](http://nepis.epa.gov/Adobe/PDF/60000N4K.pdf) (U.S. Environmental Protection Agency). (2007). Monitored natural attenuation of inorganic contaminants in ground water: volume 1 technical basis for assessment [EPA Report]. (EPA/600/R-07/139). Washington, D.C. <http://nepis.epa.gov/Adobe/PDF/60000N4K.pdf>



- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2010). Toxicological review of acrylamide (CAS No. 79-06-1) in support of summary information on the Integrated Risk Information System (IRIS) [EPA Report]. (EPA/635/R-07/008F). Washington, DC.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011a). Design for the Environment program alternatives assessment criteria for hazard evaluation (version 2.0). Washington, D.C.  
<http://www2.epa.gov/saferchoice/alternatives-assessment-criteria-hazard-evaluation>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011b). Ground water cleanup at Superfund Sites [EPA Report]. (EPA 540-K-96 008). Washington, DC: U. S. Environmental Protection Agency, Office Water.  
<http://www.epa.gov/superfund/health/conmedia/gwdocs/brochure.htm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011c). Plan to study the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA/600/R-11/122). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development.  
<http://www2.epa.gov/hfstudy/plan-study-potential-impacts-hydraulic-fracturing-drinking-water-resources-epa600r-11122>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011d). Terminology services (TS): Vocabulary catalog - IRIS glossary. Available online at  
[http://ofmpub.epa.gov/sor\\_internet/registry/termreg/searchandretrieve/glossariesandkeywordlists/search.do?details=&glossaryName=IRIS%20Glossary](http://ofmpub.epa.gov/sor_internet/registry/termreg/searchandretrieve/glossariesandkeywordlists/search.do?details=&glossaryName=IRIS%20Glossary) (accessed May 21, 2015).
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012a). 5.2 Dissolved oxygen and biochemical oxygen demand. In Water Monitoring and Assessment. <http://water.epa.gov/type/rsl/monitoring/vms52.cfm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012b). Estimation Programs Interface Suite for Microsoft Windows (EPI Suite) [Computer Program]. Washington DC: US Environmental Protection Agency. Retrieved from <http://www.epa.gov/oppt/exposure/pubs/episuite.htm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012c). Geologic sequestration of carbon dioxide: underground injection control (UIC) program class VI well construction guidance [EPA Report]. (EPA 816-R-11-020). Washington, D.C.  
<http://water.epa.gov/type/groundwater/uic/class6/upload/epa816r11020.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012d). Oil and natural gas sector: standards of performance for crude oil and natural gas production, transmission, and distribution. Background supplemental technical support document for the final new source performance standards. Washington, D.C. <http://www.epa.gov/airquality/oilandgas/pdfs/20120418tsd.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012e). Public drinking water systems: facts and figures. Washington, DC: U.S. Environmental Protection Agency, Office of Water.  
<http://water.epa.gov/infrastructure/drinkingwater/pws/factoids.cfm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012f). Study of the potential impacts of hydraulic fracturing on drinking water resources: Progress report. (EPA/601/R-12/011). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development.  
<http://nepis.epa.gov/exe/ZyPURL.cgi?Dockey=P100FH8M.txt>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013a). Data received from oil and gas exploration and production companies, including hydraulic fracturing service companies 2011 to 2013. Non-confidential business information source documents are located in Federal Docket ID: EPA-HQ-ORD2010-0674. Available at <http://www.regulations.gov>.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013b). Drinking water and ground water statistics, fiscal year 2011. Washington, DC: U.S. Environmental Protection Agency, Office of Water.  
<http://water.epa.gov/scitech/datait/databases/drink/sdwisfed/upload/epa816r13003.pdf>



- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013c). Inventory of U.S. greenhouse gas emissions and sinks: 1990-2011. Washington, DC: U.S. Environmental Protection Agency, Office of Atmospheric Programs. <http://www.epa.gov/climatechange/Downloads/ghgemissions/US-GHG-Inventory-2013-Main-Text.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013d). Supplemental programmatic quality assurance project plan for work assignment 5-83 technical support for the hydraulic fracturing drinking water assessment. Washington, D.C. <http://www2.epa.gov/sites/production/files/documents/literature-review-qapp1.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013e). SW-846 on-line. Available online at <http://www.epa.gov/epawaste/hazard/testmethods/sw846/online/index.htm> (accessed April 8, 2015).
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013f). Toxicological review of 1,4-Dioxane (with inhalation update) (CAS No. 123-91-1) in support of summary information on the Integrated Risk Information System (IRIS) [EPA Report]. (EPA-635/R-11/003-F). Washington, DC.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013g). XTO Energy, Inc. Settlement. Available online at <http://www2.epa.gov/enforcement/xto-energy-inc-settlement>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014a). Alternatives assessment for the flame retardant decabromodiphenyl ether (DecaBDE). Washington, D.C. <http://www2.epa.gov/saferchoice/partnership-evaluate-flame-retardant-alternatives-decabde-publications>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014b). Development of rapid radiochemical method for gross alpha and gross beta activity concentration in flowback and produced waters from hydraulic fracturing operations [EPA Report]. (EPA/600/R-14/107). Washington, D.C. <http://www2.epa.gov/hfstudy/development-rapid-radiochemical-method-gross-alpha-and-gross-beta-activity-concentration>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014c). Drinking water contaminants. Available online at <http://water.epa.gov/drink/contaminants/>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014d). Flame retardant alternatives for hexabromocyclododecane (HBCD) [EPA Report]. (EPA/740/R-14/001). Washington, D.C. <http://www2.epa.gov/saferchoice/partnership-evaluate-flame-retardant-alternatives-hbcd-publications>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014e). Greenhouse gas reporting program, Subpart W - Petroleum and natural gas systems. Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014f). Minimizing and managing potential impacts of injection-induced seismicity from class II disposal wells: Practical approaches [EPA Report]. Washington, D.C. <http://www.epa.gov/r5water/uic/ntwg/pdfs/induced-seismicity-201502.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014g). Quality assurance project plan - Revision no. 2: Data and literature evaluation for the EPA's study of the potential impacts of hydraulic fracturing (HF) on drinking water resources [EPA Report]. Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014h). Quality management plan- Revision no. 2: Study of the potential impacts of hydraulic fracturing for oil and gas on drinking water resources [EPA Report]. Washington, D.C. <http://www2.epa.gov/hfstudy/quality-management-plan-revision-no-2-study-potential-impacts-hydraulic-fracturing-oil-and>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014i). Retrospective case study in northeastern Pennsylvania: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/088). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014j). Safe drinking water information system (SDWIS). Data obtained from the Office of Water [Database]. Washington, D.C.: Office of Water. Retrieved from <http://water.epa.gov/scitech/datait/databases/drink/sdwisfed/index.cfm>

- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014k). The verification of a method for detecting and quantifying diethylene glycol, triethylene glycol, tetraethylene glycol, 2-butoxyethanol and 2-methoxyethanol in ground and surface waters [EPA Report]. (EPA/600/R-14/008). Washington, D.C. <http://www2.epa.gov/hfstudy/verification-method-detecting-and-quantifying-diethylene-glycol-triethylene-glycol>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015b). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Project database [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocus-1-disclosures>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015c). Case study analysis of the impacts of water acquisition for hydraulic fracturing on local water availability [EPA Report]. (EPA/600/R-14/179). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015d). DMR spreadsheet Pennsylvania wastewater treatment plants per Region 3 Information Request. Data provided by request. Washington, D.C.: Region 3, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015e). Effluent data from Pennsylvania wastewater treatment plants per Region 3 Information Request. Data provided by request. Washington, D.C.: Region 3, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015f). EPA Enforcement and Compliance History. Online: Effluent Charts: SEECO-Judsonia Water Reuse Recycling Facility. Available online at <http://echo.epa.gov/effluent-charts#AR0052051>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015g). Inventory of U.S. greenhouse gas emissions and sinks: 1990-2013. (EPA 430-R-15-004). Washington, D.C. <http://www.epa.gov/climatechange/Downloads/ghgemissions/US-GHG-Inventory-2015-Main-Text.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015h). Key documents about mid-Atlantic oil and gas extraction. Available online at [http://www.epa.gov/region3/marcellus\\_shale/#aoinfoww](http://www.epa.gov/region3/marcellus_shale/#aoinfoww) (accessed May 7, 2015).
- [U.S. EPA. National primary drinking water regulations public notification rule and consumer confidence report rule health effects language.](#) (parts 141.201, and 141.151), (U.S. Government Publishing Office 2015i). <http://www.ecfr.gov/cgi-bin/text-idx?SID=4d25ec04bc44e54b1efdf307855f3185&node=pt40.23.141&rgn=div5>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015j). Retrospective case study in Killdeer, North Dakota: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/103). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015k). Retrospective case study in southwestern Pennsylvania: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/084). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015l). Retrospective case study in the Raton Basin, Colorado: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/091). Washington, D.C.

- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015m). Retrospective case study in Wise County, Texas: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/090). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015n). Review of state and industry spill data: characterization of hydraulic fracturing-related spills [EPA Report]. (EPA/601/R-14/001). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015o). Review of well operator files for hydraulically fractured oil and gas production wells: Well design and construction [EPA Report]. (EPA/601/R-14/002). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015p). Sources contributing bromide and inorganic species to drinking water intakes on the Allegheny river in western Pennsylvania [EPA Report]. (EPA/600/R-14/430). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015q). Technical development document for proposed effluent limitation guidelines and standards for oil and gas extraction. (EPA-821-R-15-003). Washington, D.C. <http://water.epa.gov/scitech/wastetech/guide/oilandgas/unconv.cfm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015r). WaterSense: water supply in the U.S. Available online at <http://www.epa.gov/WaterSense/pubs/supply.html> (accessed January 12, 2015).
- [U.S. GAO](#) (U.S. Government Accountability Office). (2012). Energy-water nexus: Information on the quantity, quality, and management of water produced during oil and gas production. (GAO-12-156). Washington, D.C. <http://www.gao.gov/products/GAO-12-156>
- [U.S. GAO](#) (U.S. Government Accountability Office). (2014). Freshwater: Supply concerns continue, and uncertainties complicate planning. Report to Congressional requesters. (GAO-14-430). Washington, DC: U.S. Government Accountability Office (GAO). <http://www.gao.gov/assets/670/663343.pdf>
- [U.S. Global Change Research Program](#). (2009). Global climate change impacts in the United States. New York, NY: Cambridge University Press. <http://downloads.globalchange.gov/usimpacts/pdfs/climate-impacts-report.pdf>
- [Upstream Pumping](#). (2015). Upstream pumping: Wellhead technology and services. Available online at <http://upstreampumping.com/>
- [URS Corporation](#). (2011). Water-related issues associated with gas production in the Marcellus shale: Additives use flowback quality and quantities regulations on-site treatment green technologies alternate water sources water well-testing. (NYSERDA Contract PO Number 10666).
- [USGS](#) (U.S. Geological Survey). (2000). Coal-bed methane: Potential and concerns [Fact Sheet]. (Fact Sheet 123-00). <http://pubs.usgs.gov/fs/fs123-00/fs123-00.pdf>
- [USGS](#) (U.S. Geological Survey). (2002). Natural gas production in the United States [Fact Sheet]. (USGS Fact Sheet FS-113-01). Denver, CO.
- [USGS](#) (U.S. Geological Survey). (2003). Ground-Water depletion across the nation. <http://pubs.usgs.gov/fs/fs-103-03/>
- [USGS](#) (U.S. Geological Survey). (2006). Produced Water Database [Database]: U.S. Geological Survey :: USGS. Retrieved from <http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsofEnergyProductionandUse/ProducedWaters.aspx#3822110-overview>
- [USGS](#) (U.S. Geological Survey). (2007). Water-quality assessment of the high plains aquifer, 19992004. (Professional Paper 1749). Reston, VA. <http://pubs.usgs.gov/pp/1749/downloads/pdf/P1749front.pdf>

- [USGS](http://pubs.usgs.gov/circ/1337/) (U.S. Geological Survey). (2009). Water quality in the high plains aquifer, Colorado, Kansas, Nebraska, New Mexico, Oklahoma, South Dakota, Texas, and Wyoming, 19992004. Reston, VA. <http://pubs.usgs.gov/circ/1337/>
- [USGS](http://water.usgs.gov/nawqa/vocs/national_assessment/report/glossary.html) (U.S. Geological Survey). (2010). Volatile organic compounds in the nation's ground water and drinking-water supply wells: Supporting information. Glossary. Available online at [http://water.usgs.gov/nawqa/vocs/national\\_assessment/report/glossary.html](http://water.usgs.gov/nawqa/vocs/national_assessment/report/glossary.html)
- [USGS](http://pubs.usgs.gov/dds/dds-069/dds-069-z/) (U.S. Geological Survey). (2013a). Map of assessed shale gas in the United States, 2012. <http://pubs.usgs.gov/dds/dds-069/dds-069-z/>
- [USGS](http://viewer.nationalmap.gov/viewer/) (U.S. Geological Survey). (2013b). National hydrography dataset: High-resolution flowline data: The national map. Retrieved from <http://viewer.nationalmap.gov/viewer/>
- [USGS](http://waterdata.usgs.gov/nwis) (U.S. Geological Survey). (2013c). National Water Information System (NWIS) [Database]. Retrieved from <http://waterdata.usgs.gov/nwis>
- [USGS](http://energy.usgs.gov/GeneralInfo/HelpfulResources/EnergyGlossary.aspx#t) (U.S. Geological Survey). (2014a). Energy glossary and acronym list. Available online at <http://energy.usgs.gov/GeneralInfo/HelpfulResources/EnergyGlossary.aspx#t>
- [USGS](http://water.usgs.gov/watuse/data/2010/) (U.S. Geological Survey). (2014b). Estimated use of water in the United States, county-level data for 2010. Reston, VA. <http://water.usgs.gov/watuse/data/2010/>
- [USGS](http://dx.doi.org/10.3133/cir1360) (U.S. Geological Survey). (2014c). The quality of our nations waters water quality in principal aquifers of the United States, 19912010. (Circular 1360). Reston, VA. <http://dx.doi.org/10.3133/cir1360>
- [USGS](http://pubs.usgs.gov/sir/2013/5179/) (U.S. Geological Survey). (2014d). Trends in major-ion constituents and properties for selected sampling sites in the tongue and powder river watersheds, Montana and Wyoming, based on data collected during water years 19802010. (Scientific Investigations Report 20135179). Reston, VA. <http://pubs.usgs.gov/sir/2013/5179/>
- [USGS](http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsofEnergyProductionandUse/ProducedWaters.aspx#3822349-data) (U.S. Geological Survey). (2014e). U.S. Geological Survey national produced waters geochemical database v2.0 (PROVISIONAL). Available online at <http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsofEnergyProductionandUse/ProducedWaters.aspx#3822349-data>
- [USGS](http://dx.doi.org/10.3133/fs20143104) (U.S. Geological Survey). (2014f). USGS investigations of water produced during hydrocarbon reservoir development [Fact Sheet]. Reston, VA. <http://dx.doi.org/10.3133/fs20143104>
- [USGS](http://waterwatch.usgs.gov/) (U.S. Geological Survey). (2014g). WaterWatch. Available online at <http://waterwatch.usgs.gov/>
- [USGS](http://dx.doi.org/10.3133/sir20145184) (U.S. Geological Survey). (2014h). Withdrawal and consumption of water by thermoelectric power plants in the United States, 2010. (Scientific Investigations Report 20145184). Reston, VA. <http://dx.doi.org/10.3133/sir20145184>
- [USGS](http://dx.doi.org/10.3133/sir20145131) (U.S. Geological Survey). (2015). Trends in hydraulic fracturing distributions and treatment fluids, additives, proppants, and water volumes applied to wells drilled in the United States from 1947 through 2010 data analysis and comparison to the literature. (U.S. Geological Survey Scientific Investigations Report 20145131). Reston, VA. <http://dx.doi.org/10.3133/sir20145131>
- [UWS](#) (Universal Well Services). (2008). Environmental response plan for field operations. (PATT-EPA-0001060). Meadville, PA: Universal Well Services, Inc.
- [Vaidyanathan, G.](http://www.eenews.net/energywire/stories/1059985587) (2013a). Hydraulic fracturing: when 2 wells meet, spills can often follow. Available online at <http://www.eenews.net/energywire/stories/1059985587> (accessed September 2, 2014).
- [Vaidyanathan, G.](#) (2013b). XTO comes out swinging against 'unwarranted' criminal charges in Pa. E&E News 0.
- [Vaidyanathan, G.](#) (2014). Email communications between Gayathri Vaidyanathan and Ken Klewicki regarding the New Mexico Oil Conservation Division District 3 Well Communication Data. Available online

- [Valko, PP.](#) (2009). Assigning value to stimulation in the Barnett Shale: A simultaneous analysis of 7000 plus production histories and well completion records. Paper presented at SPE Hydraulic Fracturing Technology Conference, January 19-21, 2009, The Woodlands, TX.
- [van Vliet, MTH; Zwolsman, JJG.](#) (2008). Impact of summer droughts on the water quality of the Meuse river. *J Hydrol* 353: 1-17. <http://dx.doi.org/10.1016/j.jhydrol.2008.01.001>
- [Van Voast, WA.](#) (2003). Geochemical signature of formation waters associated with coalbed methane. *AAPG Bulletin* 87: 667-676.
- [Veil, JA.](#) (2011). Water management practices used by Fayetteville shale gas producers. (ANL/EVS/R-11/5). Washington, DC: U.S. Department of Energy, National Energy Technology Laboratory. <http://www.ipd.anl.gov/anlpubs/2011/06/70192.pdf>
- [Veil, JA; Puder, MG; Elcock, D; Redweik, RJ.](#) (2004). A white paper describing produced water from production of crude oil, natural gas, and coalbed methane. Lemont, IL: Argonne National Laboratory.
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A.](#) (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. *Environ Sci Technol* 48: 36-52. <http://dx.doi.org/10.1021/es405118y>
- [Venkatapathy, R; Moudgal, CJ; Bruce, RM.](#) (2004). Assessment of the oral rat chronic lowest observed adverse effect level model in TOPKAT, a QSAR software package for toxicity prediction. *J chem inf comput sci* 44: 1623-1629. <http://dx.doi.org/10.1021/ci049903s>
- [Verdegem, MCJ; Bosma, RH.](#) (2009). Water withdrawal for brackish and inland aquaculture, and options to produce more fish in ponds with present water use. *Water Policy* 11: 52-68. <http://dx.doi.org/10.2166/wp.2009.003>
- [Vidas, H; Hugman, B.](#) (2008). Availability, economics, and production potential of North American unconventional natural gas supplies. (F-2008-03). Washington, DC: The INGAA Foundation, Inc. <http://www.ingaa.org/File.aspx?id=7878>
- [Vidic, RD; Brantley, SL; Vandenbossche, JM; Yoxheimer, D; Abad, JD.](#) (2013). Impact of shale gas development on regional water quality [Review]. *Science* 340: 1235009. <http://dx.doi.org/10.1126/science.1235009>
- [Vincent, M.](#) (2011). Restimulation of unconventional reservoirs: when are refracs beneficial? *Journal of Canadian Petroleum Technology* 50: 36-52. <http://dx.doi.org/10.2118/136757-PA>
- [Vine, JD; Tourtelot, EB.](#) (1970). Geochemistry of black shale deposits; A summary report. *Econ Geol* 65: 253-272. <http://dx.doi.org/10.2113/gsecongeo.65.3.253>
- [Vittitow, JG, Sr.](#) (2010). Well control incident analysis, EOG Resources Inc., Punxautawney Hunting Club 36H, Clearfield County, Pennsylvania. Bedrock Engineering. [http://www.pahouse.com/EnvResources/documents/BEDROCK\\_ENGINEERING\\_PHC\\_36H\\_Incident\\_Report\\_Final.pdf](http://www.pahouse.com/EnvResources/documents/BEDROCK_ENGINEERING_PHC_36H_Incident_Report_Final.pdf)
- [Volz, CD; Ferrar, K; Michanowicz, D; Christen, C; Kearney, S; Kelso, M; Malone, S.](#) (2011). Contaminant Characterization of Effluent from Pennsylvania Brine Treatment Inc., Josephine Facility Being Released into Blacklick Creek, Indiana County, Pennsylvania: Implications for Disposal of Oil and Gas Flowback Fluids from Brine Treatment Plants [Standard]. Volz, CD; Ferrar, K; Michanowicz, D; Christen, C; Kearney, S; Kelso, M; Malone, S. <http://www2.epa.gov/hfstudy/contaminant-characterization-effluent-pennsylvania-brine-treatment-inc-josephine-facility>
- [Vulgamore, TB; Clawson, TD; Pope, CD; Wolhart, SL; Mayerhofer, MJ; Machovoe, SR; Waltman, CK.](#) (2007). Applying hydraulic fracture diagnostics to optimize stimulations in the Woodford Shale. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/110029-MS>
- [Waldron, P.](#) (2014). In search of greener fracking for natural gas. Available online at <http://www.insidescience.org/content/search-greener-fracking-natural-gas/1791>



- [Walsh, JM.](#) (2013). Water management for hydraulic fracturing in unconventional resources Part 1. Oil and Gas Facilities 2.
- [Walter, GR; Benke, RR; Pickett, DA.](#) (2012). Effect of biogas generation on radon emissions from landfills receiving radium-bearing waste from shale gas development. J Air Waste Manag Assoc 62: 1040-1049. <http://dx.doi.org/10.1080/10962247.2012.696084>
- [Wang, W; Dahi Taleghani, A.](#) (2014). Cement sheath integrity during hydraulic fracturing: an integrated modeling approach. In 2014 SPE hydraulic fracturing technology conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168642-MS>
- [Wang, Z; Krupnick, A.](#) (2013). A retrospective review of shale gas development in the United States. What led to the boom? (RFF DP 13-12). Washington, DC: Resources for the Future. <http://www.rff.org/RFF/documents/RFF-DP-13-12.pdf>
- [Warner, NR; Christie, CA; Jackson, RB; Vengosh, A.](#) (2013a). Impacts of shale gas wastewater disposal on water quality in western Pennsylvania. Environ Sci Technol 47: 11849-11857. <http://dx.doi.org/10.1021/es402165b>
- [Warner, NR; Jackson, RB; Darrah, TH; Osborn, SG; Down, A; Zhao, K; White, A; Vengosh, A.](#) (2012). Geochemical evidence for possible natural migration of Marcellus Formation brine to shallow aquifers in Pennsylvania. PNAS 109: 11961-11966. <http://dx.doi.org/10.1073/pnas.1121181109>
- [Warner, NR; Kresse, TM; Hays, PD; Down, A; Karr, JD; Jackson, RB; Vengosh, A.](#) (2013b). Geochemical and isotopic variations in shallow groundwater in areas of the Fayetteville Shale development, north-central Arkansas. Appl Geochem 35: 207-220.
- [Warpinski, N.](#) (2009). Microseismic monitoring: Inside and out. J Pet Tech 61: 80-85. <http://dx.doi.org/10.2118/118537-MS>
- [Water Research Foundation.](#) (2010). Assessment of inorganics accumulation in drinking water system scales and sediments. Denver, CO. <http://www.waterrf.org/PublicReportLibrary/3118.pdf>
- [Water Research Foundation.](#) (2014). Water quality impacts of extreme weather-related events. <http://www.waterrf.org/Pages/Projects.aspx?PID=4324>
- [Watson, TL; Bachu, S.](#) (2009). Evaluation of the potential for gas and CO2 leakage along wellbores. S P E Drilling & Completion 24: 115-126. <http://dx.doi.org/10.2118/106817-PA>
- [Wattenberg, EV; Bielicki, JM; Suchomel, AE; Sweet, JT; Vold, EM; Ramachandran, G.](#) (In Press) Assessment of the acute and chronic health hazards of hydraulic fracturing fluids. J Occup Environ Hyg. <http://dx.doi.org/10.1080/15459624.2015.1029612>
- [Watts, KR.](#) (2006). A Preliminary Evaluation of Vertical Separation between Production Intervals of Coalbed-Methane Wells and Water-Supply Wells in the Raton Basin, Huerfano and Las Animas Counties, Colorado, 1999-2004. 15.
- [WAWSA](#) (Western Area Water Supply Authority). (2011). Project progress report: western area water supply project: appendix N. Williston, ND. <http://www.legis.nd.gov/assembly/62-2011/docs/pdf/wr101011appendixn.pdf>
- [Weaver, JW; Xu, J; Mravik, SC.](#) (In Press) Scenario analysis of the impact on drinking water intakes from bromide in the discharge of treated oil and gas waste water. J Environ Eng.
- [Webb, CH; Nagghappan, L; Smart, G; Hoblitzell, J; Franks, R.](#) (2009). Desalination of oilfield-produced water at the San Ardo water reclamation facility, Ca. In SPE Western regional meeting 2009. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/121520-MS>
- [Weijermars, R.](#) (2014). US shale gas production outlook based on well roll-out rate scenarios. Appl Energy 124: 283-297. <http://dx.doi.org/10.1016/j.apenergy.2014.02.058>



- [Weinhold, B.](#) (2012). The future of fracking: new rules target air emissions for cleaner natural gas production. *Environ Health Perspect* 120: a272-a279. <http://dx.doi.org/10.1289/ehp.120-a272>
- [Weinstein, J.; Phillippi, M.; Walters, HG.](#) (2009). Dry-polymer blending eliminates need for hydrocarbon carrier fluids. In 2009 SPE/EPA/DOE E&P Environmental & Safety Conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/121002-MS>
- [Wendel, K.](#) (2011). Wastewater technologies critical for continued growth of Marcellus. Available online at <http://www.ogfi.com/articles/print/volume-8/issue-11/features/wastewater-technologies-critical-for.html> (accessed March 9, 2015).
- [Weng, X; Kresse, O; Cohen, C; Wu, R; Gu, H.](#) (2011). Modeling of hydraulic fracture network propagation in a naturally fractured formation. Paper presented at SPE Hydraulic Fracturing Technology Conference, January 24-26, 2011, The Woodlands, TX.
- [Wertz, J.](#) (2014). Fracking site operator faces contempt complaint after acid spill. Available online at <http://stateimpact.npr.org/oklahoma/2014/08/14/fracking-site-operator-faces-contempt-complaint-after-acid-spill/>
- [Wess, J; Ahlers, H; Dobson, S.](#) (1998). Concise International Chemical Assessment Document 10: 2-Butoxyethanol. World Health Organization. [http://www.who.int/ipcs/publications/cicad/cicad\\_10\\_revised.pdf](http://www.who.int/ipcs/publications/cicad/cicad_10_revised.pdf)
- [West Virginia DEP](#) (West Virginia Department of Environmental Protection). (2011). Memorandum of agreement from the Division of Water and Waste Management to the Division of Highway: WVDOH/WVDEP Salt brine from gas wells agreement. Available online at <http://www.dep.wv.gov/WWE/Documents/WVDOHWVDEP%20Salt%20Brine%20Agreement.pdf>
- [West Virginia DEP](#) (West Virginia Department of Environmental Protection). (2013). West Virginia water resources management plan. (Article 22-26). Charleston, WV. [http://www.dep.wv.gov/WWE/wateruse/WVWaterPlan/Documents/WV\\_WRMP.pdf](http://www.dep.wv.gov/WWE/wateruse/WVWaterPlan/Documents/WV_WRMP.pdf)
- [West Virginia DEP](#) (West Virginia Department of Environmental Protection). (2014). Personal communication: email from Jason Harmon, West Virginia DEP to Megan Fleming, U.S. EPA with attachment of WV DEP fracturing water database. Available online
- [Whitehead, PG; Wade, AJ; Butterfield, D.](#) (2009). Potential impacts of climate change on water quality and ecology in six UK rivers. 40: 113-122. <http://dx.doi.org/10.2166/nh.2009.078>
- [Whittemore, DO.](#) (2007). Fate and identification of oil-brine contamination in different hydrogeologic settings. *Appl Geochem* 22: 2099-2114. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.002>
- [Williams, JE; Taylor, LE; Low, DJ.](#) (1998). Hydrogeology and Groundwater Quality of the Glaciated Valleys of Bradford, Tioga, and Potter Counties, Pennsylvania. 98.
- [Wilson, B.](#) (2014). Geologic and baseline groundwater evidence for naturally occurring, shallowly sourced, thermogenic gas in northeastern Pennsylvania. *AAPG Bulletin* 98: 373-394. <http://dx.doi.org/10.1306/08061312218>
- [Wilson, JM; Van Briesen, JM.](#) (2013). Source water changes and energy extraction activities in the Monongahela River, 2009-2012. *Environ Sci Technol* 47: 1257512582. <http://dx.doi.org/10.1021/es402437n>
- [Wilson, JM; Vanbriesen, JM.](#) (2012). Oil and gas produced water management and surface drinking water sources in Pennsylvania. *Environmental Practice* 14: 288-300.
- [Wojtanowicz, AK.](#) (2008). Environmental control of well integrity. In ST Orszulik (Ed.), *Environmental technology in the oil industry* (pp. 53-75). Houten, Netherlands: Springer Netherlands.

- [Wolfe, D; Graham, G.](#) (2002). Water rights and beneficial use of produced water in Colorado. Denver, CO: American Water Resources Association. [http://www.gwpc.org/sites/default/files/event-sessions/Dick Wolfe PWC02\\_0.pdf](http://www.gwpc.org/sites/default/files/event-sessions/Dick%20Wolfe%20PWC02_0.pdf)
- [Wright, PR; McMahon, PB; Mueller, DK; Clark, ML.](#) (2012). Groundwater-quality and quality-control data for two monitoring wells near Pavillion, Wyoming, April and May 2012. (USGS Data Series 718). Reston, Virginia: U.S. Geological Survey. [http://pubs.usgs.gov/ds/718/DS718\\_508.pdf](http://pubs.usgs.gov/ds/718/DS718_508.pdf)
- [Wuchter, C; Banning, E; Mincer, TJ; Drenzek, NJ; Coolen, MJ.](#) (2013). Microbial diversity and methanogenic activity of Antrim Shale formation waters from recently fractured wells. FMICB 4: 1-14. <http://dx.doi.org/10.3389/fmicb.2013.00367>
- [WYOGCC](#) (Wyoming Oil and Gas Conservation Commission). (2014). Pavillion Field Well Integrity Review. Casper, Wyoming. [http://wogcc.state.wy.us/pavillionworkinggrp/PAVILLION REPORT 1082014 Final Report.pdf](http://wogcc.state.wy.us/pavillionworkinggrp/PAVILLION_REPORT_1082014_Final_Report.pdf)
- [Wyoming State Engineer's Office.](#) (2014). Groundwater control areas and advisory boards. Available online at <http://seo.wyo.gov/ground-water/groundwater-control-areas-advisory-boards>
- [Xu, B; Hill, AD; Zhu, D; Wang, L.](#) (2011). Experimental evaluation of guar fracture fluid filter cake behavior. Paper presented at SPE Hydraulic Fracturing Technology Conference, January 24-26, 2011, The Woodlands, TX.
- [Xu, P; Drewes, JE; Heil, D.](#) (2008). Beneficial use of co-produced water through membrane treatment: Technical-economic assessment. Desalination 225: 139-155. <http://dx.doi.org/10.1016/j.desal.2007.04.093>
- [Yang, Y; Robart, CJ; Ruegamer, M.](#) (2013). Analysis of U.S. Hydraulic Fracturing Design Trends. SPE Hydraulic Fracturing Technology Conference, The Woodlands, Texas, USA.
- [Yeager, RR; Bailey, DE.](#) (2013). Diesel-based gel concentrate improves Rocky Mountain region fracture treatments. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/17535-MS>
- [Yergin, D.](#) (2011). The quest : energy, security and the remaking of the modern world. In The quest : energy, security and the remaking of the modern world. New York, NY: Penquin Press.
- [Younos, T; Tulou, KE.](#) (2005). Overview of desalination techniques. Journal of Contemporary Water Research & Education 132: 3-10. <http://dx.doi.org/10.1111/j.1936-704X.2005.mp132001002.x>
- [Zhang, L; Anderson, N; Dilmore, R; Soeder, DJ; Bromhal, G.](#) (2014a). Leakage detection of Marcellus Shale natural gas at an Upper Devonian gas monitoring well: a 3-d numerical modeling approach. Environ Sci Technol 48: 10795-10803. <http://dx.doi.org/10.1021/es501997p>
- [Zhang, T; Gregory, K; Hammack, RW; Vidic, RD.](#) (2014b). Co-precipitation of radium with barium and strontium sulfate and its impact on the fate of radium during treatment of produced water from unconventional gas extraction. Environ Sci Technol 48: 4596-4603. <http://dx.doi.org/10.1021/es405168b>
- [Ziemkiewicz, P; Donovan, J; Hause, J; Gutta, B; Fillhart, J; Mack, B; O'Neal, M.](#) (2013). Water quality literature review and field monitoring of active shale gas wells: Phase II for Assessing Environmental Impacts of Horizontal Gas Well Drilling Operations. Charleston, WV: West Virginia Department of Environmental Protection.
- [Ziemkiewicz, P; Quaranta, ID; Mccawley, M.](#) (2014). Practical measures for reducing the risk of environmental contamination in shale energy production. Environ Sci Process Impacts 16: 1692-1699. <http://dx.doi.org/10.1039/c3em00510k>
- [Zoback, MD.](#) (2010). Reservoir geomechanics. Cambridge, UK: Cambridge University Press.

DRAFT- DO NOT CITE OR QUOTE



EPA/600/R-15/047b  
External Review Draft  
June 2015  
[www.epa.gov/hfstudy](http://www.epa.gov/hfstudy)

# **Assessment of the Potential Impacts of Hydraulic Fracturing for Oil and Gas on Drinking Water Resources (Appendices A – J)**

## **NOTICE**

THIS DOCUMENT IS AN EXTERNAL REVIEW DRAFT, for review purposes only. It has not been formally disseminated by EPA. It does not represent and should not be construed to represent any Agency determination or policy.

Office of Research and Development  
U.S. Environmental Protection Agency  
Washington, DC 20460

## **DISCLAIMER**

This document is an external review draft. This information is distributed solely for the purpose of pre-dissemination peer review under applicable information quality guidelines. It has not been formally disseminated by EPA. It does not represent and should not be construed to represent any Agency determination or policy. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

**Contents: Appendices****Appendix A. Chemicals Identified in Hydraulic Fracturing Fluids and/or Flowback and****Produced Water**

A.1.	Supplemental Tables and Information .....	A-1
	Table A-1. Description of sources used to create lists of chemicals used in fracturing fluids or detected in flowback or produced water. ....	A-1
	Table A-2. Chemicals reported to be used in hydraulic fracturing fluids. ....	A-4
	Table A-3. List of generic names of chemicals reportedly used in hydraulic fracturing fluids. ....	A-46
	Table A-4. Chemicals detected in flowback or produced water. ....	A-58
A.2.	References for Appendix A .....	A-63

**Appendix B. Water Acquisition Tables .....** **B-1**

B.1.	Supplemental Tables .....	B-1
	Table B-1. Annual average hydraulic fracturing water use and consumption in 2011 and 2012 compared to total annual water use and consumption in 2010 by state. ....	B-1
	Table B-2. Annual average hydraulic fracturing water use and consumption in 2011 and 2012 compared to total annual water use and consumption in 2010 by county. ....	B-3
	Table B-3. Comparison of water use per well estimates from the EPA’s project database of disclosures to FracFocus 1.0 (U.S. EPA, 2015c) and literature sources. ....	B-20
	Table B-4. Comparison of well counts from the EPA’s project database of disclosures to FracFocus 1.0 (U.S. EPA, 2015c) and state databases for North Dakota, Pennsylvania, and West Virginia. ....	B-21
	Table B-5. Water use per hydraulically fractured well as reported in the EPA’s project database of disclosures to FracFocus 1.0 (U.S. EPA, 2015c) by state and basin. ....	B-22
	Table B-6. Estimated percent domestic use water from ground water and self-supplied by county. ....	B-26
	Table B-7. Projected hydraulic fracturing water use by Texas counties between 2015 and 2060, expressed as a percentage of 2010 total county water use. ....	B-40
B.2.	References for Appendix B .....	B-52

**Appendix C. Chemical Mixing Supplemental Tables and Information .....** **C-1**

C.1.	Supplemental Tables and Information .....	C-1
	Table C-1. Chemicals reported to FracFocus in 10% or more of disclosures for gas-producing wells, with the number of disclosures where chemical is reported, percentage of disclosures, and the median maximum concentration (% by mass) of that chemical in hydraulic fracturing fluid. ....	C-1
	Table C-2. Chemicals reported to FracFocus in 10% or more of disclosures for oil-producing wells, with the number of disclosures where chemical is reported, percentage of disclosures, and the median maximum concentration (% by mass) of that chemical in hydraulic fracturing fluid. ....	C-3
	Table C-3a. Top chemicals reported to FracFocus for each state and number (and percentage) of disclosures where a chemical is reported for that state, Alabama to Montana (U.S. EPA, 2015c). ....	C-5

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

Table C-3b. Top chemicals reported to FracFocus for each state and number (and percentage) of disclosures where a chemical is reported for that state, New Mexico to Wyoming (U.S. EPA, 2015c). ..... C-12

Table C-4. Estimated mean, median, 5<sup>th</sup> percentile, and 95<sup>th</sup> percentile volumes in gallons for chemicals reported to FracFocus in 100 or more disclosures, where density information was available. .... C-20

Table C-5. Estimated mean, median, 5<sup>th</sup> percentile, and 95<sup>th</sup> percentile volumes in liters for chemicals reported to FracFocus in 100 or more disclosures, where density information was available. .... C-23

Table C-6. Calculated mean, median, 5<sup>th</sup> percentile, and 95<sup>th</sup> percentile chemical masses reported to FracFocus in 100 or more disclosures, where density information was available... C-26

Table C-7. Associated chemical densities and references used to calculate chemical mass and estimate chemical volume..... C-29

Table C-8. Selected physicochemical properties of chemicals reported as used in hydraulic fracturing fluids. .... C-32

C.2. References for Appendix C ..... C-76

**Appendix D. Designing, Constructing, and Testing Wells for Integrity ..... D-1**

D.1. Design Goals for Well Construction..... D-1

D.2. Well Components ..... D-1

    Text Box D-1. Selected Industry-Developed Specifications and Recommended Practices for Well Construction in North America..... D-2

D.2.1. Casing ..... D-2

D.2.2. Cement ..... D-3

    Figure D-1. A typical staged cementing process. .... D-8

D.3. Well Completions ..... D-9

    Figure D-2. Examples of well completion types. .... D-9

D.4. Mechanical Integrity Testing ..... D-10

D.4.1. Internal Mechanical Integrity ..... D-11

D.4.2. External Mechanical Integrity ..... D-12

D.5. References for Appendix D..... D-13

**Appendix E. Flowback and Produced Water Supplemental Tables and Information ..... E-1**

E.1. Flowback and Long-Term Produced Water Volumes .....E-1

    Table E-1. Flowback and long-term produced water characteristics for wells in unconventional formations, formation-level data. ....E-2

E.2. Produced Water Content .....E-6

E.2.1. Introduction.....E-6

E.2.2. General Water Quality Parameters .....E-6

    Table E-2. Reported concentrations of general water quality parameters in produced water for unconventional shale and tight formations, presented as: average (minimum–maximum) or *median* (minimum–maximum).....E-7

*This document is a draft for review purposes only and does not constitute Agency policy.*



Table E-3. Reported concentrations of general water quality parameters in produced water for unconventional coalbed basins, presented as: average (minimum–maximum). .....	E-10
E.2.3. Salinity and Inorganics.....	E-11
Table E-4. Reported concentrations (mg/L) of inorganic constituents contributing to salinity in unconventional shale and tight formations produced water, presented as: average (minimum–maximum) or <i>median</i> (minimum–maximum).....	E-12
Table E-5. Reported concentrations (mg/L) of inorganic constituents contributing to salinity in produced water for unconventional CBM basins, presented as: average (minimum–maximum). .....	E-14
E.2.4. Metals and Metalloids.....	E-14
Table E-6. Reported concentrations (mg/L) of metals and metalloids from unconventional shale and tight formation produced water, presented as: average (minimum–maximum) or <i>median</i> (minimum–maximum). .....	E-15
Table E-7. Reported concentrations (mg/L) of metals and metalloids from unconventional coalbed produced water, presented as: average (minimum–maximum). .....	E-18
E.2.5. Naturally Occurring Radioactive Material (NORM) and Technically Enhanced Naturally Occurring Radioactive Material (TENORM) .....	E-20
Table E-8. Reported concentrations (in pCi/L) of radioactive constituents in unconventional shale and sandstone produced water, presented as: average (minimum–maximum) or <i>median</i> (minimum–maximum). .....	E-22
E.2.6. Organics.....	E-24
Table E-9. Concentrations of select organic parameters from unconventional shale, a tight formation, and coalbed produced water, presented as: average (minimum–maximum) or <i>median</i> (minimum–maximum). .....	E-25
Table E-10. Reported concentrations (µg/L) of organic constituents in produced water for two unconventional shale formations, presented as: average (minimum–maximum) or <i>median</i> (minimum–maximum). .....	E-28
Table E-11. Reported concentrations of organic constituents in 65 samples of produced water from the Black Warrior CBM Basin, presented as average (minimum–maximum).....	E-30
E.2.7. Chemical Reactions .....	E-31
E.2.8. Microbial Community Processes and Content .....	E-32
E.3. Produced Water Content Spatial Trends.....	E-34
E.3.1. Variability between Plays of the Same Rock Type.....	E-34
E.3.2. Local Variability .....	E-36
E.4. Example Calculation for Roadway Transport .....	E-36
E.4.1. Estimation of Transport Distance.....	E-36
E.4.2. Estimation of Wastewater Volumes.....	E-37
E.4.3. Estimation of Roadway Accidents .....	E-37
Table E-12. Combination truck crashes in 2012 for the 2,469,094 registered combination trucks, which traveled 163,458 million miles (U.S. Department of Transportation, 2012). <sup>a</sup> ...	E-37
Table E-13. Large truck crashes in 2012 (U.S. Department of Transportation, 2012). <sup>a</sup> .....	E-38
E.4.4. Estimation of Material Release Rates in Crashes .....	E-38
E.4.5. Estimation of Volume Released in Accidents .....	E-38

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

Table E-14. Estimate of total truck-travel miles per well in the Susquehanna River Basin based on the transport analysis performed by Gilmore et al. (2013). ..... E-39

E.5. References for Appendix E ..... E-39

**Appendix F. Wastewater Treatment and Waste Disposal Supplemental Information ..... F-1**

F.1. Estimates of Wastewater Production in Regions where Hydraulic Fracturing is Occurring.....F-1

Table F-1. Estimated volumes (millions of gallons) of wastewater based on state data for selected years and numbers of wells producing fluid.....F-2

F.2. Overview of Treatment Processes for Treating Hydraulic Fracturing Wastewater.....F-6

F.2.1. Basic Treatment.....F-6

Figure F-1. Electrocoagulation unit. ....F-7

F.2.2. Advanced Treatment.....F-8

Figure F-2. Photograph of reverse osmosis system. ....F-9

Figure F-3. Picture of mobile electro dialysis units in Wyoming. ....F-10

Figure F-4. Picture of a mechanical vapor recompression unit near Decatur, Texas. ....F-11

Figure F-5. Mechanical vapor recompression process design – Maggie Spain Facility. ....F-12

Figure F-6. Picture of a compressed bed ion exchange unit. ....F-13

Figure F-7. Discharge water process used in the Pinedale Anticline field.....F-14

F.3. Treatment Technology Removal Capabilities .....F-14

Table F-2. Removal efficiency of different hydraulic fracturing wastewater constituents using various wastewater treatment technologies.<sup>a</sup> .....F-15

Table F-3. Treatment processes for hydraulic fracturing wastewater organic constituents. ....F-18

Table F-4. Estimated effluent concentrations for example constituents based on treatment process removal efficiencies.....F-20

F.4. Centralized Waste Treatment Facilities and Waste Management Options .....F-23

F.4.1. Discharge Options for CWTs.....F-23

F.5. Water Quality for Reuse .....F-24

Table F-5. Water quality requirements for reuse.....F-24

Figure F-8. Diagram of treatment for reuse of flowback and produced water.....F-26

F.6. Hydraulic Fracturing Impacts on POTWs .....F-27

F.6.1. Potential Impacts on Treatment Processes.....F-27

F.7. Hydraulic Fracturing and DBPs .....F-27

F.8. References for Appendix F .....F-28

**Appendix G. Identification and Hazard Evaluation of Chemicals across the Hydraulic Fracturing Water Cycle Supplemental Tables and Information .....G-1**

G.1. Criteria for Selection and Inclusion of Reference Value (RfV) and Oral Slope Factor (OSF) Data Sources G-1

G.1.1. Included Sources .....G-3

G.1.2. Excluded Sources.....G-3

G.2. Glossary of Toxicity Value Terminology.....G-4

*This document is a draft for review purposes only and does not constitute Agency policy.*

---

G.3.	Tables .....	G-9
	Table G-1a. Chemicals reported to be used in hydraulic fracturing fluids, with available federal chronic RfVs and OSFs. ....	G-9
	Table G-1b. Chemicals reported to be used in hydraulic fracturing fluids, with available state chronic RfVs and OSFs. ....	G-18
	Table G-1c. Chemicals reported to be used in hydraulic fracturing fluids, with available international chronic RfVs and OSFs. ....	G-19
	Table G-1d. Chemicals reported to be used in hydraulic fracturing fluids, with available less-than-chronic RfVs and OSFs. ....	G-20
	Table G-2a. Chemicals reported to be detected in flowback or produced water, with available federal chronic RfVs and OSFs. ....	G-23
	Table G-2b. Chemicals reported to be detected in flowback or produced water, with available state chronic RfVs and OSFs. ....	G-31
	Table G-2c. Chemicals reported to be detected in flowback or produced water, with available international chronic RfVs and OSFs. ....	G-33
	Table G-2d. Chemicals reported to be detected in flowback or produced water, with available less-than-chronic RfVs and OSFs. ....	G-34
G.4.	References for Appendix G .....	G-36
<b>Appendix H.</b>	<b>Description of EPA Hydraulic Fracturing Study Publications Cited in This Assessment .....</b>	<b>H-1</b>
	Table H-1. Titles, descriptions, and citations for EPA hydraulic fracturing study publications cited in this assessment. ....	H-1
<b>Appendix I.</b>	<b>Unit Conversions.....</b>	<b>I-1</b>
<b>Appendix J.</b>	<b>Glossary.....</b>	<b>J-1</b>
J.1.	Glossary Terms and Definitions .....	J-1
J.2.	References for Appendix J .....	J-17

## Appendix A

---

# Chemicals Identified in Hydraulic Fracturing Fluids and/or Flowback and Produced Water

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

# Appendix A. Chemicals Identified in Hydraulic Fracturing Fluids and/or Flowback and Produced Water

## A.1. Supplemental Tables and Information

1 The EPA identified authoritative sources for information on hydraulic fracturing chemicals and, to  
 2 the extent possible, verified the chemicals used in hydraulic fracturing fluids and detected in  
 3 flowback and produced water of hydraulically fractured wells. The EPA used 10 sources to identify  
 4 the chemicals used in hydraulic fracturing fluids or detected in flowback or produced water. Seven  
 5 sources are government entities (Congressional, federal, or state) that obtained the data directly  
 6 from industry. The remaining three represent collaborations between state, non-profit, academic,  
 7 and industry groups. FracFocus is the result of a collaboration between the Ground Water  
 8 Protection Council (a non-profit coalition of state ground water protection agencies) and  
 9 the Interstate Oil and Gas Compact Commission (a multi-state government agency). The Marcellus  
 10 Shale Coalition is a drilling industry trade group. [Colborn et al. \(2011\)](#) is a peer-reviewed journal  
 11 article. Most of the listed chemicals were cited by multiple sources.

12 Seven of the ten sources obtained information about the chemicals used in hydraulic fracturing  
 13 fluids from material safety data sheets (MSDSs) provided by chemical manufacturers for the  
 14 products they sell, as required by the Occupational Safety and Health Administration (OSHA). The  
 15 MSDSs must list all hazardous ingredients if they comprise at least 1% of the product; for  
 16 carcinogens, the reporting threshold is 0.1%. However, chemical manufacturers may withhold  
 17 information (e.g., chemical name, concentration of the substance in a mixture) about a hazardous  
 18 substance from MSDSs if it is claimed as confidential business information (CBI), provided that  
 19 certain conditions are met ([OSHA, 2013](#)).

**Table A-1. Description of sources used to create lists of chemicals used in fracturing fluids or detected in flowback or produced water.**

The number next to each citation in the reference column corresponds to numbers in the reference columns found in Table A-2, Table A-3, and Table A-4.

Description / Content	Reference
Chemicals and other components used by 14 hydraulic fracturing service companies from 2005 to 2009 as reported to the House Committee on Energy and Commerce. For each hydraulic fracturing product reported, companies also provided an MSDS with information about the product's chemical components.	<a href="#">House of Representatives (2011)<sup>a</sup> (1)</a>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Description / Content	Reference
Chemicals used during natural gas operations with some potential health effects. The list of chemicals was compiled from MSDSs from several sources, including the Bureau of Land Management, U.S. Forest Service, state agencies, and industry.	<a href="#">Colborn et al. (2011)<sup>a</sup></a> (2)
Chemicals used or proposed for use in hydraulic fracturing in the Marcellus Shale in New York based on product composition disclosures and MSDSs submitted to the New York State Department of Environmental Conservation (NYSDEC). Also includes data provided separately to NYSDEC by well operators on analytical results of flowback water samples from Marcellus Shale operations in Pennsylvania and West Virginia.	<a href="#">NYSDEC (2011)<sup>a,b</sup></a> (3)
Chemicals reported to be used by nine hydraulic fracturing service companies from 2005 to 2010. Companies provided the chemical names in MSDSs, product bulletins, and formulation sheets.	<a href="#">U.S. EPA (2013a)<sup>a</sup></a> (4)
MSDSs provided to the EPA during on-site visits to hydraulically fractured oil and gas wells in Oklahoma and Colorado.	<a href="#">Sheets</a>
Characteristics of undiluted chemicals found in hydraulic fracturing fluids associated with coalbed methane production, based on MSDSs, literature searches, reviews of relevant MSDSs provided by service companies, and discussions with field engineers, service company chemists, and state and federal employees.	<a href="#">U.S. EPA (2004)<sup>a</sup></a> (6)
Chemicals used in Pennsylvania for hydraulic fracturing activities based on MSDSs provided by industry.	<a href="#">PA DEP (2010)<sup>a</sup></a> (7)
Chemical records entered in FracFocus by oil and gas operators for individual wells from January 1, 2011, through February 28, 2013. FracFocus is a publicly accessible hydraulic fracturing chemical registry developed by the Ground Water Protection Council and the Interstate Oil and Gas Compact Commission. Chemicals claimed as confidential business information (CBI) do not have to be reported in FracFocus.	<a href="#">U.S. EPA (2015c)<sup>a</sup></a> (8)
Chemicals detected in flowback from 19 hydraulically fractured shale gas wells in Pennsylvania and West Virginia, based on analyses conducted by 17 Marcellus Shale Coalition member companies.	<a href="#">Hayes (2009)<sup>b</sup></a> (9)
Chemicals reportedly detected in flowback and produced water from 81 wells provided to the EPA by nine well operating companies.	<a href="#">U.S. EPA (2011b)<sup>b</sup></a> (10)

<sup>a</sup> Sources used to identify chemicals used in hydraulic fracturing fluids.

<sup>b</sup> Sources used to identify chemicals detected in flowback and produced water.

- 1 Once it had identified chemicals used in hydraulic fracturing fluids and chemicals detected in
- 2 flowback/produced water, the EPA conducted an initial review of the chemicals for preliminary
- 3 validation of provided chemical name and Chemical Abstracts Service Registry Number (CASRN)
- 4 combinations. A CASRN is a unique numeric identifier assigned by the Chemical Abstracts Service
- 5 (CAS) to a chemical substance when it enters the CAS Registry Database. The EPA Office of Research

*This document is a draft for review purposes only and does not constitute Agency policy.*



1 and Development's National Center for Computational Toxicology (NCCT) provided the final formal  
2 validation and verification of the listed chemicals.

3 The EPA first compared the hydraulic fracturing chemical CASRN and names with chemicals listed  
4 in NCCT's Distributed Structure-Searchable Toxicity Database network (DSSTox) database ([U.S.  
5 EPA, 2013b](#)). For the CASRN and chemical names that did not appear in the DSSTox database, the  
6 EPA's Substance Registry Services database and the U.S. National Library of Medicine ChemID  
7 database were used to verify accurate chemical name and CASRN pairing ([NLM, 2014](#); [U.S. EPA,  
8 2014c](#)). The EPA also identified cases where CASRN/name combinations could not be verified by  
9 use of selected public sources and flagged those cases for resolution by NCCT.

10 NCCT then verified all of the CASRN and chemical names for the chemical lists generated by the EPA  
11 in accordance with NCCT DSSTox Chemical Information Quality Review Procedures  
12 (<http://www.epa.gov/ncct/dsstox/ChemicalInfQAProcedures.html>). The process included QA/QC  
13 on the identification and validation of CASRN/chemical name combinations and resolution of  
14 inconsistencies and problems including duplications, CASRN errors, and CASRN/chemical name  
15 mismatches.

16 The general methodology for resolving conflicts between CASRN/chemical name combinations and  
17 other chemical identification issues differed slightly depending on the data provided by each  
18 source. To resolve chemical/CASRN conflict in data provided by the nine service companies, the  
19 EPA worked with each company to verify the CASRN/chemical combinations proposed by NCCT. In  
20 cases of CASRN/chemical name mismatches in data provided by FracFocus, chemical names were  
21 considered primary to the CASRN (i.e., the name overrode the CASRN). When the chemical name  
22 was non-specific and the CASRN was valid, then the CASRN was considered primary to the chemical  
23 name, and the correct specific chemical name from DSSTox was assigned to the CASRN. For all other  
24 sources, the CASRN was considered primary unless it was invalid or missing. In such cases, the  
25 chemical name was primary. All Toxic Substance Control Act (TSCA) CBI chemical lists were  
26 managed in accordance with TSCA CBI procedures.

27 Chemicals with verified CASRN that are used in hydraulic fracturing fluids are presented in Table  
28 A-2. Generic chemicals used in hydraulic fracturing fluids are presented in Table A-3. Chemicals  
29 with verified CASRN that have been detected in flowback or produced water are presented in  
30 Table A-4. Chemicals found in both fracturing fluids (see Table A-2) and flowback and produced  
31 water (see Table A-4) are italicized in each table.

**Table A-2. Chemicals reported to be used in hydraulic fracturing fluids.**

An “X” indicates the availability of physicochemical properties from EPI Suite™ (see Appendix C) and selected toxicity reference values (see Appendix G). An empty cell indicates no information was available from the sources we consulted. Reference number corresponds to the citations in Table A-1. *Italicized chemicals are found in both fracturing fluids and flowback/produced water.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
(13Z)-N,N-bis(2-hydroxyethyl)-N-methyldocos-13-en-1-aminium chloride	120086-58-0	X		1
(2,3-dihydroxypropyl)trimethylammonium chloride	34004-36-9	X		8
(E)-Crotonaldehyde	123-73-9	X	X	1, 4
[Nitrilotris(methylene)]tris-phosphonic acid pentasodium salt	2235-43-0	X		1
1-(1-Naphthylmethyl)quinolinium chloride	65322-65-8	X		1
1-(Alkyl* amino)-3-aminopropane *(42%C12, 26%C18, 15%C14, 8%C16, 5%C10, 4%C8)	68155-37-3	X		8
1-(Phenylmethyl)pyridinium Et Me derivs., chlorides	68909-18-2	X		1, 2, 3, 4, 6, 8
1,2,3-Trimethylbenzene	526-73-8	X		1, 4
<i>1,2,4-Trimethylbenzene</i>	<i>95-63-6</i>	X		<i>1, 2, 3, 4, 5</i>
1,2-Benzisothiazolin-3-one	2634-33-5	X		1, 3, 4
1,2-Dibromo-2,4-dicyanobutane	35691-65-7	X		1, 4
1,2-Dimethylbenzene	95-47-6	X		4
1,2-Ethanediamine, polymer with 2-methyloxirane	25214-63-5			8
1,2-Ethanediaminium, N,N'-bis[2-[bis(2-hydroxyethyl)methylammonio]ethyl]-N,N'-bis(2-hydroxyethyl)-N,N'-dimethyl-, tetrachloride	138879-94-4	X		1, 4
<i>1,2-Propylene glycol</i>	<i>57-55-6</i>	X	X	<i>1, 2, 3, 4, 8</i>
1,2-Propylene oxide	75-56-9	X	X	1, 4
1,3,5-Triazine	290-87-9	X		8
1,3,5-Triazine-1,3,5(2H,4H,6H)-triethanol	4719-04-4	X		1, 4
<i>1,3,5-Trimethylbenzene</i>	<i>108-67-8</i>	X		<i>1, 4</i>
1,3-Butadiene	106-99-0	X	X	8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
1,3-Dichloropropene	542-75-6	X	X	8
1,4-Dioxane	123-91-1	X	X	2, 3, 4
1,4-Dioxane-2,5-dione, 3,6-dimethyl-, (3R,6R)-, polymer with (3S,6S)-3,6-dimethyl-1,4-dioxane-2,5-dione and (3R,6S)-rel-3,6-dimethyl-1,4-dioxane-2,5-dione	9051-89-2			1, 4, 8
1,6-Hexanediamine	124-09-4	X		1, 2
1,6-Hexanediamine dihydrochloride	6055-52-3	X		1
1-[2-(2-Methoxy-1-methylethoxy)-1-methylethoxy]-2-propanol	20324-33-8	X		4
1-Amino-2-propanol	78-96-6	X		8
1-Benzylquinolinium chloride	15619-48-4	X		1, 3, 4
1-Butanol	71-36-3	X	X	1, 2, 3, 4, 7
1-Butoxy-2-propanol	5131-66-8	X		8
1-Decanol	112-30-1	X		1, 4
1-Dodecyl-2-pyrrolidinone	2687-96-9	X		1, 4
1-Eicosene	3452-07-1	X		3
1-Ethyl-2-methylbenzene	611-14-3	X		4
1-Hexadecene	629-73-2	X		3
1-Hexanol	111-27-3	X		1, 4, 8
1-Hexanol, 2-ethyl-, manuf. of, by products from, distn. residues	68909-68-7			4
1H-Imidazole-1-ethanamine, 4,5-dihydro-, 2-nortall-oil alkyl derivs.	68442-97-7			2, 4
1-Methoxy-2-propanol	107-98-2	X		1, 2, 3, 4
1-Octadecanamine, acetate (1:1)	2190-04-7	X		8
1-Octadecanamine, N,N-dimethyl-	124-28-7	X		1, 3, 4
1-Octadecene	112-88-9	X		3
1-Octanol	111-87-5	X		1, 4
1-Pentanol	71-41-0	X		8
1-Propanaminium, 3-amino-N-(carboxymethyl)-N,N-dimethyl-, N-coco acyl derivs., chlorides, sodium salts	61789-39-7			1

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
1-Propanaminium, 3-amino-N-(carboxymethyl)-N,N-dimethyl-, N-coco acyl derivs., inner salts	61789-40-0			1, 2, 3, 4
1-Propanaminium, 3-chloro-2-hydroxy-N,N,N-trimethyl-, chloride	3327-22-8	X		8
1-Propanaminium, N-(3-aminopropyl)-2-hydroxy-N,N-dimethyl-3-sulfo-, N-coco acyl derivs., inner salts	68139-30-0			1, 3, 4
1-Propanaminium, N-(carboxymethyl)-N,N-dimethyl-3-[(1-oxooctyl)amino]-, inner salt	73772-46-0			8
1-Propanesulfonic acid	5284-66-2	X		3
1-Propanol	71-23-8	X		1, 2, 4, 5
1-Propanol, zirconium(4+) salt	23519-77-9			1, 4, 8
1-Propene	115-07-1	X		2
1-tert-Butoxy-2-propanol	57018-52-7	X		8
1-Tetradecene	1120-36-1	X		3
1-Tridecanol	112-70-9	X		1, 4
1-Undecanol	112-42-5	X		2
2-(2-Butoxyethoxy)ethanol	112-34-5	X	X	2, 4
2-(2-Ethoxyethoxy)ethanol	111-90-0	X	X	1, 4
2-(2-Ethoxyethoxy)ethyl acetate	112-15-2	X		1, 4
2-(Dibutylamino)ethanol	102-81-8	X		1, 4
2-(Hydroxymethylamino)ethanol	34375-28-5	X		1, 4
2-(Thiocyanomethylthio)benzothiazole	21564-17-0	X	X	2
2,2'-(diazene-1,2-diyl)diethane-1,1-diyl)bis-4,5-dihydro-1H-imidazole dihydrochloride	27776-21-2	X		3
2,2'-(Octadecylimino)diethanol	10213-78-2	X		1
2,2'-[Ethane-1,2-diylbis(oxy)]diethanamine	929-59-9	X		1, 4
2,2'-Azobis(2-amidinopropane) dihydrochloride	2997-92-4	X		1, 4
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	X		1, 2, 3, 4, 6, 7, 8
2,2-Dibromopropanediamide	73003-80-2	X		3
2,4-Hexadienoic acid, potassium salt, (2E,4E)-	24634-61-5	X		3

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
2,6,8-Trimethyl-4-nonanol	123-17-1	X		8
2-Acrylamide - 2-propanesulfonic acid and N,N-dimethylacrylamide copolymer	NOCAS_51252			2
2-Acrylamido -2-methylpropanesulfonic acid copolymer	NOCAS_51255			8
2-Acrylamido-2-methyl-1-propanesulfonic acid	15214-89-8	X		1, 3
2-Amino-2-methylpropan-1-ol	124-68-5	X		8
2-Aminoethanol ester with boric acid (H3BO3) (1:1)	10377-81-8			8
2-Aminoethanol hydrochloride	2002-24-6	X		4, 8
2-Bromo-3-nitrilopropionamide	1113-55-9	X		1, 2, 3, 4, 5
2-Butanone oxime	96-29-7	X		1
2-Butenediamide, (2E)-, N,N'-bis[2-(4,5-dihydro-2-nortall-oil alkyl-1H-imidazol-1-yl)ethyl] derivs.	68442-77-3			3, 8
2-Butoxy-1-propanol	15821-83-7	X		8
2-Butoxyethanol	111-76-2	X	X	1, 2, 3, 4, 6, 7, 8
2-Dodecylbenzenesulfonic acid- n-(2-aminoethyl)ethane-1,2-diamine(1:1)	40139-72-8	X		8
2-Ethoxyethanol	110-80-5	X	X	6
2-Ethoxynaphthalene	93-18-5	X		3
2-Ethyl-1-hexanol	104-76-7	X		1, 2, 3, 4, 5
2-Ethyl-2-hexenal	645-62-5	X		2
2-Ethylhexyl benzoate	5444-75-7	X		4
2-Hydroxyethyl acrylate	818-61-1	X		1, 4
2-Hydroxyethylammonium hydrogen sulphite	13427-63-9	X		1
2-Hydroxy-N,N-bis(2-hydroxyethyl)-N-methylethanaminium chloride	7006-59-9	X		8
2-Mercaptoethanol	60-24-2	X		1, 4
2-Methoxyethanol	109-86-4	X	X	4
2-Methyl-1-propanol	78-83-1	X	X	1, 2, 4
2-Methyl-2,4-pentanediol	107-41-5	X		1, 2, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
2-Methyl-3(2H)-isothiazolone	2682-20-4	X		1, 2, 4
2-Methyl-3-butyn-2-ol	115-19-5	X		3
2-Methylbutane	78-78-4	X		2
2-Methylquinoline hydrochloride	62763-89-7	X		3
2-Phosphono-1,2,4-butanetricarboxylic acid	37971-36-1	X		1, 4
2-Phosphonobutane-1,2,4-tricarboxylic acid, potassium salt (1:x)	93858-78-7	X		1
2-Propanol, aluminum salt	555-31-7			1
2-Propen-1-aminium, N,N-dimethyl-N-2-propenyl-, chloride, homopolymer	26062-79-3			3
2-Propenamide, homopolymer	25038-45-3			8
2-Propenoic acid, 2-(2-hydroxyethoxy)ethyl ester	13533-05-6	X		4
2-Propenoic acid, 2-ethylhexyl ester, polymer with 2-hydroxyethyl 2-propenoate	36089-45-9			8
2-Propenoic acid, 2-methyl-, polymer with 2-propenoic acid, sodium salt	28205-96-1			8
2-Propenoic acid, 2-methyl-, polymer with sodium 2-methyl-2-[(1-oxo-2-propen-1-yl)amino]-1-propanesulfonate (1:1)	136793-29-8			8
2-Propenoic acid, ethyl ester, polymer with ethenyl acetate and 2,5-furandione, hydrolyzed	113221-69-5			4, 8
2-Propenoic acid, ethyl ester, polymer with ethenyl acetate and 2,5-furandione, hydrolyzed, sodium salt	111560-38-4			8
2-Propenoic acid, polymer with 2-propenamide, sodium salt	25987-30-8			3, 4, 8
2-Propenoic acid, polymer with ethene, zinc salt	28208-80-2			8
2-Propenoic acid, polymer with ethenylbenzene	25085-34-1			8
2-Propenoic acid, polymer with sodium ethanesulfonate, peroxydisulfuric acid, disodium salt- initiated, reaction products with tetrasodium ethenylidenebis (phosphonata)	397256-50-7			8
2-Propenoic acid, polymer with sodium phosphinate (1:1), sodium salt	129898-01-7			8

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
2-Propenoic acid, sodium salt (1:1), polymer with sodium 2-methyl-2-[(1-oxo-2-propen-1-yl)amino]-1-propanesulfonate (1:1)	37350-42-8			1
2-Propenoic acid, telomer with sodium 4-ethenylbenzenesulfonate (1:1), sodium 2-methyl-2-[(1-oxo-2-propen-1-yl)amino]-1-propanesulfonate (1:1) and sodium sulfite (1:1), sodium salt	151006-66-5			4
2-Propenoic, polymer with sodium phosphinate	71050-62-9			3, 4
3-(Dimethylamino)propylamine	109-55-7	X		8
3,4,4-Trimethyloxazolidine	75673-43-7	X		8
3,5,7-Triazatricyclo(3.3.1.1 <sup>3,7</sup> )decane, 1-(3-chloro-2-propenyl)-, chloride, (Z)-	51229-78-8	X		3
3,7-Dimethyl-2,6-octadienal	5392-40-5	X		3
3-Hydroxybutanal	107-89-1	X		1, 2, 4
3-Methoxypropylamine	5332-73-0	X		8
3-Phenylprop-2-enal	104-55-2	X		1, 2, 3, 4, 7
4,4-Dimethyloxazolidine	51200-87-4	X		8
4,6-Dimethyl-2-heptanone	19549-80-5	X		8
4-[Abieta-8,11,13-trien-18-yl(3-oxo-3-phenylpropyl)amino]butan-2-one hydrochloride	143106-84-7	X		1, 4
4-Ethyl-1-oct-3-yn-1-ol	5877-42-9	X		1, 2, 3, 4
4-Hydroxy-3-methoxybenzaldehyde	121-33-5	X		3
4-Methoxybenzyl formate	122-91-8	X		3
4-Methoxyphenol	150-76-5	X		4
4-Methyl-2-pentanol	108-11-2	X		1, 4
4-Methyl-2-pentanone	108-10-1	X		5
4-Nonylphenol	104-40-5	X		8
4-Nonylphenol polyethoxylate	68412-54-4			2, 3, 4
5-Chloro-2-methyl-3(2H)-isothiazolone	26172-55-4	X		1, 2, 4
Acetaldehyde	75-07-0	X		1, 4
Acetic acid	64-19-7	X		1, 2, 3, 4, 5, 6, 7, 8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Acetic acid ethenyl ester, polymer with ethenol	25213-24-5			1, 4
Acetic acid, C6-8-branched alkyl esters	90438-79-2	X		4
Acetic acid, hydroxy-, reaction products with triethanolamine	68442-62-6	X		3
Acetic acid, mercapto-, monoammonium salt	5421-46-5	X		2, 8
Acetic anhydride	108-24-7	X		1, 2, 3, 4, 7
Acetone	67-64-1	X	X	1, 3, 4, 6
Acetonitrile, 2,2',2''-nitrilotris-	7327-60-8	X		1, 4
Acetophenone	98-86-2	X	X	1
Acetyltriethyl citrate	77-89-4	X		1, 4
Acrolein	107-02-8	X	X	2
Acrylamide	79-06-1	X	X	1, 2, 3, 4
Acrylamide/ sodium acrylate copolymer	25085-02-3			1, 2, 3, 4, 8
Acrylamide-sodium-2-acrylamido-2-methylpropane sulfonate copolymer	38193-60-1			1, 2, 3, 4
Acrylic acid	79-10-7	X	X	2, 4
Acrylic acid, with sodium-2-acrylamido-2-methyl-1-propanesulfonate and sodium phosphinate	110224-99-2	X		8
Alcohols (C13-C15), ethoxylated	64425-86-1			8
Alcohols, C10-12, ethoxylated	67254-71-1	X		3
Alcohols, C10-14, ethoxylated	66455-15-0			3
Alcohols, C11-14-iso-, C13-rich	68526-86-3	X		3
Alcohols, C11-14-iso-, C13-rich, butoxylated ethoxylated	228414-35-5			1
Alcohols, C11-14-iso-, C13-rich, ethoxylated	78330-21-9	X		3, 4, 8
Alcohols, C12-13, ethoxylated	66455-14-9	X		4
Alcohols, C12-14, ethoxylated	68439-50-9			2, 3, 4, 8
Alcohols, C12-14, ethoxylated propoxylated	68439-51-0	X		1, 3, 4, 8
Alcohols, C12-14-secondary	126950-60-5	X		1, 3, 4
Alcohols, C12-14-secondary, ethoxylated	84133-50-6			3, 4, 8
Alcohols, C12-15, ethoxylated	68131-39-5			3, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Alcohols, C12-16, ethoxylated	68551-12-2	X		3, 4, 8
Alcohols, C14-15, ethoxylated	68951-67-7	X		3, 4, 8
Alcohols, C6-12, ethoxylated	68439-45-2	X		3, 4, 8
Alcohols, C7-9-iso-, C8-rich, ethoxylated	78330-19-5	X		2, 4, 8
Alcohols, C8-10, ethoxylated propoxylated	68603-25-8			3
Alcohols, C9-11, ethoxylated	68439-46-3	X		3, 4
Alcohols, C9-11-iso-, C10-rich, ethoxylated	78330-20-8	X		1, 2, 4, 8
Alkanes C10-16-branched and linear	90622-52-9			4
Alkanes, C10-14	93924-07-3			1
Alkanes, C12-14-iso-	68551-19-9	X		2, 4, 8
Alkanes, C13-16-iso-	68551-20-2	X		1, 4
Alkenes, C>10 .alpha.-	64743-02-8	X		1, 3, 4, 8
Alkenes, C>8	68411-00-7			1
Alkenes, C24-25 alpha-, polymers with maleic anhydride, docosyl esters	68607-07-8			8
Alkyl quaternary ammonium with bentonite	71011-24-0			4
Alkyl* dimethyl ethylbenzyl ammonium chloride *(50%C12, 30%C14, 17%C16, 3%C18)	85409-23-0_1	X		8
Alkyl* dimethyl ethylbenzyl ammonium chloride *(60%C14, 30%C16, 5%C12, 5%C18)	68956-79-6	X		8
Alkylbenzenesulfonate, linear	42615-29-2	X		1, 4, 6
Almandite and pyrope garnet	1302-62-1			1, 4
alpha-[3.5-dimethyl-1-(2-methylpropyl)hexyl]-omega-hydroxy-poly(oxy-1,2-ethandiyl)	60828-78-6			3
alpha-Amylase	9000-90-2			4
alpha-Lactose monohydrate	5989-81-1	X		8
alpha-Terpineol	98-55-5	X		3
Alumina	1344-28-1			1, 2, 4
Aluminatesilicate	1327-36-2			8
Aluminum	7429-90-5		X	1, 4, 6
Aluminum calcium oxide (Al2CaO4)	12042-68-1			2

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Aluminum chloride	7446-70-0			1, 4
Aluminum chloride hydroxide sulfate	39290-78-3			8
Aluminum chloride, basic	1327-41-9			3, 4
Aluminum oxide (Al <sub>2</sub> O <sub>3</sub> )	90669-62-8			8
Aluminum oxide silicate	12068-56-3			1, 2, 4
Aluminum silicate	12141-46-7			1, 2, 4
Aluminum sulfate	10043-01-3			1, 4
Amaranth	915-67-3	X		4
Amides, C8-18 and C18-unsatd., N,N-bis(hydroxyethyl)	68155-07-7			3
Amides, coco, N-[3-(dimethylamino)propyl]	68140-01-2			1, 4
Amides, coco, N-[3-(dimethylamino)propyl], alkylation products with chloroacetic acid, sodium salts	70851-07-9			1, 4
Amides, coco, N-[3-(dimethylamino)propyl], alkylation products with sodium 3-chloro-2-hydroxypropanesulfonate	70851-08-0			8
Amides, coco, N-[3-(dimethylamino)propyl], N-oxides	68155-09-9			1, 3, 4
Amides, from C16-22 fatty acids and diethylenetriamine	68876-82-4			3
Amides, tall-oil fatty, N,N-bis(hydroxyethyl)	68155-20-4			3, 4
Amides, tallow, N-[3-(dimethylamino)propyl],N-oxides	68647-77-8			1, 4
Amine oxides, cocoalkyldimethyl	61788-90-7			8
Amines, C14-18; C16-18-unsaturated, alkyl, ethoxylated	68155-39-5			1
Amines, C8-18 and C18-unsatd. alkyl	68037-94-5			5
Amines, coco alkyl	61788-46-3			4
Amines, coco alkyl, acetates	61790-57-6			1, 4
Amines, coco alkyl, ethoxylated	61791-14-8			8
Amines, coco alkyldimethyl	61788-93-0			8
Amines, dicoco alkyl	61789-76-2			8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Amines, dicoco alkylmethyl	61788-62-3			8
Amines, ditallow alkyl, acetates	71011-03-5			8
Amines, hydrogenated tallow alkyl, acetates	61790-59-8			4
Amines, N-tallow alkyltrimethylenedi-, ethoxylated	61790-85-0			8
Amines, polyethylenepoly-, ethoxylated, phosphonomethylated	68966-36-9			1, 4
Amines, polyethylenepoly-, reaction products with benzyl chloride	68603-67-8			1
Amines, tallow alkyl	61790-33-8			8
Amines, tallow alkyl, ethoxylated, acetates (salts)	68551-33-7			1, 3, 4
Amines, tallow alkyl, ethoxylated, phosphates	68308-48-5			4
Aminotrimethylene phosphonic acid	6419-19-8	X		1, 4, 8
<i>Ammonia</i>	7664-41-7			1, 2, 3, 4, 7
Ammonium (lauryloxy)polyethoxyethyl sulfate	32612-48-9			4
Ammonium acetate	631-61-8	X		1, 3, 4, 5, 8
Ammonium acrylate	10604-69-0	X		8
Ammonium acrylate-acrylamide polymer	26100-47-0			2, 4, 8
Ammonium bisulfate	7803-63-6			2
Ammonium bisulfite	10192-30-0			1, 2, 3, 4, 7
Ammonium chloride	12125-02-9			1, 2, 3, 4, 5, 6, 8
Ammonium citrate (1:1)	7632-50-0	X		3
Ammonium citrate (2:1)	3012-65-5	X		8
Ammonium dodecyl sulfate	2235-54-3	X		1
Ammonium fluoride	12125-01-8			1, 4
Ammonium hydrogen carbonate	1066-33-7	X		1, 4
Ammonium hydrogen difluoride	1341-49-7			1, 3, 4, 7
Ammonium hydrogen phosphonate	13446-12-3			4
Ammonium hydroxide	1336-21-6			1, 3, 4
Ammonium lactate	515-98-0	X		8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Ammonium ligninsulfonate	8061-53-8			2
Ammonium nitrate	6484-52-2			1, 2, 3
Ammonium phosphate	7722-76-1		X	1, 4
Ammonium sulfate	7783-20-2			1, 2, 3, 4, 6
Ammonium thiosulfate	7783-18-8			8
Amorphous silica	99439-28-8			1, 7
Anethole	104-46-1	X		3
Aniline	62-53-3	X	X	2, 4
Antimony pentoxide	1314-60-9			1, 4
Antimony trichloride	10025-91-9		X	1, 4
Antimony trioxide	1309-64-4		X	8
<i>Arsenic</i>	7440-38-2		X	4
Ashes, residues	68131-74-8			4
Asphalt, sulfonated, sodium salt	68201-32-1			2
Attapulgate	12174-11-7			2, 3
Aziridine, polymer with 2-methyloxirane	31974-35-3			4, 8
Barium sulfate	7727-43-7			1, 2, 4
Bauxite	1318-16-7			1, 2, 4
Benactyzine hydrochloride	57-37-4	X		8
Bentonite	1302-78-9			1, 2, 4, 6
Bentonite, benzyl(hydrogenated tallow alkyl) dimethylammonium stearate complex	121888-68-4			3, 4
Benzamorf	12068-08-5	X		1, 4
<i>Benzene</i>	71-43-2	X	X	1, 3, 4
Benzene, 1,1'-oxybis-, sec-hexyl derivs., sulfonated, sodium salts	147732-60-3			8
Benzene, 1,1'-oxybis-, tetrapropylene derivs., sulfonated	119345-03-8			8
Benzene, 1,1'-oxybis-, tetrapropylene derivs., sulfonated, sodium salts	119345-04-9			3, 4, 8
Benzene, C10-16-alkyl derivs.	68648-87-3	X		1

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Benzene, ethenyl-, polymer with 2-methyl-1,3-butadiene, hydrogenated	68648-89-5			8
Benzenemethanaminium, N,N-dimethyl-N-(2-((1-oxo-2-propen-1-yl)oxy)ethyl)-, chloride (1:1), polymer with 2-propenamide	74153-51-8			3
Benzenesulfonic acid	98-11-3	X		2
Benzenesulfonic acid, (1-methylethyl)-,	37953-05-2	X		4
Benzenesulfonic acid, (1-methylethyl)-, ammonium salt	37475-88-0	X		3, 4
Benzenesulfonic acid, (1-methylethyl)-, sodium salt	28348-53-0	X		8
Benzenesulfonic acid, C10-16-alkyl derivs.	68584-22-5		X	1, 4
Benzenesulfonic acid, C10-16-alkyl derivs., compds. with cyclohexylamine	255043-08-4	X		1
Benzenesulfonic acid, C10-16-alkyl derivs., compds. with triethanolamine	68584-25-8	X		8
Benzenesulfonic acid, C10-16-alkyl derivs., potassium salts	68584-27-0	X		1, 4, 8
Benzenesulfonic acid, dodecyl-, branched, compds. with 2-propanamine	90218-35-2	X		4
Benzenesulfonic acid, mono-C10-16 alkyl derivs., compds. with 2-propanamine	68648-81-7			1, 4
Benzenesulfonic acid, mono-C10-16-alkyl derivs., sodium salts	68081-81-2	X		8
Benzoic acid	65-85-0	X	X	1, 4, 7
Benzyl chloride	100-44-7	X	X	1, 2, 4, 8
Benzyltrimethylammonium chloride	139-07-1	X		2, 8
Benzylhexadecyldimethylammonium chloride	122-18-9	X		8
Benzyltrimethylammonium chloride	56-93-9	X		8
Bicine	150-25-4	X		1, 4
Bio-Perge	55965-84-9			8
Bis(1-methylethyl)naphthalenesulfonic acid, cyclohexylamine salt	68425-61-6	X		1
<i>Bis(2-chloroethyl) ether</i>	<i>111-44-4</i>	X	X	8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Bisphenol A	80-05-7	X	X	4
Bisphenol A/ Epichlorohydrin resin	25068-38-6			1, 2, 4
Bisphenol A/ Novolac epoxy resin	28906-96-9			1, 4
Blast furnace slag	65996-69-2			2, 3
Borax	1303-96-4			1, 2, 3, 4, 6
Boric acid	10043-35-3			1, 2, 3, 4, 6, 7
Boric acid (H3BO3), compd. with 2-aminoethanol (1:x)	26038-87-9			8
Boric oxide	1303-86-2			1, 2, 3, 4
Boron potassium oxide (B4K2O7)	1332-77-0			8
Boron potassium oxide (B4K2O7), tetrahydrate	12045-78-2			8
Boron potassium oxide (B5KO8)	11128-29-3			1
Boron sodium oxide	1330-43-4			1, 2, 4
Boron sodium oxide pentahydrate	12179-04-3			8
Bronopol	52-51-7	X		1, 2, 3, 4, 6
Butane	106-97-8	X		2, 5
Butanedioic acid, sulfo-, 1,4-bis(1,3-dimethylbutyl) ester, sodium salt	2373-38-8	X		1
Butene	25167-67-3	X		8
Butyl glycidyl ether	2426-08-6	X		1, 4
Butyl lactate	138-22-7	X		1, 4
Butyryl trihexyl citrate	82469-79-2	X		8
C.I. Acid Red 1	3734-67-6	X		4
C.I. Acid violet 12, disodium salt	6625-46-3	X		4
C.I. Pigment Red 5	6410-41-9	X		4
C.I. Solvent Red 26	4477-79-6	X		4
C10-16-Alkyldimethylamines oxides	70592-80-2	X		4
C10-C16 ethoxylated alcohol	68002-97-1	X		1, 2, 3, 4, 8
C11-15-Secondary alcohols ethoxylated	68131-40-8			1, 2, 8
C12-14 tert-alkyl ethoxylated amines	73138-27-9	X		3
C8-10 Alcohols	85566-12-7			8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Calcined bauxite	66402-68-4			2, 8
Calcium aluminate	12042-78-3			2
Calcium bromide	7789-41-5			4
Calcium carbide (CaC <sub>2</sub> )	75-20-7			8
Calcium chloride	10043-52-4			1, 2, 3, 4, 7
Calcium dichloride dihydrate	10035-04-8			1, 4
Calcium dodecylbenzene sulfonate	26264-06-2	X		4
Calcium fluoride	7789-75-5			1, 4
Calcium hydroxide	1305-62-0			1, 2, 3, 4
Calcium hypochlorite	7778-54-3			1, 2, 4
Calcium magnesium hydroxide oxide	58398-71-3			4
Calcium oxide	1305-78-8			1, 2, 4, 7
Calcium peroxide	1305-79-9			1, 3, 4, 8
Calcium sulfate	7778-18-9			1, 2, 4
Calcium sulfate dihydrate	10101-41-4			2
Camphor	76-22-2	X		3
Canola oil	120962-03-0			8
Carbon black	1333-86-4			1, 2, 4
<i>Carbon dioxide</i>	<i>124-38-9</i>	X		<i>1, 3, 4, 6</i>
Carbonic acid calcium salt (1:1)	471-34-1			1, 2, 4
Carbonic acid, dipotassium salt	584-08-7	X		1, 2, 3, 4, 8
Carboxymethyl guar gum, sodium salt	39346-76-4			1, 2, 4
Castor oil	8001-79-4			8
Cedarwood oil	8000-27-9			3
Cellophane	9005-81-6			1, 4
Cellulose	9004-34-6			1, 2, 3, 4
<i>Chloride</i>	<i>16887-00-6</i>			<i>4, 8</i>
<i>Chlorine</i>	<i>7782-50-5</i>		X	2
Chlorine dioxide	10049-04-4		X	1, 2, 3, 4, 8
Choline bicarbonate	78-73-9	X		3, 8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Choline chloride	67-48-1	X		1, 3, 4, 7, 8
Chromium (III)	16065-83-1		X	2, 6
Chromium (VI)	18540-29-9		X	6
Chromium acetate, basic	39430-51-8			2
Chromium(III) acetate	1066-30-4			1, 2
Citric acid	77-92-9	X		1, 2, 3, 4, 7
Citronella oil	8000-29-1			3
Citronellol	106-22-9	X		3
Citrus extract	94266-47-4			1, 3, 4, 8
Coal, granular	50815-10-6			1, 2, 4
Cobalt(II) acetate	71-48-7			1, 4
Coco-betaine	68424-94-2			3
Coconut oil	8001-31-8			8
Coconut oil acid/Diethanolamine condensate (2:1)	68603-42-9			1
Coconut trimethylammonium chloride	61789-18-2	X		1, 8
Copper	7440-50-8		X	1, 4
Copper sulfate	7758-98-7			1, 4, 8
Copper(I) chloride	7758-89-6			1, 4
Copper(I) iodide	7681-65-4		X	1, 2, 4, 6
Copper(II) chloride	7447-39-4			1, 3, 4
Copper(II) sulfate, pentahydrate	7758-99-8			8
Corn flour	68525-86-0			4
Corn sugar gum	11138-66-2			1, 2, 4
Corundum (Aluminum oxide)	1302-74-5			4, 8
Cottonseed, flour	68308-87-2			2, 4
Coumarin	91-64-5	X		3
Cremophor(R) EL	61791-12-6			1, 3
Cristobalite	14464-46-1			1, 2, 4
Crystalline silica, tridymite	15468-32-3			1, 2, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Chemical name</b>	<b>CASRN</b>	<b>Physico-chemical properties</b>	<b>Selected toxicity reference value</b>	<b>Reference</b>
<i>Cumene</i>	98-82-8	X	X	1, 2, 3, 4
Cupric chloride dihydrate	10125-13-0			1, 4, 7
Cyclohexane	110-82-7	X		1, 7
Cyclohexanol	108-93-0	X		8
Cyclohexanone	108-94-1	X	X	1, 4
Cyclohexylamine sulfate	19834-02-7	X		8
D&C Red 28	18472-87-2	X		4
D&C Red No. 33	3567-66-6	X		8
Daidzein	486-66-8	X		8
Dapsone	80-08-0	X		1, 4
Dazomet	533-74-4	X		1, 2, 3, 4, 7, 8
Decamethylcyclopentasiloxane	541-02-6			8
Decyldimethylamine	1120-24-7	X		3, 4
Deuterium oxide	7789-20-0			8
D-Glucitol	50-70-4	X		1, 3, 4
D-Gluconic acid	526-95-4	X		1, 4
D-Glucopyranoside, methyl	3149-68-6	X		2
D-Glucose	50-99-7	X		1, 4
<i>Di(2-ethylhexyl) phthalate</i>	117-81-7	X	X	1, 4
Diammonium peroxydisulfate	7727-54-0			1, 2, 3, 4, 6, 7, 8
Diatomaceous earth	68855-54-9			2, 4
Diatomaceous earth, calcined	91053-39-3			1, 2, 4
Dibromoacetonitrile	3252-43-5	X		1, 2, 3, 4, 8
Dicalcium silicate	10034-77-2			1, 2, 4
<i>Dichloromethane</i>	75-09-2	X	X	8
Didecyldimethylammonium chloride	7173-51-5	X	X	1, 2, 4, 8
Diethanolamine	111-42-2	X		1, 2, 3, 4, 6
Diethylbenzene	25340-17-4	X		1, 3, 4
Diethylene glycol	111-46-6	X		1, 2, 3, 4, 7

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Chemical name</b>	<b>CASRN</b>	<b>Physico-chemical properties</b>	<b>Selected toxicity reference value</b>	<b>Reference</b>
Diethylene glycol monomethyl ether	111-77-3	X		1, 2, 4
Diethylenetriamine	111-40-0	X		1, 2, 4, 5
Diethylenetriamine reaction product with fatty acid dimers	68647-57-4			2
Diisobutyl ketone	108-83-8	X		8
Diisopropanolamine	110-97-4	X		8
Diisopropyl naphthalene	38640-62-9	X		3, 4
Dimethyl adipate	627-93-0	X		8
Dimethyl glutarate	1119-40-0	X		1, 4
Dimethyl polysiloxane	63148-62-9			1, 2, 4
Dimethyl succinate	106-65-0	X		8
Dimethylaminoethanol	108-01-0	X		2, 4
Dimethyldiallylammonium chloride	7398-69-8	X		3, 4
Diphenyl oxide	101-84-8	X		3
Dipotassium monohydrogen phosphate	7758-11-4			5
Dipropylene glycol	25265-71-8	X		1, 3, 4
Di-sec-butylphenol	31291-60-8	X		1
Disodium dodecyl(sulphonatophenoxy) benzenesulphonate	28519-02-0	X		1
Disodium ethylenediaminediacetate	38011-25-5	X		1, 4
Disodium ethylenediaminetetraacetate dihydrate	6381-92-6	X		1
Disodium octaborate	12008-41-2			4, 8
Disodium octaborate tetrahydrate	12280-03-4			1, 4
Disodium sulfide	1313-82-2			8
Distillates, petroleum, catalytic reformer fractionator residue, low-boiling	68477-31-6			1, 4
Distillates, petroleum, heavy arom.	67891-79-6			1, 4
Distillates, petroleum, hydrodesulfurized light catalytic cracked	68333-25-5			1
Distillates, petroleum, hydrodesulfurized middle	64742-80-9			1

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Distillates, petroleum, hydrotreated heavy naphthenic	64742-52-5			1, 2, 3, 4
Distillates, petroleum, hydrotreated heavy paraffinic	64742-54-7			1, 2, 4
Distillates, petroleum, hydrotreated light	64742-47-8			1, 2, 3, 4, 5, 7, 8
Distillates, petroleum, hydrotreated light naphthenic	64742-53-6			1, 2, 8
Distillates, petroleum, hydrotreated light paraffinic	64742-55-8			8
Distillates, petroleum, hydrotreated middle	64742-46-7			1, 2, 3, 4, 8
Distillates, petroleum, light catalytic cracked	64741-59-9			1, 4
Distillates, petroleum, light hydrocracked	64741-77-1			3
Distillates, petroleum, solvent-dewaxed heavy paraffinic	64742-65-0			1
Distillates, petroleum, solvent-refined heavy naphthenic	64741-96-4			1, 4
Distillates, petroleum, steam-cracked	64742-91-2			1, 4
Distillates, petroleum, straight-run middle	64741-44-2			1, 2, 4
Distillates, petroleum, sweetened middle	64741-86-2			1, 4
Ditallow alkyl ethoxylated amines	71011-04-6			3
D-Lactic acid	10326-41-7	X		1, 4
D-Limonene	5989-27-5	X	X	1, 3, 4, 5, 7, 8
Docusate sodium	577-11-7	X		1
Dodecamethylcyclohexasiloxane	540-97-6			8
Dodecane	112-40-3	X		8
Dodecylbenzene	123-01-3	X		3, 4
Dodecylbenzenesulfonic acid	27176-87-0	X	X	2, 3, 4, 8
Dodecylbenzenesulfonic acid, monoethanolamine salt	26836-07-7	X		1, 4
Edifas B	9004-32-4			2, 3, 4
EDTA, copper salt	12276-01-6			1, 5, 6
Endo-1,4-.beta.-mannanase	37288-54-3			3, 8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Epichlorohydrin	106-89-8	X	X	1, 4, 8
Epoxy resin	25085-99-8			1, 4, 8
Erucic amidopropyl dimethyl betaine	149879-98-1			1, 3
Ethanaminium, N,N,N-trimethyl-2-[(1-oxo-2-propenyl)oxy]-, chloride	44992-01-0	X		3
Ethanaminium, N,N,N-trimethyl-2-[(1-oxo-2-propenyl)oxy]-,chloride, polymer with 2-propenamamide	69418-26-4			1, 3, 4
Ethanaminium, N,N,N-trimethyl-2-[(2-methyl-1-oxo-2-propen-1-yl)oxy]-, chloride (1:1), polymer with 2-propenamamide	35429-19-7			8
Ethanaminium, N,N,N-trimethyl-2-[(2-methyl-1-oxo-2-propenyl)oxy]-, methyl sulfate, homopolymer	27103-90-8			8
Ethane	74-84-0	X		2, 5
Ethanol	64-17-5	X		1, 2, 3, 4, 5, 6, 8
Ethanol, 2,2',2''-nitrilotris-, tris(dihydrogen phosphate) (ester), sodium salt	68171-29-9	X		4
Ethanol, 2,2'-iminobis-, N-coco alkyl derivs., N-oxides	61791-47-7			1
Ethanol, 2,2'-iminobis-, N-tallow alkyl derivs.	61791-44-4			1
Ethanol, 2,2'-oxybis-, reaction products with ammonia, morpholine derivs. residues	68909-77-3			4, 8
Ethanol, 2,2'-oxybis-, reaction products with ammonia, morpholine derivs. residues, acetates (salts)	68877-16-7			4
Ethanol, 2,2'-oxybis-, reaction products with ammonia, morpholine derivs. residues, reaction products with sulfur dioxide	102424-23-7			4
Ethanol, 2-[2-[2-(tridecyloxy)ethoxy]ethoxy]-, hydrogen sulfate, sodium salt	25446-78-0	X		1, 4
Ethanol, 2-amino-, polymer with formaldehyde	34411-42-2			4
Ethanol, 2-amino-, reaction products with ammonia, by-products from, phosphonomethylated	68649-44-5			4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Ethanolamine	141-43-5	X		1, 2, 3, 4, 6
Ethoxylated dodecyl alcohol	9002-92-0	X		4
Ethoxylated hydrogenated tallow alkylamines	61790-82-7			4
Ethoxylated, propoxylated trimethylolpropane	52624-57-4			3
Ethyl acetate	141-78-6	X	X	1, 4, 7
Ethyl acetoacetate	141-97-9	X		1, 4
Ethyl benzoate	93-89-0	X		3
Ethyl lactate	97-64-3	X		3
Ethyl salicylate	118-61-6	X		3
<i>Ethylbenzene</i>	<i>100-41-4</i>	X	X	1, 2, 3, 4, 7
Ethylcellulose	9004-57-3			2
Ethylene	74-85-1	X		8
<i>Ethylene glycol</i>	<i>107-21-1</i>	X	X	1, 2, 3, 4, 6, 7, 8
Ethylene oxide	75-21-8	X	X	1, 2, 3, 4
Ethylenediamine	107-15-3	X	X	2, 4
Ethylenediaminetetraacetic acid	60-00-4	X		1, 2, 4
Ethylenediaminetetraacetic acid tetrasodium salt	64-02-8	X		1, 2, 3, 4
Ethylenediaminetetraacetic acid, diammonium copper salt	67989-88-2			4
Ethylenediaminetetraacetic acid, disodium salt	139-33-3	X		1, 3, 4, 8
Ethyne	74-86-2	X		7
Fats and Glyceridic oils, vegetable, hydrogenated	68334-28-1			8
Fatty acid, tall oil, hexa esters with sorbitol, ethoxylated	61790-90-7			1, 4
Fatty acids, C 8-18 and C18-unsaturated compounds with diethanolamine	68604-35-3			3
Fatty acids, C14-18 and C16-18-unsatd., distn. residues	70321-73-2			2
Fatty acids, C18-unsatd., dimers	61788-89-4	X		2

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Fatty acids, C18-unsatd., dimers, compds. with ethoxylated tall-oil fatty acid-polyethylenepolyamine reaction products	68132-59-2			8
Fatty acids, C18-unsatd., dimers, ethoxylated propoxylated	68308-89-4			8
Fatty acids, coco, ethoxylated	61791-29-5			3
Fatty acids, coco, reaction products with diethylenetriamine and soya fatty acids, ethoxylated, chloromethane-quaternized	68604-75-1			8
Fatty acids, coco, reaction products with ethanolamine, ethoxylated	61791-08-0			3
Fatty acids, tall oil, reaction products with acetophenone, formaldehyde and thiourea	68188-40-9			3
Fatty acids, tall-oil	61790-12-3			1, 2, 3, 4
Fatty acids, tall-oil, reaction products with diethylenetriamine	61790-69-0			1, 4
Fatty acids, tall-oil, reaction products with diethylenetriamine, maleic anhydride, tetraethylenepentamine and triethylenetetramine	68990-47-6			8
Fatty acids, tallow, sodium salts	8052-48-0			1, 3
Fatty acids, vegetable-oil, reaction products with diethylenetriamine	68153-72-0			3
Fatty quaternary ammonium chloride	61789-68-2			1, 4
FD&C Blue no. 1	3844-45-9	X		1, 4
FD&C Yellow 5	1934-21-0	X		8
FD&C Yellow 6	2783-94-0	X		8
Ferric chloride	7705-08-0			1, 3, 4
Ferric sulfate	10028-22-5			1, 4
Ferrous sulfate monohydrate	17375-41-6			2
Ferumoxytol	1309-38-2			8
Fiberglass	65997-17-3			2, 3, 4
Formaldehyde	50-00-0	X	X	1, 2, 3, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Formaldehyde polymer with 4,1,1-(dimethylethyl)phenol and methyloxirane	29316-47-0			3
Formaldehyde polymer with methyl oxirane, 4-nonylphenol and oxirane	63428-92-2			4, 8
Formaldehyde, polymer with 4-(1,1-dimethylethyl)phenol, 2-methyloxirane and oxirane	30704-64-4			1, 2, 4, 8
Formaldehyde, polymer with 4-(1,1-dimethylethyl)phenol, 2-methyloxirane, 4-nonylphenol and oxirane	68188-99-8			8
Formaldehyde, polymer with 4-nonylphenol and oxirane	30846-35-6			1, 4
Formaldehyde, polymer with 4-nonylphenol and phenol	40404-63-5			8
Formaldehyde, polymer with ammonia and phenol	35297-54-2			1, 4
Formaldehyde, polymer with bisphenol A	25085-75-0			4
Formaldehyde, polymer with N1-(2-aminoethyl)-1,2-ethanediamine, benzylated	70750-07-1			8
Formaldehyde, polymer with nonylphenol and oxirane	55845-06-2			4
Formaldehyde, polymers with branched 4-nonylphenol, oxirane and 2-methyloxirane	153795-76-7			1 3
Formaldehyde/ amine	50-00-0_3			1, 2, 3, 4
Formamide	75-12-7	X		1, 2, 3, 4
<i>Formic acid</i>	<i>64-18-6</i>	X	X	<i>1, 2, 3, 4, 6, 7</i>
Formic acid, potassium salt	590-29-4	X		1, 3, 4
Frits, chemicals	65997-18-4			8
Fuel oil, no. 2	68476-30-2			1, 2
Fuels, diesel	68334-30-5			2
Fuels, diesel, no. 2	68476-34-6			2, 4, 8
Fuller's earth	8031-18-3			2
Fumaric acid	110-17-8	X		1, 2, 3, 4, 6
Fumes, silica	69012-64-2			8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Furfural	98-01-1	X	X	1, 4
Furfuryl alcohol	98-00-0	X		1, 4
Galantamine hydrobromide	69353-21-5	X		8
Gas oils, petroleum, straight-run	64741-43-1			1, 4
Gelatin	9000-70-8			1, 4
Gilsonite	12002-43-6			1, 2, 4
Gluconic acid	133-42-6	X		7
Glutaraldehyde	111-30-8	X		1, 2, 3, 4, 7
Glycerides, C14-18 and C16-18-unsatd. mono- and di-	67701-32-0			8
Glycerol	56-81-5	X		1, 2, 3, 4, 5
Glycine, N-(carboxymethyl)-N-(2-hydroxyethyl)-, disodium salt	135-37-5	X		1
Glycine, N-(hydroxymethyl)-, monosodium salt	70161-44-3	X		8
Glycine, N,N-bis(carboxymethyl)-, trisodium salt	5064-31-3	X		1, 2, 3, 4
Glycine, N-[2-[bis(carboxymethyl)amino]ethyl]-N-(2-hydroxyethyl)-, trisodium salt	139-89-9	X		1
Glycolic acid	79-14-1	X		1, 3, 4
Glycolic acid sodium salt	2836-32-0	X		1, 3, 4
Glyoxal	107-22-2	X	X	1, 2, 4
Glyoxylic acid	298-12-4	X		1
Goethite (Fe(OH)O)	1310-14-1			8
Guar gum	9000-30-0			1, 2, 3, 4, 7, 8
Guar gum, carboxymethyl 2-hydroxypropyl ether, sodium salt	68130-15-4			1, 2, 3, 4, 7
Gypsum (Ca(SO <sub>4</sub> ).2H <sub>2</sub> O)	13397-24-5			2, 4
Hematite	1317-60-8			1, 2, 4
Hemicellulase	9012-54-8			1, 2, 3, 4, 5
Hemicellulase enzyme concentrate	9025-56-3			3, 4
Heptane	142-82-5	X		1, 2
Heptene, hydroformylation products, high-boiling	68526-88-5			1, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Hexadecyltrimethylammonium bromide	57-09-0	X		1
Hexane	110-54-3	X	X	5
Hexanedioic acid	124-04-9	X	X	1, 2, 4, 6
Humic acids, commercial grade	1415-93-6			2
Hydrazine	302-01-2		X	8
Hydrocarbons, terpene processing by-products	68956-56-9			1, 3, 4
Hydrochloric acid	7647-01-0			1, 2, 3, 4, 5, 6, 7, 8
Hydrogen fluoride	7664-39-3			1, 2, 4
Hydrogen peroxide	7722-84-1			1, 3, 4
Hydrogen sulfide	7783-06-4			1, 2
Hydroxyethylcellulose	9004-62-0			1, 2, 3, 4
Hydroxylamine hydrochloride	5470-11-1			1, 3, 4
Hydroxylamine sulfate (2:1)	10039-54-0			4
Hydroxypropyl cellulose	9004-64-2			2, 4
Hydroxypropyl guar gum	39421-75-5			1, 3, 4, 5, 6, 8
Hydroxyvaleric acid	1619-16-5	X		8
Hypochlorous acid	7790-92-3			8
Illite	12173-60-3			8
Ilmenite (FeTiO <sub>3</sub> ), conc.	98072-94-7			8
Indole	120-72-9	X		2
Inulin, carboxymethyl ether, sodium salt	430439-54-6			1, 4
Iridium oxide	12030-49-8			8
<i>Iron</i>	7439-89-6		X	2, 4
Iron oxide	1332-37-2			1, 4
Iron oxide (Fe <sub>3</sub> O <sub>4</sub> )	1317-61-9			4
Iron(II) sulfate	7720-78-7			2
Iron(II) sulfate heptahydrate	7782-63-0			1, 2, 3, 4
Iron(III) oxide	1309-37-1			1, 2, 4
Isoascorbic acid	89-65-6	X		1, 3, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Isobutane	75-28-5	X		2
Isobutene	115-11-7	X		8
Isooctanol	26952-21-6	X		1, 4, 5
Isopentyl alcohol	123-51-3	X		1, 4
<i>Isopropanol</i>	<i>67-63-0</i>	X		1, 2, 3, 4, 6, 7
Isopropanolamine dodecylbenzene	42504-46-1	X		1, 3, 4
Isopropylamine	75-31-0	X		1, 4
Isoquinoline	119-65-3	X		8
Isoquinoline, reaction products with benzyl chloride and quinoline	68909-80-8	X		3
Isoquinolinium, 2-(phenylmethyl)-, chloride	35674-56-7	X		3
Isotridecanol, ethoxylated	9043-30-5			1, 3, 4, 8
Kaolin	1332-58-7			1, 2, 4
Kerosine, petroleum, hydrodesulfurized	64742-81-0			1, 2, 4
Kieselguhr	61790-53-2			1, 2, 4
Kyanite	1302-76-7			1, 2, 4
Lactic acid	50-21-5	X		1, 4, 8
Lactose	63-42-3	X		3
Latex 2000 TM	9003-55-8			2, 4
Lauryl hydroxysultaine	13197-76-7	X		1
Lavandula hybrida abrial herb oil	8022-15-9			3
L-Dilactide	4511-42-6	X		1, 4
<i>Lead</i>	<i>7439-92-1</i>		X	1, 4
Lecithin	8002-43-5			4
L-Glutamic acid	56-86-0	X		8
Lignite	129521-66-0			2
Lignosulfuric acid	8062-15-5			2
Ligroine	8032-32-4			8
Limestone	1317-65-3			1, 2, 3, 4
Linseed oil	8001-26-1			8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
L-Lactic acid	79-33-4	X		1, 4, 8
Magnesium carbonate (1:1)	7757-69-9			8
Magnesium carbonate (1:x)	546-93-0			1, 3, 4
Magnesium chloride	7786-30-3			1, 2, 4
Magnesium chloride hexahydrate	7791-18-6			4
Magnesium hydroxide	1309-42-8			1, 4
Magnesium iron silicate	19086-72-7			1, 4
Magnesium nitrate	10377-60-3			1, 2, 4
Magnesium oxide	1309-48-4			1, 2, 3, 4
Magnesium peroxide	14452-57-4			1, 4
Magnesium phosphide	12057-74-8			1
Magnesium silicate	1343-88-0			1, 4
Magnesium sulfate	7487-88-9			8
Maleic acid homopolymer	26099-09-2			8
Methanamine-N-methyl polymer with chloromethyl oxirane	25988-97-0			4
Methane	74-82-8	X		2, 5
<i>Methanol</i>	67-56-1	X	X	1, 2, 3, 4, 5, 6, 7, 8
Methenamine	100-97-0	X		1, 2, 4
Methoxyacetic acid	625-45-6	X		8
Methyl cellulose	9004-67-5			8
Methyl salicylate	119-36-8	X		1, 2, 3, 4, 7
Methyl vinyl ketone	78-94-4	X		1, 4
Methylcyclohexane	108-87-2	X		1
Methylene bis(thiocyanate)	6317-18-6	X		2
Methylenebis(5-methyloxazolidine)	66204-44-2	X		2
Methyloxirane polymer with oxirane, mono (nonylphenol) ether, branched	68891-11-2			3
Mica	12001-26-2			1, 2, 4, 6
Mineral oil - includes paraffin oil	8012-95-1		X	4, 8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Mineral spirits	64475-85-0			2
Mono- and di- potassium salts of phosphorous acid	13492-26-7			8
Montmorillonite	1318-93-0			2
Morpholine	110-91-8	X		1, 2, 4
Morpholinium, 4-ethyl-4-hexadecyl-, ethyl sulfate	78-21-7	X		8
MT 6	76-31-3			8
Mullite	1302-93-8			1,2, 4, 8
N-(2-Acryloyloxyethyl)-N-benzyl-N,N-dimethylammonium chloride	46830-22-2	X		3
N-(3-Chloroallyl)hexaminium chloride	4080-31-3	X		8
N,N,N-Trimethyl-2[1-oxo-2-propenyl]oxy ethanaminium chloride, homopolymer	54076-97-0			3
N,N,N-Trimethyl-3-((1-oxooctadecyl)amino)-1-propanaminium methyl sulfate	19277-88-4	X		1
N,N,N-Trimethyloctadecan-1-aminium chloride	112-03-8	X		1, 3, 4
N,N'-Dibutylthiourea	109-46-6	X		1, 4
N,N-Dimethyldecylamine oxide	2605-79-0	X		1, 3, 4
N,N-Dimethylformamide	68-12-2	X	X	1, 2, 4, 5, 8
N,N-Dimethylmethanamine hydrochloride	593-81-7	X		1, 4, 5, 7
N,N-Dimethyl-methanamine-N-oxide	1184-78-7	X		3
N,N-dimethyloctadecylamine hydrochloride	1613-17-8	X		1, 4
N,N'-Methylenebisacrylamide	110-26-9	X		1, 4
Naphtha, petroleum, heavy catalytic reformed	64741-68-0			1, 2, 3, 4
Naphtha, petroleum, hydrotreated heavy	64742-48-9			1, 2, 3, 4, 8
<i>Naphthalene</i>	91-20-3	X	X	1, 2, 3, 4, 5, 7
Naphthalenesulfonic acid, bis(1-methylethyl)-	28757-00-8	X		1, 3, 4
Naphthalenesulfonic acid, polymer with formaldehyde, sodium salt	9084-06-4			2
Naphthalenesulphonic acid, bis (1-methylethyl)-methyl derivatives	99811-86-6	X		1

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Naphthenic acid ethoxylate	68410-62-8	X		4
Navy fuels JP-5	8008-20-6_2			1, 2, 3, 4, 8
Nickel sulfate	7786-81-4			2
Nickel(II) sulfate hexahydrate	10101-97-0			1, 4
Nitriles, tallow, hydrogenated	61790-29-2			4
Nitrilotriacetamide	4862-18-4	X		1, 4, 7
Nitrilotriacetic acid	139-13-9	X	X	1, 4
Nitrilotriacetic acid trisodium monohydrate	18662-53-8	X	X	1, 4
Nitrogen	7727-37-9			1, 2, 3, 4, 6
N-Methyl-2-pyrrolidone	872-50-4	X	X	1, 4
N-Methyldiethanolamine	105-59-9	X		2, 4, 8
N-Methylethanolamine	109-83-1	X		4
N-Methyl-N-hydroxyethyl-N-hydroxyethoxyethylamine	68213-98-9	X		4
N-Oleyl diethanolamide	13127-82-7	X		1, 4
Nonyl nonoxynol-10	9014-93-1			4
Nonylphenol (mixed)	25154-52-3			1, 4
Octamethylcyclotetrasiloxane	556-67-2			8
Octoxynol-9	9036-19-5			1, 2, 3, 4, 8
Oil of eucalyptus	8000-48-4			3
Oil of lemongrass	8007-02-1			3
Oil of rosemary	8000-25-7			3
Oleic acid	112-80-1	X		2, 4
Olivine-group minerals	1317-71-1			4
Orange terpenes	8028-48-6			4
Oxirane, 2-methyl-, polymer with oxirane, ether with (chloromethyl) oxirane polymer with 4,4'-(1-methylidene) bis[phenol]	68036-95-3			8
Oxirane, 2-methyl-, polymer with oxirane, mono(2-ethylhexyl) ether	64366-70-7			8
Oxirane, 2-methyl-, polymer with oxirane, monodecyl ether	37251-67-5			8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Oxirane, methyl-, polymer with oxirane, mono-C10-16-alkyl ethers, phosphates	68649-29-6			1, 4
Oxygen	7782-44-7			4
Ozone	10028-15-6			8
Paraffin waxes and Hydrocarbon waxes	8002-74-2			1
Paraformaldehyde	30525-89-4			2
PEG-10 Hydrogenated tallow amine	61791-26-2			1, 3
Pentaethylenehexamine	4067-16-7	X		4
Pentane	109-66-0	X		2, 5
Pentyl acetate	628-63-7	X		3
Pentyl butyrate	540-18-1	X		3
Peracetic acid	79-21-0	X		8
Perboric acid, sodium salt, monohydrate	10332-33-9			1, 8
Perlite	93763-70-3			4
Petrolatum, petroleum, oxidized	64743-01-7			3
Petroleum	8002-05-9			1, 2
Petroleum distillate hydrotreated light	6742-47-8			8
<i>Phenanthrene</i>	85-01-8	X		6
<i>Phenol</i>	108-95-2	X	X	1, 2, 4
Phenol, 4,4'-(1-methylethylidene)bis-, polymer with 2-(chloromethyl)oxirane, 2-methyloxirane and oxirane	68123-18-2			8
Phenol-formaldehyde resin	9003-35-4			1, 2, 4, 7
Phosphine	7803-51-2		X	1, 4
Phosphonic acid	13598-36-2			1, 4
Phosphonic acid (dimethylamino(methylene))	29712-30-9	X		1
Phosphonic acid, (((2-[(2-hydroxyethyl)(phosphonomethyl)amino]ethyl)imino]bis(methylene))bis-, compd. with 2-aminoethanol	129828-36-0	X		1
Phosphonic acid, (1-hydroxyethylidene)bis-, potassium salt	67953-76-8	X		4

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Phosphonic acid, (1-hydroxyethylidene)bis-, tetrasodium salt	3794-83-0	X		1, 4
Phosphonic acid, [[[phosphonomethyl)imino]bis[2,1-ethanediylnitrilobis(methylene)]]]tetrakis-	15827-60-8	X		1, 2, 4
Phosphonic acid, [[[phosphonomethyl)imino]bis[2,1-ethanediylnitrilobis(methylene)]]]tetrakis-, ammonium salt (1:x)	70714-66-8	X		3
Phosphonic acid, [[[phosphonomethyl)imino]bis[2,1-ethanediylnitrilobis(methylene)]]]tetrakis-, sodium salt	22042-96-2	X		3
Phosphonic acid, [[[phosphonomethyl)imino]bis[6,1-hexanediylnitrilobis(methylene)]]]tetrakis-	34690-00-1	X		1, 4, 8
Phosphoric acid	7664-38-2		X	1, 2, 4
Phosphoric acid, aluminium sodium salt	7785-88-8		X	1, 2
Phosphoric acid, ammonium salt (1:3)	10361-65-6			8
Phosphoric acid, diammonium salt	7783-28-0		X	2
Phosphoric acid, mixed decyl and Et and octyl esters	68412-60-2			1
Phosphorous acid	10294-56-1			1
Phthalic anhydride	85-44-9	X	X	1, 4
Pine oils	8002-09-3			1, 2, 4
Pluronic F-127	9003-11-6			1, 3, 4, 8
Policapram (Nylon 6)	25038-54-4			1, 4
Poly (acrylamide-co-acrylic acid), partial sodium salt	62649-23-4			3, 4
Poly(acrylamide-co-acrylic acid)	9003-06-9			4, 8
Poly(lactide)	26680-10-4			1
Poly(oxy-1,2-ethanediy), .alpha.-(nonylphenyl)-.omega.-hydroxy-, phosphate	51811-79-1			1, 4
Poly(oxy-1,2-ethanediy), .alpha.-(octylphenyl)-.omega.-hydroxy-, branched	68987-90-6	X		1, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Poly(oxy-1,2-ethanediyl), .alpha.,.alpha.'-[[[(9Z)-9-octadecenylimino]di-2,1-ethanediyl]bis[.omega.-hydroxy-	26635-93-8			1, 4
Poly(oxy-1,2-ethanediyl), .alpha.-[(9Z)-1-oxo-9-octadecenyl]-.omega.-hydroxy-	9004-96-0			8
Poly(oxy-1,2-ethanediyl), .alpha.-hydro-.omega.-hydroxy-, mono-C10-14-alkyl ethers, phosphates	68585-36-4			8
Poly(oxy-1,2-ethanediyl), .alpha.-hydro-.omega.-hydroxy-, mono-C8-10-alkyl ethers, phosphates	68130-47-2			8
Poly(oxy-1,2-ethanediyl), .alpha.-isodecyl-.omega.-hydroxy-	61827-42-7			8
Poly(oxy-1,2-ethanediyl), .alpha.-sulfo-.omega.-hydroxy-, C10-16-alkyl ethers, sodium salts	68585-34-2			8
Poly(oxy-1,2-ethanediyl), .alpha.-sulfo-.omega.-hydroxy-, C12-14-alkyl ethers, sodium salts	68891-38-3			1, 4
Poly(oxy-1,2-ethanediyl), alpha-(2,3,4,5-tetramethylnonyl)-omega-hydroxy	68015-67-8			1
Poly(oxy-1,2-ethanediyl), alpha-(nonylphenyl)-omega-hydroxy-, branched, phosphates	68412-53-3			1
Poly(oxy-1,2-ethanediyl), alpha-hexyl-omega-hydroxy	31726-34-8			3, 8
Poly(oxy-1,2-ethanediyl), alpha-hydro-omega-hydroxy-, (9Z)-9-octadecenoate	56449-46-8			3
Poly(oxy-1,2-ethanediyl), alpha-hydro-omega-hydroxy-, ether with alpha-fluoro-omega-(2-hydroxyethyl)poly(difluoromethylene) (1:1)	65545-80-4			1
Poly(oxy-1,2-ethanediyl), alpha-hydro-omega-hydroxy-, ether with D-glucitol (2:1), tetra-(9Z)-9-octadecenoate	61723-83-9			8
Poly(oxy-1,2-ethanediyl), alpha-sulfo-omega-(decyloxy)-, ammonium salt (1:1)	52286-19-8			4
Poly(oxy-1,2-ethanediyl), alpha-sulfo-omega-(hexyloxy)-, ammonium salt (1:1)	63428-86-4			1, 3, 4
Poly(oxy-1,2-ethanediyl), alpha-sulfo-omega-(hexyloxy)-, C6-10-alkyl ethers, ammonium salts	68037-05-8			3, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Poly(oxy-1,2-ethanediyl), alpha-sulfo-omega--(nonylphenoxy)-	9081-17-8			4
Poly(oxy-1,2-ethanediyl), alpha-sulfo-omega-(octyloxy)-, ammonium salt (1:1)	52286-18-7			4
Poly(oxy-1,2-ethanediyl), alpha-sulfo-omega-hydroxy-, C10-12-alkyl ethers, ammonium salts	68890-88-0			8
Poly(oxy-1,2-ethanediyl), alpha-tridecyl-omega-hydroxy-	24938-91-8			1, 3, 4
Poly(oxy-1,2-ethanediyl), alpha-undecyl-omega-hydroxy-, branched and linear	127036-24-2			1
Poly-(oxy-1,2-ethanediyl)-alpha-undecyl-omega-hydroxy	34398-01-1			1, 3, 4, 8
Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy branched	127087-87-0			1, 2, 3, 4
Poly(sodium-p-styrenesulfonate)	25704-18-1			1,4
Poly(tetrafluoroethylene)	9002-84-0			8
Poly[imino(1,6-dioxo-1,6-hexanediyl)imino-1,6-hexanediyl]	32131-17-2			2
Polyacrylamide	9003-05-8			1, 2, 4, 6
Polyacrylate/ polyacrylamide blend	NOCAS_51256			2
Polyacrylic acid, sodium bisulfite terminated	66019-18-9			3
Polyethylene glycol	25322-68-3			1, 2, 3, 4, 7, 8
Polyethylene glycol (9Z)-9-octadecenyl ether	9004-98-2			8
Polyethylene glycol ester with tall oil fatty acid	68187-85-9			1
Polyethylene glycol monobutyl ether	9004-77-7			1, 4
Polyethylene glycol mono-C8-10-alkyl ether sulfate ammonium	68891-29-2			1, 3, 4
Polyethylene glycol nonylphenyl ether	9016-45-9			1, 2, 3, 4, 8
Polyethylene glycol tridecyl ether phosphate	9046-01-9			1, 3, 4
Polyethyleneimine	9002-98-6			4
Polyglycerol	25618-55-7			2
Poly-L-aspartic acid sodium salt	34345-47-6			8
Polyoxyethylene sorbitan trioleate	9005-70-3			3

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Polyoxyethylene(10)nonylphenyl ether	26027-38-3			1, 2, 3, 4, 8
Polyoxyl 15 hydroxystearate	70142-34-6			8
Polyoxypropylenediamine	9046-10-0			1
Polyphosphoric acids, esters with triethanolamine, sodium salts	68131-72-6			1
Polyphosphoric acids, sodium salts	68915-31-1		X	1, 4
Polypropylene glycol	25322-69-4			1, 2, 4
Polypropylene glycol glycerol triether, epichlorohydrin, bisphenol A polymer	68683-13-6			1
Polyquaternium 5	26006-22-4			1, 4
Polysorbate 20	9005-64-5			8
Polysorbate 60	9005-67-8			3, 4
Polysorbate 80	9005-65-6			3, 4
Polyvinyl acetate copolymer	9003-20-7			2
Polyvinyl acetate, partially hydrolyzed	304443-60-5			8
Polyvinyl alcohol	9002-89-5			1, 2, 4
Polyvinyl alcohol/polyvinyl acetate copolymer	NOCAS_50147			2
Polyvinylidene chloride	9002-85-1			8
Polyvinylpyrrolidone	9003-39-8			8
Portland cement	65997-15-1			2, 4
Potassium acetate	127-08-2	X		1, 3, 4
Potassium aluminum silicate	1327-44-2			5
Potassium antimonate	29638-69-5			1, 4
Potassium bisulfate	7646-93-7			8
Potassium borate	12712-38-8			3
Potassium borate (1:x)	20786-60-1			1, 3
Potassium carbonate sesquihydrate	6381-79-9			5
Potassium chloride	7447-40-7			1, 2, 3, 4, 5, 6, 7
Potassium dichromate	7778-50-9			4
Potassium hydroxide	1310-58-3			1, 2, 3, 4, 6

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Potassium iodide	7681-11-0		X	1, 4
Potassium metaborate	13709-94-9			1, 2, 3, 4, 8
Potassium oleate	143-18-0	X		4
Potassium oxide	12136-45-7			1, 4
Potassium persulfate	7727-21-1			1, 2, 4
Potassium phosphate, tribasic	7778-53-2		X	8
Potassium sulfate	7778-80-5			2
Propane	74-98-6	X		2, 5
Propanol, 1(or 2)-(2-methoxymethylethoxy)-	34590-94-8	X		1, 2, 3, 4
Propargyl alcohol	107-19-7	X	X	1, 2, 3, 4, 5, 6, 7, 8
Propylene carbonate	108-32-7	X		1, 4
Propylene pentamer	15220-87-8	X		1
p-Xylene	106-42-3	X		1, 4
Pyridine, alkyl derivs.	68391-11-7			1, 4
Pyridinium, 1-(phenylmethyl)-, alkyl derivs., chlorides	100765-57-9			4, 8
Pyridinium, 1-(phenylmethyl)-, C7-8-alkyl derivs., chlorides	70914-44-2			6
Pyrimidine	289-95-2	X		2
Pyrrrole	109-97-7	X		2
Quartz-alpha (SiO <sub>2</sub> )	14808-60-7			1, 2, 3, 4, 5, 6, 8
Quaternary ammonium compounds (2-ethylhexyl) hydrogenated tallow alkyl)dimethyl, methyl sulfates	308074-31-9			8
Quaternary ammonium compounds, (oxydi-2,1-ethanediyl)bis[coco alkyldimethyl, dichlorides	68607-28-3			2, 3, 4, 8
Quaternary ammonium compounds, benzyl(hydrogenated tallow alkyl)dimethyl, bis(hydrogenated tallow alkyl)dimethylammonium salt with bentonite	71011-25-1			8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Quaternary ammonium compounds, benzylbis(hydrogenated tallow alkyl)methyl, salts with bentonite	68153-30-0			2, 5, 6
Quaternary ammonium compounds, benzyl-C10-16-alkyldimethyl, chlorides	68989-00-4			1, 4
Quaternary ammonium compounds, benzyl-C12-16-alkyldimethyl, chlorides	68424-85-1		X	1, 2, 4, 8
Quaternary ammonium compounds, benzyl-C12-18-alkyldimethyl, chlorides	68391-01-5			8
Quaternary ammonium compounds, bis(hydrogenated tallow alkyl)dimethyl, salts with bentonite	68953-58-2			2, 3, 4, 8
Quaternary ammonium compounds, bis(hydrogenated tallow alkyl)dimethyl, salts with hectorite	71011-27-3			2
Quaternary ammonium compounds, di-C8-10-alkyldimethyl, chlorides	68424-95-3	X		2
Quaternary ammonium compounds, dicoco alkyldimethyl, chlorides	61789-77-3			1
Quaternary ammonium compounds, pentamethyltallow alkyltrimethylenedi-, dichlorides	68607-29-4			4
Quaternary ammonium compounds, trimethyltallow alkyl, chlorides	8030-78-2			1, 4
Quinaldine	91-63-4	X		8
Quinoline	91-22-5	X	X	2, 4
Raffinates (petroleum)	68514-29-4			5
Raffinates, petroleum, sorption process	64741-85-1			1, 2, 4, 8
Residual oils, petroleum, solvent-refined	64742-01-4			5
Residues, petroleum, catalytic reformer fractionator	64741-67-9			1, 4, 8
Rhodamine B	81-88-9	X		4
Rosin	8050-09-7			1, 4
Rutile titanium dioxide	1317-80-2			8
Sand	308075-07-2			8

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Scandium oxide	12060-08-1			8
Sepiolite	63800-37-3			2
Silane, dichlorodimethyl-, reaction products with silica	68611-44-9			2, 4
<i>Silica</i>	7631-86-9			1, 2, 3, 4, 8
silica gel, cryst. -free	112926-00-8			3, 4
Silica, amorphous, fumed, cryst.-free	112945-52-5			1, 3, 4
Silica, vitreous	60676-86-0			1, 4, 8
Silicic acid, aluminum potassium sodium salt	12736-96-8			4
Siloxanes (Polysiloxane)	9011-19-2			4
Siloxanes and Silicones, di-Me, 3-hydroxypropyl Me, ethoxylated propoxylated	68937-55-3			8
Siloxanes and Silicones, di-Me, Me hydrogen	68037-59-2			8
Siloxanes and silicones, di-Me, polymers with Me silsesquioxanes	68037-74-1			4
Siloxanes and Silicones, di-Me, reaction products with silica	67762-90-7			4
Siloxanes and silicones, dimethyl,	63148-52-7			4
Silwet L77	27306-78-1			1
Sodium 1-octanesulfonate	5324-84-5	X		3
Sodium 2-mercaptobenzothiolate	2492-26-4	X		2
Sodium acetate	127-09-3	X		1, 3, 4
Sodium aluminate	1302-42-7			2, 4
Sodium benzoate	532-32-1	X		3
Sodium bicarbonate	144-55-8	X		1, 2, 3, 4, 7
Sodium bis(tridecyl) sulfobutanedioate	2673-22-5	X		4
Sodium bisulfite	7631-90-5			1, 3, 4
Sodium borate	1333-73-9			1, 4, 6, 7
Sodium bromate	7789-38-0			1, 2, 4
Sodium bromide	7647-15-6			1, 2, 3, 4, 7
Sodium bromosulfamate	1004542-84-0			8

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Chemical name</b>	<b>CASRN</b>	<b>Physico-chemical properties</b>	<b>Selected toxicity reference value</b>	<b>Reference</b>
Sodium C14-16 alpha-olefin sulfonate	68439-57-6	X		1, 3, 4
Sodium caprylamphopropionate	68610-44-6	X		4
Sodium carbonate	497-19-8	X		1, 2, 3, 4, 8
Sodium chlorate	7775-09-9		X	1, 4
Sodium chloride	7647-14-5			1, 2, 3, 4, 5, 8
Sodium chlorite	7758-19-2		X	1, 2, 3, 4, 5, 8
Sodium chloroacetate	3926-62-3	X		3
Sodium cocaminopropionate	68608-68-4			1
Sodium decyl sulfate	142-87-0	X		1
Sodium D-gluconate	527-07-1	X		4
Sodium diacetate	126-96-5	X		1, 4
Sodium dichloroisocyanurate	2893-78-9	X		2
Sodium dl-lactate	72-17-3	X		8
Sodium dodecyl sulfate	151-21-3	X		8
Sodium erythorbate (1:1)	6381-77-7	X		1, 3, 4, 8
Sodium ethasulfate	126-92-1	X		1
Sodium formate	141-53-7	X		2, 8
Sodium hydrogen sulfate	7681-38-1			4
Sodium hydroxide	1310-73-2			1, 2, 3, 4, 7, 8
Sodium hydroxymethanesulfonate	870-72-4	X		8
Sodium hypochlorite	7681-52-9			1, 2, 3, 4, 8
Sodium iodide	7681-82-5		X	4
Sodium ligninsulfonate	8061-51-6			2
Sodium l-lactate	867-56-1	X		8
Sodium maleate (1:x)	18016-19-8	X		8
Sodium metabisulfite	7681-57-4			1
Sodium metaborate	7775-19-1			3, 4
Sodium metaborate dihydrate	16800-11-6			1, 4
Sodium metaborate tetrahydrate	10555-76-7			1, 4, 8
Sodium metasilicate	6834-92-0			1, 2, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Sodium molybdate(VI)	7631-95-0			8
Sodium nitrate	7631-99-4			2
Sodium nitrite	7632-00-0			1, 2, 4
Sodium N-methyl-N-oleoyltaurate	137-20-2	X		4
Sodium octyl sulfate	142-31-4	X		1
Sodium oxide	1313-59-3			1
Sodium perborate	11138-47-9			4
Sodium perborate tetrahydrate	10486-00-7			1, 4, 5, 8
Sodium peroxoborate	7632-04-4			1
Sodium persulfate	7775-27-1			1, 2, 3, 4, 7, 8
Sodium phosphate	7632-05-5			1, 4
Sodium polyacrylate	9003-04-7			1, 2, 3, 4
Sodium pyrophosphate	7758-16-9		X	1, 2, 4
Sodium salicylate	54-21-7	X		1, 4
Sodium sesquicarbonate	533-96-0	X		1, 2
Sodium silicate	1344-09-8			1, 2, 4
Sodium starch glycolate	9063-38-1			2
Sodium sulfate	7757-82-6			1, 2, 3, 4
Sodium sulfite	7757-83-7			2, 4, 8
Sodium thiocyanate	540-72-7	X		1, 4
Sodium thiosulfate	7772-98-7			1, 2, 3, 4
Sodium thiosulfate, pentahydrate	10102-17-7			1, 4
Sodium trichloroacetate	650-51-1	X		1, 4
Sodium trimetaphosphate	7785-84-4		X	8
Sodium xylenesulfonate	1300-72-7	X		1, 3, 4
Sodium zirconium lactate	15529-67-6			8
Sodium zirconium lactic acid (4:4:1)	10377-98-7			1, 4
Solvent naphtha, petroleum, heavy aliph.	64742-96-7			2, 4, 8
Solvent naphtha, petroleum, heavy arom.	64742-94-5			1, 2, 4, 5, 8
Solvent naphtha, petroleum, light aliph.	64742-89-8			8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Solvent naphtha, petroleum, light arom.	64742-95-6			1, 2, 4
Sorbic acid	110-44-1	X		8
Sorbitan sesquioleate	8007-43-0	X		4
Sorbitan, mono-(9Z)-9-octadecenoate	1338-43-8	X		1, 2, 3, 4
Sorbitan, monooctadecanoate	1338-41-6	X		8
Sorbitan, tri-(9Z)-9-octadecenoate	26266-58-0	X		8
Spirit of ammonia, aromatic	8013-59-0			8
Stannous chloride dihydrate	10025-69-1			1, 4
Starch	9005-25-8			1, 2, 4
Steam cracked distillate, cyclodiene dimer, dicyclopentadiene polymer	68131-87-3			1
Stoddard solvent	8052-41-3			1, 3, 4
Stoddard solvent IIC	64742-88-7			1, 2, 4
Strontium chloride	10476-85-4		X	4
Styrene	100-42-5	X	X	2
Subtilisin	9014-01-1			8
Sucrose	57-50-1	X		1, 2, 3, 4
Sulfamic acid	5329-14-6			1, 4
Sulfan blue	129-17-9	X		8
<i>Sulfate</i>	<i>14808-79-8</i>			<i>1, 4</i>
Sulfo NHS Biotin	119616-38-5			8
Sulfomethylated quebracho	68201-64-9			2
Sulfonic acids, C10-16-alkane, sodium salts	68608-21-9			6
Sulfonic acids, petroleum	61789-85-3			1
Sulfonic acids, petroleum, sodium salts	68608-26-4			3
Sulfur dioxide	7446-09-5			2, 4, 8
Sulfuric acid	7664-93-9			1, 2, 4, 7
Sulfuric acid, mono-C12-18-alkyl esters, sodium salts	68955-19-1	X		4
Sulfuric acid, mono-C6-10-alkyl esters, ammonium salts	68187-17-7	X		1, 4, 8

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Symclosene	87-90-1	X		2
Talc	14807-96-6			1, 3, 4, 6, 7
Tall oil	8002-26-4			4, 8
Tall oil imidazoline	61791-36-4			4
Tall oil, compound with diethanolamine	68092-28-4			1
Tall oil, ethoxylated	65071-95-6			4, 8
Tall-oil pitch	8016-81-7			4
Tallow alkyl amines acetate	61790-60-1			8
Tar bases, quinoline derivatives, benzyl chloride-quaternized	72480-70-7			1, 3, 4
Tegin M	8043-29-6			8
Terpenes and Terpenoids, sweet orange-oil	68647-72-3			1, 3, 4, 8
Terpineol	8000-41-7			1, 3
tert-Butyl hydroperoxide	75-91-2	X		1, 4
tert-Butyl perbenzoate	614-45-9	X		1
Tetra-calcium-alumino-ferrite	12068-35-8			1, 2, 4
Tetradecane	629-59-4	X		8
Tetradecyldimethylbenzylammonium chloride	139-08-2	X		1, 4, 8
Tetraethylene glycol	112-60-7	X		1, 4
Tetraethylenepentamine	112-57-2	X		1, 4
Tetrakis(hydroxymethyl)phosphonium sulfate	55566-30-8	X		1, 2, 3, 4, 7
Tetramethyl orthosilicate	681-84-5			1
Tetramethylammonium chloride	75-57-0	X		1, 2, 3, 4, 7, 8
Tetrasodium pyrophosphate	7722-88-5		X	8
Thiamine hydrochloride	67-03-8	X		8
Thiocyanic acid, ammonium salt	1762-95-4	X		2, 3, 4
Thioglycolic acid	68-11-1	X		1, 2, 3, 4
Thiourea	62-56-6	X	X	1, 2, 3, 4, 6
Thiourea, polymer with formaldehyde and 1-phenylethanone	68527-49-1			1, 4, 8
Thuja plicata donn ex. D. don leaf oil	68917-35-1			3

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Tin(II) chloride	7772-99-8			1
Titanium dioxide	13463-67-7			1, 2, 4
Titanium(4+) 2-[bis(2-hydroxyethyl)amino]ethanolate propan-2-olate (1:2:2)	36673-16-2			1
Titanium, isopropoxy (triethanolaminate)	74665-17-1			1, 4
<i>Toluene</i>	<i>108-88-3</i>	<b>X</b>	<b>X</b>	1, 3, 4
Tributyl phosphate	126-73-8	<b>X</b>	<b>X</b>	1, 2, 4
Tributyltetradecylphosphonium chloride	81741-28-8	<b>X</b>		1, 3, 4
Tricalcium phosphate	7758-87-4		<b>X</b>	1, 4
Tricalcium silicate	12168-85-3			1, 2, 4
Tridecane	629-50-5	<b>X</b>		8
Triethanolamine	102-71-6	<b>X</b>		1, 2, 4
Triethanolamine hydrochloride	637-39-8	<b>X</b>		8
Triethanolamine hydroxyacetate	68299-02-5	<b>X</b>		3
Triethanolamine polyphosphate ester	68131-71-5			1, 4, 8
Triethyl citrate	77-93-0	<b>X</b>		1, 4
Triethyl phosphate	78-40-0	<b>X</b>		1, 4
Triethylene glycol	112-27-6	<b>X</b>		1, 2, 3
Triethylenetetramine	112-24-3	<b>X</b>		4
Triisopropanolamine	122-20-3	<b>X</b>		1, 4
Trimethanolamine	14002-32-5	<b>X</b>		3
Trimethyl borate	121-43-7			8
Trimethylamine	75-50-3	<b>X</b>		8
Trimethylamine quaternized polyepichlorohydrin	51838-31-4			1, 2, 3, 4, 5, 8
Trimethylbenzene	25551-13-7			1, 2, 4
Triphosphoric acid, pentasodium salt	7758-29-4		<b>X</b>	1, 4
Tripoli	1317-95-9			4
Tripotassium citrate monohydrate	6100-05-6	<b>X</b>		4
Tripropylene glycol monomethyl ether	25498-49-1	<b>X</b>		2

*This document is a draft for review purposes only and does not constitute Agency policy.*



<b>Chemical name</b>	<b>CASRN</b>	<b>Physico-chemical properties</b>	<b>Selected toxicity reference value</b>	<b>Reference</b>
Trisodium citrate	68-04-2	X		3
Trisodium citrate dihydrate	6132-04-3	X		1, 4
Trisodium ethylenediaminetetraacetate	150-38-9	X		1, 3
Trisodium ethylenediaminetriacetate	19019-43-3	X		1, 4, 8
Trisodium phosphate	7601-54-9		X	1, 2, 4
Trisodium phosphate dodecahydrate	10101-89-0			1
Tritan R (X-100)	92046-34-9			8
Triton X-100	9002-93-1			1, 3, 4
Tromethamine	77-86-1	X		3, 4
Tryptone	73049-73-7			8
Ulexite	1319-33-1			1, 2, 3, 8
Undecane	1120-21-4	X		3, 8
Undecanol, branched and linear	128973-77-3			8
Urea	57-13-6	X		1, 2, 4, 8
Vermiculite	1318-00-9			2
Vinyl acetate ethylene copolymer	24937-78-8			1, 4
Vinylidene chloride/methylacrylate copolymer	25038-72-6			4
Water	7732-18-5			2, 4, 8
White mineral oil, petroleum	8042-47-5			1, 2, 4
<i>Xylenes</i>	1330-20-7	X	X	1, 2, 4
Yeast extract	8013-01-2			8
Zeolites	1318-02-1			8
<i>Zinc</i>	7440-66-6		X	2
Zinc carbonate	3486-35-9			2
Zinc chloride	7646-85-7			1, 2
Zinc oxide	1314-13-2			1, 4
Zinc sulfate monohydrate	7446-19-7			8
Zirconium nitrate	13746-89-9			2, 6
Zirconium oxide sulfate	62010-10-0			1, 4
Zirconium oxychloride	7699-43-6			1, 2, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Zirconium(IV) chloride tetrahydrofuran complex	21959-01-3			5
Zirconium(IV) sulfate	14644-61-2			2, 6
Zirconium, 1,1'-((2-((2-hydroxyethyl)(2-hydroxypropyl)amino)ethyl)imino)bis(2-propanol) complexes	197980-53-3			4
Zirconium, acetate lactate oxo ammonium complexes	68909-34-2			4, 8
Zirconium, chloro hydroxy lactate oxo sodium complexes	174206-15-6			4
Zirconium, hydroxylactate sodium complexes	113184-20-6			1, 4
Zirconium,tetrakis[2-[bis(2-hydroxyethyl)amino-kN]ethanolato-kO]-	101033-44-7			1, 2, 4, 5

**Table A-3. List of generic names of chemicals reportedly used in hydraulic fracturing fluids.**

In some cases, the generic chemical name masks a specific chemical name and CASRN provided to the EPA and claimed as CBI by one or more of the nine hydraulic fracturing service companies.

Generic chemical name	Reference
2-Substituted aromatic amine salt	1, 4
Acetylenic alcohol	1
Acrylamide acrylate copolymer	4
Acrylamide copolymer	1, 4
Acrylamide modified polymer	4
Acrylamide-sodium acrylate copolymer	4
Acrylate copolymer	1
Acrylic copolymer	1
Acrylic polymer	1, 4
Acrylic resin	4
Acyclic hydrocarbon blend	1, 4
Acylbenzylpyridinium choride	8
Alcohol alkoxylate	1, 4
Alcohol and fatty acid blend	2

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Alcohol ethoxylates	4
Alcohols	1, 4
Alcohols, C9-C22	1, 4
Aldehydes	1, 4, 5
Alfa-alumina	1, 4
Aliphatic acids	1, 2, 3, 4
Aliphatic alcohol	2
Aliphatic alcohol glycol ether	3, 4
Aliphatic alcohols, ethoxylated	2
Aliphatic amine derivative	1
Aliphatic carboxylic acid	4
Alkaline bromide salts	1, 4
Alkaline metal oxide	4
Alkanes/alkenes	4
Alkanolamine derivative	2
Alkanolamine/aldehyde condensate	1, 2, 4
Alkenes	1, 4
Alklaryl sulfonic acid	1, 4
Alkoxylated alcohols	1
Alkoxylated amines	1, 4
Alkyaryl sulfonate	1, 2, 3, 4
Alkyl alkoxylate	1, 4
Alkyl amide	4
Alkyl amine	1, 4
Alkyl amine blend in a metal salt solution	1, 4
Alkyl aryl amine sulfonate	4
Alkyl aryl polyethoxy ethanol	3, 4
Alkyl dimethyl benzyl ammonium chloride	4
Alkyl esters	1, 4
Alkyl ether phosphate	4
Alkyl hexanol	1, 4
Alkyl ortho phosphate ester	1, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Alkyl phosphate ester	1, 4
Alkyl phosphonate	4
Alkyl pyridines	2
Alkyl quaternary ammonium chlorides	1, 4
Alkyl quaternary ammonium salt	4
Alkylamine alkylaryl sulfonate	4
Alkylamine salts	2
Alkylaryl sulfonate	1, 4
Alkylated quaternary chloride	1, 2, 4
Alkylated sodium naphthalenesulphonate	2
Alkylbenzenesulfonate	2
Alkylbenzenesulfonic acid	1, 4, 5
Alkylethoammonium sulfates	1
Alkylphenol ethoxylates	1, 4
Alkylpyridinium quaternary	4
Aliphatic alcohol polyglycol ether	2
Aluminum oxide	1, 4
Amide	4
Amidoamine	1, 4
Amine	1, 4
Amine compound	4
Amine oxides	1, 4
Amine phosphonate	1, 4
Amine salt	1
Amino compounds	1, 4
Amino methylene phosphonic acid salt	1, 4
Ammonium alcohol ether sulfate	1, 4
Ammonium salt	1, 4
Ammonium salt of ethoxylated alcohol sulfate	1, 4
Amorphous silica	4
Amphoteric surfactant	2
Anionic acrylic polymer	2

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Anionic copolymer	1, 4
Anionic polyacrylamide	1, 2, 4
Anionic polyacrylamide copolymer	1, 4, 6
Anionic polymer	1, 3, 4
Anionic surfactants	2, 4, 6
Antifoulant	1, 4
Antimonate salt	1, 4
Aqueous emulsion of diethylpolysiloxane	2
Aromatic alcohol glycol ether	1
Aromatic aldehyde	1, 4
Aromatic hydrocarbons	3, 4
Aromatic ketones	1, 2, 3, 4
Aromatic polyglycol ether	1
Arsenic compounds	4
Ashes, residues	4
Bentone clay	4
Biocide	4
Biocide component	1, 4
Bis-quaternary methacrylamide monomer	4
Blast furnace slag	4
Borate salts	1, 2, 4
Cadmium compounds	4
Carbohydrates	1, 2, 4
Carboxymethyl hydroxypropyl guar	4
Cationic polyacrylamide	4
Cationic polymer	2, 4
Cedar fiber, processed	2
Cellulase enzyme	1
Cellulose derivative	1, 2, 4
Cellulose ether	2
Cellulosic polymer	2
Ceramic	4

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Chlorous ion solution	1
Chromates	1, 4
Chrome-free lignosulfonate compound	2
Citrus rutaceae extract	4
Common white	4
Complex alkylaryl polyo-ester	1
Complex aluminum salt	1, 4
Complex carbohydrate	2
Complex organometallic salt	1
Complex polyamine salt	7
Complex substituted keto-amine	1
Complex substituted keto-amine hydrochloride	1
Copper compounds	6
Coric oxide	4
Cotton dust (raw)	2
Cottonseed hulls	2
Cured acrylic resin	1, 4
Cured resin	1, 4, 5
Cured urethane resin	1, 4
Cyclic alkanes	1, 4
Defoamer	4
Dibasic ester	4
Dicarboxylic acid	1, 4
Diesel	1, 4, 6
Dimethyl silicone	1, 4
Dispersing agent	1
Emulsifier	4
Enzyme	4
Epoxy	4
Epoxy resin	1, 4
Essential oils	1, 4
Ester Salt	2, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*



<b>Generic chemical name</b>	<b>Reference</b>
Esters	2, 4
Ether compound	4
Ether salt	4
Ethoxylated alcohol blend	4
Ethoxylated alcohol/ester mixture	4
Ethoxylated alcohols	1, 2, 4, 5, 7
Ethoxylated alkyl amines	1, 4
Ethoxylated amine blend	4
Ethoxylated amines	1, 4
Ethoxylated fatty acid	4
Ethoxylated fatty acid ester	1, 4
Ethoxylated nonionic surfactant	1, 4
Ethoxylated nonylphenol	1, 2, 4
Ethoxylated sorbitol esters	1, 4
Ethylene oxide-nonylphenol polymer	4
Fatty acid amine salt mixture	4
Fatty acid ester	1, 2, 4
Fatty acid tall oil	1, 4
Fatty acid, ethoxylate	4
Fatty acids	1
Fatty alcohol alkoxyate	1, 4
Fatty alkyl amine salt	1, 4
Fatty amine carboxylates	1, 4
Fatty imidazoline	4
Fluoroaliphatic polymeric esters	1, 4
Formaldehyde polymer	1
Glass fiber	1, 4
Glyceride esters	2
Glycol	4
Glycol blend	2
Glycol ethers	1, 4, 7
Ground cedar	2

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Ground paper	2
Guar derivative	1, 4
Guar gum	4
Haloalkyl heteropolycycle salt	1, 4
Hexanes	1
High molecular weight polymer	2
High pH conventional enzymes	2
Hydrocarbons	1
Hydrogen solvent	4
Hydrotreated and hydrocracked base oil	1, 4
Hydrotreated distillate, light C9-16	4
Hydrotreated heavy naphthalene	5
Hydrotreated light distillate	2, 4
Hydrotreated light petroleum distillate	4
Hydroxyalkyl imino carboxylic sodium salt	2
Hydroxycellulose	6
Hydroxyethyl cellulose	1, 2, 4
Imidazolium compound	4
Inner salt of alkyl amines	1, 4
Inorganic borate	1, 4
Inorganic chemical	4
Inorganic particulate	1, 4
Inorganic salt	2, 4
Iso-alkanes/n-alkanes	1, 4
Isomeric aromatic ammonium salt	1, 4
Latex	2, 4
Lead compounds	4
Low toxicity base oils	1, 4
Lubra-Beads course	4
Maghemite	1, 4
Magnetite	1, 4
Metal salt	1

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Metal salt solution	1
Mineral	1, 4
Mineral fiber	2
Mineral filler	1
Mineral oil	4
Mixed titanium ortho ester complexes	1, 4
Modified acrylamide copolymer	2, 4
Modified acrylate polymer	4
Modified alkane	1, 4
Modified bentonite	4
Modified cycloaliphatic amine adduct	1, 4
Modified lignosulfonate	2, 4
Naphthalene derivatives	1, 4
Neutralized alkylated naphthalene sulfonate	4
Nickel chelate catalyst	4
Nonionic surfactant	1
N-tallowalkyltrimethylenediamines	4
Nuisance particulates	1, 2, 4
Nylon	4
Olefinic sulfonate	1, 4
Olefins	1, 4
Organic acid salt	1, 4
Organic acids	1, 4
Organic alkyl amines	4
Organic chloride	4
Organic modified bentonite clay	4
Organic phosphonate	1, 4
Organic phosphonate salts	1, 4
Organic phosphonic acid salts	1, 4
Organic polymer	4
Organic polyol	4
Organic salt	1, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Organic sulfur compound	1, 4
Organic surfactants	1
Organic titanate	1, 4
Organo amino silane	4
Organo phosphonic acid	4
Organo phosphonic acid salt	4
Organometallic ammonium complex	1
Organophilic clay	4
Oxidized tall oil	2
Oxoaliphatic acid	2
Oxyalkylated alcohol	1, 4
Oxyalkylated alkyl alcohol	2, 4
Oxyalkylated alkylphenol	1, 2, 3, 4
Oxyalkylated fatty acid	1, 4
Oxyalkylated fatty alcohol salt	2
Oxyalkylated phenol	1, 4
Oxyalkylated phenolic resin	4
Oxyalkylated polyamine	1
Oxyalkylated tallow diamine	2
Oxyethylated alcohol	2
Oxylated alcohol	1, 4
P/F resin	4
Paraffin inhibitor	4
Paraffinic naphthenic solvent	1
Paraffinic solvent	1, 4
Paraffins	1
Pecan shell	2
Petroleum distillate blend	2, 3, 4
Petroleum gas oils	1
Petroleum hydrocarbons	4
Petroleum solvent	2
Phosphate ester	1, 4

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Phosphonate	2
Phosphonic acid	1, 4
Phosphoric acid, mixed polyoxyalkylene aryl and alkyl esters	4
Plasticizer	1, 2
Polyacrylamide copolymer	4
Polyacrylamides	1
Polyacrylate	1, 4
Polyactide resin	4
Polyalkylene esters	4
Polyaminated fatty acid	2
Polyaminated fatty acid surfactants	2
Polyamine	1, 4
Polyamine polymer	4
Polyanionic cellulose	1
Polyaromatic hydrocarbons	6
Polycyclic organic matter	6
Polyelectrolyte	4
Polyether polyol	2
Polyethoxylated alkanol	2, 3, 4
Polyethylene copolymer	4
Polyethylene glycols	4
Polyethylene wax	4
Polyglycerols	2
Polyglycol	2
Polyglycol ether	6
Poly lactide resin	4
Polymer	2, 4
Polymeric hydrocarbons	3, 4
Polymerized alcohol	4
Polymethacrylate polymer	4
Polyol phosphate ester	2
Polyoxyalkylene phosphate	2

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Generic chemical name</b>	<b>Reference</b>
Polyoxyalkylene sulfate	2
Polyoxyalkylenes	1, 4, 7
Polyphenylene ether	4
Polyphosphate	4
Polypropylene glycols	2
Polyquaternary amine	4
Polysaccharide polymers in suspension	2
Polysaccharide	4
Polysaccharide blend	4
Polyvinylalcohol/polyvinylacetate copolymer	4
Potassium chloride substitute	4
Quaternized heterocyclic amines	4
Quaternary amine	2, 4
Quaternary amine salt	4
Quaternary ammonium chloride	4
Quaternary ammonium compound	1, 2, 4
Quaternary ammonium salts	1, 2, 4
Quaternary compound	1, 4
Quaternary salt	1, 4
Quaternized alkyl nitrogenated compd	4
Red dye	4
Refined mineral oil	2
Resin	4
Salt of amine-carbonyl condensate	3, 4
Salt of fatty acid/polyamine reaction product	3, 4
Salt of phosphate ester	1
Salt of phosphono-methylated diamine	1, 4
Salts	4
Salts of oxyalkylated fatty amines	4
Sand	4
Sand, AZ silica	4
Sand, brown	4

*This document is a draft for review purposes only and does not constitute Agency policy.*



<b>Generic chemical name</b>	<b>Reference</b>
Sand, sacked	4
Sand, white	4
Secondary alcohol	1, 4
Silica sand, 100 mesh, sacked	4
Silicone emulsion	1
Silicone ester	4
Sodium acid pyrophosphate	4
Sodium calcium magnesium polyphosphate	4
Sodium phosphate	4
Sodium salt of aliphatic amine acid	2
Sodium xylene sulfonate	4
Softwood dust	2
Starch blends	6
Substituted alcohol	1, 2, 4
Substituted alkene	1
Substituted alkylamine	1, 4
Substituted alkyne	4
Sulfate	4
Sulfomethylated tannin	2, 5
Sulfonate	4
Sulfonate acids	1
Sulfonate surfactants	1
Sulfonated asphalt	2
Sulfonic acid salts	1, 4
Sulfur compound	1, 4
Sulphonic amphoteric	4
Sulphonic amphoteric blend	4
Surfactant blend	3, 4
Surfactants	1, 2, 4
Synthetic copolymer	2
Synthetic polymer	4
Tallow soap	4

*This document is a draft for review purposes only and does not constitute Agency policy.*

Generic chemical name	Reference
Telomer	4
Terpenes	1, 4
Titanium complex	4
Triethanolamine zirconium chelate	1 4
Triterpanes	4
Vanadium compounds	4
Wall material	1
Walnut hulls	1, 2, 4
Zirconium complex	2, 4
Zirconium salt	4

**Table A-4. Chemicals detected in flowback or produced water.**

An "X" indicates the availability of physicochemical properties from EPI Suite™ and selected toxicity reference values (see Appendix G). An empty cell indicates no information was available from the sources we consulted. Reference number corresponds to the citations in Table A-1. Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
1,2,3-Trichlorobenzene	87-61-6	X	X	3, 9
1,2,4-Trichlorobenzene	120-82-1	X	X	9
<i>1,2,4-Trimethylbenzene</i>	<i>95-63-6</i>	X		<i>3, 9, 10</i>
<i>1,2-Propylene glycol</i>	<i>57-55-6</i>	X	X	<i>3, 9</i>
<i>1,3,5-Trimethylbenzene</i>	<i>108-67-8</i>	X		<i>3, 9, 10</i>
<i>1,4-Dioxane</i>	<i>123-91-1</i>	X	X	<i>9, 10</i>
2,4-Dimethylphenol	105-67-9	X	X	3, 9, 10
2,6-Dichlorophenol	87-65-0	X		3, 9
2-Methylnaphthalene	91-57-6	X	X	3, 9, 10
2-Methylpropanoic acid	79-31-2	X		10
2-Methylpyridine	109-06-8	X		3, 9
7,12-Dimethylbenz(a)anthracene	57-97-6	X	X	3, 9
<i>Acetic acid</i>	<i>64-19-7</i>	X		<i>3, 9, 10</i>

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Chemical name</b>	<b>CASRN</b>	<b>Physico-chemical properties</b>	<b>Selected toxicity reference value</b>	<b>Reference</b>
<i>Acetone</i>	67-64-1	X	X	3, 9, 10
<i>Acetophenone</i>	98-86-2	X	X	3, 9
<i>Acrolein</i>	107-02-8	X	X	9
Acrylonitrile	107-13-1	X	X	3, 9
Aldrin	309-00-2	X	X	3, 9
<i>Aluminum</i>	7429-90-5		X	3, 9, 10
<i>Ammonia</i>	7664-41-7			3, 9, 10
Antimony	7440-36-0		X	3, 9, 10
Aroclor 1248	12672-29-6	X		3, 9
<i>Arsenic</i>	7440-38-2		X	3, 9, 10
Barium	7440-39-3		X	3, 9, 10
<i>Benzene</i>	71-43-2	X	X	3, 9, 10
Benzo(a)pyrene	50-32-8	X	X	3, 9
Benzo(b)fluoranthene	205-99-2	X	X	3, 9
Benzo(g,h,i)perylene	191-24-2	X		3, 9, 10
Benzo(k)fluoranthene	207-08-9	X	X	3, 9
Benzyl alcohol	100-51-6	X	X	3, 9, 10
Beryllium	7440-41-7		X	3, 9, 10
beta-Hexachlorocyclohexane	319-85-7	X	X	3, 9
<i>Bis(2-chloroethyl) ether</i>	111-44-4	X	X	3, 9
Boron	7440-42-8		X	3, 9, 10
Bromide	24959-67-9			3, 9, 10
Bromodichloromethane	75-27-4	X	X	3
Bromoform	75-25-2	X	X	3, 9, 10
Butanoic acid	107-92-6	X		9, 10
Butylbenzene	104-51-8	X	X	9, 10
Cadmium	7440-43-9		X	3, 9, 10
Caesium-137	10045-97-3			3
Calcium	7440-70-2			3, 9, 10
<i>Carbon dioxide</i>	124-38-9	X		3, 9, 10

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Chemical name</b>	<b>CASRN</b>	<b>Physico-chemical properties</b>	<b>Selected toxicity reference value</b>	<b>Reference</b>
Carbon disulfide	75-15-0	X	X	3, 9
<i>Chloride</i>	16887-00-6			3, 9, 10
<i>Chlorine</i>	7782-50-5		X	3, 10
Chlorodibromomethane	124-48-1	X	X	3
Chloroform	67-66-3	X	X	3, 9, 10
Chloromethane	74-87-3	X		3, 10
Chromium	7440-47-3			3, 9, 10
<i>Chromium (III)</i>	16065-83-1		X	3
<i>Chromium (VI)</i>	18540-29-9		X	3, 10
Cobalt	7440-48-4		X	3, 9, 10
<i>Copper</i>	7440-50-8		X	3, 9, 10
<i>Cumene</i>	98-82-8	X	X	3, 9
Cyanide	57-12-5	X	X	3, 9, 10
delta-Hexachlorocyclohexane	319-86-8	X		9
<i>Di(2-ethylhexyl) phthalate</i>	117-81-7	X	X	3, 9, 10
Dibenz(a,h)anthracene	53-70-3	X	X	3, 9
Dibutyl phthalate	84-74-2	X	X	3, 9, 10
<i>Dichloromethane</i>	75-09-2	X	X	9, 10
Dieldrin	60-57-1	X	X	9
Diethyl phthalate	84-66-2	X	X	9
Diocetyl phthalate	117-84-0	X	X	9, 10
Diphenylamine	122-39-4	X	X	3, 9
Endosulfan I	959-98-8	X		3, 9
Endosulfan II	33213-65-9	X		3, 9
Endrin aldehyde	7421-93-4	X		3, 9
<i>Ethylbenzene</i>	100-41-4	X	X	3, 9, 10
<i>Ethylene glycol</i>	107-21-1	X	X	3, 9
Fluoranthene	206-44-0	X	X	3, 9
Fluorene	86-73-7	X	X	3, 9, 10
Fluoride	16984-48-8			3, 9, 10

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Chemical name</b>	<b>CASRN</b>	<b>Physico-chemical properties</b>	<b>Selected toxicity reference value</b>	<b>Reference</b>
<i>Formic acid</i>	64-18-6	X	X	10
Heptachlor	76-44-8	X	X	3, 9
Heptachlor epoxide	1024-57-3	X	X	3, 9
Heptanoic acid	111-14-8	X		10
Hexanoic acid	142-62-1	X		10
Indeno(1,2,3-cd)pyrene	193-39-5	X	X	3, 9
<i>Iron</i>	7439-89-6		X	3, 9, 10
<i>Isopropanol</i>	67-63-0	X		3, 9
Isovaleric acid	503-74-2	X		10
<i>Lead</i>	7439-92-1		X	3, 9, 10
Lindane	58-89-9	X	X	3, 9
Lithium	7439-93-2		X	3, 9, 10
Magnesium	7439-95-4			3, 9, 10
Manganese	7439-96-5		X	3, 9, 10
m-Cresol	108-39-4	X	X	3, 9, 10
Mercury	7439-97-6		X	3, 9, 10
<i>Methanol</i>	67-56-1	X	X	3, 9
Methyl bromide	74-83-9	X	X	3, 9
Methyl ethyl ketone	78-93-3	X	X	3, 9, 10
Molybdenum	7439-98-7		X	3, 9, 10
<i>Naphthalene</i>	91-20-3	X	X	3, 9, 10
Nickel	7440-02-0			3, 9, 10
Nitrate	14797-55-8		X	3, 9, 10
Nitrite	14797-65-0		X	3, 9, 10
N-Nitrosodiphenylamine	86-30-6	X	X	3, 9
o-Cresol	95-48-7	X	X	3, 9, 10
p,p'-DDE	72-55-9	X	X	3, 9
p-Cresol	106-44-5	X	X	3, 9, 10
p-Cymene	99-87-6	X		9, 10
Pentanoic acid	109-52-4	X		10

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Chemical name</b>	<b>CASRN</b>	<b>Physico-chemical properties</b>	<b>Selected toxicity reference value</b>	<b>Reference</b>
<i>Phenanthrene</i>	85-01-8	X		3, 9, 10
<i>Phenol</i>	108-95-2	X	X	3, 9, 10
Phorate	298-02-2	X	X	9
Phosphorus	7723-14-0		X	3, 9
Potassium	7440-09-7			3, 9, 10
Propionic acid	79-09-4	X		10
Propylbenzene	103-65-1	X		9
Pyrene	129-00-0	X	X	9, 10
Pyridine	110-86-1	X	X	3, 9, 10
Radium	7440-14-4			3
Radium-226	13982-63-3			3, 10
Radium-228	15262-20-1			3, 10
Safrole	94-59-7	X	X	3, 9
sec-Butylbenzene	135-98-8	X		9
Selenium	7782-49-2		X	3, 9, 10
<i>Silica</i>	7631-86-9			10
Silicon	7440-21-3			10
Silver	7440-22-4		X	3, 9, 10
Sodium	7440-23-5			3, 9, 10
Strontium	7440-24-6		X	3, 9, 10
<i>Sulfate</i>	14808-79-8			3, 9, 10
Sulfite	14265-45-3			3
Tetrachloroethylene	127-18-4	X	X	3, 9
Thallium	7440-28-0			3, 9, 10
Tin	7440-31-5		X	9, 10
Titanium	7440-32-6			3, 9, 10
<i>Toluene</i>	108-88-3	X	X	3, 9, 10
Vanadium	7440-62-2		X	3, 10

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Physico-chemical properties	Selected toxicity reference value	Reference
Xylenes	1330-20-7	X	X	3, 9, 10
Zinc	7440-66-6		X	3, 9, 10
Zirconium	7440-67-7			3

## A.2. References for Appendix A

- [Colborn, T; Kwiatkowski, C; Schultz, K; Bachran, M.](#) (2011). Natural gas operations from a public health perspective. *Hum Ecol Risk Assess* 17: 1039-1056. <http://dx.doi.org/10.1080/10807039.2011.605662>
- [Hayes, T.](#) (2009). Sampling and analysis of water streams associated with the development of Marcellus shale gas. Des Plaines, IL: Marcellus Shale Coalition. <http://eidmarcellus.org/wp-content/uploads/2012/11/MSCommission-Report.pdf>
- [House of Representatives](#) (U.S. House of Representatives). (2011). Chemicals used in hydraulic fracturing. Washington, D.C.: U.S. House of Representatives, Committee on Energy and Commerce, Minority Staff. <http://democrats.energycommerce.house.gov/sites/default/files/documents/Hydraulic-Fracturing-Chemicals-2011-4-18.pdf>
- [NLM](#) (National Institutes of Health, National Library of Medicine). (2014). ChemID plus advanced. Available online at <http://chem.sis.nlm.nih.gov/chemidplus/>
- [NYSDEC](#) (New York State Department of Environmental Conservation). (2011). Revised draft supplemental generic environmental impact statement (SGEIS) on the oil, gas and solution mining regulatory program: Well permit issuance for horizontal drilling and high-volume hydraulic fracturing to develop the Marcellus shale and other low-permeability gas reservoirs. Albany, NY: NY SDEC. <http://www.dec.ny.gov/energy/75370.html>
- [OSHA. Title 29 - Department of Labor. Subpart z Toxic and hazardous substances, hazard communication. § 1910.1200](#) (2013). <http://www.gpo.gov/fdsys/pkg/CFR-2013-title29-vol6/xml/CFR-2013-title29-vol6-sec1910-1200.xml>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2010). Chemicals used by hydraulic fracturing companies in Pennsylvania for surface and hydraulic fracturing activities. Harrisburg, PA: Pennsylvania Department of Environmental Protection (PADEP). <http://files.dep.state.pa.us/OilGas/BOGM/BOGMPortalFiles/MarcellusShale/Frac%20list%206-30-2010.pdf>.
- [Sheets, MSD.](#) (a) Encana/Halliburton Energy Services, Inc.: Duncan, Oklahoma. Provided by Halliburton Energy Services during an onsite visit by the EPA on May 10, 2010; (b) Encana Oil and Gas (USA), Inc.: Denver, Colorado. Provided to US EPA Region 8. Material Safety Data Sheets.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2004). Evaluation of impacts to underground sources of drinking water by hydraulic fracturing of coalbed methane reservoirs. (EPA/816/R-04/003). Washington, DC.: U.S. Environmental Protection Agency, Office of Solid Waste.

*This document is a draft for review purposes only and does not constitute Agency policy.*

[U.S. EPA](#) (U.S. Environmental Protection Agency). (2011b). Sampling data for flowback and produced water provided to EPA by nine oil and gas well operators (non-confidential business information). US Environmental Protection Agency.

<http://www.regulations.gov/#!docketDetail;rpp=100;so=DESC;sb=docId;po=0;D=EPA-HQ-ORD-2010-0674>

[U.S. EPA](#) (U.S. Environmental Protection Agency). (2013a). Data received from oil and gas exploration and production companies, including hydraulic fracturing service companies 2011 to 2013. Non-confidential business information source documents are located in Federal Docket ID: EPA-HQ-ORD2010-0674.

Available at <http://www.regulations.gov>.

[U.S. EPA](#) (U.S. Environmental Protection Agency). (2013b). Distributed structure-searchable toxicity (DSSTOX) database network. Available online at <http://www.epa.gov/ncct/dsstox/index.html>

## Appendix B

---

### Water Acquisition Tables

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

## Appendix B. Water Acquisition Tables

### B.1. Supplemental Tables

**Table B-1. Annual average hydraulic fracturing water use and consumption in 2011 and 2012 compared to total annual water use and consumption in 2010 by state.**

Hydraulic fracturing water use data from the EPA's project database of disclosures to FracFocus 1.0 ([U.S. EPA, 2015c](#)). Annual total water use data from the U.S. Geological Survey (USGS) Water Census ([Maupin et al., 2014](#)). Estimates of consumptions derived from hydraulic fracturing water use and total water use data. States listed in descending order by the volume of hydraulic fracturing water use.

State	Total annual water use in 2010 (millions of gal) <sup>a,b</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>c</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>d</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>d,e</sup>
Texas	9,052,000	19,942	0.2	0.7
Pennsylvania	2,967,450	5,105	0.2	1.4
Arkansas	4,124,500	3,676	0.1	0.1
Colorado	4,015,000	3,277	0.1	0.1
Oklahoma	1,157,050	2,949	0.3	0.8
Louisiana	3,117,100	2,462	0.1	0.4
North Dakota	419,750	2,181	0.5	2.9
West Virginia	1,288,450	657	0.1	0.5
Wyoming	1,715,500	538	<0.1	<0.1
New Mexico	1,153,400	371	<0.1	<0.1
Ohio	3,445,600	273	<0.1	0.1
Utah	1,627,900	251	<0.1	<0.1
Montana	2,792,250	155	<0.1	<0.1
Kansas	1,460,000	66	<0.1	<0.1
California	13,870,000	44	<0.1	<0.1
Michigan	3,942,000	28	<0.1	<0.1

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	Total annual water use in 2010 (millions of gal) <sup>a,b</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>c</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>d</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>d,e</sup>
Mississippi	1,434,450	18	<0.1	<0.1
Alaska <sup>f</sup>	397,850	7	<0.1	<0.1
Virginia	2,792,250	1	<0.1	<0.1
Alabama	3,635,400	1	<0.1	<0.1
TOTAL for all 20 states	64,407,900	42,001	0.1	0.2

<sup>a</sup> Texas, Colorado, Pennsylvania, North Dakota, Oklahoma, and Utah all made some degree of reporting to FracFocus mandatory rather than voluntary during this time period analyzed, January 1, 2011, to February 28, 2013. Three other states started requiring disclosure to either FracFocus or the state (Louisiana, Montana, and Ohio), and five states required or began requiring disclosure to the state (Arkansas, Michigan, New Mexico, West Virginia, and Wyoming). Alabama, Alaska, California, Kansas, Mississippi, and Virginia did not have reporting requirements during the period of time studied ([U.S. EPA, 2015a](#)).

<sup>b</sup> State-level data accessed from the USGS website (<http://water.usgs.gov/watuse/data/2010/>) on January 27, 2015. Total water withdrawals per day (located in downloaded Table 1) were multiplied by 365 days to estimate total water use for the year ([Maupin et al., 2014](#)).

<sup>c</sup> Average of water used for hydraulic fracturing in 2011 and 2012 as reported to FracFocus ([U.S. EPA, 2015c](#)).

<sup>d</sup> Percentages were calculated by averaging annual water use for hydraulic fracturing reported in FracFocus in 2011 and 2012 for a given state ([U.S. EPA, 2015c](#)), and then dividing by 2010 USGS hydraulic fracturing water use ([Maupin et al., 2014](#)) and multiplying by 100. Note that the annual hydraulic fracturing water use reported in FracFocus (the numerator) was not added to the 2010 total USGS water use value in the denominator, and the percentage is simply calculated as by dividing annual hydraulic fracturing use by 2010 total water use or consumption. This was done because of the difference in years between the two datasets, and because the USGS 2010 Census ([Maupin et al., 2014](#)) already included an estimate of hydraulic fracturing water use in its mining category. This approach is also consistent with that of other literature on this topic; see [Nicot and Scanlon \(2012\)](#).

<sup>e</sup> Consumption values were calculated with use-specific consumption rates predominantly from the USGS, including 19.2% for public supply, 19.2% for domestic use, 60.7% for irrigation, 60.7% for livestock, 14.8% for industrial uses, 14.8% for mining ([Solley et al., 1998](#)), and 2.7% for thermoelectric power ([USGS, 2014](#)). We used a rate of 71.6% for aquaculture ([from Verdegem and Bosma, 2009](#)) (evaporation per kg fish + infiltration per kg)/(total water use per kg) \*100. These rates were multiplied by each USGS water use value ([Maupin et al., 2014](#)) to yield a total water consumption estimate. To calculate a consumption amount for hydraulic fracturing, we used a consumption rate of 82.5%. This was calculated by taking the median value for all reported produced water/injected water percentages in Tables 7-1 and 7-2 of this assessment and then subtracting from 100%. If a range of values was given, the midpoint was used. Note that this is likely a low estimate of consumption since much of this return water is not subsequently treated and reused, but rather disposed of in underground injection wells—see Chapter 8.

<sup>f</sup> All reported hydraulic fracturing disclosures for Alaska passed state locational quality assurance methods, but not county methods ([U.S. EPA, 2015c](#)). Thus, only state-level cumulative values were reported here, and no county-level data are provided in subsequent tables.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table B-2. Annual average hydraulic fracturing water use and consumption in 2011 and 2012 compared to total annual water use and consumption in 2010 by county.**

Counties listed contained wells used for hydraulic fracturing according to the EPA's project database of disclosures to FracFocus 1.0 ([U.S. EPA, 2015c](#)). Annual total water use data from the USGS Water Census ([Maupin et al., 2014](#)). Estimates of consumption derived from hydraulic fracturing water use and total water use data.

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Alabama	Jefferson	29,685.5	0.6	<0.1	<0.1
	Tuscaloosa	14,319.0	0.5	<0.1	<0.1
Arkansas	Cleburne	9,471.8	740.9	7.8	32.9
	Conway	10,643.4	798.1	7.5	21.2
	Faulkner	3,204.7	284.0	8.9	13.7
	Independence	57,195.5	80.3	0.1	0.3
	Logan	1,525.7	2.4	0.2	0.3
	Sebastian	1,365.1	0.6	<0.1	<0.1
	Van Buren	1,587.8	899.6	56.7	168.8
	White	32,131.0	869.8	2.7	4.7
	Yell	1,507.5	<0.1	<0.1	<0.1
California	Colusa	304,782.3	<0.1	<0.1	<0.1
	Glenn	221,420.0	<0.1	<0.1	<0.1
	Kern	788,359.9	41.7	<0.1	<0.1
	Los Angeles	1,118,363.7	0.2	<0.1	<0.1
	Sutter	263,511.8	0.2	<0.1	<0.1
	Ventura	262,610.2	1.8	<0.1	<0.1
Colorado	Adams	84,285.8	3.2	<0.1	<0.1
	Arapahoe	68,255.0	4.0	<0.1	<0.1
	Boulder	84,537.7	4.1	<0.1	<0.1

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Colorado, cont.	Broomfield	2,336.0	4.5	0.2	0.4
	Delta	131,221.2	0.5	<0.1	<0.1
	Dolores	2,040.4	0.1	<0.1	<0.1
	El Paso	42,380.2	<0.1	<0.1	<0.1
	Elbert	5,040.7	<0.1	<0.1	<0.1
	Fremont	53,366.7	0.6	<0.1	<0.1
	Garfield	95,436.6	1,804.2	1.9	2.7
	Jackson	126,968.9	1.0	<0.1	<0.1
	La Plata	122,873.6	3.5	<0.1	<0.1
	Larimer	150,690.3	5.4	<0.1	<0.1
	Las Animas	26,911.5	7.9	<0.1	<0.1
	Mesa	275,476.5	122.1	<0.1	0.1
	Moffat	62,093.8	14.5	<0.1	<0.1
	Morgan	67,901.0	3.9	<0.1	<0.1
	Phillips	21,509.5	0.2	<0.1	<0.1
	Rio Blanco	97,513.4	147.3	0.2	0.2
	Routt	74,460.0	0.1	<0.1	<0.1
	San Miguel	13,848.1	0.3	<0.1	<0.1
	Weld	168,677.5	1,149.4	0.7	1.0
Yuma	80,595.7	0.4	<0.1	<0.1	
Kansas	Barber	2,164.5	9.9	0.5	0.7
	Clark	1,898.0	0.8	<0.1	0.1
	Comanche	3,011.3	25.6	0.9	1.2
	Finney	102,685.5	2.4	<0.1	<0.1
	Grant	47,128.8	0.2	<0.1	<0.1

*This document is a draft for review purposes only and does not constitute Agency policy.*



State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Kansas, cont.	Gray	69,379.2	3.3	<0.1	<0.1
	Harper	1,357.8	17.3	1.3	2.0
	Haskell	72,496.3	0.1	<0.1	<0.1
	Hodgeman	8,460.7	2.7	<0.1	<0.1
	Kearny	64,134.2	<0.1	<0.1	<0.1
	Lane	5,628.3	0.8	<0.1	<0.1
	Meade	55,958.2	<0.1	<0.1	<0.1
	Morton	17,403.2	<0.1	<0.1	<0.1
	Ness	1,478.3	1.6	0.1	0.2
	Seward	57,443.7	<0.1	<0.1	<0.1
	Sheridan	26,393.2	0.7	<0.1	<0.1
	Stanton	41,420.2	<0.1	<0.1	<0.1
	Stevens	72,124.0	0.1	<0.1	<0.1
	Sumner	3,442.0	0.2	<0.1	<0.1
Louisiana	Allen	8,942.5	0.1	<0.1	<0.1
	Beauregard	10,161.6	2.3	<0.1	0.1
	Bienville	4,810.7	108.9	2.3	10.0
	Bossier	5,599.1	110.1	2.0	4.9
	Caddo	53,644.1	153.6	0.3	1.7
	Calcasieu	81,621.3	0.1	<0.1	<0.1
	Caldwell	1,398.0	<0.1	<0.1	<0.1
	Claiborne	952.7	3.8	0.4	1.1
	De Soto	13,373.6	1,085.9	8.1	47.4
	East Feliciana	1,350.5	3.7	0.3	0.7
	Jackson	1,456.4	<0.1	<0.1	<0.1

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Louisiana, cont.	Lincoln	3,000.3	3.3	0.1	0.3
	Natchitoches	12,530.5	12.7	0.1	0.2
	Rapides	199,976.2	1.7	<0.1	<0.1
	Red River	1,606.0	569.6	35.5	83.2
	Sabine	1,522.1	395.2	26.0	76.6
	Tangipahoa	7,329.2	1.9	<0.1	0.1
	Union	1,481.9	4.9	0.3	1.0
	Webster	2,664.5	1.2	<0.1	0.1
	West Feliciana	15,191.3	2.3	<0.1	0.1
	Winn	846.8	1.1	0.1	0.4
Michigan	Cheboygan	2,777.7	<0.1	<0.1	<0.1
	Gladwin	850.5	1.1	0.1	0.4
	Kalkaska	1,233.7	24.0	1.9	3.7
	Missaukee	1,423.5	<0.1	<0.1	<0.1
	Ogemaw	1,179.0	<0.1	<0.1	<0.1
	Roscommon	1,000.1	2.4	0.2	0.9
Mississippi	Amite	792.1	14.4	1.8	3.8
	Wilkinson	1,270.2	3.2	0.3	0.4
Montana	Daniels	1,408.9	0.6	<0.1	0.1
	Garfield	1,631.6	0.5	<0.1	<0.1
	Glacier	46,760.2	5.1	<0.1	<0.1
	Musselshell	26,827.5	0.4	<0.1	<0.1
	Richland	94,797.8	83.5	0.1	0.1

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Montana, cont.	Roosevelt	31,539.7	52.1	0.2	0.2
	Rosebud	71,412.3	3.5	<0.1	<0.1
	Sheridan	7,354.8	9.7	0.1	0.2
New Mexico	Chaves	88,078.2	2.8	<0.1	<0.1
	Colfax	17,450.7	0.7	<0.1	<0.1
	Eddy	70,612.9	225.6	0.3	0.5
	Harding	1,168.0	0.1	<0.1	<0.1
	Lea	64,057.5	113.7	0.2	0.3
	Rio Arriba	39,080.6	16.5	<0.1	0.1
	Roosevelt	63,367.7	<0.1	<0.1	<0.1
	San Juan	125,432.3	11.6	<0.1	<0.1
	Sandoval	23,922.1	0.4	<0.1	<0.1
North Dakota	Billings	762.9	44.4	5.8	16.2
	Bottineau	1,164.4	0.1	<0.1	<0.1
	Burke	394.2	63.6	16.1	40.8
	Divide	806.7	102.2	12.7	18.6
	Dunn	1,076.8	309.5	28.7	43.1
	Golden Valley	208.1	4.6	2.2	3.8
	Mckenzie	13,753.2	588.4	4.3	6.2
	Mclean	7,873.1	12.2	0.2	0.4
	Mountrail	1,248.3	449.4	36.0	98.3
	Stark	1,168.0	48.0	4.1	8.5
	Williams	7,705.2	558.5	7.2	11.3

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Ohio	Ashland	2,033.1	1.5	0.1	0.2
	Belmont	65,528.5	1.9	<0.1	0.1
	Carroll	1,127.9	152.7	13.5	37.3
	Columbiana	3,763.2	30.7	0.8	2.2
	Coshocton	53,775.5	5.4	<0.1	0.1
	Guernsey	2,379.8	8.4	0.4	0.7
	Harrison	481.8	16.5	3.4	7.3
	Jefferson	632,917.3	26.2	<0.1	0.1
	Knox	3,270.4	1.1	<0.1	0.1
	Medina	3,540.5	1.3	<0.1	0.1
	Muskingum	6,018.9	5.1	0.1	0.3
	Noble	478.2	8.3	1.7	3.4
	Portage	18,414.3	3.2	<0.1	0.1
	Stark	16,479.8	2.4	<0.1	<0.1
	Tuscarawas	14,165.7	6.7	<0.1	0.2
Wayne	6,051.7	1.7	<0.1	0.1	
Oklahoma	Alfalfa	2,996.7	182.7	6.1	12.0
	Beaver	15,341.0	23.1	0.2	0.3
	Beckham	4,099.0	108.0	2.6	4.7
	Blaine	3,763.2	203.3	5.4	9.3
	Bryan	5,062.6	10.3	0.2	0.4
	Caddo	24,064.5	25.4	0.1	0.3
	Canadian	5,584.5	441.9	7.9	15.6
	Carter	159,906.5	161.9	0.1	0.5
	Coal	1,193.6	85.9	7.2	21.5

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Oklahoma, cont.	Custer	3,281.4	19.0	0.6	1.2
	Dewey	10,953.7	162.6	1.5	6.2
	Ellis	8,486.3	184.3	2.2	3.2
	Garvin	16,279.0	15.0	0.1	0.4
	Grady	13,537.9	111.5	0.8	2.3
	Grant	5,569.9	77.8	1.4	5.2
	Harper	3,266.8	8.8	0.3	0.4
	Hughes	3,394.5	30.5	0.9	2.2
	Jefferson	4,496.8	<0.1	<0.1	<0.1
	Johnston	1,671.7	32.9	2.0	4.7
	Kay	16,957.9	17.3	0.1	0.4
	Kingfisher	3,744.9	10.2	0.3	0.5
	Kiowa	5,022.4	0.1	<0.1	<0.1
	Latimer	1,062.2	0.6	0.1	0.1
	Le Flore	8,635.9	0.3	<0.1	<0.1
	Logan	4,077.1	4.2	0.1	0.3
	Love	2,011.2	4.4	0.2	0.5
	Major	6,321.8	1.2	<0.1	<0.1
	Marshall	2,613.4	98.4	3.8	7.2
	McClain	2,952.9	2.1	0.1	0.2
Noble	12,990.4	25.3	0.2	1.8	
Oklahoma	47,836.9	1.2	<0.1	<0.1	
Osage	6,971.5	3.8	0.1	0.2	
Pawnee	4,839.9	15.7	0.3	1.4	
Payne	4,332.6	9.9	0.2	0.6	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Oklahoma, cont.	Pittsburg	6,314.5	349.0	5.5	16.0
	Roger Mills	2,847.0	235.5	8.3	12.6
	Seminole	124,837.3	0.1	<0.1	<0.1
	Stephens	49,990.4	27.7	0.1	0.3
	Texas	110,208.1	0.1	<0.1	<0.1
	Washita	3,310.6	102.1	3.1	5.4
	Woods	4,139.1	155.1	3.7	10.9
Pennsylvania	Allegheny	234,140.2	13.6	<0.1	<0.1
	Armstrong	65,853.3	55.7	0.1	1.8
	Beaver	157,793.2	30.5	<0.1	0.2
	Blair	8,303.8	5.9	0.1	0.2
	Bradford	4,354.5	1,059.4	24.3	78.2
	Butler	5,730.5	121.8	2.1	6.0
	Cameron	292.0	6.6	2.3	4.1
	Centre	16,560.1	38.5	0.2	0.5
	Clarion	1,843.3	8.1	0.4	1.4
	Clearfield	111,051.3	111.5	0.1	2.3
	Clinton	6,161.2	94.4	1.5	3.0
	Columbia	3,810.6	5.6	0.1	0.4
	Crawford	5,091.8	2.4	<0.1	0.1
	Elk	7,876.7	37.5	0.5	1.9
	Fayette	16,465.2	120.2	0.7	2.7
	Forest	744.6	7.7	1.0	1.6
	Greene	13,023.2	359.0	2.8	24.7
Huntingdon	5,121.0	2.7	0.1	0.2	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Pennsylvania, cont.	Indiana	21,819.7	16.2	0.1	0.7
	Jefferson	1,730.1	13.8	0.8	1.7
	Lawrence	36,598.6	27.0	0.1	1.0
	Lycoming	5,854.6	704.6	12.0	33.8
	McKean	4,723.1	60.5	1.3	4.9
	Potter	2,281.3	16.5	0.7	1.0
	Somerset	10,833.2	5.8	0.1	0.2
	Sullivan	222.7	66.5	29.9	79.8
	Susquehanna	1,617.0	751.3	46.5	123.4
	Tioga	2,909.1	566.3	19.5	47.3
	Venango	2,989.4	2.4	0.1	0.3
	Warren	5,099.1	2.3	<0.1	0.2
	Washington	130,535.0	433.7	0.3	4.6
	Westmoreland	14,607.3	207.0	1.4	3.8
Wyoming	4,788.8	150.0	3.1	15.2	
Texas	Andrews	23,363.7	236.2	1.0	2.7
	Angelina	5,540.7	0.8	<0.1	<0.1
	Archer	2,536.8	0.1	<0.1	<0.1
	Atascosa	15,038.0	327.3	2.2	4.0
	Austin	2,555.0	2.1	0.1	0.1
	Bee	3,087.9	20.0	0.6	1.1
	Borden	2,427.3	8.0	0.3	1.0
	Bosque	3,544.2	0.7	<0.1	<0.1
	Brazos	24,790.8	7.7	<0.1	0.1
	Brooks	1,204.5	1.5	0.1	0.3

*This document is a draft for review purposes only and does not constitute Agency policy.*



State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Texas, cont.	Burleson	10,694.5	3.0	<0.1	<0.1
	Cherokee	24,845.6	0.5	<0.1	<0.1
	Clay	1,963.7	<0.1	<0.1	<0.1
	Cochran	24,035.3	3.0	<0.1	<0.1
	Coke	12,713.0	0.3	<0.1	<0.1
	Colorado	52,465.1	0.1	<0.1	<0.1
	Concho	2,832.4	<0.1	<0.1	<0.1
	Cooke	4,533.3	454.3	10.0	29.9
	Cottle	733.7	0.3	<0.1	0.1
	Crane	8,566.6	92.3	1.1	5.7
	Crockett	4,281.5	279.0	6.5	29.5
	Crosby	27,261.9	1.3	<0.1	<0.1
	Culberson	14,311.7	37.7	0.3	0.4
	Dallas	112,204.7	5.6	<0.1	<0.1
	Dawson	28,842.3	17.5	0.1	0.1
	DeWitt	2,394.4	546.6	22.8	48.6
	Denton	60,684.9	455.0	0.7	2.3
	Dimmit	4,073.4	1,794.2	44.0	81.3
	Ector	21,958.4	226.5	1.0	4.6
	Edwards	332.2	<0.1	<0.1	<0.1
	Ellis	8,530.1	4.2	<0.1	0.1
	Erath	5,876.5	0.8	<0.1	<0.1
	Fayette	9,008.2	13.7	0.2	1.2
	Fisher	2,854.3	1.8	0.1	0.1
Franklin	1,956.4	<0.1	<0.1	<0.1	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Texas, cont.	Freestone	297,861.9	53.9	<0.1	0.5
	Frio	20,589.7	127.5	0.6	0.9
	Gaines	121,778.6	21.6	<0.1	<0.1
	Garza	5,234.1	0.6	<0.1	<0.1
	Glasscock	20,680.9	598.1	2.9	4.2
	Goliad	142,963.2	<0.1	<0.1	<0.1
	Gonzales	7,121.2	577.9	8.1	17.6
	Grayson	8,143.2	9.3	0.1	0.3
	Gregg	33,010.6	9.4	<0.1	0.2
	Grimes	112,500.3	15.5	<0.1	0.3
	Hansford	43,643.1	2.9	<0.1	<0.1
	Hardeman	2,230.2	0.4	<0.1	<0.1
	Hardin	2,376.2	0.1	<0.1	<0.1
	Harrison	11,869.8	141.6	1.2	6.0
	Hartley	113,555.2	1.9	<0.1	<0.1
	Haskell	12,143.6	0.1	<0.1	<0.1
	Hemphill	3,150.0	263.9	8.4	16.3
	Hidalgo	171,630.3	8.0	<0.1	<0.1
	Hockley	46,314.9	3.0	<0.1	<0.1
	Hood	9,351.3	76.0	0.8	2.2
	Houston	3,686.5	8.6	0.2	0.6
	Howard	10,811.3	97.6	0.9	2.7
Hutchinson	34,437.8	0.3	<0.1	<0.1	
Irion	1,335.9	411.4	30.8	74.5	
Jack	2,241.1	14.0	0.6	2.2	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Texas, cont.	Jefferson	88,585.5	<0.1	<0.1	<0.1
	Jim Hogg	306.6	0.1	<0.1	0.1
	Johnson	9,241.8	582.0	6.3	18.5
	Jones	5,679.4	<0.1	<0.1	<0.1
	Karnes	1,861.5	1,055.2	56.7	120.1
	Kenedy	456.3	0.2	0.1	0.1
	Kent	6,132.0	0.4	<0.1	<0.1
	King	1,485.6	<0.1	<0.1	<0.1
	Kleberg	1,171.7	3.4	0.3	0.5
	Knox	9,800.3	<0.1	<0.1	<0.1
	La Salle	2,474.7	1,288.7	52.1	93.7
	Lavaca	3,763.2	45.0	1.2	2.0
	Lee	3,120.8	1.2	<0.1	0.1
	Leon	2,171.8	56.2	2.6	6.6
	Liberty	20,662.7	<0.1	<0.1	<0.1
	Limestone	11,158.1	10.7	0.1	0.9
	Lipscomb	11,015.7	89.0	0.8	1.1
	Live Oak	1,916.3	294.0	15.3	40.1
	Loving	781.1	138.4	17.7	94.1
	Lynn	19,892.5	1.1	<0.1	<0.1
Madison	1,554.9	45.3	2.9	8.2	
Marion	3,606.2	5.9	0.2	0.9	
Martin	14,063.5	432.0	3.1	4.7	
Maverick	20,498.4	52.4	0.3	0.4	
McMullen	657.0	745.9	113.5	350.4	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Texas, cont.	Medina	19,228.2	0.2	<0.1	<0.1
	Menard	1,014.7	<0.1	<0.1	<0.1
	Midland	12,891.8	307.4	2.4	3.7
	Milam	16,665.9	4.9	<0.1	0.1
	Mitchell	6,559.1	11.0	0.2	0.3
	Montague	3,989.5	925.3	23.2	77.8
	Montgomery	32,565.3	0.2	<0.1	<0.1
	Moore	57,075.1	<0.1	<0.1	<0.1
	Nacogdoches	5,891.1	271.7	4.6	12.5
	Navarro	18,699.0	4.8	<0.1	0.1
	Newton	2,263.0	0.2	<0.1	<0.1
	Nolan	4,124.5	4.5	0.1	0.2
	Nueces	85,767.7	1.0	<0.1	<0.1
	Ochiltree	21,348.9	33.3	0.2	0.2
	Oldham	2,124.3	1.3	0.1	0.1
	Orange	150,128.2	0.3	<0.1	<0.1
	Palo Pinto	18,403.3	9.6	0.1	0.3
	Panola	6,365.6	346.5	5.4	20.7
	Parker	8,241.7	261.7	3.2	9.8
	Pecos	52,954.2	8.2	<0.1	<0.1
Polk	204,009.5	0.2	<0.1	<0.1	
Potter	2,029.4	0.4	<0.1	<0.1	
Reagan	9,333.1	410.5	4.4	7.8	
Reeves	20,772.2	164.2	0.8	1.1	
Roberts	7,690.6	38.2	0.5	1.2	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Texas, cont.	Robertson	158,344.3	45.4	<0.1	0.2
	Runnels	2,847.0	<0.1	<0.1	<0.1
	Rusk	582,134.9	65.8	<0.1	0.3
	Sabine	799.4	31.1	3.9	13.9
	San Augustine	1,131.5	182.1	16.1	50.8
	San Patricio	4,172.0	1.1	<0.1	<0.1
	Schleicher	967.3	27.0	2.8	5.0
	Scurry	14,187.6	1.1	<0.1	<0.1
	Shelby	4,920.2	133.6	2.7	8.2
	Sherman	78,073.5	<0.1	<0.1	<0.1
	Smith	11,231.1	0.2	<0.1	<0.1
	Somervell	746,005.3	4.8	<0.1	<0.1
	Starr	9,552.1	5.0	0.1	0.1
	Stephens	13,446.6	2.6	<0.1	0.1
	Sterling	719.1	36.6	5.1	11.9
	Stonewall	923.5	0.9	0.1	0.3
	Sutton	1,153.4	1.6	0.1	0.3
	Tarrant	104,430.2	1,443.0	1.4	3.9
	Terrell	543.9	0.1	<0.1	<0.1
	Terry	48,362.5	7.5	<0.1	<0.1
Tyler	1,872.5	0.1	<0.1	<0.1	
Upshur	8,610.4	0.2	<0.1	<0.1	
Upton	7,975.3	462.6	5.8	14.2	
Van Zandt	4,139.1	0.1	<0.1	<0.1	
Walker	4,478.6	3.4	0.1	0.2	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Texas, cont.	Waller	9,829.5	0.1	<0.1	<0.1
	Ward	6,909.5	107.3	1.6	4.6
	Washington	2,430.9	2.2	0.1	0.2
	Webb	15,862.9	1,117.8	7.0	18.2
	Wharton	81,606.7	<0.1	<0.1	<0.1
	Wheeler	6,522.6	858.0	13.2	21.5
	Wichita	25,936.9	0.1	<0.1	<0.1
	Wilbarger	12,683.8	0.2	<0.1	<0.1
	Willacy	15,209.6	0.1	<0.1	<0.1
	Wilson	7,843.9	84.5	1.1	1.7
	Winkler	5,274.3	7.7	0.1	0.5
	Wise	24,966.0	529.7	2.1	8.9
	Wood	19,334.1	0.2	<0.1	<0.1
	Yoakum	77,325.3	7.5	<0.1	<0.1
	Young	21,162.7	0.1	<0.1	<0.1
Zapata	2,697.4	1.1	<0.1	0.1	
Zavala	14,410.2	130.0	0.9	1.3	
Utah	Carbon	15,067.2	7.3	<0.1	0.1
	Duchesne	119,811.3	85.5	0.1	0.1
	San Juan	10,632.5	0.3	<0.1	<0.1
	Sevier	52,512.6	<0.1	<0.1	<0.1
	Uintah	100,229.0	157.5	0.2	0.2
Virginia	Buchanan	313.9	0.6	0.2	0.3
	Dickenson	1,741.1	0.8	<0.1	0.2
	Wise	1,927.2	0.1	<0.1	<0.1

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
West Virginia	Barbour	773.8	19.9	2.6	6.9
	Brooke	4,551.6	54.8	1.2	5.1
	Doddridge	405.2	78.5	19.4	69.4
	Hancock	28,718.2	1.2	<0.1	<0.1
	Harrison	20,232.0	40.2	0.2	1.9
	Lewis	901.6	2.4	0.3	0.8
	Marion	5,982.4	70.1	1.2	4.9
	Marshall	158,358.9	84.5	0.1	0.7
	Monongalia	42,102.8	6.8	<0.1	0.1
	Ohio	3,825.2	116.5	3.0	10.4
	Pleasants	24,703.2	<0.1	<0.1	<0.1
	Preston	2,890.8	8.4	0.3	1.4
	Ritchie	587.7	2.8	0.5	1.7
	Taylor	824.9	52.9	6.4	17.6
	Tyler	4,934.8	2.1	<0.1	0.2
	Upshur	1,814.1	34.9	1.9	6.8
Webster	1,292.1	2.3	0.2	0.3	
Wetzel	1,467.3	78.2	5.3	11.9	
Wyoming	Big Horn	143,368.4	2.9	<0.1	<0.1
	Campbell	44,318.3	11.7	<0.1	0.1
	Carbon	137,130.5	4.5	<0.1	<0.1
	Converse	56,972.9	106.8	0.2	0.3
	Fremont	186,150.0	28.2	<0.1	<0.1
	Goshen	144,248.0	5.8	<0.1	<0.1
	Hot Springs	28,572.2	0.3	<0.1	<0.1

*This document is a draft for review purposes only and does not constitute Agency policy.*



State	County	Total annual water use in 2010 (millions of gal) <sup>a</sup>	Annual average hydraulic fracturing water use in 2011 and 2012 (millions of gal) <sup>b</sup>	Hydraulic fracturing water use compared to total water use (%) <sup>c</sup>	Hydraulic fracturing water consumption compared to total water consumption (%) <sup>c,d</sup>
Wyoming, cont.	Johnson	43,205.1	<0.1	<0.1	<0.1
	Laramie	86,297.0	18.3	<0.1	<0.1
	Lincoln	74,562.2	0.8	<0.1	<0.1
	Natrona	62,885.9	1.8	<0.1	<0.1
	Niobrara	25,148.5	0.1	<0.1	<0.1
	Park	111,317.7	0.9	<0.1	<0.1
	Sublette	61,006.1	314.8	0.5	0.7
	Sweetwater	61,699.6	39.4	0.1	0.1
	Uinta	79,518.9	0.6	<0.1	<0.1
	Washakie	60,400.2	1.1	<0.1	<0.1

<sup>a</sup> County-level data accessed from the USGS website (<http://water.usgs.gov/watuse/data/2010/>) on November 11, 2014. Total daily water withdrawals were multiplied by 365 days to estimate total water use for the year ([Maupin et al., 2014](#)).

<sup>b</sup> Average of water used for hydraulic fracturing in 2011 and 2012, as reported to FracFocus ([U.S. EPA, 2015c](#)).

<sup>c</sup> Percentages were calculated by averaging annual water use for hydraulic fracturing reported in FracFocus in 2011 and 2012 for a given county ([U.S. EPA, 2015c](#)), and then dividing by 2010 USGS total water use for that county ([Maupin et al., 2014](#)) and multiplying by 100.

<sup>d</sup> Consumption values were calculated with use-specific consumption rates predominantly from the USGS, including 19.2% for public supply, 19.2% for domestic use, 60.7% for irrigation, 60.7% for livestock, 14.8% for industrial uses, 14.8% for mining ([Solley et al., 1998](#)), and 2.7% for thermoelectric power ([USGS, 2014](#)). We used a rate of 71.6% for aquaculture ([from Verdegem and Bosma, 2009](#)) (evaporation per kg fish + infiltration per kg)/(total water use per kg)\*100. These rates were multiplied by each USGS water use value ([Maupin et al., 2014](#)) to yield a total water consumption estimate. To calculate a consumption amount for hydraulic fracturing, we used a consumption rate of 82.5%. This was calculated by taking the median value for all reported produced water/injected water percentages in Tables 7-1 and 7-2 of this assessment and then subtracting from 100%. If a range of values was given, the midpoint was used. Note that this is likely a low estimate of consumption since much of this return water is not subsequently treated and reused, but rather disposed of in underground injection wells—see Chapter 8.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table B-3. Comparison of water use per well estimates from the EPA’s project database of disclosures to FracFocus 1.0 (U.S. EPA, 2015c) and literature sources.**Source: ([U.S. EPA, 2015c](#))

State	Basin <sup>a</sup>	Water use per well (gal) - FracFocus estimate <sup>b</sup>	Water use per well (gal) - Literature estimate <sup>b,c</sup>	FracFocus estimate as a percentage of literature estimate (%)
Colorado	Denver	403,686	2,900,000	14
North Dakota		2,140,842	2,200,000	97
Oklahoma		2,591,778	3,000,000	86
Pennsylvania <sup>d</sup>		4,301,701	4,450,000	97
Texas	Fort Worth	3,881,220	4,500,000	86
Texas	Salt	3,139,980	4,000,000	78
Texas	Western Gulf	3,777,648	4,600,000	82
Average <sup>e</sup>				77
Median <sup>e</sup>				86

<sup>a</sup> In cases where a basin is not specified, estimates were for the entire state and not specific to a particular basin. Basin boundaries for the FracFocus estimates were determined from data from the U.S. EIA ([see U.S. EPA, 2015b](#)).

<sup>b</sup> The type of literature estimate determined the specific comparison with FracFocus. If averages were given in the literature (as for North Dakota and Pennsylvania), those values were compared with FracFocus averages; where medians were given in the literature (as for Colorado, Oklahoma, and Texas), they were compared with FracFocus medians.

<sup>c</sup> Literature estimates were from the following sources: Colorado ([Goodwin et al., 2014](#)), North Dakota ([North Dakota State Water Commission, 2014](#)), Pennsylvania ([Mitchell et al., 2013](#)), and Texas ([Nicot et al., 2012](#))—see far right-column and footnotes in Table B-5 for details on literature estimates. Where the literature provided a range, the mid-point was used. Only literature estimates that were not directly derived from FracFocus were included.

<sup>d</sup> The results from [Mitchell et al. \(2013\)](#) were used for Pennsylvania since they were derived from Pennsylvania Department of Environment Protection records. Estimates from [Hansen et al. \(2013\)](#) were not included here because they were based on FracFocus.

<sup>e</sup> Average and median percentage calculations were not weighted by the number of wells for a given estimate.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table B-4. Comparison of well counts from the EPA’s project database of disclosures to FracFocus 1.0 (U.S. EPA, 2015c) and state databases for North Dakota, Pennsylvania, and West Virginia.**

State	FracFocus well counts <sup>a</sup>			State database well counts			FracFocus counts as a percentage of state database counts		
	2011	2012	Total	2011	2012	Total	2011	2012	Total
North Dakota <sup>b</sup>	613	1,458	2,071	1,225	1,740	2,965	50%	84%	70%
Pennsylvania <sup>c</sup>	1,137	1,257	2,394	1,963	1,347	3,310	58%	93%	72%
West Virginia <sup>d</sup>	93	176	269	214	251	465	43%	70%	58%
Average							50%	82%	67%

<sup>a</sup> FracFocus disclosures from [U.S. EPA \(2015c\)](#).

<sup>b</sup> For North Dakota state well counts, we used a North Dakota Department of Mineral Resources online database containing a list of horizontal wells completed in the Bakken Formation. Data for North Dakota were accessed on July 9, 2014 at <https://www.dmr.nd.gov/oilgas/bakkenwells.asp>.

<sup>c</sup> For Pennsylvania state well counts, we used completed horizontal wells as a proxy for hydraulically fractured wells in the state. The Pennsylvania Department of Environmental Protection has online databases of permitted and spudded wells, which differentiate between conventional and unconventional wells and can generate summary statistics at both the county and state scale. The number of spudded wells (i.e., wells drilled) provided a better comparison with the number of hydraulically fractured wells in FracFocus than that of permitted wells. The number of permitted wells was nearly double that of spudded in 2011 and 2012, indicating that almost half of the wells permitted were not drilled in that same year. Therefore, we used spudded wells here. Data for Pennsylvania were accessed on February 11, 2014 from [http://www.depreportingservices.state.pa.us/ReportServer/Pages/ReportViewer.aspx?/Oil\\_Gas/Spud\\_External\\_Data](http://www.depreportingservices.state.pa.us/ReportServer/Pages/ReportViewer.aspx?/Oil_Gas/Spud_External_Data).

<sup>d</sup> For West Virginia state well counts, data on the number of hydraulically fractured wells per year were received from the West Virginia Department of Environmental Protection on February 25, 2014.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table B-5. Water use per hydraulically fractured well as reported in the EPA’s project database of disclosures to FracFocus 1.0 (U.S. EPA, 2015c) by state and basin.**

Source: ([U.S. EPA, 2015c](#))

Other literature estimates are also included where available. NA indicates other literature estimates were not available. All FracFocus estimates were limited to disclosures with valid state, county, and volume information. States listed in order addressed in Chapter 4.

State	Basin/total <sup>a</sup>	Number of disclosures	Mean (gal)	Median (gal)	10 <sup>th</sup> percentile (gal)	90 <sup>th</sup> percentile (gal)	Literature estimates
Texas	Permian	8,419	1,068,511	841,134	40,090	1,814,633	Many formations reported <sup>b</sup>
	Western Gulf	4,549	3,915,540	3,777,648	173,832	6,786,052	4.5–4.7 million gal (median, Eagle Ford play) <sup>b</sup>
	Fort Worth	2,564	3,880,724	3,881,220	923,381	6,649,406	4.5 million gal (median, Barnett play) <sup>b</sup>
	TX-LA-MS Salt	626	4,261,363	3,139,980	193,768	10,010,707	6–7.5 million gal (median, Texas-Haynesville play) and 0.5-1 million gallons (median, Cotton Valley play) <sup>b</sup>
	Anadarko	604	4,128,702	3,341,310	492,421	8,292,996	Many formations reported <sup>b</sup>
	Other	120	1,601,897	184,239	21,470	5,678,588	NA
	Total	16,882	2,494,452	1,420,613	58,709	6,115,195	Not reported by state <sup>b</sup>
Colorado	Denver	3,166	753,887	403,686	143,715	2,588,946	2.9 million gal (median, Wattenberg field of Niobrara play) <sup>c</sup>
	Uinta-Piceance	1,520	2,739,523	1,798,414	840,778	5,066,380	NA
	Raton	146	108,003	95,974	24,917	211,526	NA
	Other	66	605,740	183,408	34,412	601,816	NA
	Total	4,898	1,348,842	463,462	147,353	3,092,024	NA

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	Basin/total <sup>a</sup>	Number of disclosures	Mean (gal)	Median (gal)	10 <sup>th</sup> percentile (gal)	90 <sup>th</sup> percentile (gal)	Literature estimates
Wyoming	Greater Green River	861	841,702	752,979	147,020	1,493,266	NA
	Powder River	351	739,129	5,927	5,353	2,863,182	NA
	Other	193	613,618	41,664	22,105	1,818,606	NA
	Total	1,405	784,746	322,793	5,727	1,837,602	NA
Pennsylvania	Appalachian	2,445	4,301,701	4,184,936	2,313,649	6,615,981	4.2-4.6 million gal (average, Marcellus play, Susquehanna River Basin) <sup>d</sup>
	Total	2,445	4,301,701	4,184,936	2,313,649	6,615,981	4.1-4.5 <sup>d</sup> and 4.3-4.6 <sup>e</sup> million gal (average)
West Virginia	Appalachian	273	5,034,217	5,012,238	3,170,210	7,297,080	NA
	Total	273	5,034,217	5,012,238	3,170,210	7,297,080	4.7-6 million gal (average) <sup>d</sup>
Ohio	Appalachian	146	4,206,955	3,887,499	2,885,568	5,571,027	NA
	Total	146	4,206,955	3,887,499	2,885,568	5,571,027	NA
North Dakota	Williston	2,109	2,140,842	2,022,380	969,380	3,313,482	NA
	Total	2,109	2,140,842	2,022,380	969,380	3,313,482	2.2 million gal (average) <sup>f</sup>
Montana	Williston	187	1,640,085	1,552,596	375,864	3,037,398	NA
	Other	20	945,541	1,017,701	157,639	1,575,197	NA
	Total	207	1,572,979	1,455,757	367,326	2,997,552	NA
Oklahoma	Anadarko	935	3,742,703	3,259,774	1,211,700	6,972,652	Many formations reported <sup>g</sup>
	Arkoma	158	6,323,750	6,655,929	172,375	9,589,554	Many formations reported <sup>g</sup>
	Ardmore	98	6,637,332	8,021,559	81,894	8,835,842	Many formations reported <sup>g</sup>
	Other	592	1,963,480	1,866,144	1,319,247	2,785,352	NA
	Total	1,783	3,539,775	2,591,778	1,260,906	7,402,230	3 million gal (median) <sup>g</sup>

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	Basin/total <sup>a</sup>	Number of disclosures	Mean (gal)	Median (gal)	10 <sup>th</sup> percentile (gal)	90 <sup>th</sup> percentile (gal)	Literature estimates
Kansas	Total	121	1,135,973	1,453,788	10,836	2,227,926	NA
Arkansas	Arkoma	1,423	5,190,254	5,259,965	3,234,963	7,121,249	NA
	Total	1,423	5,190,254	5,259,965	3,234,963	7,121,249	NA
Louisiana	TX-LA-MS Salt	939	5,289,100	5,116,650	2,851,654	7,984,838	NA
	Other	27	896,899	232,464	87,003	3,562,400	NA
	Total	966	5,166,337	5,077,863	1,812,099	7,945,630	NA
Utah	Uinta-Piceance	1,396	375,852	304,105	77,166	770,699	NA
	Other	10	58,874	56,245	28,745	97,871	NA
	Total	1,406	373,597	302,075	76,286	769,360	NA
New Mexico	Permian	732	991,369	426,258	89,895	2,502,923	NA
	San Juan	363	159,680	97,734	27,217	313,919	NA
	Other	50	33,787	8,358	1,100	98,841	NA
	Total	1,145	685,882	175,241	35,638	1,871,666	NA

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	Basin/total <sup>a</sup>	Number of disclosures	Mean (gal)	Median (gal)	10 <sup>th</sup> percentile (gal)	90 <sup>th</sup> percentile (gal)	Literature estimates
California	San Joaquin	677	131,653	77,238	22,100	285,029	NA
	Other	34	132,391	36,099	13,768	361,192	NA
	Total	711	131,689	76,818	21,462	285,306	130,000 gallon (average) <sup>h</sup>

<sup>a</sup> Basin boundaries for the FracFocus estimates were determined from data from the U.S. EIA ([see U.S. EPA, 2015b](#)).

<sup>b</sup> Literature estimates for Texas were from [Nicot et al. \(2012\)](#), using proprietary data from IHS. In most cases, Nicot et al. reported at the play scale or smaller, rather than the EIA basin scale used for FracFocus. We reference 2011 and 2012 (partial year) for Nicot et al. where possible to overlap with the period of study for FracFocus, though more years were available for most formations. A range is reported for some medians because median water use was different for the two years. There were five formations reported for the Permian Basin (Wolfberry, Wolfcamp, Canyon, Clearfork, and San Andres-Greyburg). The most active area in the Permian Basin in 2011–2012 was the Wolfberry, which reported a median of 1 to 1.1 million gallons per well—these were mostly vertical wells. For the TX-LA-MS Salt Basin, Nicot et al. reported two formations (TX-Haynesville and Cotton Valley), with similar levels of activity in 2011-2012. Wells in TX-Haynesville were predominantly horizontal, while those in Cotton Valley were predominantly vertical (though horizontal wells in Cotton Valley were also reported). There were three fields reported in the Anadarko Basin (Granite Wash, Cleveland, and Marmaton). The most active area in the Anadarko Basin in 2011-2012 was the Granite Wash, which reported a median of 3.3 to 5.2 million gallons per well and where wells were mostly horizontal.

<sup>c</sup> Literature estimates for the Denver Basin were from [Goodwin et al. \(2014\)](#). Goodwin et al. assessed 200 randomly sampled wells in the Wattenberg Field of the Denver Basin (Niobrara Play), using industry data for wells operated by Noble Energy, drilled between January 1, 2010, and July 1, 2013. Water consumption is reported rather than water use, but Goodwin et al. assume, based on Noble Energy practices, that water use and water consumption were identical because none of the flowback or produced water is reused for hydraulic fracturing. Goodwin et al. reported drilling water consumed, hydraulic fracturing water consumed, and total water consumed. We present hydraulic fracturing water consumption here (hydraulic fracturing water consumption was approximately 95% of the total).

<sup>d</sup> [Hansen et al. \(2013\)](#), using data from FracFocus via Skytruth. For the Susquehanna River Basin portion of the Marcellus play, and for Pennsylvania as a whole, the range of annual averages is reported for 2011 and 2012. Similarly, for West Virginia, the range of annual averages is reported for 2011 and 2012 (partial year).

<sup>e</sup> [Mitchell et al. \(2013\)](#), using data reported to the Pennsylvania Department of Environmental Protection. Mitchell et al. reported water use in the Ohio River Basin for 2011 and 2012 (partial year) for horizontal and vertical wells. Here we report results for horizontal wells, which made up the majority of wells over the two-year period (i.e., 93%, 1,191 horizontal wells versus 96 vertical wells). A range is reported as before because the average water use differed between the two years.

<sup>f</sup> Literature estimates for North Dakota were from an informational bulletin from the [North Dakota State Water Commission \(2014\)](#). No further information was available.

<sup>g</sup> [Murray \(2013\)](#), who assessed water use for oil and gas operations from 2000–2010 for eight formations in Oklahoma using data from the Oklahoma Corporation Commission. It is not possible to extract an estimate corresponding to 2011–2012 from Murray without the raw data, because medians were presented for the 10-year period rather than separated by year.

<sup>h</sup> Literature estimates for California were from a California Council on Science and Technology report using data from FracFocus ([CCST, 2014](#)).

*This document is a draft for review purposes only and does not constitute Agency policy.*



**Table B-6. Estimated percent domestic use water from ground water and self-supplied by county.**

Counties listed contained hydraulically fractured wells with valid state, county, and volume information (U.S. EPA, 2015c).

Data estimated from the USGS Water Census (Maupin et al., 2014).

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Alabama	Jefferson	11.9	0.8
	Tuscaloosa	10.7	6.1
Arkansas	Cleburne	0.0	0.0
	Conway	8.6	8.6
	Faulkner	48.0	3.5
	Independence	20.5	9.4
	Logan	0.0	0.0
	Sebastian	0.0	0.0
	Van Buren	6.4	6.4
	White	0.4	0.0
	Yell	1.8	1.8
California	Colusa	97.9	10.3
	Glenn	96.5	21.6
	Kern	74.5	1.7
	Los Angeles	45.0	4.2
	Sutter	19.4	4.6
	Ventura	30.9	3.9
Colorado	Adams	18.1	2.8
	Arapahoe	19.3	1.3
	Boulder	1.7	1.5
	Broomfield	0.0	0.0
	Delta	59.6	28.4
	Dolores	55.2	51.4
	El Paso	19.6	5.1
	Elbert	100.0	75.2
	Fremont	15.6	15.6

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Colorado, cont.	Garfield	36.7	28.5
	Jackson	84.4	40.7
	La Plata	24.4	11.3
	Larimer	2.3	0.8
	Las Animas	26.3	16.0
	Mesa	7.3	6.2
	Moffat	36.4	25.8
	Morgan	57.9	4.9
	Phillips	100.0	25.3
	Rio Blanco	60.2	32.5
	Routt	22.6	5.9
	San Miguel	71.4	32.5
	Weld	4.7	0.7
	Yuma	100.0	38.1
Kansas	Barber	100.0	19.0
	Clark	100.0	24.2
	Comanche	100.0	19.2
	Finney	100.0	2.1
	Grant	100.0	23.8
	Gray	100.0	36.4
	Harper	100.0	10.3
	Haskell	100.0	35.2
	Hodgeman	100.0	42.3
	Kearny	100.0	14.6
	Lane	100.0	24.1
	Meade	100.0	25.4
	Morton	100.0	21.7
	Ness	100.0	24.2
	Seward	100.0	15.7

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Kansas, cont.	Sheridan	100.0	44.9
	Stanton	100.0	29.8
	Stevens	100.0	25.9
	Sumner	51.3	0.0
Louisiana	Allen	100.0	7.5
	Beauregard	100.0	20.6
	Bienville	100.0	16.8
	Bossier	29.4	14.6
	Caddo	12.2	8.8
	Calcasieu	98.3	12.7
	Caldwell	100.0	6.5
	Claiborne	100.0	10.4
	De Soto	55.8	21.8
	East Feliciana	100.0	11.8
	Jackson	100.0	13.8
	Lincoln	100.0	4.2
	Natchitoches	23.2	11.4
	Rapides	100.0	3.3
	Red River	83.2	27.6
	Sabine	67.5	36.2
	Tangipahoa	100.0	26.9
	Union	100.0	11.2
	Webster	100.0	11.3
	West Feliciana	100.0	2.4
Winn	100.0	16.4	
Michigan	Cheboygan	100.0	76.4
	Gladwin	100.0	84.5
	Kalkaska	100.0	89.0
	Missaukee	100.0	90.6
	Ogemaw	100.0	90.8
	Roscommon	100.0	91.9

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Mississippi	Amite	100.0	26.0
	Wilkinson	100.0	11.1
Montana	Daniels	100.0	29.4
	Garfield	100.0	70.0
	Glacier	62.1	17.7
	Musselshell	89.9	54.5
	Richland	100.0	30.8
	Roosevelt	84.2	20.9
	Rosebud	51.3	10.3
	Sheridan	100.0	31.0
New Mexico	Chaves	100.0	11.8
	Colfax	30.7	2.6
	Eddy	100.0	2.2
	Harding	100.0	25.0
	Lea	100.0	17.4
	Rio Arriba	84.0	42.3
	Roosevelt	100.0	8.9
	San Juan	14.6	12.9
	Sandoval	98.9	23.2
North Dakota	Billings	NA	33.3
	Bottineau	100.0	13.7
	Burke	100.0	12.5
	Divide	100.0	12.5
	Dunn	100.0	21.4
	Golden Valley	100.0	7.7
	Mckenzie	75.8	15.7
	Mclean	12.5	9.9
	Mountrail	65.7	11.5
	Stark	NA	5.7
	Williams	27.4	7.3

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Ohio	Ashland	98.8	57.4
	Belmont	76.4	8.9
	Carroll	96.4	76.4
	Columbiana	63.2	43.2
	Coshocton	99.3	34.9
	Guernsey	37.6	9.5
	Harrison	65.6	45.9
	Jefferson	33.1	10.2
	Knox	99.2	41.1
	Medina	98.4	83.1
	Muskingum	93.4	17.0
	Noble	8.0	8.0
	Portage	32.6	18.3
	Stark	91.2	30.9
	Tuscarawas	94.0	23.5
Wayne	99.1	49.0	
Oklahoma	Alfalfa	100.0	14.6
	Beaver	100.0	47.9
	Beckham	100.0	10.6
	Blaine	100.0	8.8
	Bryan	26.0	7.8
	Caddo	45.4	35.1
	Canadian	100.0	0.0
	Carter	17.5	0.5
	Coal	31.5	27.5
	Custer	70.8	13.2
	Dewey	100.0	22.5
	Ellis	100.0	31.4
	Garvin	41.3	15.8
	Grady	100.0	34.2
	Grant	100.0	13.2
Harper	100.0	22.6	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Oklahoma, cont.	Hughes	23.6	6.7
	Jefferson	13.5	1.8
	Johnston	53.4	1.1
	Kay	39.2	4.6
	Kingfisher	100.0	28.3
	Kiowa	10.3	0.0
	Latimer	12.6	12.6
	Le Flore	14.3	13.1
	Logan	61.1	34.6
	Love	100.0	3.8
	Major	100.0	28.1
	Marshall	20.1	4.4
	McClain	95.9	23.9
	Noble	23.3	14.3
	Oklahoma	22.0	2.5
	Osage	18.0	14.9
	Pawnee	38.2	27.7
	Payne	47.9	12.6
	Pittsburg	0.6	0.0
	Roger Mills	80.1	19.4
Seminole	78.8	16.1	
Stephens	99.2	14.9	
Texas	100.0	10.9	
Washita	53.9	18.2	
Woods	100.0	14.7	
Pennsylvania	Allegheny	15.7	15.3
	Armstrong	45.3	36.8
	Beaver	54.7	26.8
	Blair	34.9	24.0
	Bradford	100.0	65.2
	Butler	51.8	42.8
	Cameron	29.0	29.0

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Pennsylvania, cont.	Centre	93.1	21.3
	Clarion	61.5	55.8
	Clearfield	38.4	22.7
	Clinton	48.4	38.1
	Columbia	77.5	56.7
	Crawford	97.7	66.0
	Elk	25.3	15.6
	Fayette	19.2	16.1
	Forest	100.0	78.3
	Greene	31.9	31.9
	Huntingdon	73.2	57.8
	Indiana	52.2	49.1
	Jefferson	60.7	46.1
	Lawrence	40.5	38.8
	Lycoming	60.0	29.3
	McKean	56.6	33.3
	Potter	93.7	58.1
	Somerset	42.6	33.5
	Sullivan	100.0	76.9
	Susquehanna	79.9	74.7
Tioga	81.3	58.3	
Venango	95.9	32.7	
Warren	96.9	49.4	
Washington	21.6	21.5	
Westmoreland	21.3	19.8	
Wyoming	100.0	70.6	
Texas	Andrews	100.0	23.4
	Angelina	100.0	9.8
	Archer	16.9	16.9
	Atascosa	100.0	16.3
	Austin	100.0	55.6
	Bee	100.0	52.5

*This document is a draft for review purposes only and does not constitute Agency policy.*



State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Texas, cont.	Borden	100.0	71.4
	Bosque	88.7	30.3
	Brazos	100.0	2.1
	Brooks	100.0	35.3
	Burleson	100.0	42.9
	Cherokee	87.5	26.1
	Clay	44.6	36.7
	Cochran	100.0	23.3
	Coke	29.0	28.9
	Colorado	100.0	45.4
	Concho	96.8	5.0
	Cooke	75.5	8.9
	Cottle	100.0	21.4
	Crane	100.0	14.3
	Crockett	100.0	42.5
	Crosby	35.6	19.0
	Culberson	100.0	13.8
	Dallas	1.0	0.7
	Dawson	100.0	33.8
	DeWitt	100.0	42.3
	Denton	9.0	3.6
	Dimmit	100.0	30.5
	Ector	100.0	28.3
	Edwards	100.0	42.1
	Ellis	32.2	7.9
	Erath	100.0	43.3
	Fayette	100.0	27.6
	Fisher	NA	36.8
	Franklin	0.9	0.0
	Freestone	100.0	31.2
Frio	100.0	20.4	
Gaines	100.0	45.5	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Texas, cont.	Garza	20.1	17.2
	Glasscock	NA	100.0
	Goliad	NA	66.7
	Gonzales	96.8	15.9
	Grayson	56.0	4.2
	Gregg	20.8	14.1
	Grimes	100.0	26.0
	Hansford	100.0	16.4
	Hardeman	87.6	13.3
	Hardin	100.0	29.5
	Harrison	43.8	24.8
	Hartley	100.0	39.7
	Haskell	100.0	15.7
	Hemphill	100.0	27.5
	Hidalgo	9.2	1.6
	Hockley	100.0	27.4
	Hood	70.8	39.8
	Houston	79.7	36.6
	Howard	100.0	19.8
	Hutchinson	27.3	14.9
	Irion	100.0	50.0
	Jack	46.7	43.8
	Jefferson	25.0	5.8
	Jim Hogg	NA	25.0
	Johnson	34.9	6.8
	Jones	60.5	60.5
	Karnes	100.0	17.6
	Kenedy	100.0	25.0
	Kent	100.0	37.5
	King	100.0	33.3
Kleberg	100.0	1.9	
Knox	86.2	24.2	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Texas, cont.	La Salle	100.0	43.3
	Lavaca	100.0	56.0
	Lee	100.0	15.9
	Leon	100.0	41.4
	Liberty	98.5	42.5
	Limestone	46.5	32.5
	Lipscomb	100.0	23.5
	Live Oak	32.8	32.1
	Loving	NA	0.0
	Lynn	64.1	32.2
	Madison	100.0	66.9
	Marion	13.7	8.4
	Martin	100.0	48.9
	Maverick	27.6	27.6
	McMullen	100.0	40.0
	Medina	98.0	23.6
	Menard	36.4	36.4
	Midland	100.0	22.1
	Milam	82.5	41.1
	Mitchell	100.0	14.7
	Montague	57.1	49.7
	Montgomery	100.0	26.6
	Moore	100.0	8.1
	Nacogdoches	55.6	21.6
	Navarro	22.0	22.0
	Newton	100.0	63.7
	Nolan	100.0	17.6
	Nueces	5.6	5.6
	Ochiltree	100.0	16.8
	Oldham	100.0	58.8
Orange	99.1	41.2	
Palo Pinto	11.7	11.7	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Texas, cont.	Panola	96.6	58.7
	Parker	63.5	41.1
	Pecos	100.0	31.3
	Polk	41.9	41.7
	Potter	100.0	12.6
	Reagan	100.0	16.2
	Reeves	100.0	31.1
	Roberts	100.0	33.3
	Robertson	97.1	22.5
	Runnels	13.5	13.5
	Rusk	90.7	41.8
	Sabine	76.2	69.0
	San Augustine	78.0	74.4
	San Patricio	88.8	21.8
	Schleicher	100.0	40.0
	Scurry	32.5	27.7
	Shelby	66.2	58.2
	Sherman	100.0	33.3
	Smith	48.0	13.7
	Somervell	87.7	69.3
	Starr	23.2	23.2
	Stephens	13.5	13.5
	Sterling	NA	18.8
	Stonewall	NA	40.0
	Sutton	100.0	26.7
	Tarrant	3.7	1.3
	Terrell	100.0	25.0
	Terry	100.0	16.7
Tyler	100.0	73.6	
Upshur	54.1	23.2	
Upton	100.0	15.2	
Van Zandt	65.7	39.0	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Texas, cont.	Walker	57.7	30.6
	Waller	100.0	37.2
	Ward	100.0	4.5
	Washington	48.2	36.0
	Webb	99.4	0.5
	Wharton	100.0	45.9
	Wheeler	100.0	31.3
	Wichita	8.8	2.9
	Wilbarger	100.0	11.5
	Willacy	28.4	28.4
	Wilson	100.0	6.9
	Winkler	100.0	3.8
	Wise	51.3	50.4
	Wood	21.3	12.9
	Yoakum	100.0	36.0
	Young	19.3	18.9
Zapata	13.9	13.9	
Zavala	100.0	15.2	
Utah	Carbon	50.0	1.2
	Duchesne	57.1	10.4
	San Juan	68.3	47.5
	Sevier	100.0	10.0
	Uintah	87.7	3.1
Virginia	Buchanan	NA	27.6
	Dickenson	2.5	2.5
	Wise	5.9	2.3
West Virginia	Barbour	24.1	24.8
	Brooke	33.4	6.8
	Doddridge	60.6	62.1
	Hancock	67.7	6.9
	Harrison	8.8	8.9
	Lewis	29.5	30.3

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
West Virginia, cont.	Marion	5.8	4.9
	Marshall	96.5	12.0
	Monongalia	5.3	5.5
	Ohio	5.4	3.4
	Pleasants	100.0	27.9
	Preston	66.1	41.0
	Ritchie	45.2	46.4
	Taylor	14.9	14.9
	Tyler	44.4	39.2
	Upshur	27.3	27.8
	Webster	41.9	43.2
	Wetzel	96.3	28.6
Wyoming	Big Horn	79.4	11.3
	Campbell	100.0	0.6
	Carbon	63.8	6.7
	Converse	96.5	17.0
	Fremont	49.3	23.7
	Goshen	100.0	21.1
	Hot Springs	31.9	8.2
	Johnson	40.8	35.4
	Laramie	38.1	13.0
	Lincoln	82.4	9.0
	Natrona	69.0	6.6
	Niobrara	100.0	16.3
	Park	18.9	13.7

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	County	Percent domestic use water from ground water <sup>a,b</sup>	Percent domestic use water self supplied <sup>a,c</sup>
Wyoming, cont.	Sublette	54.6	22.1
	Sweetwater	3.5	0.4
	Uinta	19.5	11.5
	Washakie	100.0	16.0

<sup>a</sup> Data accessed from the USGS website (<http://water.usgs.gov/watuse/data/2010/>) on November 11, 2014. Domestic water use is water used for indoor household purposes such as drinking, food preparation, bathing, washing clothes and dishes, flushing toilets, and outdoor purposes such as watering lawns and gardens (Maupin et al., 2014).

<sup>b</sup> Percent domestic water use from ground water estimated with the following equation: (Domestic public supply volume from ground water + Domestic self-supplied volume from ground water) / Domestic total water use volume \* 100. Domestic public supply volume from ground water was estimated by multiplying the volume of domestic water from public supply by the ratio of public supply volume from ground water to total public supply volume.

<sup>c</sup> Percent domestic water use self-supplied estimated by dividing the volume of domestic water self-supplied by total domestic water use volume.

---

*This document is a draft for review purposes only and does not constitute Agency policy.*



**Table B-7. Projected hydraulic fracturing water use by Texas counties between 2015 and 2060, expressed as a percentage of 2010 total county water use.**

Hydraulic fracturing water use data from [Nicot et al. \(2012\)](#). Total water use data from 2010 from the USGS Water Census ([Maupin et al., 2014](#)). All 254 Texas counties are listed by descending order of percentages in 2030.

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
McMullen	126.2	137.0	152.1	165.1	176.7	164.0	145.3	126.6	108.0	89.3
Irion	36.1	59.2	70.5	63.7	53.4	43.1	32.8	22.4	12.1	5.4
La Salle	58.4	58.3	59.7	60.8	61.9	54.6	45.3	36.0	26.7	17.4
San Augustine	60.2	56.2	52.2	48.2	44.2	40.2	36.2	32.1	28.1	24.1
Sterling	12.0	32.0	39.9	40.5	41.0	34.7	28.3	21.9	15.6	10.7
Dimmit	38.2	38.1	38.9	39.0	38.7	33.9	27.9	22.0	16.0	10.1
Sabine	9.6	19.2	28.7	38.3	35.1	31.9	28.7	25.6	22.3	19.2
Leon	9.9	19.3	27.0	34.6	32.9	29.0	25.1	21.2	17.3	13.5
Karnes	48.1	43.0	37.9	32.6	27.2	21.8	16.4	11.0	5.6	0.2
Loving	13.1	17.4	23.4	29.4	28.8	26.2	23.6	20.9	18.3	15.7
Shackelford	0.0	7.9	15.7	23.6	21.2	18.9	16.5	14.1	11.8	9.4
Madison	5.5	11.8	15.7	19.7	17.4	15.2	13.0	10.9	8.7	6.5
Schleicher	10.5	15.8	19.1	19.7	17.1	14.5	11.9	9.3	6.7	4.7
Sutton	0.0	11.0	15.1	19.1	23.2	20.6	18.1	15.5	12.9	10.3
Shelby	11.0	20.4	19.4	18.4	17.4	15.7	14.1	12.5	10.9	9.3
DeWitt	26.9	24.1	21.4	18.4	15.4	12.3	9.3	6.3	3.2	0.2
Hemphill	25.7	23.1	20.5	17.8	15.2	12.6	10.0	7.3	4.7	2.1

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Terrell	0.0	9.7	13.2	16.8	20.4	18.2	15.9	13.6	11.3	9.0
Coryell	7.0	24.4	22.8	16.5	10.1	3.8	0.0	0.0	0.0	0.0
Montague	28.6	24.5	20.4	16.3	12.2	8.2	4.1	0.0	0.0	0.0
Crockett	7.6	12.5	14.8	13.4	11.2	9.1	6.9	4.7	2.5	1.1
Upton	12.1	15.2	14.1	12.9	11.7	9.8	7.9	5.9	4.0	2.7
Borden	3.1	8.6	12.0	12.1	12.2	10.3	8.4	6.4	4.5	3.1
Live Oak	13.3	12.4	11.5	11.8	12.2	12.7	13.2	11.7	9.8	7.8
Reagan	11.2	14.0	12.7	11.3	9.9	8.1	6.4	4.6	2.8	1.6
Clay	3.2	5.9	8.6	11.3	10.3	9.4	8.4	7.5	6.6	5.6
Wheeler	17.6	15.3	13.1	10.8	8.6	6.3	4.1	1.8	0.0	0.0
Lavaca	7.9	13.2	12.0	10.7	9.4	8.1	6.7	5.4	4.0	2.7
Washington	0.0	6.7	11.8	10.7	9.6	8.6	7.5	6.4	5.3	4.3
Nacogdoches	7.9	11.4	10.7	10.0	9.2	8.3	7.5	6.6	5.7	4.9
Hill	17.1	14.7	12.2	9.8	7.3	4.9	2.4	0.0	0.0	0.0
Jack	3.5	5.3	7.1	8.8	7.9	7.1	6.2	5.3	4.4	3.5
Panola	7.2	10.2	9.2	8.5	7.7	7.0	6.3	5.5	4.8	4.0
Jim Hogg	4.8	6.4	8.0	8.0	6.9	6.0	4.9	3.9	2.9	1.8
Howard	4.4	7.1	8.5	8.0	6.8	5.6	4.4	3.2	2.1	1.3
Parker	3.7	5.0	6.3	7.6	6.8	6.1	5.3	4.5	3.8	3.0
Hamilton	8.8	10.7	8.9	7.1	5.3	3.5	1.8	0.0	0.0	0.0
Johnson	14.2	11.9	9.5	7.1	4.7	2.4	0.0	0.0	0.0	0.0
Midland	6.7	8.3	7.7	7.1	6.2	5.2	4.1	3.0	2.0	1.2

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Kenedy	4.1	5.4	6.8	6.8	5.9	5.1	4.1	3.3	2.4	1.6
Fayette	3.9	8.4	7.6	6.6	5.5	4.4	3.4	2.3	1.2	0.2
Lee	2.1	4.1	5.3	6.5	5.8	5.1	4.3	3.6	2.9	2.1
Winkler	2.9	3.8	5.1	6.3	6.0	5.4	4.7	4.1	3.4	2.8
Wilson	6.7	7.7	7.0	6.2	5.4	4.6	3.9	3.1	2.3	1.5
Martin	5.7	7.1	6.5	6.0	5.3	4.4	3.5	2.6	1.8	1.2
Burleson	1.0	2.9	4.3	5.7	5.1	4.5	3.9	3.3	2.6	2.0
Atascosa	6.3	5.7	5.6	5.6	5.6	5.6	5.0	4.2	3.4	2.7
Bosque	1.8	3.0	4.3	5.5	5.1	4.6	4.2	3.7	3.2	2.8
Webb	7.5	7.1	6.3	5.4	4.6	3.8	3.1	2.3	1.4	0.5
Gonzales	8.0	7.1	6.2	5.3	4.4	3.6	2.7	1.8	0.9	0.0
Marion	1.1	2.4	3.8	5.1	5.2	4.7	4.2	3.7	3.2	2.7
Harrison	4.3	6.1	5.5	5.1	4.6	4.2	3.7	3.3	2.9	2.4
Eastland	0.0	3.9	5.9	5.0	4.2	3.3	2.5	1.7	0.8	0.0
Archer	1.0	2.4	3.6	4.9	4.5	4.1	3.7	3.3	2.9	2.5
Zavala	4.7	5.5	5.2	4.9	4.6	4.3	4.0	3.4	2.7	2.0
Roberts	6.9	6.0	5.1	4.2	3.4	2.5	1.6	0.7	0.0	0.0
Maverick	2.5	3.0	3.6	4.2	4.8	4.5	4.0	3.6	3.1	2.6
Cooke	11.9	9.3	6.7	4.1	1.5	0.0	0.0	0.0	0.0	0.0
Ward	2.7	3.2	4.2	4.1	4.0	3.6	3.2	2.7	2.3	1.9
Austin	0.0	1.2	2.5	3.7	3.4	3.0	2.6	2.2	1.9	1.5
Reeves	1.4	1.8	2.7	3.7	3.9	3.6	3.3	3.0	2.6	2.3

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Glasscock	3.1	4.1	3.9	3.6	3.1	2.6	2.1	1.5	1.0	0.7
Tyler	1.9	2.6	3.2	3.2	2.8	2.4	2.0	1.6	1.1	0.7
Hood	1.4	2.0	2.6	3.2	2.9	2.6	2.2	1.9	1.6	1.3
Garza	1.5	2.0	2.5	2.9	2.7	2.4	2.1	1.8	1.5	1.2
Andrews	2.3	3.0	2.9	2.7	2.6	2.3	2.0	1.7	1.4	1.1
Crane	1.3	1.7	2.1	2.6	3.1	2.8	2.5	2.2	1.9	1.7
Erath	0.9	1.4	1.9	2.4	2.2	2.0	1.8	1.6	1.4	1.2
Wise	3.6	3.2	2.8	2.4	2.0	1.6	1.2	0.8	0.4	0.0
Upshur	0.2	0.9	1.7	2.4	2.9	2.6	2.3	2.1	1.8	1.5
Mitchell	1.2	1.6	2.0	2.4	2.1	1.9	1.7	1.4	1.2	0.9
Ector	1.5	2.0	2.1	2.3	2.2	1.9	1.7	1.4	1.2	1.0
Culberson	0.3	0.4	1.3	2.2	2.9	2.6	2.4	2.1	1.9	1.6
Lipscomb	1.7	3.0	2.6	2.1	1.7	1.3	0.8	0.4	0.0	0.0
Angelina	0.4	0.9	1.5	2.1	2.2	2.0	1.8	1.6	1.4	1.2
Houston	2.1	2.7	2.4	2.1	1.8	1.5	1.2	0.9	0.6	0.3
Frio	1.8	1.8	1.9	1.9	1.8	1.8	1.7	1.5	1.2	0.9
Newton	1.8	2.3	2.1	1.8	1.6	1.3	1.0	0.8	0.5	0.3
Kleberg	1.0	1.4	1.7	1.7	1.5	1.3	1.1	0.8	0.6	0.4
Brooks	1.0	1.3	1.7	1.7	1.5	1.2	1.0	0.8	0.6	0.4
Brazos	0.4	0.9	1.2	1.5	1.4	1.2	1.0	0.8	0.7	0.5
Comanche	0.4	0.7	1.0	1.4	1.2	1.1	1.0	0.8	0.7	0.5
Ochiltree	0.6	1.1	1.5	1.2	1.0	0.7	0.5	0.2	0.0	0.0

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Palo Pinto	0.3	0.6	0.9	1.2	1.1	1.0	0.8	0.7	0.6	0.5
Limestone	0.9	1.0	1.1	1.2	1.1	1.0	0.8	0.7	0.6	0.4
Duval	0.7	0.9	1.1	1.1	1.0	0.8	0.7	0.5	0.4	0.3
Stephens	0.1	0.4	0.8	1.1	1.0	0.9	0.8	0.6	0.5	0.4
Dawson	0.5	0.8	1.0	1.1	1.1	1.0	0.8	0.6	0.5	0.3
Scurry	0.0	0.6	0.8	1.0	1.2	1.1	0.9	0.8	0.7	0.5
Bee	0.8	1.1	1.1	1.0	0.9	0.7	0.6	0.4	0.3	0.1
Val Verde	0.0	0.5	0.8	0.9	1.1	1.0	0.9	0.8	0.6	0.5
Colorado	<0.1	0.3	0.6	0.9	0.8	0.7	0.6	0.5	0.4	0.4
Tarrant	2.1	1.7	1.3	0.9	0.4	0.0	0.0	0.0	0.0	0.0
Zapata	0.5	0.7	0.8	0.8	0.7	0.6	0.5	0.4	0.3	0.2
Ellis	0.3	0.5	0.6	0.8	0.7	0.6	0.6	0.5	0.4	0.3
Jim Wells	0.4	0.6	0.7	0.7	0.6	0.5	0.4	0.4	0.3	0.2
Lynn	0.0	0.4	0.6	0.7	0.8	0.8	0.7	0.6	0.5	0.4
Henderson	0.1	0.3	0.5	0.7	0.8	0.7	0.6	0.5	0.4	0.4
Hansford	0.0	0.4	0.8	0.7	0.5	0.4	0.3	0.2	0.1	0
Gaines	0.2	0.3	0.5	0.5	0.5	0.4	0.4	0.3	0.2	0.2
Gregg	0.1	0.2	0.3	0.4	0.4	0.4	0.4	0.3	0.3	0.2
Refugio	0.2	0.3	0.4	0.4	0.3	0.3	0.2	0.2	0.1	0.1
Caldwell	0.4	0.5	0.4	0.4	0.3	0.3	0.2	0.2	0.1	0.1
Pecos	0.1	0.1	0.2	0.4	0.5	0.4	0.4	0.3	0.3	0.2
Anderson	0.1	0.2	0.3	0.4	0.4	0.4	0.4	0.3	0.3	0.2

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Young	0.0	0.1	0.2	0.4	0.3	0.3	0.3	0.2	0.2	0.1
San Patricio	0.2	0.3	0.4	0.4	0.3	0.3	0.2	0.2	0.1	0.1
Smith	0.1	0.1	0.2	0.3	0.4	0.3	0.3	0.3	0.2	0.2
Cherokee	0.1	0.2	0.2	0.3	0.4	0.3	0.3	0.2	0.2	0.2
McLennan	0.1	0.1	0.2	0.3	0.3	0.2	0.2	0.2	0.2	0.1
Terry	0.0	0.2	0.2	0.3	0.3	0.3	0.3	0.2	0.2	0.2
Starr	0.2	0.2	0.3	0.3	0.2	0.2	0.2	0.1	0.1	0.1
Cochran	0.1	0.2	0.2	0.2	0.3	0.2	0.2	0.2	0.2	0.1
Jasper	0.2	0.3	0.2	0.2	0.2	0.1	0.1	0.1	0.1	<0.1
Dallas	0.2	0.3	0.2	0.2	0.1	0.1	<0.1	0.0	0.0	0.0
Robertson	0.1	0.2	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.1
Grimes	<0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.1	0.1	0.1
Yoakum	0.1	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1
Freestone	0.1	0.1	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.1
Cass	<0.1	0.1	0.1	0.2	0.2	0.2	0.1	0.1	0.1	0.1
Hutchinson	0.0	0.1	0.2	0.1	0.1	0.1	0.1	<0.1	<0.1	0.0
Rusk	<0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	<0.1
Willacy	<0.1	0.1	0.1	0.1	0.1	0.1	0.1	<0.1	<0.1	<0.1
Victoria	<0.1	0.1	0.1	0.1	0.1	0.1	<0.1	<0.1	<0.1	<0.1
Sherman	0.0	0.0	<0.1	0.1	0.1	0.1	<0.1	<0.1	<0.1	<0.1
Calhoun	<0.1	0.1	0.1	0.1	0.1	0.1	<0.1	<0.1	<0.1	<0.1
Lubbock	0.0	0.0	<0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Jackson	<0.1	<0.1	0.1	0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Matagorda	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Polk	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Wharton	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Nueces	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Hidalgo	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Cameron	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Somervell	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Goliad	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Brazoria	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Fort Bend	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Aransas	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Armstrong	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bailey	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bandera	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bastrop	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Baylor	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bell	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bexar	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Blanco	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bowie	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Brewster	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

*This document is a draft for review purposes only and does not constitute Agency policy.*



Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Briscoe	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Brown	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Burnet	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Callahan	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Camp	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Carson	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Castro	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Chambers	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Childress	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Coke	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Coleman	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Collin	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Collingsworth	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Comal	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Concho	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Cottle	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosby	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Dallam	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Deaf Smith	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Delta	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Denton	1.7	1.1	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Dickens	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Donley	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Edwards	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
El Paso	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Falls	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Fannin	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Fisher	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Floyd	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Foard	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Franklin	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Galveston	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Gillespie	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Gray	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Grayson	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Guadalupe	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hale	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hall	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hardeman	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hardin	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Harris	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hartley	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Haskell	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hays	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Hockley	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hopkins	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hudspeth	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Hunt	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Jeff Davis	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Jefferson	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Jones	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Kaufman	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Kendall	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Kent	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Kerr	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Kimble	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
King	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Kinney	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Knox	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lamar	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lamb	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lampasas	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Liberty	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Llano	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
McCulloch	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Mason	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
Medina	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Menard	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Milam	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Mills	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Montgomery	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Moore	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Morris	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Motley	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Navarro	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Nolan	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Oldham	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Orange	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Parmer	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Potter	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Presidio	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rains	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Randall	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Real	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Red River	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rockwall	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Runnels	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
San Jacinto	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

*This document is a draft for review purposes only and does not constitute Agency policy.*

Texas county	Projected hydraulic fracturing water use as a percentage of 2010 total water use <sup>a,b</sup>									
	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060
San Saba	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Stonewall	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Swisher	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Taylor	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Throckmorton	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Titus	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Tom Green	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Travis	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trinity	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Uvalde	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Van Zandt	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Walker	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Waller	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Wichita	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Wilbarger	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Williamson	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Wood	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

<sup>a</sup> Total water use data accessed from the USGS website (<http://water.usgs.gov/watuse/data/2010/>) on April 21, 2015. Data from [Nicot et al. \(2012\)](#) transcribed.

<sup>b</sup> Percentages calculated by dividing projected hydraulic fracturing water use volumes from [Nicot et al. \(2012\)](#) by 2010 total water use from the USGS and multiplying by 100. Percentages less than 0.1 were not rounded and simply noted as “<0.1”, but where the percentage was actually zero because there was no projected hydraulic fracturing water use we noted that as “0.0”.

## B.2. References for Appendix B

- [CCST](http://ccst.us/publications/2014/2014wst.pdf) (California Council on Science and Technology). (2014). Advanced well stimulation technologies in California: An independent review of scientific and technical information. Sacramento, CA. <http://ccst.us/publications/2014/2014wst.pdf>
- [Goodwin, S; Carlson, K; Knox, K; Douglas, C; Rein, L.](http://dx.doi.org/10.1021/es404675h) (2014). Water intensity assessment of shale gas resources in the Wattenberg field in northeastern Colorado. *Environ Sci Technol* 48: 5991-5995. <http://dx.doi.org/10.1021/es404675h>
- [Hansen, E; Mulvaney, D; Betcher, M.](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf) (2013). Water resource reporting and water footprint from Marcellus Shale development in West Virginia and Pennsylvania. Durango, CO: Earthworks Oil & Gas Accountability Project. [http://www.downstreamstrategies.com/documents/reports\\_publication/marcellus\\_wv\\_pa.pdf](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf)
- [Maupin, MA; Kenny, JF; Hutson, SS; Lovelace, JK; Barber, NL; Linsey, KS.](http://dx.doi.org/10.3133/cir1405) (2014). Estimated use of water in the United States in 2010. (USGS Circular 1405). Reston, VA: U.S. Geological Survey. <http://dx.doi.org/10.3133/cir1405>
- [Mitchell, AL; Small, M; Casman, EA.](http://dx.doi.org/10.1021/es403537z) (2013). Surface water withdrawals for Marcellus Shale gas development: performance of alternative regulatory approaches in the Upper Ohio River Basin. *Environ Sci Technol* 47: 12669-12678. <http://dx.doi.org/10.1021/es403537z>
- [Murray, KE.](http://dx.doi.org/10.1021/es4000593) (2013). State-scale perspective on water use and production associated with oil and gas operations, Oklahoma, U.S. *Environ Sci Technol* 47: 4918-4925. <http://dx.doi.org/10.1021/es4000593>
- [Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.](http://www.twdb.state.tx.us/publications/reports/contracted_reports/doc/0904830939_2012Update_MiningWaterUse.pdf) (2012). Oil & gas water use in Texas: Update to the 2011 mining water use report. Nicot, JP; Reedy, RC; Costley, RA; Huang, Y. [http://www.twdb.state.tx.us/publications/reports/contracted\\_reports/doc/0904830939\\_2012Update\\_MiningWaterUse.pdf](http://www.twdb.state.tx.us/publications/reports/contracted_reports/doc/0904830939_2012Update_MiningWaterUse.pdf)
- [Nicot, JP; Scanlon, BR.](http://dx.doi.org/10.1021/es204602t) (2012). Water use for shale-gas production in Texas, U.S. *Environ Sci Technol* 46: 3580-3586. <http://dx.doi.org/10.1021/es204602t>
- [North Dakota State Water Commission.](http://www.swc.nd.gov/4dlink9/4dcgi/GetContentPDF/PB-2419/Fact%20Sheet.pdf) (2014). Facts about North Dakota fracking and water use. Bismarck, ND. <http://www.swc.nd.gov/4dlink9/4dcgi/GetContentPDF/PB-2419/Fact%20Sheet.pdf>
- [Solley, WB; Pierce, RR; Perlman, HA.](http://pubs.er.usgs.gov/publication/cir1200) (1998). Estimated use of water in the United States in 1995. (USGS Circular: 1200). U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/cir1200>
- [U.S. EPA](http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf) (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- [U.S. EPA](http://www2.epa.gov/sites/production/files/2015-03/documents/fracfocus_data_management_report_final_032015_508.pdf) (U.S. Environmental Protection Agency). (2015b). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Data management and quality assessment report [EPA Report]. (EPA/601/R-14/006). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. [http://www2.epa.gov/sites/production/files/2015-03/documents/fracfocus\\_data\\_management\\_report\\_final\\_032015\\_508.pdf](http://www2.epa.gov/sites/production/files/2015-03/documents/fracfocus_data_management_report_final_032015_508.pdf)
- [U.S. EPA](http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocus-1-disclosures) (U.S. Environmental Protection Agency). (2015c). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Project database [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocus-1-disclosures>
- [USGS](http://dx.doi.org/10.3133/sir20145184) (U.S. Geological Survey). (2014). Withdrawal and consumption of water by thermoelectric power plants in the United States, 2010. (Scientific Investigations Report 20145184). Reston, VA. <http://dx.doi.org/10.3133/sir20145184>

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

[Verdegem, MCI; Bosma, RH.](#) (2009). Water withdrawal for brackish and inland aquaculture, and options to produce more fish in ponds with present water use. *Water Policy* 11: 52-68.  
<http://dx.doi.org/10.2166/wp.2009.003>

---

*This document is a draft for review purposes only and does not constitute Agency policy.*



## Appendix C

---

# Chemical Mixing Supplemental Tables and Information

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

## Appendix C. Chemical Mixing Supplemental Tables and Information

### C.1. Supplemental Tables and Information

**Table C-1. Chemicals reported to FracFocus in 10% or more of disclosures for gas-producing wells, with the number of disclosures where chemical is reported, percentage of disclosures, and the median maximum concentration (% by mass) of that chemical in hydraulic fracturing fluid.**

Chemicals ranked by frequency of occurrence ([U.S. EPA, 2015c](#)).

Chemical name	CASRN	Number of disclosures	Percentage of disclosures	Median maximum concentration in hydraulic fracturing fluid (% by mass)
Hydrochloric acid	7647-01-0	12,351	72.8%	15%
Methanol	67-56-1	12,269	72.3%	30%
Distillates, petroleum, hydrotreated light	64742-47-8	11,897	70.1%	30%
Isopropanol	67-63-0	8,008	47.2%	30%
Water	7732-18-5	7,998	47.1%	63%
Ethanol	64-17-5	6,325	37.3%	5%
Propargyl alcohol	107-19-7	5,811	34.2%	10%
Glutaraldehyde	111-30-8	5,635	33.2%	30%
Ethylene glycol	107-21-1	5,493	32.4%	35%
Citric acid	77-92-9	4,832	28.5%	60%
Sodium hydroxide	1310-73-2	4,656	27.4%	5%
Peroxydisulfuric acid, diammonium salt	7727-54-0	4,618	27.2%	100%
Quartz	14808-60-7	3,758	22.1%	10%
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	3,668	21.6%	100%
Sodium chloride	7647-14-5	3,608	21.3%	30%
Guar gum	9000-30-0	3,586	21.1%	60%
Acetic acid	64-19-7	3,563	21.0%	50%
2-Butoxyethanol	111-76-2	3,325	19.6%	10%
Naphthalene	91-20-3	3,294	19.4%	5%
Solvent naphtha, petroleum, heavy arom.	64742-94-5	3,287	19.4%	30%
Quaternary ammonium compounds, benzyl-C12-16-alkyldimethyl, chlorides	68424-85-1	3,259	19.2%	7%
Potassium hydroxide	1310-58-3	2,843	16.8%	15%
Ammonium chloride	12125-02-9	2,483	14.6%	10%
Choline chloride	67-48-1	2,477	14.6%	75%

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Number of disclosures	Percentage of disclosures	Median maximum concentration in hydraulic fracturing fluid (% by mass)
Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy (mixture)	127087-87-0	2,455	14.5%	5%
Sodium chlorite	7758-19-2	2,372	14.0%	10%
1,2,4-Trimethylbenzene	95-63-6	2,229	13.1%	1%
Carbonic acid, dipotassium salt	584-08-7	2,154	12.7%	60%
Methenamine	100-97-0	2,134	12.6%	1%
Formic acid	64-18-6	2,118	12.5%	60%
Didecyl dimethyl ammonium chloride	7173-51-5	2,063	12.2%	10%
N,N-Dimethylformamide	68-12-2	1,892	11.2%	13%
Phenolic resin	9003-35-4	1,852	10.9%	5%
Thiourea polymer	68527-49-1	1,702	10.0%	30%
Polyethylene glycol	25322-68-3	1,696	10.0%	60%

Note: Analysis considered 17,035 disclosures and 291,363 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (1,587) or other, query-specific criteria were excluded from analysis.

**Table C-2. Chemicals reported to FracFocus in 10% or more of disclosures for oil-producing wells, with the number of disclosures where chemical is reported, percentage of disclosures, and the median maximum concentration (% by mass) of that chemical in hydraulic fracturing fluid.**

Chemicals ranked by frequency of occurrence ([U.S. EPA, 2015c](#)).

Chemical name	CASRN	Number of disclosures	Percentage of disclosures	Median maximum concentration in hydraulic fracturing fluid (% by mass)
Methanol	67-56-1	12,484	71.8%	30%
Distillates, petroleum, hydrotreated light	64742-47-8	10,566	60.8%	40%
Peroxydisulfuric acid, diammonium salt	7727-54-0	10,350	59.6%	100%
Ethylene glycol	107-21-1	10,307	59.3%	30%
Hydrochloric acid	7647-01-0	10,029	57.7%	15%
Guar gum	9000-30-0	9,110	52.4%	50%
Sodium hydroxide	1310-73-2	8,609	49.5%	10%
Quartz	14808-60-7	8,577	49.4%	2%
Water	7732-18-5	8,538	49.1%	67%
Isopropanol	67-63-0	8,031	46.2%	15%
Potassium hydroxide	1310-58-3	7,206	41.5%	15%
Glutaraldehyde	111-30-8	5,927	34.1%	15%
Propargyl alcohol	107-19-7	5,599	32.2%	5%
Acetic acid	64-19-7	4,623	26.6%	30%
2-Butoxyethanol	111-76-2	4,022	23.1%	10%
Solvent naphtha, petroleum, heavy arom.	64742-94-5	3,821	22.0%	5%
Sodium chloride	7647-14-5	3,692	21.2%	25%
Ethanol	64-17-5	3,536	20.3%	45%
Citric acid	77-92-9	3,310	19.0%	60%
Phenolic resin	9003-35-4	3,109	17.9%	5%
Naphthalene	91-20-3	3,060	17.6%	5%
Nonyl phenol ethoxylate	9016-45-9	2,829	16.3%	20%
Diatomaceous earth, calcined	91053-39-3	2,655	15.3%	100%
Methenamine	100-97-0	2,559	14.7%	1%
Tetramethylammonium chloride	75-57-0	2,428	14.0%	1%
Carbonic acid, dipotassium salt	584-08-7	2,402	13.8%	60%
Ethoxylated propoxylated C12-14 alcohols	68439-51-0	2,342	13.5%	2%
Choline chloride	67-48-1	2,264	13.0%	75%
Boron sodium oxide	1330-43-4	2,228	12.8%	30%
Tetrakis(hydroxymethyl)phosphonium sulfate	55566-30-8	2,130	12.3%	50%
1,2,4-Trimethylbenzene	95-63-6	2,118	12.2%	1%

*This document is a draft for review purposes only and does not constitute Agency policy.*

<b>Chemical name</b>	<b>CASRN</b>	<b>Number of disclosures</b>	<b>Percentage of disclosures</b>	<b>Median maximum concentration in hydraulic fracturing fluid (% by mass)</b>
Boric acid	10043-35-3	2,070	11.9%	25%
Polyethylene glycol	25322-68-3	2,025	11.7%	5%
2-Mercaptoethanol	60-24-2	2,012	11.6%	100%
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	1,988	11.4%	98%
Formic acid	64-18-6	1,948	11.2%	60%
Sodium persulfate	7775-27-1	1,914	11.0%	100%
Phosphonic acid	13598-36-2	1,865	10.7%	1%
Sodium tetraborate decahydrate	1303-96-4	1,862	10.7%	30%
Potassium metaborate	13709-94-9	1,682	9.7%	60%
Ethylenediaminetetraacetic acid tetrasodium salt hydrate	64-02-8	1,676	9.6%	0%
Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy (mixture)	127087-87-0	1,668	9.6%	5%

Note: Analysis considered 17,640 disclosures and 385,013 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (2,268) or other, query-specific criteria were excluded from analysis.

**Table C-3a. Top chemicals reported to FracFocus for each state and number (and percentage) of disclosures where a chemical is reported for that state, Alabama to Montana (U.S. EPA, 2015c).**

Source: (U.S. EPA, 2015c). The top 20 most frequent chemicals were identified for the 20 states that reported to FracFocus, resulting in a total of 93 chemicals. The chemicals were ranked by counting the number of states where that chemical was in the top 20; chemicals used most widely among the most states come first. For example, methanol is reported in 19 of 20 states, so methanol is ranked first.

Chemical name	CASRN	Alabama	Alaska	Arkansas	California	Colorado	Kansas	Louisiana	Michigan	Mississippi	Montana
Methanol	67-56-1	55 (100%)		1333 (99.7%)	228 (39.0%)	2883 (63.3%)	77 (79.4%)	596 (59.2%)	13 (92.9%)	3 (75%)	121 (62.7%)
Distillates, petroleum, hydrotreated light	64742-47-8		9 (45%)	743 (55.6%)	322 (55.0%)	3358 (73.7%)	87 (89.7%)	844 (83.9%)	14 (100%)	4 (100%)	115 (59.6%)
Ethylene glycol	107-21-1	55 (100%)	20 (100%)	291 (21.8%)	350 (59.8%)		61 (62.9%)	341 (33.9%)	10 (71.4%)	3 (75%)	95 (49.2%)
Isopropanol	67-63-0	55 (100%)	13 (65%)	586 (43.9%)		2586 (56.8%)	24 (24.7%)	515 (51.2%)	11 (78.6%)		123 (63.7%)
Quartz	14808-60-7		20 (100%)		519 (88.7%)	1048 (23.0%)	22 (22.7%)	377 (37.5%)		2 (50%)	124 (64.2%)
Sodium hydroxide	1310-73-2		20 (100%)	285 (21.3%)	403 (68.9%)	996 (21.9%)	27 (27.8%)	535 (53.2%)		2 (50%)	105 (54.4%)
Ethanol	64-17-5			603 (45.1%)		2258 (49.6%)	78 (80.4%)	420 (41.7%)		4 (100%)	
Guar gum	9000-30-0		10 (50%)		545 (93.2%)			494 (49.1%)		2 (50%)	83 (43.0%)
Hydrochloric acid	7647-01-0	55 (100%)		1330 (99.5%)		2408 (52.9%)	82 (84.5%)	569 (56.6%)			45 (23.3%)
Peroxydisulfuric acid, diammonium salt	7727-54-0		10 (50%)		484 (82.7%)		21 (21.6%)	273 (27.2%)	8 (57.1%)		119 (61.7%)

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Alabama	Alaska	Arkansas	California	Colorado	Kansas	Louisiana	Michigan	Mississippi	Montana
Propargyl alcohol	107-19-7			813 (60.8%)			69 (71.1%)	299 (29.7%)	5 (35.7%)		
Glutaraldehyde	111-30-8			737 (55.1%)			73 (75.3%)	364 (36.3%)		2 (50%)	
Naphthalene	91-20-3	55 (100%)				1363 (29.9%)	41 (42.3%)	293 (29.2%)	12 (85.7%)		95 (49.2%)
2-Butoxyethanol	111-76-2	55 (100%)	20 (100%)						11 (78.6%)		
Citric acid	77-92-9						45 (46.4%)				
Saline	7647-14-5					1574 (34.5%)		408 (40.6%)		2 (50%)	
Solvent naphtha, petroleum, heavy arom.	64742-94-5					1507 (33.1%)	42 (43.3%)				135 (70.0%)
Quaternary ammonium compounds, benzyl-C12- 16-alkyldimethyl, chlorides	68424-85-1			375 (28.0%)			52 (53.6%)			2 (50%)	
2,2-Dibromo-3- nitrilopropionamide	10222-01-2	55 (100%)				2215 (48.6%)			10 (71.4%)		70 (36.3%)
Potassium hydroxide	1310-58-3							340 (33.8%)		4 (100%)	115 (59.6%)
Choline chloride	67-48-1					1235 (27.1%)					
Polyethylene glycol	25322-68-3	55 (100%)							7 (50%)		69 (35.8%)
1,2,4-Trimethylbenzene	95-63-6					1211 (26.63%)	39 (40.2%)				

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Alabama	Alaska	Arkansas	California	Colorado	Kansas	Louisiana	Michigan	Mississippi	Montana
Ammonium chloride	12125-02-9			277 (20.7%)		1280 (28.0%)					
Diatomaceous earth, calcined	91053-39-3		20 (100%)		417 (71.3%)						
Didecyl dimethyl ammonium chloride	7173-51-5			317 (23.7%)						2 (50%)	
Sodium chlorite	7758-19-2							352 (35.0%)		4 (100%)	
Sodium erythorbate	6381-77-7			435 (32.5%)			29 (29.9%)				
N,N-Dimethylformamide	68-12-2										
Nonyl phenol ethoxylate	9016-45-9										
Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy (mixture)	127087-87-0				1150 (25.2%)	39 (40.2%)					
Sodium persulfate	7775-27-1									4 (100%)	
Tetramethylammonium chloride	75-57-0										85 (44.0%)
1,2-Propylene glycol	57-55-6								10 (71.4%)		
5-Chloro-2-methyl-3(2H)-isothiazolone	26172-55-4		20 (100%)		389 (66.5%)						
Acetic acid	64-19-7					959 (21.0%)		284 (28.2%)			
Ammonium acetate	631-61-8									2 (50%)	

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Alabama	Alaska	Arkansas	California	Colorado	Kansas	Louisiana	Michigan	Mississippi	Montana
Boric acid	10043-35-3		3 (15%)								
Carbonic acid, dipotassium salt	584-08-7					1159 (25.4%)					
Cristobalite	14464-46-1		20 (100%)		389 (66.5%)						
Formic acid	64-18-6	55 (100%)						293 (29.1%)			
Hemicellulase enzyme	9012-54-8										
Hemicellulase enzyme concentrate	9025-56-3				395 (67.5%)						
Iron(II) sulfate heptahydrate	7782-63-0								7 (50%)		
Magnesium chloride	7786-30-3		20 (100%)		389 (66.5%)						
Magnesium nitrate	10377-60-3		20 (100%)		389 (66.5%)						
Phenolic resin	9003-35-4										
Sodium hypochlorite	7681-52-9					1046 (23.0%)					
Sodium tetraborate decahydrate	1303-96-4		14 (70%)								
Solvent naphtha, petroleum, heavy aliph.	64742-96-7								7 (50%)	2 (50%)	
1-Butoxy-2-propanol	5131-66-8				315 (53.8%)						

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Alabama	Alaska	Arkansas	California	Colorado	Kansas	Louisiana	Michigan	Mississippi	Montana
1-Propanol	71-23-8					1232 (27.0%)					
1,2-Ethanediaminium, N, N'-bis[2-[bis(2-hydroxyethyl)methylammonio]ethyl]-N,N'bis(2-hydroxyethyl)-N,N'-dimethyl-,tetrachloride	138879-94-4			343 (58.6%)							
2-bromo-3-nitrilopropionamide	1113-55-9										
2-Ethylhexanol	104-76-7										83 (43.0052%)
2-Methyl-3(2H)-isothiazolone	2682-20-4		20 (100%)		389 (66.5%)						
2-Propenoic acid, polymer with 2-propenamide	9003-06-9										
Alkenes, C>10 .alpha.-	64743-02-8			241 (18.0%)							
Benzene, 1,1'-oxybis-, tetrapropylene derivs., sulfonated	119345-03-8										50 (25.9%)
Benzenesulfonic acid, dodecyl-, compd. with N1-(2-aminoethyl)-1,2-ethanediamine (1:?)	40139-72-8										48 (24.9%)
Benzyltrimethylammonium chloride	139-07-1			268 (20.0%)							

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Alabama	Alaska	Arkansas	California	Colorado	Kansas	Louisiana	Michigan	Mississippi	Montana
Benzylhexadecyldimethylammonium chloride	122-18-9			268 (20.0%)							
Boron sodium oxide	1330-43-4				361 (61.7%)						
C10-C16 ethoxylated alcohol	68002-97-1		3 (15%)								
Calcium chloride	10043-52-4		20 (100%)								
Carbon dioxide	124-38-9								7 (50%)		
Cinnamaldehyde (3-phenyl-2-propenal)	104-55-2	55 (100%)									
Diethylene glycol	111-46-6										
Diethylene glycol monobutyl ether	112-34-5								7 (50%)		
Diethylenetriamine	111-40-0										55 (28.5%)
Distillates, petroleum, hydrotreated light paraffinic	64742-55-8				314 (53.7%)						
Distillates, petroleum, hydrotreated middle	64742-46-7		3 (15%)								
Ethoxylated C12-16 alcohols	68551-12-2										
Ethoxylated C14-15 alcohols	68951-67-7			241 (18.0%)							
Formic acid, potassium salt	590-29-4										

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Alabama	Alaska	Arkansas	California	Colorado	Kansas	Louisiana	Michigan	Mississippi	Montana
Glycerin, natural	56-81-5								7 (50%)		
Isotridecanol, ethoxylated	9043-30-5				312 (53.3%)						
Methenamine	100-97-0							298 (29.6%)			
Naphtha, petroleum, hydrotreated heavy	64742-48-9										
Poly(oxy-1,2-ethanediyl), .alpha.,.alpha.'-[[[(9Z)-9-octadecenylimino]di-2,1-ethanediyl]bis[.omega.-hydroxy-	26635-93-8								9 (64.3%)		
Potassium chloride	7447-40-7								7 (50%)		
Sodium bromate	7789-38-0								7 (50%)		
Sodium perborate tetrahydrate	10486-00-7										
Sulfamic acid	5329-14-6									2 (50%)	
Terpenes and Terpenoids, sweet orange-oil	68647-72-3									2 (50%)	
Tetradecyl dimethyl benzyl ammonium chloride	139-08-2			268 (20.0%)							
Tetrakis(hydroxymethyl)p hosphonium sulfate	55566-30-8										

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Alabama	Alaska	Arkansas	California	Colorado	Kansas	Louisiana	Michigan	Mississippi	Montana
Thiourea polymer	68527-49-1			384 (28.7%)							
Tri-n-butyl tetradecyl phosphonium chloride	81741-28-8										
Trisodium phosphate	7601-54-9						19 (19.6%)				

Note for Table C-3a and C-3b: Analysis considered 34,675 disclosures and 676,376 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (3,855) or other, query-specific criteria were excluded from analysis.

**Table C-3b. Top chemicals reported to FracFocus for each state and number (and percentage) of disclosures where a chemical is reported for that state, New Mexico to Wyoming (U.S. EPA, 2015c).**

Source: ([U.S. EPA, 2015c](#)). The top 20 most frequent chemicals were identified for the 20 states that reported to FracFocus, resulting in a total of 93 chemicals. The chemicals were ranked by counting the number of states where that chemical was in the top 20; chemicals used most widely among the most states come first. For example, methanol is reported in 19 of 20 states, so methanol is ranked first.

Chemical name	CASRN	New Mexico	North Dakota	Ohio	Oklahoma	Pennsylvania	Texas	Utah	Virginia	West Virginia	Wyoming
Methanol	67-56-1	1012 (90.8%)	1059 (53.3%)	76 (52.1%)	1270 (70.3%)	1633 (68.6%)	12664 (78.5%)	984 (78.5%)	48 (60.8%)	153 (64.0%)	460 (38.4%)
Distillates, petroleum, hydrotreated light	64742-47-8	699 (62.7%)	943 (47.5%)	122 (83.6%)	1270 (70.3%)	1434 (60.2%)	10677 (66.1%)	934 (74.5%)		196 (82.0%)	612 (51.1%)
Ethylene glycol	107-21-1	503 (45.1%)	724 (36.4%)	83 (56.8%)	843 (46.7%)	807 (33.9%)	9591 (59.4%)	1065 (85.0%)	22 (27.8%)	141 (59.0%)	
Isopropanol	67-63-0	695 (62.3%)	739 (37.2%)	71 (48.6%)	764 (42.28%)	735 (30.9%)	7731 (47.9%)	661 (52.8%)	43 (54.4%)	74 (31.0%)	516 (43.1%)

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	New Mexico	North Dakota	Ohio	Oklahoma	Pennsylvania	Texas	Utah	Virginia	West Virginia	Wyoming
Quartz	14808-60-7	762 (68.3%)	920 (46.3%)	66 (45.2%)	491 (27.2%)		6869 (42.6%)	503 (40.1%)		53 (22.2%)	356 (29.7%)
Sodium hydroxide	1310-73-2	329 (29.5%)	1028 (51.7%)		490 (27.1%)	406 (17.0%)	7371 (45.7%)	466 (37.2%)			688 (57.4%)
Ethanol	64-17-5	529 (47.4%)	545 (27.4%)	87 (59.6%)	838 (46.4%)	388 (16.3%)	3439 (21.3%)		50 (63.3%)	130 (54.3%)	298 (24.9%)
Guar gum	9000-30-0	702 (63.0%)	1094 (55.1%)	74 (50.7%)	457 (25.3%)	538 (22.6%)	6863 (42.5%)	538 (42.9%)		55 (23.0%)	823 (68.7%)
Hydrochloric acid	7647-01-0	880 (78.9%)		145 (99.3%)	1372 (75.9%)	2279 (95.7%)	11424 (70.8%)	1064 (84.9%)	68 (86.1%)	229 (95.8%)	
Peroxydisulfuric acid, diammonium salt	7727-54-0	836 (75.0%)	1089 (54.8%)	93 (63.7%)	713 (39.5%)		8666 (53.7%)	483 (38.5%)		128 (53.6%)	771 (64.4%)
Propargyl alcohol	107-19-7	760 (68.2%)		72 (49.3%)	732 (40.5%)	1371 (57.6%)	6269 (38.8%)	456 (36.4%)	22 (27.8%)	138 (57.7%)	
Glutaraldehyde	111-30-8	632 (56.7%)		105 (71.9%)	989 (54.7%)	819 (34.4%)	6470 (40.1%)			169 (70.7%)	260 (21.7%)
Naphthalene	91-20-3		864 (43.5%)		448 (24.8%)			478 (38.1%)	7 (8.9%)		
2-Butoxyethanol	111-76-2	412 (37.0%)				498 (20.9%)	3898 (24.1%)	663 (52.9%)	70 (88.6%)	62 (25.9%)	
Citric acid	77-92-9	447 (40.1%)		96 (65.8%)	644 (35.6%)	701 (29.4%)	3820 (23.7%)	992 (79.2%)	63 (79.8%)	98 (41.0%)	
Saline	7647-14-5		491 (24.7%)				3462 (21.4%)		7 (8.9%)	53 (22.2%)	274 (22.9%)
Solvent naphtha, petroleum, heavy arom.	64742-94-5		981 (49.4%)		557 (30.8%)		2751 (17.0%)		7 (8.9%)		415 (34.6%)

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	New Mexico	North Dakota	Ohio	Oklahoma	Pennsylvania	Texas	Utah	Virginia	West Virginia	Wyoming
Quaternary ammonium compounds, benzyl-C12-16-alkyldimethyl, chlorides	68424-85-1			54 (37.0%)	597 (33.0%)	373 (15.7%)				53 (22.2%)	
2,2-Dibromo-3-nitrilopropionamide	10222-01-2					804 (33.8%)			22 (27.8%)		
Potassium hydroxide	1310-58-3		1176 (59.2%)	106 (72.6%)			6369 (39.5%)				
Choline chloride	67-48-1	384 (34.4%)		55 (37.7%)				649 (51.8%)	45 (57.0%)		
Polyethylene glycol	25322-68-3		567 (28.5%)			688 (28.9%)					
1,2,4-Trimethylbenzene	95-63-6		496 (25.0%)						7 (8.9%)		
Ammonium chloride	12125-02-9					732 (30.7%)				50 (20.9%)	
Diatomaceous earth, calcined	91053-39-3	419 (37.6%)						435 (34.7%)			
Didecyl dimethyl ammonium chloride	7173-51-5			46 (31.6%)						49 (20.5%)	
Sodium chlorite	7758-19-2		482 (24.3%)								271 (22.6%)
Sodium erythorbate	6381-77-7								10 (12.7%)	76 (31.8%)	
N,N-Dimethylformamide	68-12-2			68 (46.6%)	355 (19.6%)			410 (32.7%)			
Nonyl phenol ethoxylate	9016-45-9	333 (29.9%)						447 (35.7%)	25 (31.6%)		

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	New Mexico	North Dakota	Ohio	Oklahoma	Pennsylvania	Texas	Utah	Virginia	West Virginia	Wyoming
Poly(oxy-1,2-ethanediyl)-nonylphenyl-hydroxy (mixture)	127087-87-0								7 (8.9%)		
Sodium persulfate	7775-27-1					373 (15.7%)					308 (25.7%)
Tetramethylammonium chloride	75-57-0		579 (29.1%)								315 (26.3%)
1,2-Propylene glycol	57-55-6								22 (27.8%)		
5-Chloro-2-methyl-3(2H)-isothiazolone	26172-55-4										
Acetic acid	64-19-7										
Ammonium acetate	631-61-8										323 (27.0%)
Boric acid	10043-35-3			82 (56.2%)							
Carbonic acid, dipotassium salt	584-08-7		482 (24.2%)								
Cristobalite	14464-46-1										
Formic acid	64-18-6										
Hemicellulase enzyme	9012-54-8					367 (15.4%)			11 (13.9%)		
Hemicellulase enzyme concentrate	9025-56-3	331 (29.7%)									
Iron(II) sulfate heptahydrate	7782-63-0								22 (27.8%)		
Magnesium chloride	7786-30-3										

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	New Mexico	North Dakota	Ohio	Oklahoma	Pennsylvania	Texas	Utah	Virginia	West Virginia	Wyoming
Magnesium nitrate	10377-60-3										
Phenolic resin	9003-35-4	419 (37.6%)					2903 (18.0%)				
Sodium hypochlorite	7681-52-9										282 (23.5%)
Sodium tetraborate decahydrate	1303-96-4										265 (22.1%)
Solvent naphtha, petroleum, heavy aliph.	64742-96-7										
1-Butoxy-2-propanol	5131-66-8										
1-Propanol	71-23-8										
1,2-Ethanediaminium, N, N'-bis[2-[bis(2-hydroxy ethyl) methylammonio] ethyl]-N,N'bis(2-hydroxyethyl)-N,N'-dimethyl-, tetrachloride	138879-94-4										
2-Bromo-3-nitrilopropionamide	1113-55-9								11 (13.9%)		
2-Ethylhexanol	104-76-7										
2-Methyl-3(2H)-isothiazolone	2682-20-4										
2-Propenoic acid, polymer with 2-propenamide	9003-06-9							486 (38.8%)			
Alkenes, C>10 .alpha.-	64743-02-8										

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	New Mexico	North Dakota	Ohio	Oklahoma	Pennsylvania	Texas	Utah	Virginia	West Virginia	Wyoming
Benzene, 1,1'-oxybis-, tetrapropylene derivs., sulfonated	119345-03-8										
Benzenesulfonic acid, dodecyl-, compd. with N1-(2-aminoethyl)-1,2-ethanediamine (1:?)	40139-72-8										
Benzyltrimethylammonium chloride	139-07-1										
Benzylhexadecyltrimethylammonium chloride	122-18-9										
Boron sodium oxide	1330-43-4										
C10-C16 ethoxylated alcohol	68002-97-1										
Calcium chloride	10043-52-4										
Carbon dioxide	124-38-9										
Cinnamaldehyde (3-phenyl-2-propenal)	104-55-2										
Diethylene glycol	111-46-6			45 (30.8%)							
Diethylene glycol monobutyl ether	112-34-5										
Diethylenetriamine	111-40-0										
Distillates, petroleum, hydrotreated light paraffinic	64742-55-8										

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	New Mexico	North Dakota	Ohio	Oklahoma	Pennsylvania	Texas	Utah	Virginia	West Virginia	Wyoming
Distillates, petroleum, hydrotreated middle	64742-46-7										
Ethoxylated C12-16 alcohols	68551-12-2									57 (23.8%)	
Ethoxylated C14-15 alcohols	68951-67-7										
Formic acid, potassium salt	590-29-4										361 (30.1%)
Glycerin, natural	56-81-5										
Isotridecanol, ethoxylated	9043-30-5										
Methenamine	100-97-0										
Naphtha, petroleum, hydrotreated heavy	64742-48-9										384 (32.1%)
Poly(oxy-1,2-ethanediyl), .alpha.,.alpha.'-[[[(9Z)-9-octadecenylimino]di-2,1-ethanediyl]bis[.omega.-hydroxy-	26635-93-8										
Potassium chloride	7447-40-7										
Sodium bromate	7789-38-0										
Sodium perborate tetrahydrate	10486-00-7				351 (19.4%)						
Sulfamic acid	5329-14-6										
Terpenes and terpenoids, sweet orange-oil	68647-72-3										

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	New Mexico	North Dakota	Ohio	Oklahoma	Pennsylvania	Texas	Utah	Virginia	West Virginia	Wyoming
Tetradecyl dimethyl benzyl ammonium chloride	139-08-2										
Tetrakis(hydroxymethyl)p hosphonium sulfate	55566-30-8							945 (75.4%)			
Thiourea polymer	68527-49-1										
Tri-n-butyl tetradecyl phosphonium chloride	81741-28-8					350 (14.7%)					
Trisodium phosphate	7601-54-9										

Note for Table C-3a and C-3b: Analysis considered 34,675 disclosures and 676,376 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (3,855) or other, query-specific criteria were excluded from analysis.

**Table C-4. Estimated mean, median, 5<sup>th</sup> percentile, and 95<sup>th</sup> percentile volumes in gallons for chemicals reported to FracFocus in 100 or more disclosures, where density information was available.**

Chemicals are listed in alphabetical order. Density information came from Reaxys® and other sources. All density sources are referenced in Table C-7.

Name	CASRN	Volume (gallons)			
		Mean	Median	5th Percentile	95th Percentile
(4R)-1-methyl-4-(prop-1-en-2-yl)cyclohexene	5989-27-5	2,702	406	0	19,741
1-Butoxy-2-propanol	5131-66-8	167	21	5	654
1-Decanol	112-30-1	28	4	0	33
1-Octanol	111-87-5	5	4	0	10
1-Propanol	71-23-8	128	55	6	367
1,2-Propylene glycol	57-55-6	13,105	72	4	61,071
1,2,4-Trimethylbenzene	95-63-6	38	6	0	43
2-Butoxyethanol	111-76-2	385	26	0	1,811
2-Ethylhexanol	104-76-7	100	11	0	292
2-Mercaptoethanol	60-24-2	1,175	445	0	4,194
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	183	5	0	341
Acetic acid	64-19-7	646	47	0	1,042
Acetic anhydride	108-24-7	239	50	3	722
Acrylamide	79-06-1	95	3	0	57
Adipic acid	124-04-9	153	0	0	109
Aluminum chloride	7446-70-0	2	0	0	0
Ammonia	7664-41-7	44	35	2	138
Ammonium acetate	631-61-8	839	117	0	1,384
Ammonium chloride	12125-02-9	440	48	3	458
Ammonium hydroxide	1336-21-6	7	2	0	14
Benzyl chloride	100-44-7	52	0	0	40
Carbonic acid, dipotassium salt	584-08-7	467	113	0	1,729
Chlorine dioxide	10049-04-4	31	11	0	28
Choline chloride	67-48-1	2,131	290	28	4,364
Cinnamaldehyde (3-phenyl-2-propenal)	104-55-2	68	3	0	697

*This document is a draft for review purposes only and does not constitute Agency policy.*



Name	CASRN	Volume (gallons)			
		Mean	Median	5th Percentile	95th Percentile
Citric acid	77-92-9	163	20	1	269
Dibromoacetonitrile	3252-43-5	22	13	1	45
Diethylene glycol	111-46-6	168	16	0	102
Diethylenetriamine	111-40-0	92	21	0	207
Dodecane	112-40-3	190	31	0	151
Ethanol	64-17-5	831	121	1	2,645
Ethanolamine	141-43-5	70	30	0	283
Ethyl acetate	141-78-6	0	0	0	0
Ethylene glycol	107-21-1	614	184	4	2,470
Ferric chloride	7705-08-0	0	0	0	0
Formalin	50-00-0	200	0	0	8
Formic acid	64-18-6	501	38	1	1,229
Fumaric acid	110-17-8	2	0	0	12
Glutaraldehyde	111-30-8	1,313	122	2	1,165
Glycerin, natural	56-81-5	413	109	10	911
Glycolic acid	79-14-1	38	10	4	94
Hydrochloric acid	7647-01-0	28,320	3,110	96	26,877
Isopropanol	67-63-0	2,095	55	0	1,264
Isopropylamine	75-31-0	83	121	0	172
Magnesium chloride	7786-30-3	14	0	0	2
Methanol	67-56-1	1,218	110	2	3,731
Methenamine	100-97-0	3,386	100	0	3,648
Methoxyacetic acid	625-45-6	36	4	2	115
N,N-Dimethylformamide	68-12-2	119	10	0	216
Naphthalene	91-20-3	72	12	0	204
Nitrogen, liquid	7727-37-9	41,841	26,610	3,091	108,200
Ozone	10028-15-6	15,844	15,473	8,785	26,063
Peracetic acid	79-21-0	300	268	50	663
Phosphonic acid	13598-36-2	1,201	0	0	3
Phosphoric acid Divosan X-Tend formulation	7664-38-2	13	4	0	15
Potassium acetate	127-08-2	204	1	0	974

*This document is a draft for review purposes only and does not constitute Agency policy.*

Name	CASRN	Volume (gallons)			
		Mean	Median	5th Percentile	95th Percentile
Propargyl alcohol	107-19-7	183	2	0	51
Saline	7647-14-5	876	85	0	1,544
Saturated sucrose	57-50-1	1	1	0	2
Silica, amorphous	7631-86-9	6,877	8	0	38,371
Sodium carbonate	497-19-8	228	16	0	1,319
Sodium formate	141-53-7	0	0	0	0
Sodium hydroxide	1310-73-2	551	38	0	1,327
Sulfur dioxide	7446-09-5	0	0	0	0
Sulfuric acid	7664-93-9	3	0	0	3
tert-Butyl hydroperoxide (70% solution in Water)	75-91-2	156	64	0	557
Tetramethylammonium chloride	75-57-0	970	483	2	3,508
Thioglycolic acid	68-11-1	55	7	2	229
Toluene	108-88-3	18	0	0	11
Tridecane	629-50-5	190	31	0	190
Triethanolamine	102-71-6	846	60	0	2,264
Triethyl phosphate	78-40-0	55	1	0	533
Triethylene glycol	112-27-6	5,198	116	28	945
Triisopropanolamine	122-20-3	46	4	1	330
Trimethyl borate	121-43-7	83	40	4	283
Undecane	1120-21-4	273	29	0	1,641

Note: Analysis considered 34,495 disclosures and 672,358 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; criteria for water volumes; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (4,035) or other, query-specific criteria were excluded from analysis.

**Table C-5. Estimated mean, median, 5<sup>th</sup> percentile, and 95<sup>th</sup> percentile volumes in liters for chemicals reported to FracFocus in 100 or more disclosures, where density information was available.**

Chemicals are listed in alphabetical order. Density information came from Reaxys® and other sources. All density sources are referenced in Table C-7.

Name	CASRN	Volume (L)			
		Mean	Median	5th Percentile	95th Percentile
(4R)-1-methyl-4-(prop-1-en-2-yl)cyclohexene	5989-27-5	10,229	1,536	0	74,729
1-Butoxy-2-propanol	5131-66-8	631	80	18	2,475
1-Decanol	112-30-1	107	14	1	123
1-Octanol	111-87-5	21	14	1	39
1-Propanol	71-23-8	483	208	22	1,391
1,2-Propylene glycol	57-55-6	49,607	274	15	231,179
1,2,4-Trimethylbenzene	95-63-6	145	24	0	165
2-Butoxyethanol	111-76-2	1,459	98	0	6,856
2-Ethylhexanol	104-76-7	377	40	1	1,106
2-Mercaptoethanol	60-24-2	4,449	1,685	0	15,878
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	692	18	0	1,292
Acetic acid	64-19-7	2,446	176	0	3,945
Acetic anhydride	108-24-7	906	189	12	2,734
Acrylamide	79-06-1	361	10	0	216
Adipic acid	124-04-9	578	0	0	414
Aluminum chloride	7446-70-0	6	0	0	0
Ammonia	7664-41-7	166	134	7	523
Ammonium acetate	631-61-8	3,177	444	0	5,238
Ammonium chloride	12125-02-9	1,666	182	11	1,733
Ammonium hydroxide	1336-21-6	27	6	1	52
Benzyl chloride	100-44-7	196	1	0	151
Carbonic acid, dipotassium salt	584-08-7	1,769	429	0	6,544
Chlorine dioxide	10049-04-4	117	43	1	106
Choline chloride	67-48-1	8,068	1,096	107	16,521
Cinnamaldehyde (3-phenyl-2-propenal)	104-55-2	258	12	0	2,638
Citric acid	77-92-9	618	77	5	1,019

*This document is a draft for review purposes only and does not constitute Agency policy.*

Name	CASRN	Volume (L)			
		Mean	Median	5th Percentile	95th Percentile
Dibromoacetonitrile	3252-43-5	82	50	4	170
Diethylene glycol	111-46-6	636	61	1	384
Diethylenetriamine	111-40-0	347	80	0	785
Dodecane	112-40-3	719	117	0	572
Ethanol	64-17-5	3,144	458	6	10,011
Ethanolamine	141-43-5	264	112	0	1,070
Ethyl acetate	141-78-6	0	0	0	0
Ethylene glycol	107-21-1	2,324	697	14	9,349
Ferric chloride	7705-08-0	0	0	0	0
Formalin	50-00-0	756	2	0	31
Formic acid	64-18-6	1,896	144	2	4,653
Fumaric acid	110-17-8	9	0	0	46
Glutaraldehyde	111-30-8	4,972	462	6	4,409
Glycerin, natural	56-81-5	1,565	412	38	3,447
Glycolic acid	79-14-1	146	39	14	356
Hydrochloric acid	7647-01-0	107,204	11,772	362	101,741
Isopropanol	67-63-0	7,932	210	1	4,786
Isopropylamine	75-31-0	314	458	0	652
Magnesium chloride	7786-30-3	52	0	0	8
Methanol	67-56-1	4,609	416	6	14,125
Methenamine	100-97-0	12,817	378	0	13,810
Methoxyacetic acid	625-45-6	136	17	8	436
N,N-Dimethylformamide	68-12-2	449	38	2	819
Naphthalene	91-20-3	271	44	0	774
Nitrogen, liquid	7727-37-9	158,384	100,731	11,700	409,583
Ozone	10028-15-6	59,976	58,570	33,254	98,658
Peracetic acid	79-21-0	1,137	1,016	190	2,511
Phosphonic acid	13598-36-2	4,547	2	0	11
Phosphoric acid Divosan X-Tend formulation	7664-38-2	51	15	0	57
Potassium acetate	127-08-2	775	3	0	3,690
Propargyl alcohol	107-19-7	693	9	0	193

*This document is a draft for review purposes only and does not constitute Agency policy.*

Name	CASRN	Volume (L)			
		Mean	Median	5th Percentile	95th Percentile
Saline	7647-14-5	3,317	321	0	5,844
Saturated sucrose	57-50-1	5	2	0	6
Silica, amorphous	7631-86-9	26,031	32	0	145,251
Sodium carbonate	497-19-8	862	62	0	4,991
Sodium formate	141-53-7	1	1	0	1
Sodium hydroxide	1310-73-2	2,087	144	1	5,024
Sulfur dioxide	7446-09-5	2	0	0	0
Sulfuric acid	7664-93-9	10	0	0	12
tert-Butyl hydroperoxide (70% solution in Water)	75-91-2	591	242	0	2,109
Tetramethylammonium chloride	75-57-0	3,672	1,830	8	13,279
Thioglycolic acid	68-11-1	208	28	6	868
Toluene	108-88-3	69	0	0	41
Tridecane	629-50-5	721	118	0	721
Triethanolamine	102-71-6	3,203	228	0	8,570
Triethyl phosphate	78-40-0	209	6	0	2,019
Triethylene glycol	112-27-6	19,676	439	106	3,579
Triisopropanolamine	122-20-3	174	16	4	1,249
Trimethyl borate	121-43-7	314	152	16	1,072
Undecane	1120-21-4	1,035	111	0	6,212

Note: Analysis considered 34,495 disclosures and 672,358 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; criteria for water volumes; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (4,035) or other, query-specific criteria were excluded from analysis.

**Table C-6. Calculated mean, median, 5<sup>th</sup> percentile, and 95<sup>th</sup> percentile chemical masses reported to FracFocus in 100 or more disclosures, where density information was available.**

Density information came from Reaxys® and other sources. All density sources are referenced in Table C-7. Number of disclosures reported for each chemical is also included.

Name	CASRN	Mass (kg)				Disclosures
		Mean	Median	5th Percentile	95th Percentile	
(4R)-1-methyl-4-(prop-1-en-2-yl)cyclohexene	5989-27-5	8,593	1,290	0	62,772	578
1-Butoxy-2-propanol	5131-66-8	555	71	16	2,178	773
1-Decanol	112-30-1	89	12	1	102	434
1-Octanol	111-87-5	17	12	1	32	434
1-Propanol	71-23-8	386	167	18	1,113	1,481
1,2-Propylene glycol	57-55-6	51,095	282	15	238,114	1,023
1,2,4-Trimethylbenzene	95-63-6	126	21	0	143	3,976
2-Butoxyethanol	111-76-2	1,313	88	0	6,170	6,778
2-Ethylhexanol	104-76-7	313	34	0	918	1,291
2-Mercaptoethanol	60-24-2	489	185	0	1,747	2,051
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	1,660	44	0	3,102	4,927
Acetic acid	64-19-7	2,544	183	0	4,103	7,643
Acetic anhydride	108-24-7	969	203	12	2,925	1,377
Acrylamide	79-06-1	408	11	0	244	251
Adipic acid	124-04-9	785	0	0	564	233
Aluminum chloride	7446-70-0	15	0	0	0	122
Ammonia	7664-41-7	111	90	4	351	398
Ammonium acetate	631-61-8	3,718	520	0	6,129	1,504
Ammonium chloride	12125-02-9	2,530	277	16	2,633	3,288
Ammonium hydroxide	1336-21-6	48	11	2	94	1,173
Benzyl chloride	100-44-7	214	1	0	165	1,833
Carbonic acid, dipotassium salt	584-08-7	4,298	1,042	0	15,902	4,093
Chlorine dioxide	10049-04-4	321	117	3	291	331
Choline chloride	67-48-1	9,440	1,282	125	19,329	4,241
Cinnamaldehyde (3-phenyl-2-propenal)	104-55-2	284	13	0	2,902	1,377

*This document is a draft for review purposes only and does not constitute Agency policy.*

Name	CASRN	Mass (kg)				Disclosures
		Mean	Median	5th Percentile	95th Percentile	
Citric acid	77-92-9	989	123	8	1,630	7,503
Dibromoacetonitrile	3252-43-5	193	118	11	403	272
Diethylene glycol	111-46-6	712	68	1	430	1,732
Diethylenetriamine	111-40-0	330	76	0	746	784
Dodecane	112-40-3	539	88	0	429	131
Ethanol	64-17-5	2,484	361	4	7,908	9,233
Ethanolamine	141-43-5	267	113	0	1,081	585
Ethyl acetate	141-78-6	0	0	0	0	110
Ethylene glycol	107-21-1	2,557	767	15	10,283	14,767
Ferric chloride	7705-08-0	0	0	0	0	118
Formalin	50-00-0	816	2	0	34	456
Formic acid	64-18-6	2,313	176	2	5,677	3,781
Fumaric acid	110-17-8	15	0	0	75	224
Glutaraldehyde	111-30-8	4,972	462	6	4,409	10,963
Glycerin, natural	56-81-5	1,972	519	47	4,343	1,829
Glycolic acid	79-14-1	217	58	21	530	595
Hydrochloric acid	7647-01-0	107,204	11,772	362	101,741	20,996
Isopropanol	67-63-0	6,187	163	1	3,733	15,058
Isopropylamine	75-31-0	213	311	0	444	255
Magnesium chloride	7786-30-3	120	1	0	18	1,113
Methanol	67-56-1	3,641	329	5	11,159	23,225
Methenamine	100-97-0	15,380	454	0	16,572	4,412
Methoxyacetic acid	625-45-6	161	20	9	514	584
N,N-Dimethylformamide	68-12-2	422	36	2	770	2,972
Naphthalene	91-20-3	220	35	0	627	5,945
Nitrogen, liquid	7727-37-9	129,875	82,599	9,594	335,858	713
Ozone	10028-15-6	129	126	71	212	209
Peracetic acid	79-21-0	1,251	1,117	209	2,762	221
Phosphonic acid	13598-36-2	7,730	3	0	18	2,216
Phosphoric acid Divosan X-Tend formulation	7664-38-2	48	14	0	54	315
Potassium acetate	127-08-2	1,216	5	0	5,793	325

*This document is a draft for review purposes only and does not constitute Agency policy.*



Name	CASRN	Mass (kg)				Disclosures
		Mean	Median	5th Percentile	95th Percentile	
Propargyl alcohol	107-19-7	658	9	0	183	10,771
Saline	7647-14-5	7,197	696	0	12,682	6,673
Saturated sucrose	57-50-1	6	2	0	7	125
Silica, amorphous	7631-86-9	57,267	71	0	319,553	2,423
Sodium carbonate	497-19-8	2,191	158	0	12,678	396
Sodium formate	141-53-7	2	1	1	2	204
Sodium hydroxide	1310-73-2	4,445	306	2	10,701	12,585
Sulfur dioxide	7446-09-5	2	0	0	0	224
Sulfuric acid	7664-93-9	18	0	0	22	402
tert-Butyl hydroperoxide (70% solution in water)	75-91-2	532	218	0	1,898	814
Tetramethylammonium chloride	75-57-0	4,296	2,141	10	15,537	3,162
Thioglycolic acid	68-11-1	277	37	8	1,155	156
Toluene	108-88-3	59	0	0	35	214
Tridecane	629-50-5	541	88	0	541	132
Triethanolamine	102-71-6	3,588	255	0	9,599	1,498
Triethyl phosphate	78-40-0	222	6	0	2,140	991
Triethylene glycol	112-27-6	22,038	491	119	4,008	528
Triisopropanolamine	122-20-3	177	17	4	1,274	251
Trimethyl borate	121-43-7	292	141	14	997	294
Undecane	1120-21-4	766	82	0	4,597	241

Note: Analysis considered 34,495 disclosures and 672,358 ingredient records that met selected quality assurance criteria, including: completely parsed; unique combination of fracture date and API well number; fracture date between January 1, 2011, and February 28, 2013; criteria for water volumes; valid CASRN; and valid concentrations. Disclosures that did not meet quality assurance criteria (4,035) or other, query-specific criteria were excluded from analysis.

**Table C-7. Associated chemical densities and references used to calculate chemical mass and estimate chemical volume.**

Name	CASRN	Density (g/mL)	Reference
(4R)-1-methyl-4-(prop-1-en-2-yl)cyclohexene	5989-27-5	0.84	<a href="#">Dejoye Tanzi et al. (2012)</a>
1-Butoxy-2-propanol	5131-66-8	0.88	<a href="#">Pal et al. (2013)</a>
1-Decanol	112-30-1	0.83	<a href="#">Faria et al. (2013)</a>
1-Octanol	111-87-5	0.82	<a href="#">Dubey and Kumar (2013)</a>
1-Propanol	71-23-8	0.8	<a href="#">Rani and Maken (2013)</a>
1,2-Propylene glycol	57-55-6	1.03	<a href="#">Moosavi et al. (2013)</a>
1,2,4-Trimethylbenzene	95-63-6	0.87	<a href="#">He et al. (2008)</a>
2-Butoxyethanol	111-76-2	0.9	<a href="#">Dhondge et al. (2010)</a>
2-Ethylhexanol	104-76-7	0.83	<a href="#">Laavi et al. (2012)</a>
2-Mercaptoethanol	60-24-2	0.11	<a href="#">Rawat et al. (1976)</a>
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	2.4	<a href="#">Fels (1900)</a>
Acetic acid	64-19-7	1.04	<a href="#">Chafer et al. (2010)</a>
Acetic anhydride	108-24-7	1.07	<a href="#">Radwan and Hanna (1976)</a>
Acrylamide	79-06-1	1.13	<a href="#">Carpenter and Davis (1957)</a>
Adipic acid	124-04-9	1.36	<a href="#">Thalladi et al. (2000)</a>
Aluminum chloride	7446-70-0	2.44	<a href="#">Sigma-Aldrich (2015a)</a>
Ammonia	7664-41-7	0.67	<a href="#">Harlow et al. (1997)</a>
Ammonium acetate	631-61-8	1.17	<a href="#">Biltz and Balz (1928)</a>
Ammonium chloride	12125-02-9	1.519	<a href="#">Haynes (2014)</a>
Ammonium hydroxide	1336-21-6	1.8	<a href="#">Xiao et al. (2013)</a>
Benzyl chloride	100-44-7	1.09	<a href="#">Sarkar et al. (2012)</a>
Carbonic acid, dipotassium salt	584-08-7	2.43	<a href="#">Sigma-Aldrich (2014b)</a>
Chlorine dioxide	10049-04-4	2.757	<a href="#">Haynes (2014)</a>
Choline chloride	67-48-1	1.17	<a href="#">Shanley and Collin (1961)</a>
Cinnamaldehyde (3-phenyl-2-propenal)	104-55-2	1.1	<a href="#">Masood et al. (1976)</a>
Citric acid	77-92-9	1.6	<a href="#">Bennett and Yuill (1935)</a>
Dibromoacetonitrile	3252-43-5	2.37	<a href="#">Wilt (1956)</a>
Diethylene glycol	111-46-6	1.12	<a href="#">Chasib (2013)</a>
Diethylenetriamine	111-40-0	0.95	<a href="#">Dubey and Kumar (2011)</a>
Dodecane	112-40-3	0.75	<a href="#">Baragi et al. (2013)</a>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Name	CASRN	Density (g/mL)	Reference
Ethanol	64-17-5	0.79	<a href="#">Kiselev et al. (2012)</a>
Ethanolamine	141-43-5	1.01	<a href="#">Blanco et al. (2013)</a>
Ethyl acetate	141-78-6	0.89	<a href="#">Laavi et al. (2013)</a>
Ethylene glycol	107-21-1	1.1	<a href="#">Rodnikova et al. (2012)</a>
Ferric chloride	7705-08-0	2.9	<a href="#">Haynes (2014)</a>
Formalin	50-00-0	1.08	<a href="#">Alfa Aesar (2015)</a>
Formic acid	64-18-6	1.22	<a href="#">Casanova et al. (1981)</a>
Fumaric acid	110-17-8	1.64	<a href="#">Huffman and Fox (1938)</a>
Glutaraldehyde	111-30-8	1	<a href="#">Oka (1962)</a>
Glycerin, natural	56-81-5	1.26	<a href="#">Egorov et al. (2013)</a>
Glycolic acid	79-14-1	1.49	<a href="#">Pijper (1971)</a>
Hydrochloric acid	7647-01-0	1	<a href="#">Steinhauser et al. (1990)</a>
Isopropanol	67-63-0	0.78	<a href="#">Zhang et al. (2013)</a>
Isopropylamine	75-31-0	0.68	<a href="#">Sarkar and Roy (2009)</a>
Magnesium chloride	7786-30-3	2.32	<a href="#">Haynes (2014)</a>
Methanol	67-56-1	0.79	<a href="#">Kiselev et al. (2012)</a>
Methenamine	100-97-0	1.2	<a href="#">Mak (1965)</a>
Methoxyacetic acid	625-45-6	1.18	<a href="#">Haynes (2014)</a>
N,N-Dimethylformamide	68-12-2	0.94	<a href="#">Smirnov and Badelin (2013)</a>
Naphthalene	91-20-3	0.81	<a href="#">Dyshin et al. (2008)</a>
Nitrogen, liquid	7727-37-9	0.8	<a href="#">finemech (2012)</a>
Ozone	10028-15-6	0.002144	<a href="#">Haynes (2014)</a>
Peracetic acid	79-21-0	1.1	<a href="#">Sigma-Aldrich (2015b)</a>
Phosphonic acid	13598-36-2	1.7	<a href="#">Sigma-Aldrich (2014a)</a>
Phosphoric acid Divosan X-Tend formulation	7664-38-2	0.94	<a href="#">Fadeeva et al. (2004)</a>
Potassium acetate	127-08-2	1.57	<a href="#">Haynes (2014)</a>
Propargyl alcohol	107-19-7	0.95	<a href="#">Vijaya Kumar et al. (1996)</a>
Saline	7647-14-5	2.17	<a href="#">Sigma-Aldrich (2010)</a>
Saturated sucrose	57-50-1	1.13	<a href="#">Hagen and Kaatze (2004)</a>
Silica, amorphous	7631-86-9	2.2	<a href="#">Fujino et al. (2004)</a>
Sodium carbonate	497-19-8	2.54	<a href="#">Haynes (2014)</a>
Sodium formate	141-53-7	1.97	<a href="#">Fuess et al. (1982)</a>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Name	CASRN	Density (g/mL)	Reference
Sodium hydroxide	1310-73-2	2.13	<a href="#">Haynes (2014)</a>
Sulfur dioxide	7446-09-5	1.3	<a href="#">Sigma-Aldrich (2015c)</a>
Sulfuric acid	7664-93-9	1.83	<a href="#">Sigma-Aldrich (2015d)</a>
tert-Butyl hydroperoxide (70% solution in water)	75-91-2	0.9	<a href="#">Sigma-Aldrich (2007)</a>
Tetramethylammonium chloride	75-57-0	1.17	<a href="#">Haynes (2014)</a>
Thioglycolic acid	68-11-1	1.33	<a href="#">Biilmann (1906)</a>
Toluene	108-88-3	0.86	<a href="#">Martinez-Reina et al. (2012)</a>
Tridecane	629-50-5	0.75	<a href="#">Zhang et al. (2011)</a>
Triethanolamine	102-71-6	1.12	<a href="#">Blanco et al. (2013)</a>
Triethyl phosphate	78-40-0	1.06	<a href="#">Krakowiak et al. (2001)</a>
Triethylene glycol	112-27-6	1.12	<a href="#">Afzal et al. (2009)</a>
Triisopropanolamine	122-20-3	1.02	<a href="#">IUPAC (2014)</a>
Trimethyl borate	121-43-7	0.93	<a href="#">Sigma-Aldrich (2015e)</a>
Undecane	1120-21-4	0.74	<a href="#">de Oliveira et al. (2011)</a>

**Table C-8. Selected physicochemical properties of chemicals reported as used in hydraulic fracturing fluids.**

Properties are provided for chemicals, where available from EPI Suite™ version 4.1 ([U.S. EPA, 2012a](#)).

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
(13Z)-N,N-bis(2-hydroxyethyl)-N-methyldocos-13-en-1-aminium chloride	120086-58-0	4.38	--	0.3827	$3.32 \times 10^{-15}$	--	--
(2,3-Dihydroxypropyl)trimethyl ammonium chloride	34004-36-9	-5.8	--	$1.00 \times 10^6$	$9.84 \times 10^{-18}$	--	--
(E)-Crotonaldehyde	123-73-9	0.6	--	$4.15 \times 10^4$	$5.61 \times 10^{-5}$	$1.90 \times 10^{-5}$	$1.94 \times 10^{-5}$
[Nitrilotris(methylene)]tris-phosphonic acid pentasodium salt	2235-43-0	-5.45	-3.53	$1.00 \times 10^6$	$1.65 \times 10^{-34}$	--	--
1-(1-Naphthylmethyl)quinolinium chloride	65322-65-8	5.57	--	0.02454	$1.16 \times 10^{-7}$	--	--
1-(Alkyl* amino)-3-aminopropane *(42%C12, 26%C18, 15%C14, 8%C16, 5%C10, 4%C8)	68155-37-3	4.74	--	23.71	$6.81 \times 10^{-8}$	$2.39 \times 10^{-8}$	--
1-(Phenylmethyl)pyridinium Et Me derivatives, chlorides	68909-18-2	4.1	--	14.13	$1.78 \times 10^{-5}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
1,2,3-Trimethylbenzene	526-73-8	3.63	3.66	75.03	$7.24 \times 10^{-3}$	$6.58 \times 10^{-3}$	$4.36 \times 10^{-3}$
1,2,4-Trimethylbenzene	95-63-6	3.63	3.63	79.59	$7.24 \times 10^{-3}$	$6.58 \times 10^{-3}$	$6.16 \times 10^{-3}$
1,2-Benzisothiazolin-3-one	2634-33-5	0.64	--	$2.14 \times 10^4$	$6.92 \times 10^{-9}$	--	--
1,2-Dibromo-2,4-dicyanobutane	35691-65-7	1.63	--	424	$3.94 \times 10^{-10}$	--	--
1,2-Dimethylbenzene	95-47-6	3.09	3.12	224.1	$6.56 \times 10^{-3}$	$6.14 \times 10^{-3}$	$5.18 \times 10^{-3}$
1,2-Ethanediaminium, N,N'-bis[2-[bis(2-hydroxyethyl)methylammonio]ethyl]-N,N'-bis(2-hydroxyethyl)-N,N'-dimethyl-, tetrachloride	138879-94-4	-23.19	--	$1.00 \times 10^6$	$2.33 \times 10^{-35}$	--	--
1,2-Propylene glycol	57-55-6	-0.78	-0.92	$8.11 \times 10^5$	$1.74 \times 10^{-7}$	$1.31 \times 10^{-10}$	$1.29 \times 10^{-8}$
1,2-Propylene oxide	75-56-9	0.37	0.03	$1.29 \times 10^5$	$1.60 \times 10^{-4}$	$1.23 \times 10^{-4}$	$6.96 \times 10^{-5}$
1,3,5-Triazine	290-87-9	-0.2	0.12	$1.03 \times 10^5$	$1.21 \times 10^{-6}$	--	--
1,3,5-Triazine-1,3,5(2H,4H,6H)-triethanol	4719-04-4	-4.67	--	$1.00 \times 10^6$	$1.08 \times 10^{-11}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
1,3,5-Trimethylbenzene	108-67-8	3.63	3.42	120.3	$7.24 \times 10^{-3}$	$6.58 \times 10^{-3}$	$8.77 \times 10^{-3}$
1,3-Butadiene	106-99-0	2.03	1.99	792.3	$7.79 \times 10^{-2}$	$7.05 \times 10^{-2}$	$7.36 \times 10^{-2}$
1,3-Dichloropropene	542-75-6	2.29	2.04	1,994	$2.45 \times 10^{-2}$	$3.22 \times 10^{-3}$	$3.55 \times 10^{-3}$
1,4-Dioxane	123-91-1	-0.32	-0.27	$2.14 \times 10^5$	$5.91 \times 10^{-6}$	$1.12 \times 10^{-7}$	$4.80 \times 10^{-6}$
1,6-Hexanediamine	124-09-4	0.35	--	$5.34 \times 10^5$	$3.21 \times 10^{-9}$	$7.05 \times 10^{-10}$	--
1,6-Hexanediamine dihydrochloride	6055-52-3	0.35	--	$5.34 \times 10^5$	$3.21 \times 10^{-9}$	$7.05 \times 10^{-10}$	--
1-[2-(2-Methoxy-1-methylethoxy)-1-methylethoxy]-2-propanol	20324-33-8	-0.2	--	$1.96 \times 10^5$	$2.36 \times 10^{-11}$	$4.55 \times 10^{-13}$	--
1-Amino-2-propanol	78-96-6	-1.19	-0.96	$1.00 \times 10^6$	$4.88 \times 10^{-10}$	$2.34 \times 10^{-10}$	--
1-Benzylquinolinium chloride	15619-48-4	4.4	--	6.02	$1.19 \times 10^{-6}$	--	--
1-Butanol	71-36-3	0.84	0.88	$7.67 \times 10^4$	$9.99 \times 10^{-6}$	$9.74 \times 10^{-6}$	$8.81 \times 10^{-6}$
1-Butoxy-2-propanol	5131-66-8	0.98	--	$4.21 \times 10^4$	$1.30 \times 10^{-7}$	$4.88 \times 10^{-8}$	--

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
1-Decanol	112-30-1	3.79	4.57	28.21	$5.47 \times 10^{-5}$	$7.73 \times 10^{-5}$	$3.20 \times 10^{-5}$
1-Dodecyl-2-pyrrolidinone	2687-96-9	5.3	4.2	5.862	$7.12 \times 10^{-7}$	--	--
1-Eicosene	3452-07-1	10.03	--	$1.26 \times 10^{-5}$	$1.89 \times 10^1$	$6.74 \times 10^1$	--
1-Ethyl-2-methylbenzene	611-14-3	3.58	3.53	96.88	$8.71 \times 10^{-3}$	$9.52 \times 10^{-3}$	$5.53 \times 10^{-3}$
1-Hexadecene	629-73-2	8.06	--	0.001232	6.10	$1.69 \times 10^1$	--
1-Hexanol	111-27-3	1.82	2.03	6,885	$1.76 \times 10^{-5}$	$1.94 \times 10^{-5}$	$1.71 \times 10^{-5}$
1-Methoxy-2-propanol	107-98-2	-0.49	--	$1.00 \times 10^6$	$5.56 \times 10^{-8}$	$1.81 \times 10^{-8}$	$9.20 \times 10^{-7}$
1-Octadecanamine, acetate (1:1)	2190-04-7	7.71	--	0.04875	$9.36 \times 10^{-4}$	$2.18 \times 10^{-3}$	--
1-Octadecanamine, N,N-dimethyl-	124-28-7	8.39	--	0.008882	$4.51 \times 10^{-3}$	$3.88 \times 10^{-2}$	--
1-Octadecene	112-88-9	9.04	--	$1.256 \times 10^{-4}$	10.7	$3.38 \times 10^1$	--
1-Octanol	111-87-5	2.81	3	814	$3.10 \times 10^{-5}$	$3.88 \times 10^{-5}$	$2.45 \times 10^{-5}$
1-Pentanol	71-41-0	1.33	1.51	$2.09 \times 10^4$	$1.33 \times 10^{-5}$	$1.38 \times 10^{-5}$	$1.30 \times 10^{-5}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
1-Propanaminium, 3-chloro-2-hydroxy-N,N,N-trimethyl-, chloride	3327-22-8	-4.48	--	$1.00 \times 10^6$	$9.48 \times 10^{-17}$	--	--
1-Propanesulfonic acid	5284-66-2	-1.4	--	$1.00 \times 10^6$	$2.22 \times 10^{-8}$	--	--
1-Propanol	71-23-8	0.35	0.25	$2.72 \times 10^5$	$7.52 \times 10^{-6}$	$6.89 \times 10^{-6}$	$7.41 \times 10^{-6}$
1-Propene	115-07-1	1.68	1.77	1,162	$1.53 \times 10^{-1}$	$1.58 \times 10^{-1}$	$1.96 \times 10^{-1}$
1-tert-Butoxy-2-propanol	57018-52-7	0.87	--	$5.24 \times 10^4$	$1.30 \times 10^{-7}$	$5.23 \times 10^{-8}$	--
1-Tetradecene	1120-36-1	7.08	--	0.01191	3.46	8.48	--
1-Tridecanol	112-70-9	5.26	--	4.533	$1.28 \times 10^{-4}$	$2.18 \times 10^{-4}$	--
1-Undecanol	112-42-5	4.28	--	43.04	$7.26 \times 10^{-5}$	$1.09 \times 10^{-4}$	--
2-(2-Butoxyethoxy)ethanol	112-34-5	0.29	0.56	$7.19 \times 10^4$	$1.52 \times 10^{-9}$	$4.45 \times 10^{-11}$	$7.20 \times 10^{-9}$
2-(2-Ethoxyethoxy)ethanol	111-90-0	-0.69	-0.54	$8.28 \times 10^5$	$8.63 \times 10^{-10}$	$2.23 \times 10^{-11}$	$2.23 \times 10^{-8}$
2-(2-Ethoxyethoxy)ethyl acetate	112-15-2	0.32	--	$3.09 \times 10^4$	$5.62 \times 10^{-8}$	$7.22 \times 10^{-10}$	$2.29 \times 10^{-8}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
2-(Dibutylamino)ethanol	102-81-8	2.01	2.65	3,297	$9.70 \times 10^{-9}$	$1.02 \times 10^{-8}$	--
2-(Hydroxymethylamino)ethanol	34375-28-5	-1.53	--	$1.00 \times 10^6$	$1.62 \times 10^{-12}$	--	--
2-(Thiocyanomethylthio)benzothiazole	21564-17-0	3.12	3.3	41.67	$6.49 \times 10^{-12}$	--	--
2,2'-(Diazene-1,2-diyl)diethane-1,1-diyl)bis-4,5-dihydro-1H-imidazole dihydrochloride	27776-21-2	2.12	--	193.3	$3.11 \times 10^{-14}$	--	--
2,2'-(Octadecylimino)diethanol	10213-78-2	6.85	--	0.08076	$1.06 \times 10^{-8}$	$7.39 \times 10^{-12}$	--
2,2'-[Ethane-1,2-diylbis(oxy)]diethanamine	929-59-9	-2.17	--	$1.00 \times 10^6$	$2.50 \times 10^{-13}$	$8.10 \times 10^{-16}$	--
2,2'-Azobis(2-amidinopropane) dihydrochloride	2997-92-4	-3.28	--	$1.00 \times 10^6$	$1.21 \times 10^{-14}$	--	--
2,2-Dibromo-3-nitrilopropionamide	10222-01-2	1.01	0.82	2,841	$6.16 \times 10^{-14}$	--	$1.91 \times 10^{-8}$
2,2-Dibromopropanediamide	73003-80-2	0.37	--	$1.00 \times 10^4$	$3.58 \times 10^{-14}$	--	--
2,4-Hexadienoic acid, potassium salt, (2E,4E)-	24634-61-5	1.62	1.33	$1.94 \times 10^4$	$5.72 \times 10^{-7}$	$4.99 \times 10^{-8}$	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
2,6,8-Trimethyl-4-nonanol	123-17-1	4.48	--	24.97	$9.63 \times 10^{-5}$	$4.45 \times 10^{-4}$	--
2-Acrylamido-2-methyl-1-propanesulfonic acid	15214-89-8	-2.19	--	$1.00 \times 10^6$	$5.18 \times 10^{-15}$	--	--
2-Amino-2-methylpropan-1-ol	124-68-5	-0.74	--	$1.00 \times 10^6$	$6.48 \times 10^{-10}$	--	--
2-Aminoethanol hydrochloride	2002-24-6	-1.61	-1.31	$1.00 \times 10^6$	$3.68 \times 10^{-10}$	$9.96 \times 10^{-11}$	--
2-Bromo-3-nitrilopropionamide	1113-55-9	-0.31	--	3,274	$5.35 \times 10^{-13}$	--	--
2-Butanone oxime	96-29-7	1.69	0.63	$3.66 \times 10^4$	$1.04 \times 10^{-5}$	--	--
2-Butoxy-1-propanol	15821-83-7	0.98	--	$4.21 \times 10^4$	$1.30 \times 10^{-7}$	$4.88 \times 10^{-8}$	--
2-Butoxyethanol	111-76-2	0.57	0.83	$6.45 \times 10^4$	$9.79 \times 10^{-8}$	$2.08 \times 10^{-8}$	$1.60 \times 10^{-6}$
2-Dodecylbenzenesulfonic acid- N-(2-aminoethyl)ethane-1,2-diamine(1:1)	40139-72-8	4.78	--	0.7032	$6.27 \times 10^{-8}$	--	--
2-Ethoxyethanol	110-80-5	-0.42	-0.32	$7.55 \times 10^5$	$5.56 \times 10^{-8}$	$1.04 \times 10^{-8}$	$4.70 \times 10^{-7}$
2-Ethoxynaphthalene	93-18-5	3.74	--	38.32	$4.13 \times 10^{-5}$	$4.06 \times 10^{-4}$	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
2-Ethyl-1-hexanol	104-76-7	2.73	--	1,379	$3.10 \times 10^{-5}$	$4.66 \times 10^{-5}$	$2.65 \times 10^{-5}$
2-Ethyl-2-hexenal	645-62-5	2.62	--	548.6	$2.06 \times 10^{-4}$	$4.88 \times 10^{-4}$	--
2-Ethylhexyl benzoate	5444-75-7	5.19	--	1.061	$2.52 \times 10^{-4}$	$2.34 \times 10^{-4}$	--
2-Hydroxyethyl acrylate	818-61-1	-0.25	-0.21	$5.07 \times 10^5$	$4.49 \times 10^{-9}$	$7.22 \times 10^{-10}$	--
2-Hydroxyethylammonium hydrogen sulphite	13427-63-9	-1.61	-1.31	$1.00 \times 10^6$	$3.68 \times 10^{-10}$	$9.96 \times 10^{-11}$	--
2-Hydroxy-N,N-bis(2-hydroxyethyl)-N-methylethanaminium chloride	7006-59-9	-6.7	--	$1.00 \times 10^6$	$4.78 \times 10^{-19}$	--	--
2-Mercaptoethanol	60-24-2	-0.2	--	$1.94 \times 10^5$	$1.27 \times 10^{-7}$	$3.38 \times 10^{-8}$	$1.80 \times 10^{-7}$
2-Methoxyethanol	109-86-4	-0.91	-0.77	$1.00 \times 10^6$	$4.19 \times 10^{-8}$	$7.73 \times 10^{-9}$	$3.30 \times 10^{-7}$
2-Methyl-1-propanol	78-83-1	0.77	0.76	$9.71 \times 10^4$	$9.99 \times 10^{-6}$	$1.17 \times 10^{-5}$	$9.78 \times 10^{-6}$
2-Methyl-2,4-pentanediol	107-41-5	0.58	--	$3.26 \times 10^4$	$4.06 \times 10^{-7}$	$3.97 \times 10^{-10}$	--
2-Methyl-3(2H)-isothiazolone	2682-20-4	-0.83	--	$5.37 \times 10^5$	$4.96 \times 10^{-8}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
2-Methyl-3-butyn-2-ol	115-19-5	0.45	0.28	$2.40 \times 10^5$	$1.04 \times 10^{-6}$	--	$3.91 \times 10^{-6}$
2-Methylbutane	78-78-4	2.72	--	184.6	1.29	1.44	1.40
2-Methylquinoline hydrochloride	62763-89-7	2.69	2.59	498.5	$7.60 \times 10^{-7}$	$2.13 \times 10^{-6}$	--
2-Phosphono-1,2,4-butanetricarboxylic acid	37971-36-1	-1.66	--	$1.00 \times 10^6$	$1.17 \times 10^{-26}$	--	--
2-Phosphonobutane-1,2,4-tricarboxylic acid, potassium salt (1:x)	93858-78-7	-1.66	--	$1.00 \times 10^6$	$1.17 \times 10^{-26}$	--	--
2-Propenoic acid, 2-(2-hydroxyethoxy)ethyl ester	13533-05-6	-0.52	-0.3	$3.99 \times 10^5$	$6.98 \times 10^{-11}$	$1.54 \times 10^{-12}$	--
3-(Dimethylamino)propylamine	109-55-7	-0.45	--	$1.00 \times 10^6$	$6.62 \times 10^{-9}$	$4.45 \times 10^{-9}$	--
3,4,4-Trimethyloxazolidine	75673-43-7	0.13	--	$8.22 \times 10^5$	$6.63 \times 10^{-6}$	--	--
3,5,7-Triazatricyclo(3.3.1.1 <sup>3,7</sup> )decane, 1-(3-chloro-2-propenyl)-, chloride, (Z)-	51229-78-8	-5.92	--	$1.00 \times 10^6$	$1.76 \times 10^{-8}$	--	--
3,7-Dimethyl-2,6-octadienal	5392-40-5	3.45	--	84.71	$3.76 \times 10^{-4}$	$4.35 \times 10^{-5}$	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
3-Hydroxybutanal	107-89-1	-0.72	--	$1.00 \times 10^6$	$4.37 \times 10^{-9}$	$2.28 \times 10^{-9}$	--
3-Methoxypropylamine	5332-73-0	-0.42	--	$1.00 \times 10^6$	$1.56 \times 10^{-7}$	$1.94 \times 10^{-8}$	--
3-Phenylprop-2-enal	104-55-2	1.82	1.9	2,150	$1.60 \times 10^{-6}$	$3.38 \times 10^{-7}$	--
4,4-Dimethyloxazolidine	51200-87-4	-0.08	--	$1.00 \times 10^6$	$3.02 \times 10^{-6}$	--	--
4,6-Dimethyl-2-heptanone	19549-80-5	2.56	--	528.8	$2.71 \times 10^{-4}$	$4.55 \times 10^{-4}$	--
4-[Abieta-8,11,13-trien-18-yl(3-oxo-3-phenylpropyl)amino]butan-2-one hydrochloride	143106-84-7	7.72	--	0.002229	$2.49 \times 10^{-12}$	$1.20 \times 10^{-14}$	--
4-Ethyl-1-oct-3-yn-3-ol	5877-42-9	2.87	--	833.9	$4.27 \times 10^{-6}$	--	--
4-Hydroxy-3-methoxybenzaldehyde	121-33-5	1.05	1.21	6,875	$8.27 \times 10^{-11}$	$2.81 \times 10^{-9}$	$2.15 \times 10^{-9}$
4-Methoxybenzyl formate	122-91-8	1.61	--	2,679	$1.15 \times 10^{-6}$	$2.13 \times 10^{-6}$	--
4-Methoxyphenol	150-76-5	1.59	1.58	$1.65 \times 10^4$	$3.32 \times 10^{-8}$	$5.35 \times 10^{-7}$	--
4-Methyl-2-pentanol	108-11-2	1.68	--	$1.38 \times 10^4$	$1.76 \times 10^{-5}$	$3.88 \times 10^{-5}$	$4.45 \times 10^{-5}$

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
4-Methyl-2-pentanone	108-10-1	1.16	1.31	8,888	$1.16 \times 10^{-4}$	$1.34 \times 10^{-4}$	$1.38 \times 10^{-4}$
4-Nonylphenol	104-40-5	5.99	5.76	1.57	$5.97 \times 10^{-6}$	$1.23 \times 10^{-5}$	$3.40 \times 10^{-5}$
5-Chloro-2-methyl-3(2H)-isothiazolone	26172-55-4	-0.34	--	$1.49 \times 10^5$	$3.57 \times 10^{-8}$	--	--
Acetaldehyde	75-07-0	-0.17	-0.34	$2.57 \times 10^5$	$6.78 \times 10^{-5}$	$6.00 \times 10^{-5}$	$6.67 \times 10^{-5}$
Acetic acid	64-19-7	0.09	-0.17	$4.76 \times 10^5$	$5.48 \times 10^{-7}$	$2.94 \times 10^{-7}$	$1.00 \times 10^{-7}$
Acetic acid, C6-8-branched alkyl esters	90438-79-2	3.25	--	117.8	$9.60 \times 10^{-4}$	$1.07 \times 10^{-3}$	--
Acetic acid, hydroxy-, reaction products with triethanolamine	68442-62-6	-2.48	-1	$1.00 \times 10^6$	$4.18 \times 10^{-12}$	$3.38 \times 10^{-19}$	$7.05 \times 10^{-13}$
Acetic acid, mercapto-, monoammonium salt	5421-46-5	0.03	0.09	$2.56 \times 10^5$	$1.94 \times 10^{-8}$	--	--
Acetic anhydride	108-24-7	-0.58	--	$3.59 \times 10^5$	$3.57 \times 10^{-5}$	--	$5.71 \times 10^{-6}$
Acetone	67-64-1	-0.24	-0.24	$2.20 \times 10^5$	$4.96 \times 10^{-5}$	$3.97 \times 10^{-5}$	$3.50 \times 10^{-5}$
Acetonitrile, 2,2',2''-nitrilotris-	7327-60-8	-1.39	--	$1.00 \times 10^6$	$2.61 \times 10^{-15}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Acetophenone	98-86-2	1.67	1.58	4,484	$9.81 \times 10^{-6}$	$1.09 \times 10^{-5}$	$1.04 \times 10^{-5}$
Acetyltriethyl citrate	77-89-4	1.34	--	688.2	$6.91 \times 10^{-11}$	--	--
Acrolein	107-02-8	0.19	-0.01	$1.40 \times 10^5$	$3.58 \times 10^{-5}$	$1.94 \times 10^{-5}$	$1.22 \times 10^{-4}$
Acrylamide	79-06-1	-0.81	-0.67	$5.04 \times 10^5$	$5.90 \times 10^{-9}$	--	$1.70 \times 10^{-9}$
Acrylic acid	79-10-7	0.44	0.35	$1.68 \times 10^5$	$2.89 \times 10^{-7}$	$1.17 \times 10^{-7}$	$3.70 \times 10^{-7}$
Acrylic acid, with sodium-2-acrylamido-2-methyl-1-propanesulfonate and sodium phosphinate	110224-99-2	-2.19	--	$1.00 \times 10^6$	$5.18 \times 10^{-15}$	--	--
Alcohols, C10-12, ethoxylated	67254-71-1	5.47	--	0.9301	$1.95 \times 10^{-2}$	$2.03 \times 10^{-2}$	--
Alcohols, C11-14-iso-, C13-rich	68526-86-3	5.19	--	5.237	$1.28 \times 10^{-4}$	$2.62 \times 10^{-4}$	--
Alcohols, C11-14-iso-, C13-rich, ethoxylated	78330-21-9	4.91	--	5.237	$1.25 \times 10^{-6}$	$7.73 \times 10^{-7}$	--
Alcohols, C12-13, ethoxylated	66455-14-9	5.96	--	0.2995	$2.58 \times 10^{-2}$	$2.87 \times 10^{-2}$	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Alcohols, C12-14, ethoxylated propoxylated	68439-51-0	6.67	--	0.02971	$7.08 \times 10^{-4}$	$1.23 \times 10^{-4}$	--
Alcohols, C12-14-secondary	126950-60-5	5.19	--	5.237	$1.28 \times 10^{-4}$	$3.62 \times 10^{-4}$	--
Alcohols, C12-16, ethoxylated	68551-12-2	6.45	--	0.09603	$3.43 \times 10^{-2}$	$4.06 \times 10^{-2}$	--
Alcohols, C14-15, ethoxylated	68951-67-7	7.43	--	0.009765	$6.04 \times 10^{-2}$	$8.10 \times 10^{-2}$	--
Alcohols, C6-12, ethoxylated	68439-45-2	4.49	--	8.832	$1.10 \times 10^{-2}$	$1.02 \times 10^{-2}$	--
Alcohols, C7-9-iso-, C8-rich, ethoxylated	78330-19-5	2.46	--	1,513	$3.04 \times 10^{-7}$	$1.38 \times 10^{-7}$	--
Alcohols, C9-11, ethoxylated	68439-46-3	4.98	--	2.874	$1.47 \times 10^{-2}$	$1.44 \times 10^{-2}$	--
Alcohols, C9-11-iso-, C10-rich, ethoxylated	78330-20-8	4.9	--	3.321	$1.47 \times 10^{-2}$	$2.39 \times 10^{-2}$	--
Alkanes, C12-14-iso-	68551-19-9	6.65	--	0.03173	$1.24 \times 10^1$	$2.28 \times 10^1$	--
Alkanes, C13-16-iso-	68551-20-2	7.63	--	0.003311	$2.19 \times 10^1$	$4.55 \times 10^1$	--
Alkenes, C>10 alpha-	64743-02-8	8.55	--	0.0003941	8.09	$2.39 \times 10^1$	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Alkyl* dimethyl ethylbenzyl ammonium chloride *(50%C12, 30%C14, 17%C16, 3%C18)	85409-23-0_1	3.97	--	3.23	$1.11 \times 10^{-11}$	--	--
Alkyl* dimethyl ethylbenzyl ammonium chloride *(60%C14, 30%C16, 5%C12, 5%C18)	68956-79-6	4.95	--	0.3172	$1.96 \times 10^{-11}$	--	--
Alkylbenzenesulfonate, linear	42615-29-2	4.71	--	0.8126	$6.27 \times 10^{-8}$	--	--
alpha-Lactose monohydrate	5989-81-1	-5.12	--	$1.00 \times 10^6$	$4.47 \times 10^{-22}$	$9.81 \times 10^{-45}$	--
alpha-Terpineol	98-55-5	3.33	2.98	371.7	$1.58 \times 10^{-5}$	$3.15 \times 10^{-6}$	$1.22 \times 10^{-5}$
Amaranth	915-67-3	1.63	--	1.789	$1.49 \times 10^{-30}$	--	--
Aminotrimethylene phosphonic acid	6419-19-8	-5.45	-3.53	$1.00 \times 10^6$	$1.65 \times 10^{-34}$	--	--
Ammonium acetate	631-61-8	0.09	-0.17	$4.76 \times 10^5$	$5.48 \times 10^{-7}$	$2.94 \times 10^{-7}$	$1.00 \times 10^{-7}$
Ammonium acrylate	10604-69-0	0.44	0.35	$1.68 \times 10^5$	$2.89 \times 10^{-7}$	$1.17 \times 10^{-7}$	$3.70 \times 10^{-7}$
Ammonium citrate (1:1)	7632-50-0	-1.67	-1.64	$1.00 \times 10^6$	$8.33 \times 10^{-18}$	--	$4.33 \times 10^{-14}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Ammonium citrate (2:1)	3012-65-5	-1.67	-1.64	$1.00 \times 10^6$	$8.33 \times 10^{-18}$	--	$4.33 \times 10^{-14}$
Ammonium dodecyl sulfate	2235-54-3	2.42	--	163.7	$1.84 \times 10^{-7}$	--	--
Ammonium hydrogen carbonate	1066-33-7	-0.46	--	$8.42 \times 10^5$	$6.05 \times 10^{-9}$	--	--
Ammonium lactate	515-98-0	-0.65	-0.72	$1.00 \times 10^6$	$1.13 \times 10^{-7}$	--	$8.13 \times 10^{-8}$
Anethole	104-46-1	3.39	--	98.68	$2.56 \times 10^{-4}$	$2.23 \times 10^{-3}$	--
Aniline	62-53-3	1.08	0.9	$2.08 \times 10^4$	$1.90 \times 10^{-6}$	$2.18 \times 10^{-6}$	$2.02 \times 10^{-6}$
Benactyzine hydrochloride	57-37-4	2.89	--	292.1	$2.07 \times 10^{-10}$	--	--
Benzamorf	12068-08-5	4.71	--	0.8126	$6.27 \times 10^{-8}$	--	--
Benzene	71-43-2	1.99	2.13	2,000	$5.39 \times 10^{-3}$	$5.35 \times 10^{-3}$	$5.55 \times 10^{-3}$
Benzene, C10-16-alkyl derivatives	68648-87-3	8.43	9.36	0.0002099	$1.78 \times 10^{-1}$	$3.97 \times 10^{-1}$	--
Benzenesulfonic acid	98-11-3	-1.17	--	$6.90 \times 10^5$	$2.52 \times 10^{-9}$	--	--
Benzenesulfonic acid, (1-methylethyl)-,	37953-05-2	0.29	--	$2.46 \times 10^4$	$4.89 \times 10^{-9}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Benzenesulfonic acid, (1-methylethyl)-, ammonium salt	37475-88-0	0.29	--	$2.46 \times 10^4$	$4.89 \times 10^{-9}$	--	--
Benzenesulfonic acid, (1-methylethyl)-, sodium salt	28348-53-0	0.29	--	$2.46 \times 10^4$	$4.89 \times 10^{-9}$	--	--
Benzenesulfonic acid, C10-16-alkyl derivatives, compounds with cyclohexylamine	255043-08-4	4.71	--	0.8126	$6.27 \times 10^{-8}$	--	--
Benzenesulfonic acid, C10-16-alkyl derivatives, compounds with triethanolamine	68584-25-8	5.2	--	0.255	$8.32 \times 10^{-8}$	--	--
Benzenesulfonic acid, C10-16-alkyl derivatives, potassium salts	68584-27-0	5.2	--	0.255	$8.32 \times 10^{-8}$	--	--
Benzenesulfonic acid, dodecyl-, branched, compounds with 2-propanamine	90218-35-2	4.49	--	1.254	$6.27 \times 10^{-8}$	--	--
Benzenesulfonic acid, mono-C10-16-alkyl derivatives, sodium salts	68081-81-2	4.22	--	2.584	$4.72 \times 10^{-8}$	--	--
Benzoic acid	65-85-0	1.87	1.87	2,493	$1.08 \times 10^{-7}$	$4.55 \times 10^{-8}$	$3.81 \times 10^{-8}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Benzyl chloride	100-44-7	2.79	2.3	1,030	$2.09 \times 10^{-3}$	$3.97 \times 10^{-4}$	$4.12 \times 10^{-4}$
Benzyltrimethylammonium chloride	139-07-1	2.93	--	36.47	$7.61 \times 10^{-12}$	--	--
Benzylhexadecyldimethylammonium chloride	122-18-9	4.89	--	0.3543	$2.36 \times 10^{-11}$	--	--
Benzyltrimethylammonium chloride	56-93-9	-2.47	--	$1.00 \times 10^6$	$3.37 \times 10^{-13}$	--	--
Bicine	150-25-4	-3.27	--	$3.52 \times 10^5$	$1.28 \times 10^{-14}$	--	--
Bis(1-methylethyl)naphthalenesulfonic acid, cyclohexylamine salt	68425-61-6	2.92	--	43.36	$9.29 \times 10^{-10}$	--	--
Bis(2-chloroethyl) ether	111-44-4	1.56	1.29	6,435	$1.89 \times 10^{-4}$	$4.15 \times 10^{-7}$	$1.70 \times 10^{-5}$
Bisphenol A	80-05-7	3.64	3.32	172.7	$9.16 \times 10^{-12}$	--	--
Bronopol	52-51-7	-1.51	--	$8.37 \times 10^5$	$6.35 \times 10^{-21}$	--	--
Butane	106-97-8	2.31	2.89	135.6	$9.69 \times 10^{-1}$	$8.48 \times 10^{-1}$	$9.50 \times 10^{-1}$

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Butanedioic acid, sulfo-, 1,4-bis(1,3-dimethylbutyl) ester, sodium salt	2373-38-8	3.98	--	0.1733	$1.61 \times 10^{-12}$	--	--
Butene	25167-67-3	2.17	2.4	354.8	$2.03 \times 10^{-1}$	$2.68 \times 10^{-1}$	$2.33 \times 10^{-1}$
Butyl glycidyl ether	2426-08-6	1.08	0.63	$2.66 \times 10^4$	$4.37 \times 10^{-6}$	$5.23 \times 10^{-7}$	$2.47 \times 10^{-5}$
Butyl lactate	138-22-7	0.8	--	$5.30 \times 10^4$	$8.49 \times 10^{-5}$	--	$1.92 \times 10^{-6}$
Butyryl trihexyl citrate	82469-79-2	8.21	--	$5.56 \times 10^{-5}$	$3.65 \times 10^{-9}$	--	--
C.I. Acid Red 1	3734-67-6	0.51	--	6.157	$3.73 \times 10^{-29}$	--	--
C.I. Acid Violet 12, disodium salt	6625-46-3	0.59	--	3.379	$2.21 \times 10^{-30}$	--	--
C.I. Pigment Red 5	6410-41-9	7.65	--	$4.38 \times 10^{-5}$	$4.36 \times 10^{-21}$	--	--
C.I. Solvent Red 26	4477-79-6	9.27	--	$5.68 \times 10^{-5}$	$5.48 \times 10^{-13}$	$4.66 \times 10^{-13}$	--
C10-16-Alkyldimethylamines oxides	70592-80-2	2.87	--	89.63	$1.14 \times 10^{-13}$	--	--
C10-C16 Ethoxylated alcohol	68002-97-1	4.99	--	4.532	$1.25 \times 10^{-6}$	$4.66 \times 10^{-7}$	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
C12-14 tert-Alkyl ethoxylated amines	73138-27-9	3.4	--	264.2	$1.29 \times 10^{-10}$	--	--
Calcium dodecylbenzene sulfonate	26264-06-2	4.71	--	0.8126	$6.27 \times 10^{-8}$	--	--
Camphor	76-22-2	3.04	2.38	339.1	$7.00 \times 10^{-5}$	--	$8.10 \times 10^{-5}$
Carbon dioxide	124-38-9	0.83	0.83	$2.57 \times 10^4$	$1.52 \times 10^{-2}$	--	$1.52 \times 10^{-2}$
Carbonic acid, dipotassium salt	584-08-7	-0.46	--	$8.42 \times 10^5$	$6.05 \times 10^{-9}$	--	--
Choline bicarbonate	78-73-9	-5.16	--	$1.00 \times 10^6$	$2.03 \times 10^{-16}$	--	--
Choline chloride	67-48-1	-5.16	--	$1.00 \times 10^6$	$2.03 \times 10^{-16}$	--	--
Citric acid	77-92-9	-1.67	-1.64	$1.00 \times 10^6$	$8.33 \times 10^{-18}$	--	$4.33 \times 10^{-14}$
Citronellol	106-22-9	3.56	3.91	105.5	$5.68 \times 10^{-5}$	$2.13 \times 10^{-5}$	--
Coconut trimethylammonium chloride	61789-18-2	1.22	--	2,816	$9.42 \times 10^{-11}$	--	--
Coumarin	91-64-5	1.51	1.39	5,126	$6.95 \times 10^{-6}$	--	$9.92 \times 10^{-8}$
Cumene	98-82-8	3.45	3.66	75.03	$1.05 \times 10^{-2}$	$1.23 \times 10^{-2}$	$1.15 \times 10^{-2}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Cyclohexane	110-82-7	3.18	3.44	43.02	$2.55 \times 10^{-1}$	$1.94 \times 10^{-1}$	$1.50 \times 10^{-1}$
Cyclohexanol	108-93-0	1.64	1.23	$3.37 \times 10^4$	$4.90 \times 10^{-6}$	$3.70 \times 10^{-6}$	$4.40 \times 10^{-6}$
Cyclohexanone	108-94-1	1.13	0.81	$2.41 \times 10^4$	$5.11 \times 10^{-5}$	$1.28 \times 10^{-5}$	$9.00 \times 10^{-6}$
Cyclohexylamine sulfate	19834-02-7	1.63	1.49	$6.40 \times 10^4$	$1.38 \times 10^{-5}$	--	$4.16 \times 10^{-6}$
D&C Red no. 28	18472-87-2	9.62	--	$1.64 \times 10^{-8}$	$6.37 \times 10^{-21}$	--	--
D&C Red no. 33	3567-66-6	0.48	--	11.87	$1.15 \times 10^{-26}$	--	--
Daidzein	486-66-8	2.55	--	568.4	$3.91 \times 10^{-16}$	--	--
Dapsone	80-08-0	0.77	0.97	3,589	$3.11 \times 10^{-14}$	--	--
Dazomet	533-74-4	0.94	0.63	$1.94 \times 10^4$	$2.84 \times 10^{-3}$	--	$4.98 \times 10^{-10}$
Decyldimethylamine	1120-24-7	4.46	--	82.23	$4.68 \times 10^{-4}$	$2.45 \times 10^{-3}$	--
D-Glucitol	50-70-4	-3.01	-2.2	$1.00 \times 10^6$	$7.26 \times 10^{-13}$	$2.94 \times 10^{-29}$	--
D-Gluconic acid	526-95-4	-1.87	--	$1.00 \times 10^6$	$4.74 \times 10^{-13}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
D-Glucopyranoside, methyl	3149-68-6	-2.5	--	$1.00 \times 10^6$	$1.56 \times 10^{-14}$	$2.23 \times 10^{-24}$	--
D-Glucose	50-99-7	-2.89	-3.24	$1.00 \times 10^6$	$9.72 \times 10^{-15}$	$1.62 \times 10^{-26}$	--
Di(2-ethylhexyl) phthalate	117-81-7	8.39	7.6	0.001132	$1.18 \times 10^{-5}$	$1.02 \times 10^{-5}$	$2.70 \times 10^{-7}$
Dibromoacetonitrile	3252-43-5	0.47	--	9,600	$4.06 \times 10^{-7}$	--	--
Dichloromethane	75-09-2	1.34	1.25	$1.10 \times 10^4$	$9.14 \times 10^{-3}$	$3.01 \times 10^{-3}$	$3.25 \times 10^{-3}$
Didecyldimethylammonium chloride	7173-51-5	4.66	--	0.9	$6.85 \times 10^{-10}$	--	--
Diethanolamine	111-42-2	-1.71	-1.43	$1.00 \times 10^6$	$3.92 \times 10^{-11}$	$3.46 \times 10^{-15}$	$3.87 \times 10^{-11}$
Diethylbenzene	25340-17-4	4.07	3.72	58.86	$1.16 \times 10^{-2}$	$1.47 \times 10^{-2}$	$2.61 \times 10^{-3}$
Diethylene glycol	111-46-6	-1.47	--	$1.00 \times 10^6$	$2.03 \times 10^{-9}$	$1.20 \times 10^{-13}$	--
Diethylene glycol monomethyl ether	111-77-3	-1.18	--	$1.00 \times 10^6$	$6.50 \times 10^{-10}$	$1.65 \times 10^{-11}$	--
Diethylenetriamine	111-40-0	-2.13	--	$1.00 \times 10^6$	$3.10 \times 10^{-13}$	$1.09 \times 10^{-14}$	--
Diisobutyl ketone	108-83-8	2.56	--	528.8	$2.71 \times 10^{-4}$	$4.55 \times 10^{-4}$	$1.17 \times 10^{-4}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Diisopropanolamine	110-97-4	-0.88	-0.82	$1.00 \times 10^6$	$6.91 \times 10^{-11}$	$1.90 \times 10^{-14}$	--
Diisopropylnaphthalene	38640-62-9	6.08	--	0.2421	$1.99 \times 10^{-3}$	$1.94 \times 10^{-3}$	--
Dimethyl adipate	627-93-0	1.39	1.03	7,749	$9.77 \times 10^{-7}$	$1.28 \times 10^{-7}$	$2.31 \times 10^{-6}$
Dimethyl glutarate	1119-40-0	0.9	0.62	$2.02 \times 10^4$	$7.36 \times 10^{-7}$	$9.09 \times 10^{-8}$	$6.43 \times 10^{-7}$
Dimethyl succinate	106-65-0	0.4	0.35	$3.96 \times 10^4$	$5.54 \times 10^{-7}$	$6.43 \times 10^{-8}$	--
Dimethylaminoethanol	108-01-0	-0.94	--	$1.00 \times 10^6$	$1.77 \times 10^{-9}$	$1.77 \times 10^{-9}$	$3.73 \times 10^{-7}$
Dimethyldiallylammonium chloride	7398-69-8	-2.49	--	$1.00 \times 10^6$	$7.20 \times 10^{-12}$	--	--
Diphenyl oxide	101-84-8	4.05	4.21	15.58	$1.18 \times 10^{-4}$	$2.81 \times 10^{-4}$	$2.79 \times 10^{-4}$
Dipropylene glycol	25265-71-8	-0.64	--	$3.11 \times 10^5$	$3.58 \times 10^{-9}$	$6.29 \times 10^{-10}$	--
Di-sec-butylphenol	31291-60-8	5.41	--	3.723	$3.74 \times 10^{-6}$	$6.89 \times 10^{-6}$	--
Disodium dodecyl(sulphonatophenoxy)benzenesulp honate	28519-02-0	5.05	--	0.0353	$6.40 \times 10^{-16}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Disodium ethylenediaminediacetate	38011-25-5	-4.79	--	$1.00 \times 10^6$	$1.10 \times 10^{-16}$	--	--
Disodium ethylenediaminetetraacetate dihydrate	6381-92-6	-3.86	--	$2.28 \times 10^5$	$1.17 \times 10^{-23}$	--	$5.77 \times 10^{-16}$
D-Lactic acid	10326-41-7	-0.65	-0.72	$1.00 \times 10^6$	$1.13 \times 10^{-7}$	--	$8.13 \times 10^{-8}$
D-Limonene	5989-27-5	4.83	4.57	4.581	$3.80 \times 10^{-1}$	--	$3.19 \times 10^{-2}$
Docusate sodium	577-11-7	6.1	--	0.001227	$5.00 \times 10^{-12}$	--	--
Dodecane	112-40-3	6.23	6.1	0.1099	9.35	$1.34 \times 10^1$	8.18
Dodecylbenzene	123-01-3	7.94	8.65	0.001015	$1.34 \times 10^{-1}$	$2.81 \times 10^{-1}$	--
Dodecylbenzenesulfonic acid	27176-87-0	4.71	--	0.8126	$6.27 \times 10^{-8}$	--	--
Dodecylbenzenesulfonic acid, monoethanolamine salt	26836-07-7	4.71	--	0.8126	$6.27 \times 10^{-8}$	--	--
Epichlorohydrin	106-89-8	0.63	0.45	$5.06 \times 10^4$	$5.62 \times 10^{-5}$	$2.62 \times 10^{-6}$	$3.04 \times 10^{-5}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Ethanaminium, N,N,N-trimethyl-2-[(1-oxo-2-propenyl)oxy]-, chloride	44992-01-0	-3.1	--	$1.00 \times 10^6$	$6.96 \times 10^{-15}$	--	--
Ethane	74-84-0	1.32	1.81	938.6	$5.50 \times 10^{-1}$	$4.25 \times 10^{-1}$	$5.00 \times 10^{-1}$
Ethanol	64-17-5	-0.14	-0.31	$7.92 \times 10^5$	$5.67 \times 10^{-6}$	$4.88 \times 10^{-6}$	$5.00 \times 10^{-6}$
Ethanol, 2,2',2''-nitriлотris-, tris(dihydrogen phosphate) (ester), sodium salt	68171-29-9	-3.13	--	$1.00 \times 10^6$	$3.08 \times 10^{-36}$	--	--
Ethanol, 2-[2-[2-(tridecyloxy)ethoxy]ethoxy]-, hydrogen sulfate, sodium salt	25446-78-0	2.09	--	42	$9.15 \times 10^{-13}$	--	--
Ethanolamine	141-43-5	-1.61	-1.31	$1.00 \times 10^6$	$3.68 \times 10^{-10}$	$9.96 \times 10^{-11}$	--
Ethoxylated dodecyl alcohol	9002-92-0	4.5	--	14.19	$9.45 \times 10^{-7}$	$3.30 \times 10^{-7}$	--
Ethyl acetate	141-78-6	0.86	0.73	$2.99 \times 10^4$	$2.33 \times 10^{-4}$	$1.58 \times 10^{-4}$	$1.34 \times 10^{-4}$
Ethyl acetoacetate	141-97-9	-0.2	0.25	$5.62 \times 10^4$	$1.57 \times 10^{-7}$	--	$1.20 \times 10^{-6}$
Ethyl benzoate	93-89-0	2.32	2.64	421.5	$4.61 \times 10^{-5}$	$2.45 \times 10^{-5}$	$7.33 \times 10^{-5}$

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Ethyl lactate	97-64-3	-0.18	--	$4.73 \times 10^5$	$4.82 \times 10^{-5}$	--	$5.83 \times 10^{-7}$
Ethyl salicylate	118-61-6	3.09	2.95	737.1	$6.04 \times 10^{-6}$	$3.01 \times 10^{-9}$	--
Ethylbenzene	100-41-4	3.03	3.15	228.6	$7.89 \times 10^{-3}$	$8.88 \times 10^{-3}$	$7.88 \times 10^{-3}$
Ethylene	74-85-1	1.27	1.13	3,449	$9.78 \times 10^{-2}$	$1.62 \times 10^{-1}$	$2.28 \times 10^{-1}$
Ethylene glycol	107-21-1	-1.2	-1.36	$1.00 \times 10^6$	$1.31 \times 10^{-7}$	$5.60 \times 10^{-11}$	$6.00 \times 10^{-8}$
Ethylene oxide	75-21-8	-0.05	-0.3	$2.37 \times 10^5$	$1.20 \times 10^{-4}$	$5.23 \times 10^{-5}$	$1.48 \times 10^{-4}$
Ethylenediamine	107-15-3	-1.62	-2.04	$1.00 \times 10^6$	$1.03 \times 10^{-9}$	$1.77 \times 10^{-10}$	$1.73 \times 10^{-9}$
Ethylenediaminetetraacetic acid	60-00-4	-3.86	--	$2.28 \times 10^5$	$1.17 \times 10^{-23}$	--	$5.77 \times 10^{-16}$
Ethylenediaminetetraacetic acid tetrasodium salt	64-02-8	-3.86	--	$2.28 \times 10^5$	$1.17 \times 10^{-23}$	--	$5.77 \times 10^{-16}$
Ethylenediaminetetraacetic acid, disodium salt	139-33-3	-3.86	--	$2.28 \times 10^5$	$1.17 \times 10^{-23}$	--	$5.77 \times 10^{-16}$
Ethyne	74-86-2	0.5	0.37	$1.48 \times 10^4$	$2.40 \times 10^{-2}$	$2.45 \times 10^{-2}$	$2.17 \times 10^{-2}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Fatty acids, C18-unsaturated, dimers	61788-89-4	14.6	--	$2.31 \times 10^{-10}$	$4.12 \times 10^{-8}$	$9.74 \times 10^{-9}$	--
FD&C Blue no. 1	3844-45-9	-0.15	--	0.2205	$2.25 \times 10^{-35}$	--	--
FD&C Yellow no. 5	1934-21-0	-1.82	--	7.388	$1.31 \times 10^{-28}$	--	--
FD&C Yellow no. 6	2783-94-0	1.4	--	242.7	$3.26 \times 10^{-23}$	--	--
Formaldehyde	50-00-0	0.35	0.35	$5.70 \times 10^4$	$9.29 \times 10^{-5}$	$6.14 \times 10^{-5}$	$3.37 \times 10^{-7}$
Formamide	75-12-7	-1.61	-1.51	$1.00 \times 10^6$	$1.53 \times 10^{-8}$	--	$1.39 \times 10^{-9}$
Formic acid	64-18-6	-0.46	-0.54	$9.55 \times 10^5$	$7.50 \times 10^{-7}$	$5.11 \times 10^{-7}$	$1.67 \times 10^{-7}$
Formic acid, potassium salt	590-29-4	-0.46	-0.54	$9.55 \times 10^5$	$7.50 \times 10^{-7}$	$5.11 \times 10^{-7}$	$1.67 \times 10^{-7}$
Fumaric acid	110-17-8	0.05	-0.48	$1.04 \times 10^5$	$1.35 \times 10^{-12}$	$8.48 \times 10^{-14}$	--
Furfural	98-01-1	0.83	0.41	$5.36 \times 10^4$	$1.34 \times 10^{-5}$	--	$3.77 \times 10^{-6}$
Furfuryl alcohol	98-00-0	0.45	0.28	$2.21 \times 10^5$	$2.17 \times 10^{-7}$	--	$7.86 \times 10^{-8}$
Galantamine hydrobromide	69353-21-5	2.29	--	1,606	$1.70 \times 10^{-13}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Gluconic acid	133-42-6	-1.87	--	$1.00 \times 10^6$	$4.74 \times 10^{-13}$	--	--
Glutaraldehyde	111-30-8	-0.18	--	$1.67 \times 10^5$	$1.10 \times 10^{-7}$	$2.39 \times 10^{-8}$	--
Glycerol	56-81-5	-1.65	-1.76	$1.00 \times 10^6$	$6.35 \times 10^{-9}$	$1.51 \times 10^{-15}$	$1.73 \times 10^{-8}$
Glycine, N-(carboxymethyl)-N-(2-hydroxyethyl)-, disodium salt	135-37-5	-3.04	--	$1.90 \times 10^5$	$3.90 \times 10^{-17}$	--	--
Glycine, N-(hydroxymethyl)-, monosodium salt	70161-44-3	-3.41	--	$7.82 \times 10^5$	$1.80 \times 10^{-12}$	--	--
Glycine, N,N-bis(carboxymethyl)-, trisodium salt	5064-31-3	-3.81	--	$7.39 \times 10^5$	$1.19 \times 10^{-16}$	--	--
Glycine, N-[2-bis(carboxymethyl)amino]ethyl]-N-(2-hydroxyethyl)-, trisodium salt	139-89-9	-4.09	--	$4.31 \times 10^5$	$3.81 \times 10^{-24}$	--	--
Glycolic acid	79-14-1	-1.07	-1.11	$1.00 \times 10^6$	$8.54 \times 10^{-8}$	$6.29 \times 10^{-11}$	--
Glycolic acid sodium salt	2836-32-0	-1.07	-1.11	$1.00 \times 10^6$	$8.54 \times 10^{-8}$	$6.29 \times 10^{-11}$	--
Glyoxal	107-22-2	-1.66	--	$1.00 \times 10^6$	$3.70 \times 10^{-7}$	--	$3.33 \times 10^{-9}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Glyoxylic acid	298-12-4	-1.4	--	$1.00 \times 10^6$	$2.98 \times 10^{-9}$	--	--
Heptane	142-82-5	3.78	4.66	3.554	2.27	2.39	2.00
Hexadecyltrimethylammonium bromide	57-09-0	3.18	--	28.77	$2.93 \times 10^{-10}$	--	--
Hexane	110-54-3	3.29	3.9	17.24	1.71	1.69	1.80
Hexanedioic acid	124-04-9	0.23	0.08	$1.67 \times 10^5$	$9.53 \times 10^{-12}$	$8.10 \times 10^{-13}$	$4.71 \times 10^{-12}$
Hydroxyvaleric acid	1619-16-5	3.31	--	282.1	--	--	--
Indole	120-72-9	2.05	2.14	1,529	$8.86 \times 10^{-7}$	$1.99 \times 10^{-6}$	$5.28 \times 10^{-7}$
Isoascorbic acid	89-65-6	-1.88	-1.85	$1.00 \times 10^6$	$4.07 \times 10^{-8}$	--	--
Isobutane	75-28-5	2.23	2.76	175.1	$9.69 \times 10^{-1}$	1.02	1.19
Isobutene	115-11-7	2.23	2.34	399.2	$2.40 \times 10^{-1}$	$2.34 \times 10^{-1}$	$2.18 \times 10^{-1}$
Isooctanol	26952-21-6	2.73	--	1,379	$3.10 \times 10^{-5}$	$4.66 \times 10^{-5}$	$9.21 \times 10^{-5}$
Isopentyl alcohol	123-51-3	1.26	1.16	$4.16 \times 10^4$	$1.33 \times 10^{-5}$	$1.65 \times 10^{-5}$	$1.41 \times 10^{-5}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Isopropanol	67-63-0	0.28	0.05	$4.02 \times 10^5$	$7.52 \times 10^{-6}$	$1.14 \times 10^{-5}$	$8.10 \times 10^{-6}$
Isopropanolamine dodecylbenzene	42504-46-1	7.94	8.65	0.001015	$1.34 \times 10^{-1}$	$2.81 \times 10^{-1}$	--
Isopropylamine	75-31-0	0.27	0.26	$8.38 \times 10^5$	$1.34 \times 10^{-5}$	--	$4.51 \times 10^{-5}$
Isoquinoline	119-65-3	2.14	2.08	1,551	$6.88 \times 10^{-7}$	$4.15 \times 10^{-7}$	--
Isoquinoline, reaction products with benzyl chloride and quinoline	68909-80-8	2.14	2.08	1,551	$6.88 \times 10^{-7}$	$4.15 \times 10^{-7}$	--
Isoquinolinium, 2-(phenylmethyl)-, chloride	35674-56-7	4.4	--	6.02	$1.19 \times 10^{-6}$	--	--
Lactic acid	50-21-5	-0.65	-0.72	$1.00 \times 10^6$	$1.13 \times 10^{-7}$	--	$8.13 \times 10^{-8}$
Lactose	63-42-3	-5.12	--	$1.00 \times 10^6$	$4.47 \times 10^{-22}$	$9.81 \times 10^{-45}$	--
Lauryl hydroxysultaine	13197-76-7	-1.3	--	$7.71 \times 10^4$	$1.04 \times 10^{-21}$	--	--
L-Dilactide	4511-42-6	1.65	--	3,165	$1.22 \times 10^{-5}$	--	--
L-Glutamic acid	56-86-0	-3.83	-3.69	$9.42 \times 10^5$	$1.47 \times 10^{-14}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
L-Lactic acid	79-33-4	-0.65	-0.72	$1.00 \times 10^6$	$1.13 \times 10^{-7}$	--	$8.13 \times 10^{-8}$
Methane	74-82-8	0.78	1.09	2,610	$4.14 \times 10^{-1}$	$6.58 \times 10^{-1}$	$6.58 \times 10^{-1}$
Methanol	67-56-1	-0.63	-0.77	$1.00 \times 10^6$	$4.27 \times 10^{-6}$	$3.62 \times 10^{-6}$	$4.55 \times 10^{-6}$
Methenamine	100-97-0	-4.15	--	$1.00 \times 10^6$	$1.63 \times 10^{-1}$	--	$1.64 \times 10^{-9}$
Methoxyacetic acid	625-45-6	-0.68	--	$1.00 \times 10^6$	$4.54 \times 10^{-8}$	$8.68 \times 10^{-9}$	$6.42 \times 10^{-9}$
Methyl salicylate	119-36-8	2.6	2.55	1,875	$4.55 \times 10^{-6}$	$2.23 \times 10^{-9}$	$9.81 \times 10^{-5}$
Methyl vinyl ketone	78-94-4	0.41	--	$6.06 \times 10^4$	$2.61 \times 10^{-5}$	$1.38 \times 10^{-5}$	$4.65 \times 10^{-5}$
Methylcyclohexane	108-87-2	3.59	3.61	28.4	$3.39 \times 10^{-1}$	$3.30 \times 10^{-1}$	$4.30 \times 10^{-1}$
Methylene bis(thiocyanate)	6317-18-6	0.62	--	$2.72 \times 10^4$	$2.61 \times 10^{-8}$	--	--
Methylenebis(5-methyloxazolidine)	66204-44-2	-0.58	--	$1.00 \times 10^6$	$1.07 \times 10^{-7}$	--	--
Morpholine	110-91-8	-0.56	-0.86	$1.00 \times 10^6$	$1.14 \times 10^{-7}$	$3.22 \times 10^{-9}$	$1.16 \times 10^{-6}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Morpholinium, 4-ethyl-4-hexadecyl-, ethyl sulfate	78-21-7	4.54	--	0.9381	$2.66 \times 10^{-12}$	--	--
N-(2-Acryloyloxyethyl)-N-benzyl-N,N-dimethylammonium chloride	46830-22-2	-1.39	--	$4.42 \times 10^5$	$5.62 \times 10^{-16}$	--	--
N-(3-Chloroallyl)hexaminium chloride	4080-31-3	-5.92	--	$1.00 \times 10^6$	$1.76 \times 10^{-8}$	--	--
N,N,N-Trimethyl-3-((1-oxooctadecyl)amino)-1-propanaminium methyl sulfate	19277-88-4	4.38	--	0.7028	$2.28 \times 10^{-16}$	--	--
N,N,N-Trimethyloctadecan-1-aminium chloride	112-03-8	4.17	--	2.862	$5.16 \times 10^{-10}$	--	--
N,N'-Dibutylthiourea	109-46-6	2.57	2.75	2,287	$4.17 \times 10^{-6}$	--	--
N,N-Dimethyldecylamine oxide	2605-79-0	1.4	--	2,722	$4.88 \times 10^{-14}$	--	--
N,N-Dimethylformamide	68-12-2	-0.93	-1.01	$9.78 \times 10^5$	$7.38 \times 10^{-8}$	--	$7.39 \times 10^{-8}$
N,N-Dimethylmethanamine hydrochloride	593-81-7	0.04	0.16	$1.00 \times 10^6$	$3.65 \times 10^{-5}$	$1.28 \times 10^{-4}$	$1.04 \times 10^{-4}$

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
N,N-Dimethyl-methanamine-N-oxide	1184-78-7	-3.02	--	$1.00 \times 10^6$	$3.81 \times 10^{-15}$	--	--
N,N-dimethyloctadecylamine hydrochloride	1613-17-8	8.39	--	0.008882	$4.51 \times 10^{-3}$	$3.88 \times 10^{-2}$	--
N,N'-Methylenebisacrylamide	110-26-9	-1.52	--	$7.01 \times 10^4$	$1.14 \times 10^{-9}$	--	--
Naphthalene	91-20-3	3.17	3.3	142.1	$5.26 \times 10^{-4}$	$3.70 \times 10^{-4}$	$4.40 \times 10^{-4}$
Naphthalenesulfonic acid, bis(1- methylethyl)-	28757-00-8	2.92	--	43.36	$9.29 \times 10^{-10}$	--	--
Naphthalenesulphonic acid, bis (1- methylethyl)-methyl derivatives	99811-86-6	4.02	--	3.45	$1.13 \times 10^{-9}$	--	--
Naphthenic acid ethoxylate	68410-62-8	3.41	--	112.5	$3.62 \times 10^{-8}$	$2.74 \times 10^{-9}$	--
Nitrilotriacetamide	4862-18-4	-4.75	--	$1.00 \times 10^6$	$1.61 \times 10^{-18}$	--	--
Nitrilotriacetic acid	139-13-9	-3.81	--	$7.39 \times 10^5$	$1.19 \times 10^{-16}$	--	--
Nitrilotriacetic acid trisodium monohydrate	18662-53-8	-3.81	--	$7.39 \times 10^5$	$1.19 \times 10^{-16}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility Estimate from log $K_{ow}$ (mg/L at 25°C)	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured		Bond method	Group method 25	Measured
N-Methyl-2-pyrrolidone	872-50-4	-0.11	-0.38	$2.48 \times 10^5$	$3.16 \times 10^{-8}$	--	$3.20 \times 10^{-9}$
N-Methyldiethanolamine	105-59-9	-1.5	--	$1.00 \times 10^6$	$8.61 \times 10^{-11}$	$2.45 \times 10^{-14}$	$3.14 \times 10^{-11}$
N-Methylethanolamine	109-83-1	-1.15	-0.94	$1.00 \times 10^6$	$8.07 \times 10^{-10}$	$2.50 \times 10^{-10}$	--
N-Methyl-N-hydroxyethyl-N-hydroxyethoxyethylamine	68213-98-9	-1.78	--	$1.00 \times 10^6$	$1.34 \times 10^{-12}$	$5.23 \times 10^{-17}$	--
N-Oleyl diethanolamide	13127-82-7	6.63	--	0.1268	$9.35 \times 10^{-9}$	$1.94 \times 10^{-12}$	--
Oleic acid	112-80-1	7.73	7.64	0.01151	$4.48 \times 10^{-5}$	$1.94 \times 10^{-5}$	--
Pentaethylenehexamine	4067-16-7	-3.67	--	$1.00 \times 10^6$	$8.36 \times 10^{-24}$	$2.56 \times 10^{-27}$	--
Pentane	109-66-0	2.8	3.39	49.76	1.29	1.20	1.25
Pentyl acetate	628-63-7	2.34	2.3	996.8	$5.45 \times 10^{-4}$	$4.45 \times 10^{-4}$	$3.88 \times 10^{-4}$
Pentyl butyrate	540-18-1	3.32	--	101.9	$9.60 \times 10^{-4}$	$8.88 \times 10^{-4}$	--
Peracetic acid	79-21-0	-1.07	--	$1.00 \times 10^6$	$1.39 \times 10^{-6}$	--	$2.14 \times 10^{-6}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Phenanthrene	85-01-8	4.35	4.46	0.677	$5.13 \times 10^{-5}$	$2.56 \times 10^{-5}$	$4.23 \times 10^{-5}$
Phenol	108-95-2	1.51	1.46	$2.62 \times 10^4$	$5.61 \times 10^{-7}$	$6.58 \times 10^{-7}$	$3.33 \times 10^{-7}$
Phosphonic acid (dimethylamino(methylene))	29712-30-9	-1.9	--	$1.00 \times 10^6$	$1.00 \times 10^{-24}$	--	--
Phosphonic acid, (((2-[(2-hydroxyethyl) (phosphonomethyl)amino)ethyl)imino]bis (methylene))bis-, compd. with 2- aminoethanol	129828-36-0	-6.73	--	$1.00 \times 10^6$	$5.29 \times 10^{-42}$	--	--
Phosphonic acid, (1-hydroxyethylidene) bis-, potassium salt	67953-76-8	-0.01	--	$1.34 \times 10^5$	$9.79 \times 10^{-26}$	--	--
Phosphonic acid, (1-hydroxyethylidene) bis-, tetrasodium salt	3794-83-0	-0.01	--	$1.34 \times 10^5$	$9.79 \times 10^{-26}$	--	--
Phosphonic acid, [[[phosphonomethyl) imino]bis[2,1-ethanediylnitrilobis (methylene)]]]tetrakis-	15827-60-8	-9.72	--	$1.00 \times 10^6$	--	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm·m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Phosphonic acid, [[[phosphonomethyl) imino]bis[2,1-ethanediylnitrilobis (methylene)]]]tetrakis-, ammonium salt (1:x)	70714-66-8	-9.72	--	$1.00 \times 10^6$	--	--	--
Phosphonic acid, [[[phosphonomethyl) imino]bis[2,1-ethanediylnitrilobis (methylene)]]]tetrakis-, sodium salt	22042-96-2	-9.72	--	$1.00 \times 10^6$	--	--	--
Phosphonic acid, [[[phosphonomethyl) imino]bis[6,1-hexanediylnitrilobis (methylene)]]]tetrakis-	34690-00-1	-5.79	--	$1.00 \times 10^6$	--	--	--
Phthalic anhydride	85-44-9	2.07	1.6	3,326	$6.35 \times 10^{-6}$	--	$1.63 \times 10^{-8}$
Poly(oxy-1,2-ethanediyl), .alpha.-(octylphenyl)-.omega.-hydroxy-, branched	68987-90-6	5.01	--	3.998	$1.24 \times 10^{-7}$	$1.07 \times 10^{-6}$	--
Potassium acetate	127-08-2	0.09	-0.17	$4.76 \times 10^5$	$5.48 \times 10^{-7}$	$2.94 \times 10^{-7}$	$1.00 \times 10^{-7}$
Potassium oleate	143-18-0	7.73	7.64	0.01151	$4.48 \times 10^{-5}$	$1.94 \times 10^{-5}$	--
Propane	74-98-6	1.81	2.36	368.9	$7.30 \times 10^{-1}$	$6.00 \times 10^{-1}$	$7.07 \times 10^{-1}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Propanol, 1(or 2)-(2-methoxymethylethoxy)-	34590-94-8	-0.27	--	$4.27 \times 10^5$	$1.15 \times 10^{-9}$	$1.69 \times 10^{-9}$	--
Propargyl alcohol	107-19-7	-0.42	-0.38	$9.36 \times 10^5$	$5.88 \times 10^{-7}$	--	$1.15 \times 10^{-6}$
Propylene carbonate	108-32-7	0.08	-0.41	$2.58 \times 10^5$	$3.63 \times 10^{-4}$	--	$3.45 \times 10^{-8}$
Propylene pentamer	15220-87-8	6.28	--	0.05601	$3.92 \times 10^{-1}$	$1.09 \times 10^{-3}$	--
p-Xylene	106-42-3	3.09	3.15	228.6	$6.56 \times 10^{-3}$	$6.14 \times 10^{-3}$	$6.90 \times 10^{-3}$
Pyrimidine	289-95-2	-0.06	-0.4	$2.87 \times 10^5$	$2.92 \times 10^{-6}$	--	--
Pyrrole	109-97-7	0.88	0.75	$3.12 \times 10^4$	$9.07 \times 10^{-6}$	$7.73 \times 10^{-6}$	$1.80 \times 10^{-5}$
Quaternary ammonium compounds, di-C8-10-alkyldimethyl, chlorides	68424-95-3	2.69	--	90.87	$2.20 \times 10^{-10}$	--	--
Quinaldine	91-63-4	2.69	2.59	498.5	$7.60 \times 10^{-7}$	$2.13 \times 10^{-6}$	--
Quinoline	91-22-5	2.14	2.03	1,711	$6.88 \times 10^{-7}$	$1.54 \times 10^{-6}$	$1.67 \times 10^{-6}$
Rhodamine B	81-88-9	6.03	--	0.0116	--	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Sodium 1-octanesulfonate	5324-84-5	1.06	--	5,864	$9.15 \times 10^{-8}$	--	--
Sodium 2-mercaptobenzothiolate	2492-26-4	2.86	2.42	543.4	$3.63 \times 10^{-8}$	--	--
Sodium acetate	127-09-3	0.09	-0.17	$4.76 \times 10^5$	$5.48 \times 10^{-7}$	$2.94 \times 10^{-7}$	$1.00 \times 10^{-7}$
Sodium benzoate	532-32-1	1.87	1.87	2,493	$1.08 \times 10^{-7}$	$4.55 \times 10^{-8}$	$3.81 \times 10^{-8}$
Sodium bicarbonate	144-55-8	-0.46	--	$8.42 \times 10^5$	$6.05 \times 10^{-9}$	--	--
Sodium bis(tridecyl) sulfobutanedioate	2673-22-5	11.15	--	$7.46 \times 10^{-9}$	$8.51 \times 10^{-11}$	--	--
Sodium C14-16 alpha-olefin sulfonate	68439-57-6	4.36	--	2,651	$4.95 \times 10^{-7}$	--	--
Sodium caprylamphopropionate	68610-44-6	-0.26	--	615.1	$1.19 \times 10^{-9}$	$2.45 \times 10^{-10}$	--
Sodium carbonate	497-19-8	-0.46	--	$8.42 \times 10^5$	$6.05 \times 10^{-9}$	--	--
Sodium chloroacetate	3926-62-3	0.34	0.22	$1.95 \times 10^5$	$1.93 \times 10^{-7}$	$8.88 \times 10^{-8}$	$9.26 \times 10^{-9}$
Sodium decyl sulfate	142-87-0	1.44	--	1,617	$1.04 \times 10^{-7}$	--	--
Sodium D-gluconate	527-07-1	-1.87	--	$1.00 \times 10^6$	$4.74 \times 10^{-13}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Sodium diacetate	126-96-5	0.09	-0.17	$4.76 \times 10^5$	$5.48 \times 10^{-7}$	$2.94 \times 10^{-7}$	$1.00 \times 10^{-7}$
Sodium dichloroisocyanurate	2893-78-9	1.28	--	3,613	$3.22 \times 10^{-12}$	--	--
Sodium dl-lactate	72-17-3	-0.65	-0.72	$1.00 \times 10^6$	$1.13 \times 10^{-7}$	--	$8.13 \times 10^{-8}$
Sodium dodecyl sulfate	151-21-3	2.42	--	163.7	$1.84 \times 10^{-7}$	--	--
Sodium erythorbate (1:1)	6381-77-7	-1.88	-1.85	$1.00 \times 10^6$	$4.07 \times 10^{-8}$	--	--
Sodium ethasulfate	126-92-1	0.38	--	$1.82 \times 10^4$	$5.91 \times 10^{-8}$	--	--
Sodium formate	141-53-7	-0.46	-0.54	$9.55 \times 10^5$	$7.50 \times 10^{-7}$	$5.11 \times 10^{-7}$	$1.67 \times 10^{-7}$
Sodium hydroxymethanesulfonate	870-72-4	-3.85	--	$1.00 \times 10^6$	$4.60 \times 10^{-13}$	--	--
Sodium l-lactate	867-56-1	-0.65	-0.72	$1.00 \times 10^6$	$1.13 \times 10^{-7}$	--	$8.13 \times 10^{-8}$
Sodium maleate (1:x)	18016-19-8	0.05	-0.48	$1.04 \times 10^5$	$1.35 \times 10^{-12}$	$8.48 \times 10^{-14}$	--
Sodium N-methyl-N-oleoyltaurate	137-20-2	4.43	--	0.4748	$1.00 \times 10^{-12}$	--	--
Sodium octyl sulfate	142-31-4	0.46	--	$1.58 \times 10^4$	$5.91 \times 10^{-8}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*



Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Sodium salicylate	54-21-7	2.24	2.26	3,808	$1.42 \times 10^{-8}$	$5.60 \times 10^{-12}$	$7.34 \times 10^{-9}$
Sodium sesquicarbonate	533-96-0	-0.46	--	$8.42 \times 10^5$	$6.05 \times 10^{-9}$	--	--
Sodium thiocyanate	540-72-7	0.58	--	$4.36 \times 10^4$	$1.46 \times 10^{-4}$	--	--
Sodium trichloroacetate	650-51-1	1.44	1.33	$1.20 \times 10^4$	$2.39 \times 10^{-8}$	--	$1.35 \times 10^{-8}$
Sodium xylenesulfonate	1300-72-7	-0.07	--	$5.89 \times 10^4$	$3.06 \times 10^{-9}$	--	--
Sorbic acid	110-44-1	1.62	1.33	$1.94 \times 10^4$	$5.72 \times 10^{-7}$	$4.99 \times 10^{-8}$	--
Sorbitan sesquioleate	8007-43-0	14.32	--	$2.31 \times 10^{-11}$	$7.55 \times 10^{-12}$	$1.25 \times 10^{-16}$	--
Sorbitan, mono-(9Z)-9-octadecenoate	1338-43-8	5.89	--	0.01914	$1.42 \times 10^{-12}$	$5.87 \times 10^{-20}$	--
Sorbitan, monooctadecanoate	1338-41-6	6.1	--	0.01218	$1.61 \times 10^{-12}$	$2.23 \times 10^{-19}$	--
Sorbitan, tri-(9Z)-9-octadecenoate	26266-58-0	22.56	--	$1.12 \times 10^{-19}$	$4.02 \times 10^{-11}$	$2.68 \times 10^{-13}$	--
Styrene	100-42-5	2.89	2.95	343.7	$2.76 \times 10^{-3}$	$2.81 \times 10^{-3}$	$2.75 \times 10^{-3}$
Sucrose	57-50-1	-4.27	-3.7	$1.00 \times 10^6$	$4.47 \times 10^{-22}$	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Sulfan blue	129-17-9	-1.34	--	50.67	$1.31 \times 10^{-26}$	--	--
Sulfuric acid, mono-C12-18-alkyl esters, sodium salts	68955-19-1	3.9	--	5.165	$4.29 \times 10^{-7}$	--	--
Sulfuric acid, mono-C6-10-alkyl esters, ammonium salts	68187-17-7	0.46	--	$1.58 \times 10^4$	$5.91 \times 10^{-8}$	--	--
Symclosene	87-90-1	0.94	--	4,610	$6.19 \times 10^{-11}$	--	--
tert-Butyl hydroperoxide	75-91-2	0.94	--	$1.97 \times 10^4$	$1.60 \times 10^{-5}$	--	--
tert-Butyl perbenzoate	614-45-9	2.89	--	159.2	$2.06 \times 10^{-4}$	--	--
Tetradecane	629-59-4	7.22	7.2	0.009192	$1.65 \times 10^1$	$2.68 \times 10^1$	9.20
Tetradecyldimethylbenzylammonium chloride	139-08-2	3.91	--	3.608	$1.34 \times 10^{-11}$	--	--
Tetraethylene glycol	112-60-7	-2.02	--	$1.00 \times 10^6$	$4.91 \times 10^{-13}$	$5.48 \times 10^{-19}$	--
Tetraethylenepentamine	112-57-2	-3.16	--	$1.00 \times 10^6$	$2.79 \times 10^{-20}$	$4.15 \times 10^{-23}$	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Tetrakis(hydroxymethyl)phosphonium sulfate	55566-30-8	-5.03	--	$1.00 \times 10^6$	$9.17 \times 10^{-13}$	--	--
Tetramethylammonium chloride	75-57-0	-4.18	--	$1.00 \times 10^6$	$4.17 \times 10^{-12}$	--	--
Thiamine hydrochloride	67-03-8	0.95	--	3,018	$8.24 \times 10^{-17}$	--	--
Thiocyanic acid, ammonium salt	1762-95-4	0.58	--	$4.36 \times 10^4$	$1.46 \times 10^{-4}$	--	--
Thioglycolic acid	68-11-1	0.03	0.09	$2.56 \times 10^5$	$1.94 \times 10^{-8}$	--	--
Thiourea	62-56-6	-1.31	-1.08	$5.54 \times 10^5$	$1.58 \times 10^{-7}$	--	$1.98 \times 10^{-9}$
Toluene	108-88-3	2.54	2.73	573.1	$5.95 \times 10^{-3}$	$5.73 \times 10^{-3}$	$6.64 \times 10^{-3}$
Tributyl phosphate	126-73-8	3.82	4	7.355	$3.19 \times 10^{-6}$	--	$1.41 \times 10^{-6}$
Tributyltetradecylphosphonium chloride	81741-28-8	11.22	--	$7.90 \times 10^{-7}$	$2.61 \times 10^{-1}$	--	--
Tridecane	629-50-5	6.73	--	0.02746	$1.24 \times 10^1$	$1.90 \times 10^1$	2.88
Triethanolamine	102-71-6	-2.48	-1	$1.00 \times 10^6$	$4.18 \times 10^{-12}$	$3.38 \times 10^{-19}$	$7.05 \times 10^{-13}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Triethanolamine hydrochloride	637-39-8	-2.48	-1	$1.00 \times 10^6$	$4.18 \times 10^{-12}$	$3.38 \times 10^{-19}$	$7.05 \times 10^{-13}$
Triethanolamine hydroxyacetate	68299-02-5	-2.97	--	$1.00 \times 10^6$	$6.28 \times 10^{-11}$	--	--
Triethyl citrate	77-93-0	0.33	--	$2.82 \times 10^4$	$6.39 \times 10^{-10}$	--	$3.84 \times 10^{-9}$
Triethyl phosphate	78-40-0	0.87	0.8	$1.12 \times 10^4$	$5.83 \times 10^{-7}$	--	$3.60 \times 10^{-8}$
Triethylene glycol	112-27-6	-1.75	-1.75	$1.00 \times 10^6$	$3.16 \times 10^{-11}$	$2.56 \times 10^{-16}$	--
Triethylenetetramine	112-24-3	-2.65	--	$1.00 \times 10^6$	$9.30 \times 10^{-17}$	$6.74 \times 10^{-19}$	--
Triisopropanolamine	122-20-3	-1.22	--	$1.00 \times 10^6$	$9.77 \times 10^{-12}$	$4.35 \times 10^{-18}$	--
Trimethanolamine	14002-32-5	-3.95	--	$1.00 \times 10^6$	$1.42 \times 10^{-8}$	--	--
Trimethylamine	75-50-3	0.04	0.16	$1.00 \times 10^6$	$3.65 \times 10^{-5}$	$1.28 \times 10^{-4}$	$1.04 \times 10^{-4}$
Tripotassium citrate monohydrate	6100-05-6	-1.67	-1.64	$1.00 \times 10^6$	$8.33 \times 10^{-18}$	--	$4.33 \times 10^{-14}$
Tripropylene glycol monomethyl ether	25498-49-1	-0.2	--	$1.96 \times 10^5$	$2.36 \times 10^{-11}$	$4.55 \times 10^{-13}$	--
Trisodium citrate	68-04-2	-1.67	-1.64	$1.00 \times 10^6$	$8.33 \times 10^{-18}$	--	$4.33 \times 10^{-14}$

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Log $K_{ow}$		Water solubility	Henry's law constant (atm-m <sup>3</sup> /mol at 25°C)		
		Estimated	Measured	Estimate from log $K_{ow}$ (mg/L at 25°C)	Bond method	Group method 25	Measured
Trisodium citrate dihydrate	6132-04-3	-1.67	-1.64	$1.00 \times 10^6$	$8.33 \times 10^{-18}$	--	$4.33 \times 10^{-14}$
Trisodium ethylenediaminetetraacetate	150-38-9	-3.86	--	$2.28 \times 10^5$	$1.17 \times 10^{-23}$	--	$5.77 \times 10^{-16}$
Trisodium ethylenediaminetriacetate	19019-43-3	-4.32	--	$1.00 \times 10^6$	$3.58 \times 10^{-20}$	--	--
Tromethamine	77-86-1	-1.56	--	$1.00 \times 10^6$	$8.67 \times 10^{-13}$	--	--
Undecane	1120-21-4	5.74	--	0.2571	7.04	9.52	1.93
Urea	57-13-6	-1.56	-2.11	$4.26 \times 10^5$	$3.65 \times 10^{-10}$	--	$1.74 \times 10^{-12}$
Xylenes	1330-20-7	3.09	3.2	207.2	$6.56 \times 10^{-3}$	$6.14 \times 10^{-3}$	$7.18 \times 10^{-3}$

"--" indicates no information available.

1 The EPI (Estimation Programs Interface) Suite™ ([U.S. EPA, 2012a](#)) is an open-source, Windows®-  
2 based suite of physicochemical property and environmental fate estimation programs developed by  
3 the EPA's Office of Pollution Prevention Toxics and Syracuse Research Corporation. More  
4 information on EPI Suite™ is available at <http://www.epa.gov/oppt/exposure/pubs/episuite.htm>.

5 Although only physicochemical properties from EPI Suite™ are provided here, other sources of  
6 information were also consulted. QikProp ([Schrodinger, 2012](#)) and LeadScope® ([Inc., 2012](#)) are  
7 commercial products designed primarily as drug development and screening tools. QikProp is  
8 specifically focused on drug discovery and provides predictions for physically significant  
9 descriptors and pharmaceutically (and toxicologically) relevant properties useful in predicting  
10 ADME (adsorption, distribution, metabolism, and excretion) characteristics of drug candidates.  
11 QikProp's use of whole-molecule descriptors that have a straightforward physical interpretation (as  
12 opposed to fragment-based descriptors).

13 LeadScope® is a program designed for interpreting chemical and biological screening data that can  
14 assist pharmaceutical scientists in finding promising drug candidates. The software organizes the  
15 chemical data by structural features familiar to medicinal chemists. Graphs are used to summarize  
16 the data, and structural classes are highlighted that are statistically correlated with biological  
17 activity. It incorporates chemically-based data mining, visualization, and advanced informatics  
18 techniques (e.g., prediction tools, scaffold generators). Note that properties generated by QikProp  
19 and LeadScope® are generally more relevant to drug development than to environmental  
20 assessment.

21 Physicochemical properties of chemicals were generated from the two-dimensional (2-D) chemical  
22 structures from the EPA National Center for Computational Toxicology's Distributed Structure-  
23 Searchable Toxicity (NCCT DSSTox) Database Network in structure-data file (SDF) format. For EPI  
24 Suite™ properties, both the desalted and non-desalted 2-D files were run using the program's batch  
25 mode (i.e., processing many molecules at once) to calculate environmentally-relevant, chemical  
26 property descriptors. The chemical descriptors in QikProp require 3-D chemical structures. For  
27 these calculations, the 2-D desalted chemical structures were converted to 3-D using the Rebuild3D  
28 function in the Molecular Operating Environment software ([CCG, 2011](#)). All computed  
29 physicochemical properties are added into the structure-data file prior to assigning toxicological  
30 properties.

31 Both LeadScope® and Qikprop software require input of desalted structures. Therefore, the  
32 structures were desalted, a process where salts and complexes are simplified to the neutral,  
33 uncomplexed form of the chemical, using "Desalt Batch" option in ACD Labs ChemFolder. All  
34 LeadScope® general chemical descriptors (Parent Molecular Weight, AlogP, Hydrogen Bond  
35 Acceptors, Hydrogen Bond Donors, Lipinski Score, Molecular Weight, Parent Atom Count, Polar  
36 Surface Area, and Rotatable Bonds) were calculated by default.

37 All physicochemical properties generated from EPI Suite™, QikProp, and LeadScope® will be made  
38 available to the public in an electronic format in 2015.

## C.2. References for Appendix C

- [Afzal, W; Mohammadi, AH; Richon, D.](#) (2009). Volumetric properties of mono-, di-, tri-, and polyethylene glycol aqueous solutions from (273.15 to 363.15) K: experimental measurements and correlations. *Journal of Chemical and Engineering Data* 54: 1254-1261. <http://dx.doi.org/10.1021/je800694a>
- [Alfa Aesar.](#) (2015). A16163: Formaldehyde, 37% w/w aq. soln., stab. with 7-8% methanol. Available online at <https://www.alfa.com/en/catalog/A16163> (accessed May 4, 2015).
- [Baragi, JG; Maganur, S; Malode, V; Baragi, SJ.](#) (2013). Excess molar volumes and refractive indices of binary liquid mixtures of acetyl acetone with n-Nonane, n-Decane and n-Dodecane at (298.15, 303.15, and 308.15) K. *Journal of Molecular Liquids* 178: 175-177. <http://dx.doi.org/10.1016/j.molliq.2012.11.022>
- [Bennett, GM; Yuill, JL.](#) (1935). The crystal form of anhydrous citric acid. *J Chem Soc* 1935: 130. <http://dx.doi.org/10.1039/JR9350000130>
- [Biilmann, E.](#) (1906). [Studien über organische Thiosäuren III]. *Justus Liebigs Annalen der Chemie* 348: 133-143. <http://dx.doi.org/10.1002/jlac.19063480110>
- [Biltz, W; Balz, G.](#) (1928). [Über molekular- und atomvolumina. XVIII. Das volumen des ammoniaks in kristallisierten ammoniumsalzen]. *Zeitschrift für Anorganische und Allgemeine Chemie* 170: 327-341. <http://dx.doi.org/10.1002/zaac.19281700141>
- [Blanco, A; Garcia-Abuin, A; Gomez-Diaz, D; Navaza, JM; Villaverde, OL.](#) (2013). Density, speed of sound, viscosity, surface tension, and excess volume of n-ethyl-2-pyrrolidone plus ethanolamine (or diethanolamine or triethanolamine) from T = (293.15 to 323.15) K. *Journal of Chemical and Engineering Data* 58: 653-659. <http://dx.doi.org/10.1021/je301123j>
- [Carpenter, EL; Davis, HS.](#) (1957). Acrylamide. Its preparation and properties. *Journal of Applied Chemistry* 7: 671-676. <http://dx.doi.org/10.1002/jctb.5010071206>
- [Casanova, C; Wilhelm, E; Grolier, JPE; Kehiaian, HV.](#) (1981). Excess volumes and excess heat-capacities of (water + alkanolic acid). *The Journal of Chemical Thermodynamics* 13: 241-248. [http://dx.doi.org/10.1016/0021-9614\(81\)90123-3](http://dx.doi.org/10.1016/0021-9614(81)90123-3)
- [CCG](#) (Chemical Computing Group). (2011). Molecular Operating Environment (MOE) Linux (Version 2011.10) [Computer Program]. Montreal, Quebec. Retrieved from <http://www.chemcomp.com/software.htm>
- [Chafer, A; Lladosa, E; Monton, JB; Cruz Burguet, M, a.](#) (2010). Liquid-liquid equilibria for the system 1-methyl propyl ethanoate (1) + acetic acid (2) + water (3) at (283.15 and 323.15) K. *Journal of Chemical and Engineering Data* 55: 523-525. <http://dx.doi.org/10.1021/je900332x>
- [Chasib, KF.](#) (2013). Extraction of phenolic pollutants (phenol and p-chlorophenol) from industrial wastewater. *Journal of Chemical and Engineering Data* 58: 1549-1564. <http://dx.doi.org/10.1021/je4001284>
- [de Oliveira, LH; da Silva, JL, Jr; Aznar, M.](#) (2011). Apparent and partial molar volumes at infinite dilution and solid-liquid equilibria of dibenzothiophene plus alkane systems. *Journal of Chemical and Engineering Data* 56: 3955-3962. <http://dx.doi.org/10.1021/je200327s>
- [Dejoye Tanzi, C; Abert Vian, M; Ginies, C; Elmaataoui, M; Chemat, F.](#) (2012). Terpenes as green solvents for extraction of oil from microalgae. *Molecules* 17: 8196-8205. <http://dx.doi.org/10.3390/molecules17078196>
- [Dhondge, SS; Pandhurnekar, CP; Parwate, DV.](#) (2010). Density, speed of sound, and refractive index of aqueous binary mixtures of some glycol ethers at T=298.15 K. *Journal of Chemical and Engineering Data* 55: 3962-3968. <http://dx.doi.org/10.1021/je901072c>
- [Dubey, GP; Kumar, K.](#) (2011). Thermodynamic properties of binary liquid mixtures of diethylenetriamine with alcohols at different temperatures. *Thermochim Acta* 524: 7-17. <http://dx.doi.org/10.1016/j.tca.2011.06.003>



- [Dubey, GP; Kumar, K.](#) (2013). Studies of thermodynamic, thermophysical and partial molar properties of liquid mixtures of diethylenetriamine with alcohols at 293.15 to 313.15 K. *Journal of Molecular Liquids* 180: 164-171. <http://dx.doi.org/10.1016/j.molliq.2013.01.011>
- [Dyshin, AA; Eliseeva, OV; Kiselev, MG; Al'per, GA.](#) (2008). The volume characteristics of solution of naphthalene in heptane-ethanol mixtures at 298.15 K. *Russian Journal of Physical Chemistry A, Focus on Chemistry* 82: 1258-1261. <http://dx.doi.org/10.1134/S0036024408080037>
- [Egorov, GI; Makarov, DM; Kolker, AM.](#) (2013). Volume properties of liquid mixture of water plus glycerol over the temperature range from 278.15 to 348.15 K at atmospheric pressure. *Thermochim Acta* 570: 16-26. <http://dx.doi.org/10.1016/j.tca.2013.07.012>
- [Fadeeva, YA; Shmukler, LE; Safonova, LP.](#) (2004). Physicochemical properties of the H3PO4-dimethylformamide system. *Russian Journal of General Chemistry* 74: 174-178. <http://dx.doi.org/10.1023/B:RUGC.0000025496.07304.66>
- [Faria, MAF; Martins, RJ; Cardoso, MJE, M; Barcia, OE.](#) (2013). Density and viscosity of the binary systems ethanol + butan-1-ol, + pentan-1-ol, + heptan-1-ol, + octan-1-ol, nonan-1-ol, + decan-1-ol at 0.1 mpa and temperatures from 283.15 K to 313.15 K. *Journal of Chemical and Engineering Data* 58: 3405-3419. <http://dx.doi.org/10.1021/je400630f>
- [Fels, G.](#) (1900). Ueber die Frage der isomorphen vertretung von halogen und hydroxyl. In *Zeitschrift fur Kristallographie, Kristallgeometrie, Kristallphysik, Kristallchemie*. Frankfurt: Leipzig. <http://babel.hathitrust.org/cgi/pt?id=uc1.b3327977;view=1up;seq=5>
- [finemech](#) (finemech Precision Mechanical Components). (2012). Technical resources: Liquid nitrogen, LN2. Available online at [http://www.finemech.com/tech\\_resources/liquid\\_nitrogen.html](http://www.finemech.com/tech_resources/liquid_nitrogen.html)
- [Fuess, H; Bats, JW; Dannohl, H; Meyer, H; Schweig, A.](#) (1982). Comparison of observed and calculated densities. XII. Deformation density in complex anions. II. Experimental and theoretical densities in sodium formate. *Acta Crystallogr B* B38: 736-743. <http://dx.doi.org/10.1107/S0567740882003999>
- [Fujino, S; Hwang, C; Morinaga, K.](#) (2004). Density, surface tension, and viscosity of PbO-B2O3-SiO2 glass melts. *Journal of the American Ceramic Society* 87: 10-16. <http://dx.doi.org/10.1111/j.1151-2916.2004.tb19937.x>
- [Hagen, R; Kaatze, U.](#) (2004). Conformational kinetics of disaccharides in aqueous solutions. *J Chem Phys* 120: 9656-9664. <http://dx.doi.org/10.1063/1.1701835>
- [Harlow, A; Wiegand, G; Franck, EU.](#) (1997). The Density of Ammonia at High Pressures to 723 K and 950 MPa. 101: 1461-1465. <http://dx.doi.org/10.1002/bbpc.199700007>
- [Haynes, WM.](#) (2014). CRC handbook of chemistry and physics. In WM Haynes (Ed.), (95 ed.). Boca Raton, FL: CRC Press. <http://www.hbcpnetbase.com/>
- [He, YM; Jiang, RF; Zhu, F; Luan, TG; Huang, ZQ; Ouyang, GF.](#) (2008). Excess molar volumes and surface tensions of 1,2,4-trimethylbenzene and 1,3,5-trimethylbenzene with isopropyl acetate and isobutyl acetate at (298.15, 308.15, and 313.15)K. *Journal of Chemical and Engineering Data* 53: 1186-1191. <http://dx.doi.org/10.1021/je800046k>
- [Huffman, HM; Fox, SW.](#) (1938). Thermal data. X. The heats of combustion and free energies, at 25, of some organic compounds concerned in carbohydrate metabolism. *J Am Chem Soc* 60: 1400-1403. <http://dx.doi.org/10.1021/ja01273a036>
- [Inc., L.](#) (2012). Leadscope [Computer Program]. Columbus, Ohio. Retrieved from <http://www.leadscope.com>
- [IUPAC](#) (International Union of Pure and Applied Chemistry). (2014). Global availability of information on agrochemicals: Triisopropanolamine. Available online at <http://sitem.herts.ac.uk/aeru/iupac/Reports/1338.htm>

- [Kiselev, VD; Kashaeva, HA; Shakirova, II; Potapova, LN; Konovalov, AI](#). (2012). Solvent effect on the enthalpy of solution and partial molar volume of the ionic liquid 1-butyl-3-methylimidazolium tetrafluoroborate. *Journal of Solution Chemistry* 41: 1375-1387. <http://dx.doi.org/10.1007/s10953-012-9881-9>
- [Krakowiak, J; Bobicz, D; Grzybkowski, W](#). (2001). Limiting partial molar volumes of tetra-n-alkylammonium perchlorates in N,N-dimethylacetamide, triethylphosphate and dimethyl sulfoxide at T=298.15 K. *The Journal of Chemical Thermodynamics* 33: 121-133. <http://dx.doi.org/10.1006/jcht.2000.0725>
- [Laavi, H; Pokki, JP; Uusi-Kyyny, P; Massimi, A; Kim, Y; Sapei, E; Alopaeus, V](#). (2013). Vapor-liquid equilibrium at 350 K, excess molar enthalpies at 298 K, and excess molar volumes at 298 K of binary mixtures containing ethyl acetate, butyl acetate, and 2-butanol. *Journal of Chemical and Engineering Data* 58: 1011-1019. <http://dx.doi.org/10.1021/je400036b>
- [Laavi, H; Zaitseva, A; Pokki, JP; Uusi-Kyyny, P; Kim, Y; Alopaeus, V](#). (2012). Vapor-liquid equilibrium, excess molar enthalpies, and excess molar volumes of binary mixtures containing methyl isobutyl ketone (MIBK) and 2-butanol, tert-pentanol, or 2-ethyl-1-hexanol. *Journal of Chemical and Engineering Data* 57: 3092-3101. <http://dx.doi.org/10.1021/je300678r>
- [Mak, TCW](#). (1965). Hexamethylenetetramine hexahydrate: A new type of clathrate hydrate. *J Chem Phys* 43: 2799. <http://dx.doi.org/10.1063/1.1697212>
- [Martinez-Reina, M; Amado-Gonzalez, E; Mauricio Munoz-Munoz, Y](#). (2012). Study of liquid-liquid equilibria of toluene plus (hexane, heptane, or cyclohexane) with 1-ethyl-3-methylimidazolium ethylsulfate at 308.15 K. *Bull Chem Soc Jpn* 85: 1138-1144. <http://dx.doi.org/10.1246/bcsj.20120112>
- [Masood, AKM; Pethrick, RA; Swinton, FL](#). (1976). Physicochemical studies of super-cooled liquids - cyclic carbonates and alpha,beta-unsaturated aldehydes. *Faraday Trans 1* 72: 20-28. <http://dx.doi.org/10.1039/f19767200020>
- [Moosavi, M; Motahari, A; Omrani, A; Rostami, AA](#). (2013). Thermodynamic study on some alkanediol solutions: Measurement and modeling. *Thermochim Acta* 561: 1-13. <http://dx.doi.org/10.1016/j.tca.2013.03.010>
- [Oka, S](#). (1962). Studies on lactone formation in vapor phase. III. Mechanism of lactone formation from diols. *Bull Chem Soc Jpn* 35: 986-989. <http://dx.doi.org/10.1246/bcsj.35.986>
- [Pal, A; Kumar, H; Maan, R; Sharma, HK](#). (2013). Densities and speeds of sound of binary liquid mixtures of some n-alkoxypropanols with methyl acetate, ethyl acetate, and n-butyl acetate at T = (288.15, 293.15, 298.15, 303.15, and 308.15) K. *Journal of Chemical and Engineering Data* 58: 225-239. <http://dx.doi.org/10.1021/je300789a>
- [Pijper, WP](#). (1971). Molecular and crystal structure of glycolic acid. *Acta Crystallogr B* B27: 344-348. <http://dx.doi.org/10.1107/S056774087100219X>
- [Radwan, MHS; Hanna, AA](#). (1976). Binary azeotropes containing butyric acids. *Journal of Chemical and Engineering Data* 21: 285-289. <http://dx.doi.org/10.1021/je60070a032>
- [Rani, M; Maken, S](#). (2013). Excess molar enthalpies and excess molar volumes of formamide+1-propanol or 2-propanol and thermodynamic modeling by Prigogine-Flory-Patterson theory and Treszczanowicz-Benson association model. *Thermochim Acta* 559: 98-106. <http://dx.doi.org/10.1016/j.tca.2013.02.010>
- [Rawat, BS; Gulati, IB; Mallik, KL](#). (1976). Study of some sulphur-group solvents for aromatics extraction by gas chromatography. *Journal of Applied Chemistry and Biotechnology* 26: 247-252. <http://dx.doi.org/10.1002/jctb.5020260504>
- [Rodnikova, MN; Solonina, IA; Egorov, GI; Makarov, DM; Gunina, MA](#). (2012). The bulk properties of dioxane solutions in ethylene glycol at 2575C. *Russian Journal of Physical Chemistry A, Focus on Chemistry* 86: 330-332. <http://dx.doi.org/10.1134/S0036024412020239>

- [Sarkar, BK; Choudhury, A; Sinha, B.](#) (2012). Excess molar volumes, excess viscosities and ultrasonic speeds of sound of binary mixtures of 1,2-dimethoxyethane with some aromatic liquids at 298.15 K. *Journal of Solution Chemistry* 41: 53-74. <http://dx.doi.org/10.1007/s10953-011-9780-5>
- [Sarkar, L; Roy, MN.](#) (2009). Density, viscosity, refractive index, and ultrasonic speed of binary mixtures of 1,3-dioxolane with 2-methoxyethanol, 2-ethoxyethanol, 2-butoxyethanol, 2-propylamine, and cyclohexylamine. *Journal of Chemical and Engineering Data* 54: 3307-3312. <http://dx.doi.org/10.1021/je900240s>
- [Schrodinger.](#) (2012). Qikprop [Computer Program]. New York, New York: Schrodinger, LLC. Retrieved from <http://www.schrodinger.com/products/14/17>
- [Shanley, P; Collin, RL.](#) (1961). The crystal structure of the high temperature form of choline chloride. *Acta Cryst* 14: 79-80. <http://dx.doi.org/10.1107/S0365110X61000292>
- [Sigma-Aldrich.](#) (2007). Material safety data sheet: Tert-butyl hydroperoxide (70% solution in water). Available online at [http://www.orcbs.msu.edu/msds/111607\\_DLI\\_027\\_TERT-BUTYL.PDF](http://www.orcbs.msu.edu/msds/111607_DLI_027_TERT-BUTYL.PDF)
- [Sigma-Aldrich.](#) (2010). Product information: Sodium chloride. Available online at [https://www.sigmaaldrich.com/content/dam/sigma-aldrich/docs/Sigma-Aldrich/Product\\_Information\\_Sheet/s7653pis.pdf](https://www.sigmaaldrich.com/content/dam/sigma-aldrich/docs/Sigma-Aldrich/Product_Information_Sheet/s7653pis.pdf)
- [Sigma-Aldrich.](#) (2014a). Material safety data sheet: Phosphorus acid. Available online at <http://www.sigmaaldrich.com/catalog/product/sial/215112?lang=en&region=US>
- [Sigma-Aldrich.](#) (2014b). Material safety data sheet: Potassium carbonate. Available online at <http://www.sigmaaldrich.com/catalog/product/aldrich/367877?lang=en&region=US>
- [Sigma-Aldrich.](#) (2015a). Material safety data sheet: Aluminum chloride [Fact Sheet]. St. Louis, MO. <http://www.sigmaaldrich.com/catalog/product/aldrich/563919?lang=en&region=US>
- [Sigma-Aldrich.](#) (2015b). Material safety data sheet: Peracetic acid solution. Available online at <http://www.sigmaaldrich.com/catalog/product/sial/269336?lang=en&region=US>
- [Sigma-Aldrich.](#) (2015c). Material safety data sheet: Sulfur dioxide. Available online at <http://www.sigmaaldrich.com/catalog/product/aldrich/295698?lang=en&region=US>
- [Sigma-Aldrich.](#) (2015d). Material safety data sheet: Sulfuric acid. Available online at <http://www.sigmaaldrich.com/catalog/product/aldrich/339741?lang=en&region=US>
- [Sigma-Aldrich.](#) (2015e). Material safety data sheet: Trimethyl borate. Available online at <http://www.sigmaaldrich.com/catalog/product/aldrich/447218?lang=en&region=US>
- [Smirnov, VI; Badelin, VG.](#) (2013). Enthalpy characteristics of dissolution of L-tryptophan in water plus formamides binary solvents at 298.15 K. *Russian Journal of Physical Chemistry A, Focus on Chemistry* 87: 1165-1169. <http://dx.doi.org/10.1134/S0036024413070285>
- [Steinhauser, O; Boresch, S; Bertagnolli, H.](#) (1990). The effect of density variation on the structure of liquid hydrogen chloride. A Monte Carlo study. *J Chem Phys* 93: 2357-2363. <http://dx.doi.org/10.1063/1.459015>
- [Thalladi, VR; Nusse, M; Boese, R.](#) (2000). The melting point alternation in alpha,omega-alkanedicarboxylic acids. *J Am Chem Soc* 122: 9227-9236. <http://dx.doi.org/10.1021/ja0011459>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012a). Estimation Programs Interface Suite for Microsoft Windows (EPI Suite) [Computer Program]. Washington DC: US Environmental Protection Agency. Retrieved from <http://www.epa.gov/oppt/exposure/pubs/episuitedl.htm>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015c). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Project database [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocus-1-disclosures>

- 
- [Vijaya Kumar, R; Anand Rao, M; Venkateshwara Rao, M; Ravi Kumar, YVL; Prasad, DHL.](#) (1996). Bubble temperature measurements on 2-propyn-1-ol with 1,2-dichloroethane, 1,1,1-trichloroethane, and 1,1,2,2-tetrachloroethane. *Journal of Chemical and Engineering Data* 41: 1020-1023. <http://dx.doi.org/10.1021/je9600156>
- [Wilt, JW.](#) (1956). Notes - the halodecarboxylation of cyanoacetic acid. *J Org Chem* 21: 920-921. <http://dx.doi.org/10.1021/jo01114a607>
- [Xiao, LN; Xu, JN; Hu, YY; Wang, LM; Wang, Y; Ding, H; Cui, XB; Xu, JQ.](#) (2013). Synthesis and characterizations of the first [V16O39Cl]6- (V16O39) polyanion. *Dalton Transactions (Online)* 42: 5247-5251. <http://dx.doi.org/10.1039/c3dt33081h>
- [Zhang, L; Guo, Y; Xiao, J; Gong, X; Fang, W.](#) (2011). Density, refractive index, viscosity, and surface tension of binary mixtures of exo-tetrahydrodicyclopentadiene with some n-alkanes from (293.15 to 313.15) K. *Journal of Chemical and Engineering Data* 56: 4268-4273. <http://dx.doi.org/10.1021/je200757a>
- [Zhang, Z; Yang, L; Xing, Y; Li, W.](#) (2013). Vapor-liquid equilibrium for ternary and binary mixtures of 2-isopropoxypropane, 2-propanol, and n,n-dimethylacetamide at 101.3 kPa. *Journal of Chemical and Engineering Data* 58: 357-363. <http://dx.doi.org/10.1021/je300994y>

## Appendix D

---

# Designing, Constructing, and Testing Wells for Integrity

## Appendix D. Designing, Constructing, and Testing Wells for Integrity

1 This appendix presents the goals for the design and construction of oil and gas production wells,  
2 the well components used to achieve those goals, and methods for testing well integrity to help  
3 verify that the goals for well performance are achieved. This information provides additional  
4 background for the well component discussions presented in Chapter 6. Information on the  
5 pathways associated with the well that can cause fluid movement into drinking water resources is  
6 presented in Chapter 6.

### D.1. Design Goals for Well Construction

7 Simply stated, production wells are designed to move oil and gas from the production zone (within  
8 the oil and gas reservoir) into the well and then through the well to the surface. There are typically  
9 a variety of goals for well design ([Renpu, 2011](#)), but the main purposes are facilitating the flow of  
10 oil and gas from the hydrocarbon reservoirs to the well (production management) while isolating  
11 that oil and gas and the hydrocarbon reservoirs from nearby ground water resources (zonal  
12 isolation).

13 To achieve these goals, operators design and construct wells to have and maintain mechanical  
14 integrity throughout the life of the well. A properly designed and constructed well has two types of  
15 mechanical integrity: internal and external. Internal mechanical integrity refers to the absence of  
16 significant leakage within the production tubing, casing, or packer. External mechanical integrity  
17 refers to the absence of significant leakage along the well outside of the casing.

18 Achieving mechanical integrity involves designing the well components to resist the stresses they  
19 will encounter. Each well component must be designed to withstand all of the stresses to which the  
20 well will be subjected, including burst pressure, collapse, tensile, compression (or bending), and  
21 cyclical stresses (see Section 6.2.1 for additional information on these stresses). Well materials  
22 should also be compatible with the fluids (including liquids or gases) with which they come into  
23 contact to prevent leaks caused by corrosion.

24 These goals are accomplished by the use of one or more layers of casing, cement, and mechanical  
25 devices (such as packers), which provide the main barrier preventing migration of fluids from the  
26 well into drinking water sources.

### D.2. Well Components

27 Casing and cement are used in the design and construction of wells to achieve the goals of  
28 mechanical integrity and zonal isolation. Several industry-developed specifications and best  
29 practices for well construction have been established to guide well operators in the construction  
30 process; see Text Box D-1. (Information is not available to determine how often these practices are  
31 used or how well they prevent the development of pathways for fluid movement to drinking water  
32 resources.) The sections below describe options available for casing, cement, and other well  
33 components.

## Text Box D-1. Selected Industry-Developed Specifications and Recommended Practices for Well Construction in North America.

### 1 *American Petroleum Institute (API)*

- 2 • API Guidance Document HF1—Hydraulic Fracturing Operations—Well Construction and Integrity
- 3 Guidelines ([API, 2009a](#))
- 4 • API RP 10B-2—Recommended Practice for Testing Well Cements ([API, 2013](#))
- 5 • API RP 10D-2—Recommended Practice for Centralizer Placement and Stop Collar Testing ([API, 2004](#))
- 6 • API RP 5C1—Recommended Practices for Care and Use of Casing and Tubing ([API, 1999](#))
- 7 • API RP 65-2—Isolating Potential Flow Zones during Well Construction ([API, 2010a](#))
- 8 • API Specification 10A—Specification on Cements and Materials for Well Cementing ([API, 2010b](#))
- 9 • API Specification 11D1—Packers and Bridge Plugs ([API, 2009b](#))
- 10 • API Specification 5CT—Specification for Casing and Tubing ([API, 2011](#))

### 11 *Canadian Association of Petroleum Producers (CAPP) and Enform*

- 12 • Hydraulic Fracturing Operating Practices: Wellbore Construction and Quality Assurance ([CAPP, 2013](#))
- 13 • Interim Industry Recommended Practice Volume #24—Fracture Stimulation: Inter-wellbore
- 14 Communication ([Enform, 2013](#))

### 15 *Marcellus Shale Coalition (MSC)*

- 16 • Recommended Practices—Drilling and Completions ([MSC, 2013](#))

### D.2.1. Casing

17 Casing is steel pipe that is placed into the wellbore (the cylindrical hole drilled through the  
18 subsurface rock formation) to maintain the stability of the wellbore, to transport the hydrocarbons  
19 from the subsurface to the surface, and to prevent intrusion of other fluids into the well and  
20 wellbore. Up to four types of casing may be present in a well, including (from largest to smallest-  
21 diameter): conductor casing, surface casing, intermediate casing, and production casing. Each is  
22 described below.

23 The **conductor casing** is the largest diameter string of casing. It is typically in the range of 30 in.  
24 (76 cm) to 42 in. (107 cm) in diameter ([Hyne, 2012](#)). Its main purpose is to prevent unconsolidated  
25 material, such as sand, gravel, and soil, from collapsing into the wellbore. Therefore, the casing is  
26 typically installed from the surface to the top of the bedrock or other consolidated formations. The  
27 conductor casing may or may not be cemented in place.

28 The next string of casing is the **surface casing**. A typical surface casing diameter is 13.75 in. (34.93  
29 cm), but diameter can vary ([Hyne, 2012](#)). The surface casing's main purposes are to isolate any  
30 ground water resources that are to be protected by preventing fluid migration along the wellbore



1 once the casing is cemented and to provide a sturdy structure to which blow-out prevention  
2 equipment can be attached. For these reasons, the surface casing most commonly extends from the  
3 surface to some distance beneath the lowermost geologic formation containing ground water  
4 resources to be protected. The specific depth to which the surface casing is set is often governed by  
5 the depth of the ground water resource as defined and identified for protection in state regulations.

6 **Intermediate casing** is typically used in wells to control pressure in an intermediate-depth  
7 formation. It may be used to reduce or prevent exposure of weak formations to pressure from the  
8 weight of the drilling fluid or cement or to allow better control of over-pressured formations. The  
9 intermediate casing extends from the surface through the formation of concern. There may be more  
10 than one string of concentric intermediate casing present or none at all, depending on the  
11 subsurface geology. Intermediate casing may be cemented, especially through over-pressured  
12 zones; however, it is not always cemented to the surface. Intermediate casing, when present, is  
13 often 8.625 in. (21.908 cm) in diameter but can vary ([Hyne, 2012](#)).

14 **Production casing** extends from the surface into the production zone. The main purposes of the  
15 production casing are to isolate the hydrocarbon product from fluids in surrounding formations  
16 and to transport the product to the surface. It can also be used to inject fracturing fluids, receive  
17 flowback during hydraulic fracturing operations (e.g., if tubing or a temporary fracturing string is  
18 not present), and prevent other fluids from mixing with and diluting the produced hydrocarbons.  
19 The production casing is generally cemented to some point above the production zone. Production  
20 casing is often 5.5 in. (14.0 cm) in diameter but can vary ([Hyne, 2012](#)).

21 **Liners** are another type of metal tubular (casing-like) well component that can be used to fulfill the  
22 same purposes as intermediate and production casing in the production zone. Like casing, they are  
23 steel pipe, but differ in that they do not extend from the production zone to the surface. Rather, they  
24 are connected to the next largest string of casing by a hanger that is attached to the casing. A frac  
25 sleeve is a specialized type of liner that is used during fracturing. It has plugs that can be opened  
26 and closed by dropping balls from the surface (see the discussion of well completions below for  
27 additional information on the use of frac sleeves).

28 **Production tubing** is the smallest, innermost steel pipe in the well and is distinguished from casing  
29 by not being cemented in place. It is used to transport the hydrocarbons to the surface. Fracturing  
30 may be done through the tubing if present, or through the production casing. Because casing cannot  
31 be replaced, tubing is often used, especially if the hydrocarbons contain corrosive substances such  
32 as hydrogen sulfide or carbon dioxide. Tubing may not be used in high-volume production wells.  
33 Typical tubing diameter is between 1.25 in. (3.18 cm) and 4.5 in. (11.4 cm) ([Hyne, 2012](#)).

### D.2.2. Cement

34 Cement is the main barrier preventing fluid movement along the wellbore outside the casing. It also  
35 lends mechanical strength to the well and protects the casing from corrosion by naturally occurring  
36 formation fluids. Cement is placed in the annulus, which is the space between two adjacent casings  
37 or the space between the outermost casing and the rock formation through which the wellbore was

1 drilled. The sections below describe considerations for selecting cement and additives, as well as  
2 cementing procedures and techniques.

### **D.2.2.1. Considerations for Cementing**

3 The length and location of the casing section to be cemented and the composition of the cement can  
4 vary based on numerous factors, including the presence and locations of weak formations, over- or  
5 under-pressured formations, or formations containing fluids; formation permeability; and  
6 temperature. State requirements for oil and gas production well construction and the relative costs  
7 of well construction options are also factors.

8 Improper cementing can lead to the formation of channels (small connected voids) in the cement,  
9 which can—if they extend across multiple formations or connect to other existing channels or  
10 fractures—present pathways for fluid migration. This section describes some of the considerations  
11 and concerns for proper cement placement and techniques and materials that are available to  
12 address these concerns. Careful selection of cements (and additives) and design of the cementing  
13 job can avoid integrity problems related to cement.

14 To select the appropriate cement type, properties, and additives, operators consider the required  
15 strength needed to withstand downhole conditions and compatibility with subsurface chemistry, as  
16 described below:

- 17 • The cement design needs to **achieve the strength** required under the measured or  
18 anticipated downhole conditions. Factors that are taken into account to achieve proper  
19 strength can include density, thickening time, the presence of free water, compressive  
20 strength, and formation permeability ([Renpu, 2011](#)). Commonly, cement properties are  
21 varied during the process, with a “weaker” (i.e., less dense) lead cement, followed by a  
22 “stronger” (denser) tail cement. The lead cement is designed with a lower density to  
23 reduce pressure on the formation and better displace drilling fluid without a large concern  
24 for strength. The stronger tail cement provides greater strength for the deeper portions of  
25 the well the operator considers as requiring greater strength.
- 26 • The **compatibility of the cement** with the chemistry of formation fluids, hydrocarbons,  
27 and hydraulic fracturing fluids is important for maintaining well integrity through the life  
28 of the well. Most oil and gas wells are constructed using some form of Portland cement.  
29 Portland cement is a specific type of cement consisting primarily of calcium silicates with  
30 additional iron and aluminum. Industry specifications for recommended cements are  
31 determined by the downhole pressure, temperature, and chemical compatibility required.

32 There are a number of considerations in the design and execution of a cement job. Proper  
33 centralization of the casing within the wellbore is one of the more important considerations. Others  
34 include the potential for lost cement, gas invasion, cement shrinkage, incomplete removal of drilling  
35 mud, settling of solids in the wellbore, and water loss into the formation while curing. These  
36 concerns, and techniques available to address them, include the following:

- 1 • **Improper centralization of the casing within the wellbore** can lead to preferential flow  
2 of cement on the side of the casing with the larger space and little to no cement on the side  
3 closest to the formation. If the casing is not centered in the wellbore, cement will flow  
4 unevenly during the cement job, leading to the formation of cement channels. [Kirksey](#)  
5 [\(2013\)](#) notes that, if the casing is off-center by just 25%, the cement job is almost always  
6 inadequate. Centralizers are used to keep the casing in the center of the hole and allow an  
7 even cement job. To ensure proper centralization, centralizers are placed at regular  
8 intervals along the casing ([API, 2010a](#)). Centralizer use is especially key in horizontal  
9 wells, as the casing will tend to settle (due to gravity) to the bottom of the wellbore if the  
10 casing is not centered ([Sabins, 1990](#)), leading to inadequate cement on the lower side.
- 11 • **Lost cement** (sometimes referred to as lost returns) refers to cement that moves out of  
12 the wellbore and into the formation instead of filling up the annulus between the casing  
13 and the formation. Lost cement can occur in weak formations that fail (fracture) under  
14 pressure of the cement or in particularly porous, permeable, or naturally fractured  
15 formations. Lost cement can result in lack of adequate cement across a water- or brine-  
16 bearing zone. To avoid inadequate placement of cement due to lost cement, records of  
17 nearby wells can be examined to determine zones where lost cement returns occur ([API,](#)  
18 [2009a](#)). If records from nearby wells are not available, cores and logs may be used to  
19 identify any high-permeability or mechanically weak formations that might lead to lost  
20 cement. Steps can then be taken to eliminate or reduce loss of cement to the formation.  
21 Staged cementing (see below) can reduce the hydrostatic pressure on the formation and  
22 may avoid fracturing weak formations ([Lyons and Pligsa, 2004](#)). Additives are also  
23 available that will lessen the flow of cement into highly porous formations ([API, 2010a;](#) [Ali](#)  
24 [et al., 2009](#)).
- 25 • **Gas invasion and cement shrinkage** during cement setting can also cause channels and  
26 poor bonding. During the cementing process, the hydrostatic pressure from the cement  
27 column keeps formation gas from entering the cement. As the cement sets (hardens), the  
28 hydrostatic pressure decreases; if it becomes less than the formation pressure, gas can  
29 enter the cement, leading to channels. Cement also shrinks as it sets, which can lead to  
30 poor bonding and formation of microannuli. These problems can be avoided by using  
31 cement additives that increase setting time or expand to offset shrinkage ([McDaniel et al.,](#)  
32 [2014;](#) [Wojtanowicz, 2008;](#) [Dusseault et al., 2000](#)). Foamed cement can help alleviate  
33 problems with shrinkage, although care needs to be taken in cement design to ensure the  
34 proper balance of pressure between the cement column and formation ([API, 2010a](#)).  
35 Cement additives are also available that will expand upon contact with certain fluids such  
36 as hydrocarbons. These cements, termed self-healing cements, are relatively new but have  
37 shown early promise in some fields ([Ali et al., 2009](#)). Rotating the casing during cementing  
38 will also delay cement setting. Another technique called pulsation, where pressure pulses  
39 are applied to the cement while it is setting, also can delay cement setting and loss of  
40 hydrostatic pressure until the cement is strong enough to resist gas penetration ([Stein et](#)  
41 [al., 2003](#)).

- 1 • Another important issue is **removal of drilling mud**. If drilling mud is not completely  
2 removed, it can gather on one side of the wellbore and prevent that portion of the  
3 wellbore from being adequately cemented. The drilling mud can then be eroded away after  
4 the cement sets, leaving a channel. Drilling mud can be removed by circulating a denser  
5 fluid (spacer fluid) to flush the drilling mud out ([Kirksey, 2013](#); [Brufatto et al., 2003](#)).  
6 Mechanical devices called scratchers can also be attached to the casing and the casing  
7 rotated or reciprocated to scrape drilling mud from the wellbore ([Hyne, 2012](#); [Crook,](#)  
8 [2008](#)). The spacer fluid, which is circulated prior to the cement to wash the drilling fluid  
9 out of the wellbore, must be designed with the appropriate properties and pumped in such  
10 a way that it displaces the drilling fluid without mixing with the cement ([Kirksey, 2013](#);  
11 [API, 2010a](#); [Brufatto et al., 2003](#)).
- 12 • Also of concern in horizontal wells is the possibility of **solids settling** at the bottom of the  
13 wellbore and free water collecting at the top of the wellbore. This can lead to channels and  
14 poor cement bonding. The cement slurry must be properly designed for horizontal wells to  
15 minimize free water and solids settling.
- 16 • If there is free water in the cement, pressure can cause **water loss into the formation**,  
17 leaving behind poor cement or channels ([Jiang et al., 2012](#)). In horizontal wells, free water  
18 can also accumulate at the top of the wellbore, forming a channel ([Sabins, 1990](#)).  
19 Minimizing free water in the cement design and using fluid loss control additives can help  
20 control loss of water ([Ross and King, 2007](#)).

#### D.2.2.2. Cement Placement Techniques

21 The primary cement job is most commonly conducted by pumping the cement down the inside of  
22 the casing, then out the bottom of the casing where it is then forced up the space between the  
23 outside of the casing and the formation. (The cement can also be placed in the space between two  
24 casings.) If **continuous cement** (i.e., a sheath of cement placed along the entire wellbore) is  
25 desired, cement is circulated through the annulus until cement that is pumped down the central  
26 casing flows out of the annulus at the surface. A spacer fluid is often pumped ahead of cement to  
27 remove any excess drilling fluid left in the wellbore; even if the operator does not plan to circulate  
28 cement to the surface, the spacer fluid will still return to the surface, as this is necessary to remove  
29 the drilling mud from the annulus. If neither the spacer fluid nor the cement returns to the surface,  
30 this indicates that fluids are being lost into the formation.

31 **Staged cementing** is a technique that reduces pressure on the formation by decreasing the height  
32 (and therefore the weight) of the cement column. This may be necessary if the estimated weight  
33 and pressure associated with standard cement emplacement could damage zones where the  
34 formation intersected is weak. The reduced hydrostatic pressure at the bottom of the cement  
35 column can also reduce the loss of water to permeable formations, improving the quality of the  
36 cement job. In multiple-stage cementing, cement is circulated to just below a cement collar placed  
37 between two sections of casing. A cement collar will have been placed between two sections of  
38 casing, just above, with ports that can be opened by dropping a weighted tool. Two plugs—which  
39 are often referred to as bombs or darts because of their shape—are then dropped. The first plug is

1 dropped, once the desired cement for the first stage has been pushed out of the casing by a spacer  
2 fluid. It closes the section of the well below the cement collar and stops cement from flowing into  
3 the lower portion of the well. The second plug (or opening bomb) opens the cement ports in the  
4 collar, allowing cement to flow into the annulus between the casing and formation. Cement is then  
5 circulated down the wellbore, out the cement ports, into the annulus, and up to the surface. Once  
6 cementing is complete, a third plug is dropped to close the cement ports, preventing the newly  
7 pumped cement from flowing back into the well ([Lyons and Pligsa, 2004](#)); see Figure D-1.

8 Another less commonly used primary cementing technique is **reverse circulation cementing**. This  
9 technique has been developed to decrease the force exerted on weak formations. In reverse  
10 circulation cementing, the cement is pumped down the annulus directly between the outside of the  
11 outermost casing and the formation. This essentially allows use of lower density cement and lower  
12 pumping pressures. With reverse circulation cementing, greater care must be taken in calculating  
13 the required cement, ensuring proper cement circulation, and locating the beginning and end of the  
14 cemented portion.

15 Another method used to cement specific portions of the well without circulating cement along the  
16 entire wellbore length is to use a **cement basket**. A cement basket is a device that attaches to the  
17 well casing. It is made of flexible material such as canvas or rubber that can conform to the shape of  
18 the wellbore. The cement basket acts as a one-way barrier to cement flow. Cement can be circulated  
19 up the wellbore past the cement basket, but when circulation stops the basket prevents the cement  
20 from falling back down the wellbore. Cement baskets can be used to isolate weak formations or  
21 formations with voids. They can also be placed above large voids such as mines or caverns with  
22 staged cementing used to cement the casing above the void.

23 If any deficiencies are identified, **remedial cementing** may be performed. The techniques available  
24 to address deficiencies in the primary cement job including cement squeezes or top-job cementing.  
25 A cement squeeze injects cement under high pressure to fill in voids or spaces in the primary  
26 cement job caused by high pressure, failed formations, or improper removal of drilling mud.  
27 Although cement squeezes can be used to fix deficiencies in the primary cement job, they require  
28 the well to be perforated, which can weaken the well and make it susceptible to degradation by  
29 pressure and temperature cycling as would occur during fracturing ([Crescent, 2011](#)). Another  
30 method of secondary cementing is the top job. In a top job, cement is pumped down the annulus  
31 directly to fill the remaining uncemented space when cement fails to circulate to the surface.


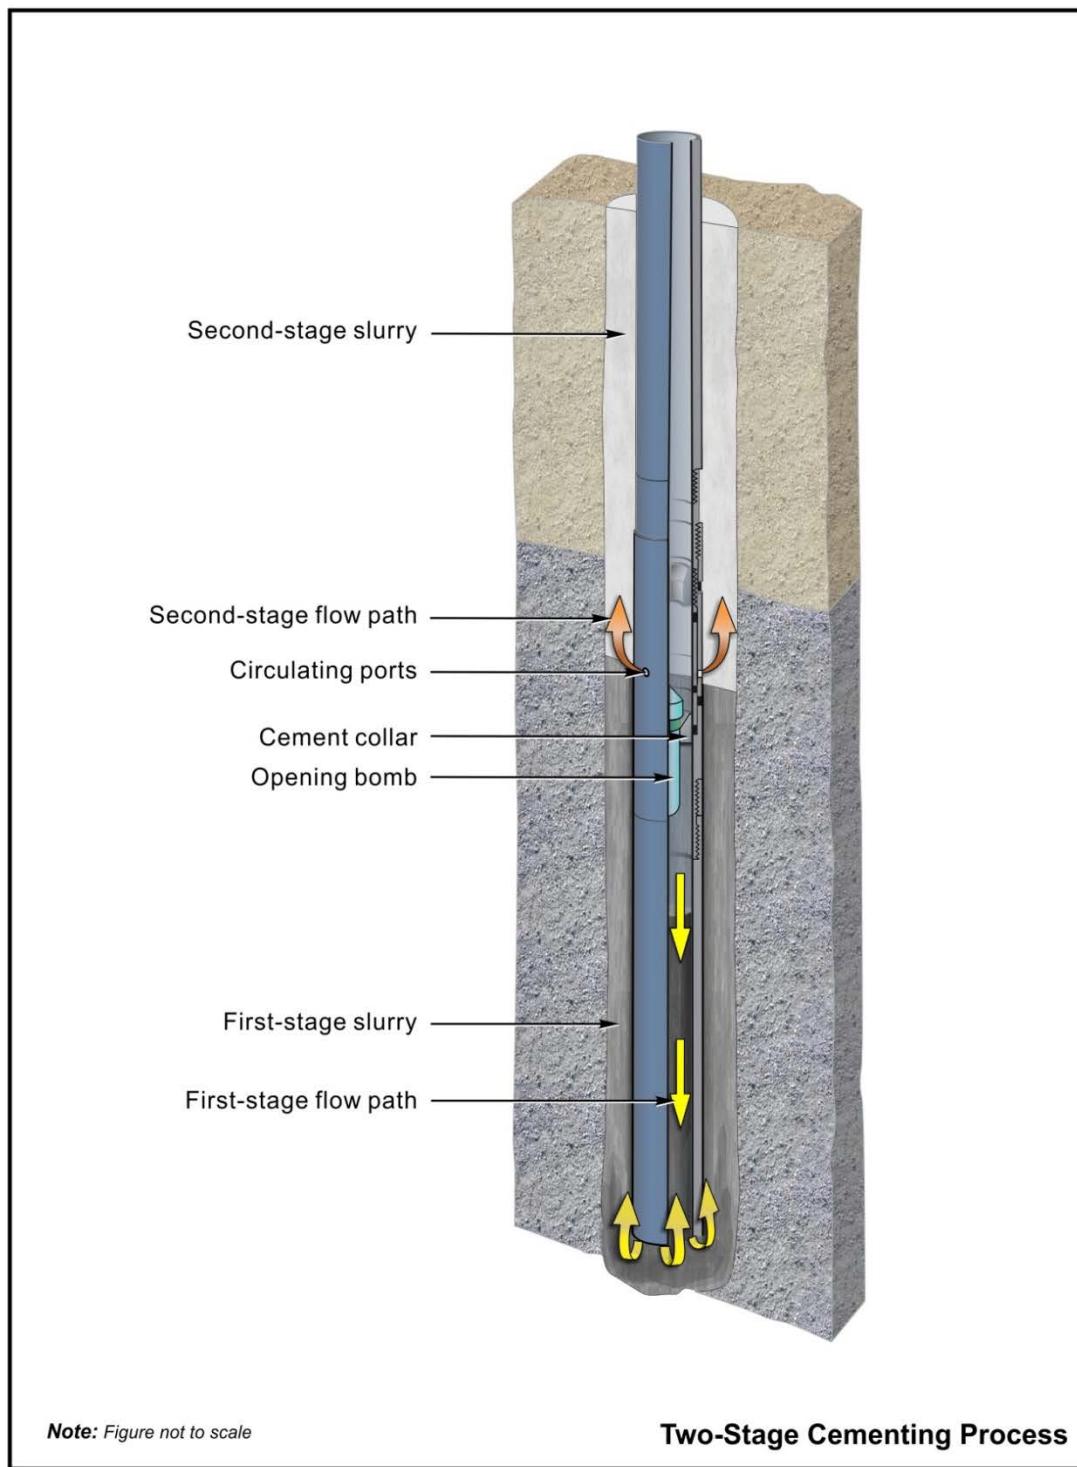


Figure D-1. A typical staged cementing process.



### D.3. Well Completions

- 1 Completion refers to how the well is prepared for production and how flow is established between
- 2 the formation and the surface. Figure D-2 presents examples of well completion types, including
- 3 cased, formation packer, and open hole completion.

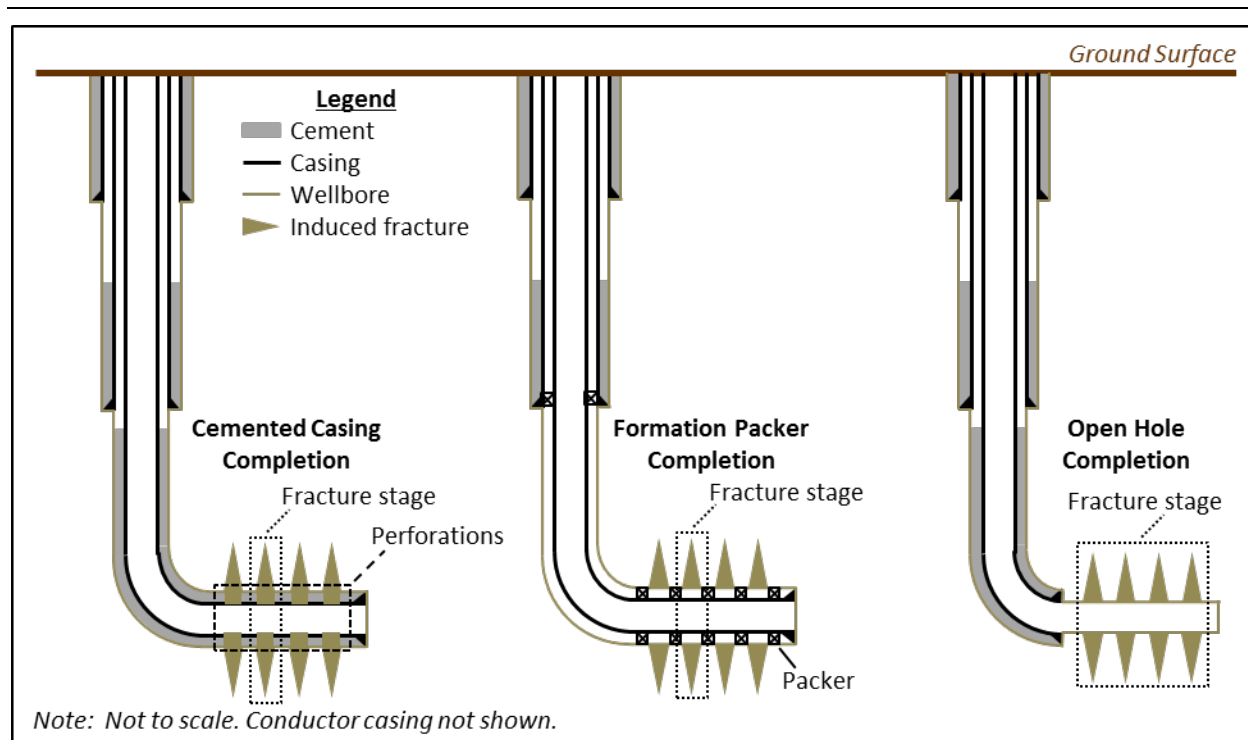

**Figure D-2. Examples of well completion types.**

Configurations shown include cased, formation packer, and open hole completion. From [U.S. EPA \(2015f\)](#).

- 4 A **cased completion**, where the casing extends to the end of the wellbore and is cemented in place,
- 5 is the most common configuration of the well in the production zone ([U.S. EPA, 2015f](#)). Perforations
- 6 are made through the casing and cement and into the formation using small explosive charges
- 7 called “perf guns” or other devices, such as sand jets. Hydraulic fracturing then is conducted
- 8 through the perforations. This is a common technique in wells that produce from several different
- 9 depths and in low-permeability formations that are fractured ([Renpu, 2011](#)). While perforations do
- 10 control the initiation point of the fracture, this can be a disadvantage if the perforations are not
- 11 properly aligned with the local stress field. If the perforations are not aligned, the fractures will
- 12 twist to align with the stress field, leading to tortuosity in the fractures and making fluid movement
- 13 through them more difficult ([Cramer, 2008](#)). Fracturing stages can be isolated from each other
- 14 using various mechanisms such as plugs or baffle rings, which close off a section of the well when a
- 15 ball of the correct size is dropped down the well.



1 **A packer** is a mechanical device used to selectively seal off certain sections of the wellbore.  
2 Packers can be used to seal the space between the tubing and casing, between two casings, or  
3 between the production casing and formation. The packer has one or more rubber elements that  
4 can be manipulated downhole to increase in diameter and make contact with the inner wall of the  
5 next-largest casing or the formation, effectively sealing the annulus created between the outside of  
6 the tubing and the inside of the casing. Packers vary in how they are constructed and how they are  
7 set, based on the downhole conditions in which they are used. There are two types of packers:  
8 internal packers and formation packers. Internal packers are used to seal the space between the  
9 casing and tubing or between two different casings. They isolate the outer casing layers from  
10 produced fluids and prevent fluid movement into the annulus. Formation packers seal the space  
11 between the casing and the formation and are often used to isolate fracture stages; they can be used  
12 to separate an open hole completion into separate fracture stages. Packers can seal an annulus by  
13 several different mechanisms. Mechanical packers expand mechanically against the formation and  
14 can exert a significant force on the formation. Swellable packers have elastomer sealing elements  
15 that swell when they come into contact with a triggering fluid such as water or hydrocarbons. They  
16 exert less force on the formation and can seal larger spaces but take some time to fully swell  
17 ([McDaniel and Rispler, 2009](#)). Internal mechanical integrity tests such as pressure tests can verify  
18 that the packer is functioning as designed and has not corroded or deteriorated.

19 In an **open hole completion**, the production casing extends just into the production zone and the  
20 entire length of the wellbore through the production zone is left uncased. This is only an option in  
21 formations where the wellbore is stable enough to not collapse into the wellbore. In formations that  
22 are unstable, a slotted liner may be used in open hole completions to control sand production  
23 ([Renpu, 2011](#)). Perforations are not needed in an open hole completion, since the production zone  
24 is not cased. An open hole completion can be fractured in a single stage or in multiple stages.

25 If formations are to be fractured in stages, additional completion methods are needed to separate  
26 the stages from each other and control the location of the fractures. One possibility is use of a liner  
27 with formation packers to isolate each stage. The liner is equipped with sliding sleeves that can be  
28 opened by dropping balls down the casing to open each stage. Fracturing typically occurs from the  
29 end of the well and continues toward the beginning of the production zone.

#### D.4. Mechanical Integrity Testing

30 While proper design and construction of the well's casing and cement are important, it is also  
31 important to verify the well was constructed and is performing as designed. Mechanical integrity  
32 tests (MITs) can verify that the well was constructed as planned and can detect damage to the  
33 production well that occurs during operations, including hydraulic fracturing activities. Verifying  
34 that a well has mechanical integrity can prevent potential impacts to drinking water resources by  
35 providing early warning of a problem with the well or cement and allowing repairs.

36 It is important to note that if a well fails an MIT, this does not mean the well has failed or that an  
37 impact on drinking water resources has occurred. An MIT failure is a warning that one or more  
38 components of the well are not performing as designed and is an indication that corrective actions

1 are necessary. If well remediation is not performed, a loss of well integrity could occur, which could  
2 result in fluid movement from the well.

#### D.4.1. Internal Mechanical Integrity

3 Internal mechanical integrity is an absence of significant leakage in the tubing, casing, or packers  
4 within the well system. Loss of internal mechanical integrity is usually due to corrosion or  
5 mechanical failure of the well's tubular and mechanical components.

6 Internal mechanical integrity can be tested by the use of pressure testing, annulus pressure  
7 monitoring, ultrasonic monitoring, and casing inspection logs or caliper logs:

- 8 • **Pressure testing** involves raising the pressure in the wellbore to a set level and shutting  
9 in the well. If the well has internal mechanical integrity, the pressure should remain  
10 constant with only small changes due to temperature fluctuation. Typically, the well is  
11 shut in (i.e., production is stopped and the wellhead valves closed) for half an hour, and if  
12 the pressure remains within 5% of the original reading, the well is considered to have  
13 passed the test. Usually, the well is pressure tested to the maximum expected pressure; for  
14 a well to be used for hydraulic fracturing this would be the pressure applied during  
15 hydraulic fracturing. Pressure tests, however, can cause debonding of the cement from the  
16 casing, so test length is often limited to reduce this effect ([API, 2010a](#)).
- 17 • If the annulus between the tubing and casing is sealed by a packer, **annulus pressure**  
18 **monitoring** can give an indication of the integrity of the tubing and casing. If the tubing,  
19 casing, and packer all have mechanical integrity, the pressure in the annulus should not  
20 change except for small changes in response to temperature fluctuations. The annulus can  
21 be filled with a non-corrosive liquid and the level of the liquid can be used as another  
22 indication of the integrity of the casing, tubing, and packer. The advantage of monitoring  
23 the tubing/production casing annulus is it can give a continuous, real-time indication of  
24 the internal integrity of the well. Even if the annulus is not filled with a fluid, monitoring its  
25 pressure can indicate leaks. If pressure builds up in the annulus and then recovers quickly  
26 after having bled off, that condition is referred to as sustained casing pressure or surface  
27 casing vent flow and is a sign of a leak in the tubing or casing ([Watson and Bachu, 2009](#)).  
28 Monitoring of annuli between other sets of casings can also provide information on the  
29 integrity of those casings. It can also provide information on external mechanical integrity  
30 for annuli open to the formation (see Section D.4.2 for additional information on external  
31 MITs). [Jackson et al. \(2013\)](#) also note that monitoring annular pressure allows the  
32 operator to vent gas before it accumulates enough pressure to cause migration into  
33 drinking water resources. Measuring annulus flow rate also allows detection of gas  
34 flowing into the annulus ([Arthur, 2012](#)).
- 35 • A newer tool uses **ultrasonic monitors** to detect leaks in casing and other equipment. It  
36 measures the attenuation of an ultrasonic signal as it is transmitted through the wellbore.  
37 The tool measures transmitted ultrasonic signals as it is lowered down the wellbore. The  
38 tool can pick up ultrasonic signals created by the leak, similar to noise logs. The tool only

- 1 has a range of a few feet but is claimed to detect leaks as small as half a cup per minute  
2 ([Julian et al., 2007](#)).
- 3 • **Caliper logs** have mechanical fingers that extend from a central tool and measure the  
4 distance from the center of the wellbore to the side of the casing. Running a caliper log can  
5 identify areas where corrosion has altered the diameter of the casing or where holes have  
6 formed in the casing. Caliper logs may also detect debris or obstructions in the well. Casing  
7 inspection and caliper logs are primarily used to determine the condition of the casing.  
8 Regular use of them may identify problems such as corrosion and allow mitigation before  
9 they cause of loss of integrity to the casing. To run these logs in a producing well, the  
10 tubing must first be pulled.
  - 11 • **Casing inspection logs** are instruments lowered into the casing to inspect the casing for  
12 signs of wear or corrosion. One type of casing log uses video equipment to detect  
13 corrosion or holes. Another type uses electromagnetic pulses to detect variations in metal  
14 thickness. Running these logs in a producing well requires the tubing to be pulled.
- 15 If an internal mechanical integrity problem is detected, first, the location of the problem must be  
16 found. Caliper or casing inspection logs can detect locations of holes in casing. Locations of leaks  
17 can also be detected by sealing off different sections of the well using packers and performing  
18 pressure tests on each section until the faulty section is located. If the leaks are in the tubing or a  
19 packer, the problem may be remedied by replacing the well component. Casing leaks may be  
20 remedied by performing a cement squeeze (see the section on cementing).

#### D.4.2. External Mechanical Integrity

21 External well mechanical integrity is demonstrated by establishing the absence of significant fluid  
22 movement along the outside of the casing, either between the outer casing and cement or between  
23 the cement and the wellbore. Failure of an external MIT can indicate improper cementing or  
24 degradation of the cement emplaced in the annular space between the outside of the casing and the  
25 wellbore. This type of failure can lead to movement of fluids out of intended production zones and  
26 toward drinking water resources.

27 Several types of logs are available to evaluate external mechanical integrity, including temperature  
28 logs, noise logs, oxygen activation logs, radioactive tracer logs, and cement evaluation logs.

- 29 • **Temperature logs** measure the temperature in the wellbore. They are capable of  
30 measuring small changes in temperature. They can be performed using instruments that  
31 are lowered down the well on a wireline or they can be done using fiber optic sensors  
32 permanently installed in the well. When performed immediately after cementing, they can  
33 detect the heat from the cement setting and determine the location of the top of cement.  
34 After the cement has set, temperature logs can sense the difference in temperatures  
35 between formation fluids and injected or produced fluids. They may also detect  
36 temperature changes due to cooling or warming caused by flow. In this way temperature  
37 logs may detect movement of fluid outside the casing in the wellbore ([Arthur, 2012](#)).

1 Temperature logs require interpretation of the causes of temperature changes and are  
2 therefore subject to varying results among different users.

- 3 • **Noise logs** are sensitive microphones that are lowered down the well on a wireline. They  
4 are capable of detecting small noises caused by flowing fluids, such as fluids flowing  
5 through channels in the cement ([Arthur, 2012](#)). They are most effective at detecting fast-  
6 moving gas leaks and less successful with more slowly moving liquid migration.
- 7 • **Oxygen activation logs** consist of a neutron source and one or more detectors that are  
8 lowered on a wireline. The neutron source bombards oxygen molecules surrounding the  
9 wellbore and converts them into unstable nitrogen molecules that rapidly decay back to  
10 oxygen, emitting gamma radiation in the process. Gamma radiation detectors above or  
11 below the neutron source measure how quickly the oxygen molecules are moving away  
12 from the source, thereby determining flow associated with water.
- 13 • **Radioactive tracer logs** involve release of a radioactive tracer and then passing a  
14 detector up or down the wellbore to measure the path the tracers have taken. They can be  
15 used to determine if fluid is flowing up the wellbore. Tracer logs can be very sensitive but  
16 may be limited in the range over which leaks can be detected.
- 17 • **Cement evaluation logs** (also known as cement bond logs) are acoustic logs consisting of  
18 an instrument that sends out acoustic signals along with receivers, separated by some  
19 distance, that record the acoustic signals. As the acoustic signals pass through the casing  
20 they will be attenuated to an extent, depending on whether the pipe is free or is bonded to  
21 cement. By analyzing the return acoustic signal, the degree of cement bonding with the  
22 casing can be determined. The cement evaluation log measures the sound attenuation as  
23 sound waves passing through the cement and casing. There are different types of cement  
24 evaluation logs available. Some instruments can only return an average value over the  
25 entire wellbore. Other instruments are capable of measuring the cement bond radially.  
26 Cement logs do not actually determine whether fluid movement through the annulus is  
27 occurring. They only can determine whether cement is present in the annulus and in some  
28 cases can give a qualitative assessment of the quality of the cement in the annulus. Cement  
29 evaluation logs are used to calculate a bond index which varies between 0 and 1, with 1  
30 representing the strongest bond and 0 representing the weakest bond.

31 If the well fails an external MIT, damaged or missing cement may be repaired using a cement  
32 squeeze ([Wojtanowicz, 2008](#)). A cement squeeze involves injection of cement slurry into voids  
33 behind the casing or into permeable formations. Different types of cement squeezes are available  
34 depending on the location of the void needing to be filled and well conditions ([Kirksey, 2013](#)).  
35 Cement squeezes are not always successful, however, and may need to be repeated to successfully  
36 seal off flow ([Wojtanowicz, 2008](#)).

## D.5. References for Appendix D

[Ali, M.; Taoutaou, S.; Shafqat, AU; Salehapour, A; Noor, S.](#) (2009). The use of self healing cement to ensure long term zonal isolation for HPHT wells subject to hydraulic fracturing operations in Pakistan. Paper presented at International Petroleum Technology Conference, December 7-9, 2009, Doha, Qatar.

- [API](#) (American Petroleum Institute). (1999). Recommended practice for care and use of casing and tubing [Standard] (18th ed.). (API RP 5C1). Washington, DC: API Publishing Services.
- [API](#) (American Petroleum Institute). (2004). Recommended practice for centralizer placement and stop collar testing (First ed.). (API RP 10D-2 (R2010)).
- [API](#) (American Petroleum Institute). (2009a). Hydraulic fracturing operations - Well construction and integrity guidelines [Standard] (First ed.). Washington, DC: API Publishing Services.
- [API](#) (American Petroleum Institute). (2009b). Packers and bridge plugs (Second ed.). (API Spec 11D1).
- [API](#) (American Petroleum Institute). (2010a). Isolating potential flow zones during well construction [Standard] (1st ed.). (RP 65-2). Washington, DC: API Publishing Services.  
<http://www.techstreet.com/products/preview/1695866>
- [API](#) (American Petroleum Institute). (2010b). Specification for cements and materials for well cementing [Standard] (24th ed.). (ANSI/API SPECIFICATION 10A). Washington, DC: API Publishing Services.  
<http://www.techstreet.com/products/1757666>
- [API](#) (American Petroleum Institute). (2011). Specification for casing and tubing - Ninth edition [Standard] (9th ed.). (API SPEC 5CT). Washington, DC: API Publishing Services.  
<http://www.techstreet.com/products/1802047>
- [API](#) (American Petroleum Institute). (2013). Recommended practice for testing well cements [Standard] (2nd ed.). (RP 10B-2). Washington, DC: API Publishing Services.  
<http://www.techstreet.com/products/1855370>
- [Arthur, JD.](#) (2012). Understanding and assessing well integrity relative to wellbore stray gas intrusion issues. Presentation presented at Ground Water Protection Council Stray Gas - Incidence & Response Forum, July 24-26, 2012, Cleveland, OH.
- [Brufatto, C; Cochran, J; Conn, L; El-Zeghaty, SZA, A; Fraboulet, B; Griffin, T; James, S; Munk, T; Justus, F; Levine, JR; Montgomery, C; Murphy, D; Pfeiffer, J; Pornpoch, T; Rishmani, L.](#) (2003). From mud to cement - Building gas wells. *Oilfield Rev* 15: 62-76.
- [CAPP](#) (Canadian Association of Petroleum Producers). (2013). CAPP hydraulic fracturing operating practice: Wellbore construction and quality assurance. (2012-0034).  
<http://www.capp.ca/getdoc.aspx?DocId=218137&DT=NTV>
- [Cramer, DD.](#) (2008). Stimulating unconventional reservoirs: Lessons learned, successful practices, areas for improvement. SPE Unconventional Reservoirs Conference, February 10-12, 2008, Keystone, CO.
- [Crescent](#) (Crescent Consulting, LLC). (2011). East Mamm creek project drilling and cementing study. Oklahoma City, OK. <http://cogcc.state.co.us/Library/PiceanceBasin/EastMammCreek/ReportFinal.pdf>
- [Crook, R.](#) (2008). Cementing: Cementing horizontal wells. Halliburton.
- [Dusseault, MB; Gray, MN; Nawrocki, PA.](#) (2000). Why oilwells leak: Cement behavior and long-term consequences. Paper presented at SPE International Oil and Gas Conference and Exhibition in China, November 7-10, 2000, Beijing, China.
- [Enform.](#) (2013). Interim industry recommended practice 24: fracture stimulation: Interwellbore communication 3/27/2013 (1.0 ed.). (IRP 24). Calgary, Alberta: Enform Canada.  
[http://www.enform.ca/safety\\_resources/publications/PublicationDetails.aspx?a=29&type=irp](http://www.enform.ca/safety_resources/publications/PublicationDetails.aspx?a=29&type=irp)
- [Hyne, NJ.](#) (2012). Nontechnical guide to petroleum geology, exploration, drilling and production. In *Nontechnical guide to petroleum geology, exploration, drilling and production* (3 ed.). Tulsa, OK: PennWell Corporation.
- [Jackson, RE; Gorody, AW; Mayer, B; Roy, JW; Ryan, MC; Van Stempvoort, DR.](#) (2013). Groundwater protection and unconventional gas extraction: the critical need for field-based hydrogeological research. *Ground Water* 51: 488-510. <http://dx.doi.org/10.1111/gwat.12074>

- [Jiang, L; Guillot, D; Meraji, M; Kumari, P; Vidick, B; Duncan, B; Gaafar, GR; Sansudin, SB.](#) (2012). Measuring isolation integrity in depleted reservoirs. SPWLA 53rd Annual Logging Symposium, June 16 - 20, 2012, Cartagena, Colombia.
- [Julian, JY; King, GE; Johns, JE; Sack, JK; Robertson, DB.](#) (2007). Detecting ultrasmall leaks with ultrasonic leak detection, case histories from the North Slope, Alaska. Paper presented at International Oil Conference and Exhibition in Mexico, June 27-30, 2007, Veracruz, Mexico.
- [Kirksey, J.](#) (2013). Optimizing wellbore integrity in well construction. Presentation presented at North American Wellbore Integrity Workshop, October 16-17, 2013, Denver, CO.
- [Lyons, WC; Pligsa, GJ.](#) (2004). Standard handbook of petroleum and natural gas engineering (2nd ed.). Houston, TX: Gulf Professional Publishing. <http://www.elsevier.com/books/standard-handbook-of-petroleum-and-natural-gas-engineering/lyons-phd-pe/978-0-7506-7785-1>
- [McDaniel, BW; Rispler, KA.](#) (2009). Horizontal wells with multistage fracs prove to be best economic completion for many low permeability reservoirs. Paper presented at SPE Eastern Regional Meeting, September 23-15, 2009, Charleston, WV.
- [McDaniel, J; Watters, L; Shadravan, A.](#) (2014). Cement sheath durability: Increasing cement sheath integrity to reduce gas migration in the Marcellus Shale Play. In SPE hydraulic fracturing technology conference proceedings. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168650-MS>
- [MSC](#) (Marcellus Shale Coalition). (2013). Recommended practices: Drilling and completions. (MSC RP 2013-3). Pittsburgh, Pennsylvania.
- [Renpu, W.](#) (2011). Advanced well completion engineering (Third ed.). Houston, TX: Gulf Professional Publishing.
- [Ross, D; King, G.](#) (2007). Well completions. In MJ Economides; T Martin (Eds.), Modern fracturing: Enhancing natural gas production (1 ed., pp. 169-198). Houston, Texas: ET Publishing.
- [Sabins, F.](#) (1990). Problems in cementing horizontal wells. J Pet Tech 42: 398-400. <http://dx.doi.org/10.2118/20005-PA>
- [Stein, D; Griffin Jr, TJ; Dusterhoft, D.](#) (2003). Cement pulsation reduces remedial cementing costs. GasTIPS 9: 22-24.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015f). Review of well operator files for hydraulically fractured oil and gas production wells: Well design and construction [EPA Report]. (EPA/601/R-14/002). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [Watson, TL; Bachu, S.](#) (2009). Evaluation of the potential for gas and CO2 leakage along wellbores. S P E Drilling & Completion 24: 115-126. <http://dx.doi.org/10.2118/106817-PA>
- [Wojtanowicz, AK.](#) (2008). Environmental control of well integrity. In ST Orszulik (Ed.), Environmental technology in the oil industry (pp. 53-75). Houten, Netherlands: Springer Netherlands.



## Appendix E

---

# Flowback and Produced Water Supplemental Tables and Information



## Appendix E. Flowback and Produced Water Supplemental Tables and Information

### E.1. Flowback and Long-Term Produced Water Volumes

- 1 The EPA ([2015g](#)) estimates of flowback volumes and long-term produced water volumes used to
- 2 generate the summaries appearing in Table 7-3 of Chapter 7 appear below in Table E-1.

**Table E-1. Flowback and long-term produced water characteristics for wells in unconventional formations, formation-level data.**

Source: [U.S. EPA \(2015g\)](#).

Basin	Resource Type	Unconventional Formation	Drill Type	Fracturing Fluid (Mgal)			Flowback (% of Fracturing Fluid Returned)			Long-Term Produced Water Rates (gpd)		
				Median	Range	Number of Data Points	Median	Range <sup>a</sup>	Number of Data Points	Median	Range <sup>b</sup>	Number of Data Points
Anadarko	Shale	Woodford	H	4.7	1.0-12	2,239	34	20-50	3	5,500	3,200-6,400	198
	Tight	Cleveland	H	0.81	0.2-4.0	144	--	12-40	2	82	20-300	571
			V	0.69	0.11-3	4	--	--	2	32	6.6-170	390
		Granite Wash	H	6.2	0.2-9.4	77	--	7-22	2	1,300	0-2,200	273
			V	0.56	0.05-3	26	--	--	2	500	170-1,300	2,413
		Mississippi Lime	H	1.8	0.82-2.4	428	--	50	1	--	37,000-120,000	4
Appalachian	Shale	Marcellus	H	4.4	0.9-11	14,010	7	4-47	4,374	860	54-13,000	4,984
			V	2.6	0.53-6.6	66	40	21-60	7	230	100-1,200	714
		Utica	H	4.0	1.0-11	150	4	2-27	73	510	210-1,200	82
Arkoma	Shale	Fayetteville	H	5.1	1.7-11	1,668	--	10-20	2	430	150-2,300	2,305
Denver-Julesburg	Shale	Niobrara	H	2.6	0.73-3.4	69	13	6-25	16	680	260-810	250
			V	0.32	0.27-3.3	367	11	7-35	9	340	240-600	5,474
	Tight	Codell	D	0.28	0.21-0.46	78	--	--	0	--	--	0
			V	0.27	0.13-0.46	185	--	--	0	--	--	0
		Codell-Niobrara	H	2.6	0.15-2.7	62	7	--	32	34	19-140	32
	D		0.45	0.21-0.47	116	--	--	0	--	--	0	
	V		0.30	0.13-0.46	592	--	--	0	29	13-65	1,677	

*This document is a draft for review purposes only and does not constitute Agency policy.*

Basin	Resource Type	Unconventional Formation	Drill Type	Fracturing Fluid (Mgal)			Flowback (% of Fracturing Fluid Returned)			Long-Term Produced Water Rates (gpd)		
				Median	Range	Number of Data Points	Median	Range <sup>a</sup>	Number of Data Points	Median	Range <sup>b</sup>	Number of Data Points
Denver-Julesburg, cont.	Tight cont.	Muddy J	D	0.59	.025-0.62	162	--	--	0	230	64-390	3
			V	0.28	0.16-0.62	292	--	--	0	55	9.3-500	129
Fort Worth	Shale	Barnett	H	3.6	1-7.3	23,917	30	21-40	11	920	160-4,200	10,349
			V	1.3	0.4-1.9	3,589	--	--	0	250	170-580	3,318
Green River	Shale	Hilliard-Baxter-Mancos	H	1.7	1.0-5.6	2	--	--	0	37	15-58	7
	Tight	Lance	V	1.3	0.81-3.5	29	3	1-50	31	410	250-580	1,050
			D	1.2	0.76-1.9	180	6	1-17	170	860	360-1,200	1,140
Green River, cont.		Mesaverde	D	0.23	0.16-0.31	73	8	0-37	61	190	150-440	445
			V	0.17	0.081-0.29	14	21	6-83	11	290	140-610	1,081
Illinois	Shale	New Albany	H	--	--	0	--	--	0	--	2,900	2
Michigan	Shale	Antrim	V	--	0.05	1	--	25-75	2	--	4,600	1
Permian	Shale	Avalon & Bone Spring	D	2.2	0.94-4.5	20	13	5-31	16	950	220-2,400	183
			H	1.1	0.73-2.8	17	--	--	0	0	0-2,300	37
		Barnett-Woodford	H	2.1	0.5-4.5	2	--	--	0	--	--	0

This document is a draft for review purposes only and does not constitute Agency policy.

Basin	Resource Type	Unconventional Formation	Drill Type	Fracturing Fluid (Mgal)			Flowback (% of Fracturing Fluid Returned)			Long-Term Produced Water Rates (gpd)		
				Median	Range	Number of Data Points	Median	Range <sup>a</sup>	Number of Data Points	Median	Range <sup>b</sup>	Number of Data Points
Permian, cont.	Shale, cont.	Devonian (TX)	H	0.32	0.13-0.89	10	--	--	0	880	310-1,800	381
			V	0.27	0.12-1.0	16	--	--	0	400	150-3,000	162
		Wolfcamp	H	1.4	1.1-3.9	55	--	--	0	3,000	210-19,000	104
			D	1.3	0.26-1.7	12	16	15-20	3	310	22-8,700	259
			V	0.81	0.078-1.7	60	--	--	0	910	130-1,700	926
	Tight	Spraberry	V	--	1.0	1	--	--	0	870	100-4,000	66
San Juan	Tight	Mesaverde (San Juan)	D	--	--	0	--	--	0	18	12-260	48
		Dakota	V	0.2	0.063-0.22	19	--	--	0	65	29-120	6
			D	0.12	0.07-0.3	52	4	1-40	30	160	41-370	379
TX-LA-MS	Shale	Bossier	H	2.7	1.7-3.6	2	--	--	0	750	610-1,200	25
			V	0.4	0.19-1.7	16	--	--	0	470	180-1,100	1,203
			D	0.28	0.13-0.8	21	--	--	0	320	130-1,300	253
		Haynesville	H	5.3	0.95-15	3,222	5	5-30	3	1,700	84-1,800	1,249
			V	0.61	.14-3.5	9	--	--	0	210	56-850	263
		Tight	Cotton Valley	H	4.2	.25-6.0	30	--	<60	2	770	130-2,700
	D			.48	.084-4.0	24	--	<60	2	950	630-1,800	1801
	V			.28	.019-.94	76	--	<60	2	640	370-1,800	10,717

This document is a draft for review purposes only and does not constitute Agency policy.

Basin	Resource Type	Unconventional Formation	Drill Type	Fracturing Fluid (Mgal)			Flowback (% of Fracturing Fluid Returned)			Long-Term Produced Water Rates (gpd)		
				Median	Range	Number of Data Points	Median	Range <sup>a</sup>	Number of Data Points	Median	Range <sup>b</sup>	Number of Data Points
TX-LA-MS, cont.	Tight, cont.	Travis Peak	H	3.0	0.25-6	2	--	--	0	200	39-1,700	5
			V	0.9	0.2-4	2	--	--	0	980	330-1,800	1,380
Western Gulf	Shale	Eagle Ford	H	5.0	1.0-14	2,485	4	2-8	1,800	110	9.1-250	498
			V	2.9	2.0-4.1	9	--	--	0	--	--	0
		Pearsall	H	3.7	3.3-4.1	2	--	--	0	200	54-370	12
	Tight	Austin Chalk	H	0.94	0.58-1.3	15	--	--	0	720	290-2,400	1,097
		Vicksburg	V	.016	0.084-0.6	20	--	--	0	1,000	650-1,900	937
			D	0.11	0.1-0.13	4	--	--	0	--	--	0
		Wilcox Lobo	H	2.1	0.66-2.6	4	--	--	0	330	62-740	77
			V	0.21	0.06-0.6	14	--	--	0	620	330-1,400	1,514
			D	.058	.056-.076	3	--	--	0	--	--	0
		Olmos	V	--	0.15	2	--	--	0	--	--	0
Williston		Bakken	H	2.0	0.35-10	2,203	19	5-47	206	680	380-1,500	1,739
			V	1.1	.35-2.9	12	--	--	0	1,000	340-3,100	222

"--" indicates no data; H, horizontal well; D, directional well; V, vertical well.

<sup>a</sup> For some formations, if only one data point was reported, the EPA reported it in the range column and did not report a median value.

<sup>b</sup> For some formations, the number of data points was not reported in the data source. In these instances, the EPA reported the number of data points as equal to one, even if the source reported a range and median value.

*This document is a draft for review purposes only and does not constitute Agency policy.*

## **E.2. Produced Water Content**

### **E.2.1. Introduction**

1 In the main text of Chapter 7, we describe aspects of flowback and produced water composition,  
2 including temporal changes in water quality parameters of flowback (Section 7.5) and major classes  
3 of compounds in produced water (Section 7.6). In section 7.7 we describe variability as occurring  
4 on three levels: between different rock types (e.g., coal vs. sandstone), between formations  
5 composed of the same rock types (e.g., Barnett Shale vs. Bakken Shale), and within formations of  
6 the same rock type (e.g., northeastern vs. southwestern Marcellus Shale). In this appendix we  
7 present data from the literature which illustrates the differences among these three variability  
8 levels.

### **E.2.2. General Water Quality Parameters**

9 As noted in Chapter 7, the EPA identified data characterizing the content of unconventional  
10 flowback and produced water in a total of 12 shale and tight formations and coalbed methane  
11 (CBM) basins. These formations and basins span 18 states. Note that in this subsection we treat all  
12 fluids as produced water. As a consequence, the variability of reported concentrations is likely  
13 higher than if the data could be standardized to a specific point on the flowback-to-produced water  
14 continuum. Table E-2 and Table E-3 provide supporting data on general water quality parameters  
15 of produced water for 12 formations.

**Table E-2. Reported concentrations of general water quality parameters in produced water for unconventional shale and tight formations, presented as: average (minimum–maximum) or *median* (minimum–maximum).**

Parameter	Units	Shales					Tight formations			
		Bakken <sup>a</sup>	Barnett <sup>b</sup>	Fayetteville <sup>c</sup>	Marcellus		Cotton Valley Group <sup>f</sup>	Devonian Sandstone <sup>g</sup>	Mesaverde <sup>f</sup>	Oswego <sup>f</sup>
States	n/a	MT, ND	TX	AR	PA <sup>d</sup>	PA, WV <sup>e</sup>	LA, TX	PA	CO, NM, UT, WY	OK
Acidity	mg/L	-	NC (ND–ND)	-	NC (<5–473)	<b>162</b> (5–925)	-	-	-	-
Alkalinity	mg/L	-	<b>725</b> (215–1,240)	1,347 (811–1,896)	165 (8–577)	<b>99.8</b> (7.5–577)	-	99 (43–194)	-	582 (207–1,220)
Ammonium	mg/L	-	-	-	-	-	89 (40–131)	-	-	-
Bicarbonate	mg/L	291 (122–610)	-	-	-	-	-	524 (ND–8,440)	2,230 (1,281–13,650)	-
Biochemical oxygen demand (BOD)	mg/L	-	<b>582</b> (101–2,120)	-	-	<b>141</b> (2.8–12,400)	-	-	-	-
Carbonate	mg/L	-	-	-	-	-	-	-	227 (ND–1,680)	-
Chloride	mg/L	119,000 (90,000–133,000)	<b>34,700</b> (9,600–60,800)	9,156 (5,507–12,287)	57,447 (64–196,000)	<b>49,000</b> (64.2–196,000)	101,332 (3,167–221,498.7)	132,567 (58,900–207,000)	4,260 (8–75,000)	44,567 (23,000–75,000)
Chemical oxygen demand	mg/L	-	<b>2,945</b> (927–3,150)	-	15,358 (195–36,600)	<b>4,670</b> (195–36,600)	-	-	-	-

*This document is a draft for review purposes only and does not constitute Agency policy.*



Parameter	Units	Shales					Tight formations			
		Bakken <sup>a</sup>	Barnett <sup>b</sup>	Fayetteville <sup>c</sup>	Marcellus		Cotton Valley Group <sup>f</sup>	Devonian Sandstone <sup>g</sup>	Mesaverde <sup>f</sup>	Oswego <sup>f</sup>
States	n/a	MT, ND	TX	AR	PA <sup>d</sup>	PA, WV <sup>e</sup>	LA, TX	PA	CO, NM, UT, WY	OK
DO	mg/L	-	-	-	-	-	-	0.8 (0.2–2.5)	-	-
DOC	mg/L	-	<b>11.2</b> (5.5–65.3)	-	-	<b>117</b> (3.3–5,960)	-	-	-	-
Hardness as CaCO <sub>3</sub>	mg/L	-	<b>5,800</b> (3,500–21,000)	-	34,000 (630–95,000)	<b>25,000</b> (156–106,000)	-	-	-	-
Oil and grease	mg/L	-	<b>163.5</b> (88.2–1,430)	-	74 (5–802)	<b>16.85</b> (4.7–802)	-	-	-	-
pH	SU	5.87 (5.47–6.53)	<b>7.05</b> (6.5–7.2)	-	6.6 (5.1–8.4)	<b>6.5</b> (4.9–7.9)	-	6.3 (5.5–6.8)	8 (5.8–11.62)	6.3 (6.1–6.4)
Specific conductivity	µS/cm	213,000 (205,000–220,800)	<b>111,500</b> (34,800–179,000)	-	-	<b>183,000</b> (479–763,000)	-	184,800 (118,000–211,000)	-	-
Specific gravity	--	1.13 (1.0961–1.155)	-	-	-	-	-	-	-	-
TDS	mg/L	196,000 (150,000–219,000)	<b>50,550</b> (16,400–97,800)	13,290 (9,972–15,721)	106,390 (680–345,000)	<b>87,800</b> (680–345,000)	164,683 (5,241–356,666)	235,125 (106,000–354,000)	15,802 (1,032–125,304)	73,082 (56,541–108,813)
Total Kjeldahl nitrogen	mg/L	-	<b>171</b> (26–298)	-	-	<b>94.9</b> (5.6–312)	-	-	-	-

This document is a draft for review purposes only and does not constitute Agency policy.

Parameter	Units	Shales					Tight formations			
		Bakken <sup>a</sup>	Barnett <sup>b</sup>	Fayetteville <sup>c</sup>	Marcellus		Cotton Valley Group <sup>f</sup>	Devonian Sandstone <sup>g</sup>	Mesaverde <sup>f</sup>	Oswego <sup>f</sup>
States	n/a	MT, ND	TX	AR	PA <sup>d</sup>	PA, WV <sup>e</sup>	LA, TX	PA	CO, NM, UT, WY	OK
TOC	mg/L	-	<b>9.75</b> (6.2–36.2)	-	160 (1.2–1,530)	<b>89.2</b> (1.2–5,680)	198 (184–212)	-	-	-
Total suspended solids	mg/L	-	<b>242</b> (120–535)	-	352 (4–7,600)	<b>127</b> (6.8–3,220)	-	-	-	-
Turbidity	NTU	-	<b>239</b> (144–314)	-	-	<b>126</b> (2.3–1,540)	-	-	-	-

n/a, not applicable; -, no value available; NC, not calculated; ND, not detected., SU= standard units, **bolded italic** numbers are medians

<sup>a</sup> [Stepan et al. \(2010\)](#). *n* = 3. Concentrations were calculated based on Stepan et al.'s raw data. Samples had charge balance errors of 1.74, -0.752, and -0.220%

<sup>b</sup> [Hayes and Severin \(2012b\)](#). *n* = 16. This data source reported concentrations without direct presentation of raw data.

<sup>c</sup> [Warner et al. \(2013\)](#). *n* = 6. Concentrations were calculated based on Warner et al.'s raw data. Both flowback and produced water included.

<sup>d</sup> [Barbot et al. \(2013\)](#). *n* = 134–159. This data source reported concentrations without direct presentation of raw data.

<sup>e</sup> [Hayes \(2009\)](#). *n* = 31–67. Concentrations were calculated based on Hayes's raw data. Both flowback and produced water included. Non-detects and contaminated blanks omitted.

<sup>f</sup> [Blondes et al. \(2014\)](#). Cotton Valley Group, *n*=2; Mesa Verde, *n* = 1–407; Oswego, *n* = 4–30. Concentrations were calculated based on raw data presented in the U.S. Geological Survey (USGS) National Produced Water Database v2.0.

<sup>g</sup> [Dresel and Rose \(2010\)](#). *n* = 3–15. Concentrations were calculated based on Dresel and Rose's raw data.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table E-3. Reported concentrations of general water quality parameters in produced water for unconventional coalbed basins, presented as: average (minimum–maximum).**

Parameter	Units	Black Warrior <sup>a</sup>	Powder River <sup>b</sup>	Raton <sup>b</sup>	San Juan <sup>b</sup>
States	n/a	AL, MS	MT, WY	CO, NM	AZ, CO, NM, UT
Alkalinity	mg/L	355 (3–1,600)	1,384 (653–2,672)	1,107 (130–2,160)	3,181 (51–11,400)
Ammonium	mg/L	3.60 (0.16–8.91)	-	-	-
Bicarbonate	mg/L	427 (2–1,922)	1,080 (236–3,080)	1,124 (127–2,640)	3,380 (117–13,900)
Carbonate	mg/L	3 (0–64)	2.17 (0.00–139.0)	51.30 (1.30–316.33)	40.17 (0.00–1,178)
Chloride	mg/L	9,078 (11–42,800)	21 (BDL–282)	787 (4.8–8,310)	624 (BDL–20,100)
Chemical oxygen demand	mg/L	830 (0–10,500)	-	-	-
Dissolved oxygen	mg/L	-	1.07 (0.11–3.48)	0.39 (0.01–3.52)	0.51 (0.04–1.69)
DOC	mg/L	3.37 (0.53–61.41)	3.18 (1.09–8.04)	1.26 (0.30–8.54)	3.21 (0.89–11.41)
Hardness as CaCO <sub>3</sub>	mg/L	871 (3–6,150)	-	-	-
Hydrogen sulfide	mg/L	-	-	4.41 (BDL–190.0)	23.00 (23.00–23.00)
Oil and grease	mg/L	-	-	9.10 (0.60–17.6)	-
pH	SU	7.5 (5.3–9.0)	7.71 (6.86–9.16)	8.19 (6.90–9.31)	7.82 (5.40–9.26)
Phosphate	mg/L	0.435 (0.026–3.570)	BDL (BDL–BDL)	0.04 (BDL–1.00)	1.89 (BDL–9.42)
Specific conductivity	μS/cm	20,631 (718–97,700)	1,598 (413–4,420)	3,199 (742–11,550)	5,308 (232–18,066)
TDS	mg/L	14,319 (589–61,733)	997 (252–2,768)	2,512 (244–14,800)	4,693 (150–39,260)
Total Kjeldahl nitrogen	mg/L	6.08 (0.15–38.40)	0.48 (BDL–4.70)	2.61 (BDL–26.10)	0.46 (BDL–3.76)
TOC	mg/L	6.03 (0.00–103.00)	3.52 (2.07–6.57)	1.74 (0.25–13.00)	2.91 (0.95–9.36)
Total suspended solids	mg/L	78 (0–2,290)	11.0 (1.4–72.7)	32.3 (1.0–580.0)	47.2 (1.4–236.0)
Turbidity	NTU	74 (0–539)	8.2 (0.7–57.0)	4.5 (0.3–25.0)	61.6 (0.8–810.0)

n/a, not applicable; -, no value available; BDL, below detection limit.

<sup>a</sup> [DOE \(2014\)](#).  $n = 206$ . Concentrations were calculated based on raw data presented in the reference.

<sup>b</sup> [Dahm et al. \(2011\)](#). Powder River,  $n = 31$ ; Raton,  $n = 40$ ; San Juan,  $n = 20$ . This data source reported concentrations without presentation of raw data.

*This document is a draft for review purposes only and does not constitute Agency policy.*

### E.2.3. Salinity and Inorganics

1 Table E-4 and Table E-5 provide supporting data on salinity and inorganic constituents of produced  
2 water for 12 formations.

#### E.2.3.1. Processes Controlling Salinity and Inorganics Concentrations

3 Multiple mechanisms likely control elevated salt concentrations in flowback and produced water  
4 and are largely dependent upon post-injection fluid interactions and the formation's stratigraphic  
5 and hydrogeologic environment ([Barbot et al., 2013](#)). High inorganic ionic loads observed in  
6 flowback and produced water are expressed as TDS.

7 Subsurface brines or formation waters are saline fluids associated with the targeted formation.  
8 Shale and sandstone brines are typically much more saline than coalbed waters. After hydraulic  
9 fracturing fluids are injected into the subsurface, the injected fluids (which are typically not sources  
10 of high TDS) mix with in situ brines, which typically contain high ionic loads ([Haluszczak et al.,  
11 2013](#)).

12 Deep brines, present in over- or underlying strata, may naturally migrate into targeted formations  
13 over geologic time or artificially intrude if a saline aquifer is breached during hydraulic fracturing  
14 ([Chapman et al., 2012](#); [Maxwell, 2011](#); [Blauch et al., 2009](#)). Whether it is through natural or induced  
15 intrusion, saline fluids may contact the producing formation and introduce novel salinity sources to  
16 the produced water ([Chapman et al., 2012](#)).

17 The dissolution salts associated with formation solids both increases TDS concentrations and alters  
18 formation porosity and permeability ([Blauch et al., 2009](#)). Additionally, the mobilization of connate  
19 fluids (deposition-associated pore fluids) and formation fluids during hydraulic fracturing likely  
20 contributes to increased TDS levels ([Dresel and Rose, 2010](#); [Blauch et al., 2009](#)). Despite the general  
21 use of fresh water for hydraulic fracturing fluid, some elevated salts in produced water may result  
22 from the use of reused saline flowback or produced water as a hydraulic fracturing base fluid  
23 ([Hayes, 2009](#)).

**Table E-4. Reported concentrations (mg/L) of inorganic constituents contributing to salinity in unconventional shale and tight formations produced water, presented as: average (minimum–maximum) or *median* (minimum–maximum).**

Parameter	Shale					Tight Formations			
	Bakken <sup>a</sup>	Barnett <sup>b</sup>	Fayetteville <sup>c</sup>	Marcellus		Cotton Valley Group <sup>f</sup>	Devonian Sandstone <sup>g</sup>	Mesaverde <sup>f</sup>	Oswego <sup>f</sup>
States	MT, ND	TX	AR	PA <sup>d</sup>	PA, WV <sup>e</sup>	LA, TX	PA	CO, NM, UT, WY	OK
<b>Bromide</b>	-	<b>589</b> (117–798)	111 (96–144)	511 (0.2–1,990)	<b>512</b> (15.8–1,990)	498 (32–1,338)	1,048 (349–1,350)	-	-
<b>Calcium</b>	9,680 (7,540–13,500)	<b>1,600</b> (1,110–6,730)	317 (221–386)	7,220 (38–41,000)	<b>7,465</b> (173–33,000)	19,998 (181–51,400)	20,262 (8,930–34,400)	212 (1.01–4,580)	5,903 (3,609–8,662)
<b>Chloride</b>	119,000 (90,000–133,000)	<b>34,700</b> (9,600–60,800)	9,156 (5,507–12,287)	57,447 (64–196,000)	<b>49,000</b> (64.2–196,000)	101,332 (3,167–221,498.7)	132,567 (58,900–207,000)	4,260 (8–75,000)	44,567 (23,000–75,000)
<b>Fluoride</b>	-	<b>3.8</b> (3.5–12.8)	-	-	<b>0.975</b> (0.077–32.9)	-	-	-	-
<b>Iodine</b>	-	-	-	-	-	20 (1–36)	39 (11–56)	1.01 (1.01–1.01)	-
<b>Nitrate as N</b>	-	-	NC (ND–ND)	-	<b>1.7</b> (0.65–15.9)	-	-	0.6 (0.6–0.6)	-
<b>Nitrite as N</b>	-	<b>4.7</b> (3.5–38.1)	-	-	<b>11.8</b> (1.1–146)	-	-	-	-
<b>Phosphorus</b>	NC (ND–0.03)	<b>0.395</b> (0.19–0.7)	-	-	<b>0.3</b> (0.08–21.8)	-	-	-	-
<b>Potassium</b>	2,970 (0–5,770)	<b>316</b> (80–750)	-	-	<b>337</b> (38–3,950)	1,975 (8–7,099)	858 (126–3,890)	160 (4–2,621)	-

*This document is a draft for review purposes only and does not constitute Agency policy.*

Parameter	Shale					Tight Formations			
	Bakken <sup>a</sup>	Barnett <sup>b</sup>	Fayetteville <sup>c</sup>	Marcellus		Cotton Valley Group <sup>f</sup>	Devonian Sandstone <sup>g</sup>	Mesaverde <sup>f</sup>	Oswego <sup>f</sup>
States	MT, ND	TX	AR	PA <sup>d</sup>	PA,WV <sup>e</sup>	LA, TX	PA	CO, NM, UT, WY	OK
Silica	7 (6.41–7)	-	52 (13–160)	-	-	4 (4–4)	-	-	-
Sodium	61,500 (47,100–74,600)	<b>18,850</b> (4,370–28,200)	3,758 (3,152–4,607)	21,123 (69–117,000)	<b>21,650</b> (63.8–95,500)	39,836 (1,320–85,623.24)	58,160 (24,400–83,300)	5,828 (132–48,817)	19,460 (13,484–31,328)
Sulfate	660 (300–1,000)	<b>709</b> (120–1,260)	NC (ND–3)	71 (0–763)	<b>58.9</b> (2.4–348)	407 (ND–2,200.46)	20 (1–140)	837 (ND–14,612)	183 (120–271)
Sulfide	-	NC (ND–ND)	-	-	<b>3.2</b> (1.6–5.6)	-	0.7 (0.1–2.5)	-	-
Sulfite	-	-	-	-	<b>12.4</b> (5.2–73.6)	-	-	-	-
TDS	196,000 (150,000–219,000)	<b>50,550</b> (16,400–97,800)	13,290 (9,972–15,721)	106,390 (680–345,000)	<b>87,800</b> (680–345,000)	164,683 (5,241–356,666)	235,125 (106,000–354,000)	15,802 (1,032–125,304)	73,082 (56,541–108,813)

-, no value available; NC, not calculated; ND, not detected. **Bolded italic** numbers are medians.

<sup>a</sup> [Stepan et al. \(2010\)](#).  $n = 3$ . Concentrations were calculated based on Stepan et al.'s raw data. Samples had charge balance errors of 1.74, -0.752, and -0.220%

<sup>b</sup> [Hayes and Severin \(2012b\)](#).  $n = 16$ . This data source reported concentrations without presentation of raw data.

<sup>c</sup> [Warner et al. \(2013\)](#).  $n = 6$ . Concentrations were calculated based on Warner et al.'s raw data. Both flowback and produced water included.

<sup>d</sup> [Barbot et al. \(2013\)](#).  $n = 134–159$ . This data source reported concentrations without presentation of raw data.

<sup>e</sup> [Hayes \(2009\)](#).  $n = 8–65$ . Concentrations were calculated based on Hayes's raw data. Both flowback and produced water included. Non-detects and contaminated blanks omitted.

<sup>f</sup> [Blondes et al. \(2014\)](#) Cotton Valley Group,  $n = 2$ ; Mesa Verde,  $n = 1–407$ ; Oswego,  $n = 4–30$ . Concentrations were calculated based on raw data presented in the USGS National Produced Water Database v2.0.

<sup>g</sup> [Dresel and Rose \(2010\)](#).  $n = 3–15$ . Concentrations were calculated based on Dresel and Rose's raw data.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table E-5. Reported concentrations (mg/L) of inorganic constituents contributing to salinity in produced water for unconventional CBM basins, presented as: average (minimum–maximum).**

Parameter	Black Warrior <sup>a</sup>	Powder River <sup>b</sup>	Raton <sup>b</sup>	San Juan <sup>b</sup>
State	AL, MS	MT, WY	CO, NM	AZ, CO, NM, UT
Barium	45.540 (0.136–352)	0.61 (0.14–2.47)	1.67 (BDL–27.40)	10.80 (BDL–74.0)
Boron	0.185 (0–0.541)	0.17 (BDL–0.39)	0.36 (BDL–4.70)	1.30 (0.21–3.45)
Bromide	-	0.09 (BDL–0.26)	4.86 (0.04–69.60)	9.77 (BDL–43.48)
Calcium	218 (0–1,640)	32.09 (2.00–154.0)	14.47 (0.81–269.0)	53.29 (1.00–5,530)
Chloride	9,078 (11–42,800)	21 (BDL–282)	787 (4.8–8,310)	624 (BDL–20,100)
Fluoride	6.13 (0.00–22.60)	1.57 (0.40–4.00)	4.27 (0.59–20.00)	1.76 (0.58–10.00)
Magnesium	68.12 (0.18–414.00)	14.66 (BDL–95.00)	3.31 (0.10–56.10)	15.45 (BDL–511.0)
Nitrate	8.70 (0.00–127.50)	-	-	-
Nitrite	0.03 (0.00–2.08)	-	-	-
Phosphorus	0.32 (0.00–5.76)	-	-	-
Potassium	12.02 (0.46–74.00)	11.95 (BDL–44.00)	6.37 (BDL–29.40)	26.99 (BDL–970.0)
Silica	8.66 (1.04–18.10)	6.46 (4.40–12.79)	7.05 (4.86–10.56)	12.37 (3.62–37.75)
Sodium	4,353 (126–16,700)	356 (12–1,170)	989 (95–5,260)	1,610 (36–7,834)
Strontium	11.354 (0.015–142.000)	0.60 (0.10–1.83)	5.87 (BDL–47.90)	5.36 (BDL–27.00)
Sulfate	5.83 (0.00–302.00)	5.64 (BDL–300.0)	14.75 (BDL–253.00)	25.73 (BDL–1,800)
TDS	14,319 (589–61,733)	997 (252–2,768)	2,512 (244–14,800)	4,693 (150–39,260)

-, no value available; BDL, below detection limit.

<sup>a</sup> DOE (2014). *n* = 206. Concentrations were calculated based on the authors' raw data.

<sup>b</sup> Dahm et al. (2011). Powder River, *n* = 31; Raton, *n* = 40; San Juan, *n* = 20. This data source reported concentrations without presentation of raw data.

#### E.2.4. Metals and Metalloids

- 1 Table E-6 and Table E-7 provide supporting data on metal constituents of produced water for 12
- 2 formations.



**Table E-6. Reported concentrations (mg/L) of metals and metalloids from unconventional shale and tight formation produced water, presented as: average (minimum–maximum) or *median* (minimum–maximum).**

Note that calcium, potassium, and sodium appear in Table E-4.

Parameter	Shale					Tight Formation			
	Bakken <sup>a</sup>	Barnett <sup>b</sup>	Fayetteville <sup>c</sup>	Marcellus		Cotton Valley Group <sup>f</sup>	Devonian Sandstone <sup>g</sup>	Mesaverde <sup>f</sup>	Oswego <sup>f</sup>
States	MT, ND	TX	AR	PA <sup>d</sup>	PA, WV <sup>e</sup>	LA, TX	PA	CO, NM, UT, WY	OK
Aluminum	-	<b>0.43</b> (0.37–2.21)	-	-	<b>2.57</b> (0.22–47.2)	-	-	-	-
Antimony	-	NC (ND–ND)	-	-	<b>0.028</b> (0.018–0.038)	-	-	-	-
Arsenic	-	NC (ND–ND)	-	-	<b>0.101</b> (0.013–0.124)	-	-	-	-
Barium	10 (0–24.6)	<b>3.6</b> (0.93–17.9)	4 (3–5)	2,224 (0.24–13,800)	<b>542.5</b> (2.590–13,900)	160 (ND–400.52)	1,488 (7–4,370)	139 (4–257)	-
Beryllium	-	NC (ND–ND)	-	-	-	-	-	-	-
Boron	116 (39.9–192)	<b>30.3</b> (7.0–31.9)	4.800 (2.395–21.102)	-	<b>12.2</b> (0.808–145)	37 (2–100)	-	10 (1–14.2)	-
Cadmium	-	NC (ND–ND)	-	-	-	-	-	-	-
Chromium	-	<b>0.03</b> (0.01–0.12)	-	-	<b>0.079</b> (0.011–0.567)	-	-	-	-
Cobalt	-	<b>0.01</b> (0.01–0.01)	-	-	-	-	-	-	-

*This document is a draft for review purposes only and does not constitute Agency policy.*

Parameter	Shale					Tight Formation			
	Bakken <sup>a</sup>	Barnett <sup>b</sup>	Fayetteville <sup>c</sup>	Marcellus		Cotton Valley Group <sup>f</sup>	Devonian Sandstone <sup>g</sup>	Mesaverde <sup>f</sup>	Oswego <sup>f</sup>
States	MT, ND	TX	AR	PA <sup>d</sup>	PA, WV <sup>e</sup>	LA, TX	PA	CO, NM, UT, WY	OK
<b>Copper</b>	NC (ND-0.21)	<b>0.29</b> (0.06-0.52)	-	-	<b>0.506</b> (0.253-4.150)	0.7 (0.48-1)	0.04 (0.01-0.13)	-	-
<b>Iron</b>	96 (ND-120)	<b>24.9</b> (12.1-93.8)	7 (1-13)	-	<b>53.65</b> (2.68-574)	-	188 (90-458)	9 (1-29)	61 (41-78)
<b>Lead</b>	-	<b>0.02</b> (0.01-0.02)	-	-	<b>0.066</b> (0.003-0.970)	-	0.02 (0.01-0.04)	-	-
<b>Lithium</b>	-	<b>19.0</b> (2.56-37.4)	9.825 (2.777-28.145)	-	<b>53.85</b> (3.410-323)	23 (1-53)	97.8 (20.2-315)	3 (1-33)	-
<b>Magnesium</b>	1,270 (630-1,750)	<b>255</b> (149-755)	61 (47-75)	632 (17-2,550)	<b>678</b> (40.8-2,020)	1,363 (27-3,712.98)	2,334 (797-3,140)	74 (1-2,394)	753 (486-1,264)
<b>Manganese</b>	7 (4-10.2)	<b>0.86</b> (0.25-2.20)	2 (2-3)	-	<b>2.825</b> (0.369-18.600)	30.33 (30.33-30.33)	19 (5.6-68)	-	-
<b>Mercury</b>	-	NC (ND-ND)	-	-	<i>0.00024</i>	-	-	-	-
<b>Molybdenum</b>	NC (ND-<0.2)	<b>0.02</b> (0.02-0.03)	-	-	-	-	-	-	-
<b>Nickel</b>	-	<b>0.04</b> (0.03-0.05)	-	<b>0.1815</b> (0.007-0.137)	<b>0.419</b> (0.068-0.769)	-	-	-	-
<b>Selenium</b>	-	<b>0.03</b> (0.03-0.04)	-	-	<i>0.004</i>	-	-	-	-
<b>Silver</b>	-	-	-	-	<b>4</b> (3-6)	-	-	-	-

This document is a draft for review purposes only and does not constitute Agency policy.

Parameter	Shale					Tight Formation			
	Bakken <sup>a</sup>	Barnett <sup>b</sup>	Fayetteville <sup>c</sup>	Marcellus		Cotton Valley Group <sup>f</sup>	Devonian Sandstone <sup>g</sup>	Mesaverde <sup>f</sup>	Oswego <sup>f</sup>
States	MT, ND	TX	AR	PA <sup>d</sup>	PA, WV <sup>e</sup>	LA, TX	PA	CO, NM, UT, WY	OK
Strontium	764 (518–1,010)	<b>529</b> (48–1,550)	27 (14–49)	1,695 (0.6–8,460)	<b>1,240</b> (0.580–8,020)	2,312 (39–9,770)	3,890 (404–13,100)	-	-
Thallium	-	NC (ND–0.14)	-	-	<i>0.168</i>	-	-	-	-
Tin	-	NC (ND–ND)	-	-	-	-	-	-	-
Titanium	-	<b>0.02</b> (0.02–0.03)	-	-	-	-	-	-	-
Zinc	7 (2–11.3)	<b>0.15</b> (0.10–0.36)	-	-	<b>0.391</b> (0.087–247)	-	0.20 (0.03–1.26)	-	-

-, no value available; NC, not calculated; ND, not detected; BDL, below detection limit. ***Bolded italic*** numbers are medians.

<sup>a</sup> [Stepan et al. \(2010\)](#). *n* = 3. Concentrations were calculated based on Stepan et al.'s raw data.

<sup>b</sup> [Hayes and Severin \(2012b\)](#). *n* = 16. This data source reported concentrations without presentation of raw data.

<sup>c</sup> [Warner et al. \(2013\)](#). *n* = 6. Concentrations were calculated based on Warner et al.'s raw data. Both flowback and produced water included.

<sup>d</sup> [Barbot et al. \(2013\)](#). *n* = 134–159. This data source reported concentrations without presentation of data.

<sup>e</sup> [Hayes \(2009\)](#). *n* = 48. Concentrations were calculated based on Hayes's raw data. Both flowback and produced water included. Non-detects and contaminated blanks omitted.

<sup>f</sup> [Blondes et al. \(2014\)](#). Cotton Valley Group, *n* = 2; Mesa Verde, *n* = 1–407; Oswego, *n* = 4–30. Concentrations were calculated based on raw data presented in the USGS National Produced Water Database v2.0.

<sup>g</sup> [Dresel and Rose \(2010\)](#). *n* = 3–15. Concentrations were calculated based on Dresel and Rose's raw data.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table E-7. Reported concentrations (mg/L) of metals and metalloids from unconventional coalbed produced water, presented as: average (minimum–maximum).**

Parameter	Black Warrior <sup>a</sup>	Powder River <sup>b</sup>	Raton <sup>b</sup>	San Juan <sup>b</sup>
States	AL, MS	MT, WY	CO, NM	AZ, CO, NM, UT
Aluminum	0.037 (0–0.099)	0.018 (BDL–0.124)	0.193 (BDL–2,900)	0.069 (BDL–0.546)
Antimony	0.006 (0.00–0.022)	BDL (BDL–BDL)	BDL (BDL–BDL)	BDL (BDL–BDL)
Arsenic	0.002 (0.0–0.085)	0.001 (BDL–0.004)	0.010 (BDL–0.060)	0.001 (BDL–0.020)
Barium	45.540 (0.136–352)	0.61 (0.14–2.47)	1.67 (BDL–27.40)	10.80 (BDL–74.0)
Beryllium	0.0 (0.0–0.008)	BDL (BDL–BDL)	BDL (BDL–BDL)	BDL (BDL–BDL)
Boron	0.185 (0–0.541)	0.17 (BDL–0.39)	0.36 (BDL–4.70)	1.30 (0.21–3.45)
Cadmium	0.001 (0.00–0.015)	BDL (BDL–0.002)	0.002 (BDL–0.003)	0.002 (BDL–.006)
Calcium	218 (0–1,640)	32.09 (2.00–154.0)	14.47 (0.81–269.0)	53.29 (1.00–5,530)
Cesium	0.011 (0.0–0.072)	-	-	-
Chromium	0.002 (0.0–0.351)	0.012 (BDL–0.250)	0.105 (BDL–3.710)	0.002 (BDL–0.023)
Cobalt	0.023 (0.00–0.162)	BDL (BDL–BDL)	0.001 (BDL–0.018)	0.001 (BDL–0.017)
Copper	0.001 (0.0–0.098)	0.078 (BDL–1.505)	0.091 (BDL–4.600)	0.058 (BDL–0.706)
Iron	8.956 (0.045–93.100)	1.55 (BDL–190.0)	7.18 (0.09–95.90)	6.20 (BDL–258.0)
Lead	0.008 (0.00–0.250)	BDL (BDL–BDL)	0.023 (BDL–0.233)	0.023 (BDL–0.390)
Lithium	1.157 (0–8.940)	0.13 (BDL–0.34)	0.32 (0.01–1.00)	1.61 (0.21–4.73)
Magnesium	68.12 (0.18–414.00)	14.66 (BDL–95.00)	3.31 (0.10–56.10)	15.45 (BDL–511.0)
Manganese	0.245 (0.006–4.840)	0.02 (BDL–0.16)	0.11 (0.01–2.00)	0.19 (BDL–1.34)
Mercury	0.000 (0.000–0.000)	-	-	-
Molybdenum	0.002 (0–0.083)	0.005 (BDL–0.029)	0.002 (BDL–0.035)	0.020 (BDL–0.040)
Nickel	0.015 (0.0–0.358)	0.141 (BDL–2.61)	0.015 (0.004–0.11)	0.020 (BDL–0.13)
Potassium	12.02 (0.46–74.00)	11.95 (BDL–44.00)	6.37 (BDL–29.40)	26.99 (BDL–970.0)
Rubidium	0.013 (0.0–0.114)	-	-	-
Selenium	0.002 (0.00–0.063)	0.006 (BDL–0.046)	0.017 (BDL–0.100)	0.018 (BDL–0.067)
Silver	0.015 (0.0–0.565)	0.003 (0.003–0.003)	0.015 (BDL–0.140)	BDL (BDL–BDL)
Sodium	4,353 (126–16,700)	356 (12–1,170)	989 (95–5,260)	1,610 (36–7,834)
Strontium	11.354 (0.015–142.000)	0.60 (0.10–1.83)	5.87 (BDL–47.90)	5.36 (BDL–27.00)
Thallium	-	-	-	-
Tin	0.00 (0.00–0.009)	0.006 (BDL–0.028)	0.008 (BDL–0.021)	0.017 (BDL–0.039)
Titanium	0.003 (0.0–0.045)	BDL (BDL–0.002)	BDL (BDL–0.002)	0.004 (BDL–0.020)

*This document is a draft for review purposes only and does not constitute Agency policy.*

Parameter	Black Warrior <sup>a</sup>	Powder River <sup>b</sup>	Raton <sup>b</sup>	San Juan <sup>b</sup>
States	AL, MS	MT, WY	CO, NM	AZ, CO, NM, UT
Vanadium	0.001 (0.0–0.039)	BDL (BDL–BDL)	0.001 (BDL–0.013)	BDL (BDL–BDL)
Zinc	0.024 (0.0–0.278)	0.063 (BDL–0.390)	0.083 (0.010–3.900)	0.047 (0.005–0.263)

-, no value available; BDL, below detection limit.

<sup>a</sup> DOE (2014).  $n = 206$ . Concentrations were calculated based on the authors' raw data.

<sup>b</sup> Dahm et al. (2011). Powder River,  $n = 31$ ; Raton,  $n = 40$ ; San Juan,  $n = 20$ . This data source reported concentrations without presentation of raw data.

#### E.2.4.1. Processes Controlling Mineral Precipitation and Dissolution

1 Hydraulic fracturing treatments introduce fluids into the subsurface that are not in equilibrium  
 2 with respect to formation mineralogy. Subsurface geochemical equilibrium modeling and  
 3 saturation indices are therefore used to assess the solution chemistry of unconventional produced  
 4 water and the subsequent likelihood of precipitation and dissolution reactions (Engle and Rowan,  
 5 2014; Barbot et al., 2013). Dissolution and precipitation reactions between fracturing fluids,  
 6 formation solids, and formation water contribute to the chemistry of flowback and produced water.

7 For example, early flowback fluids may be under-saturated with respect to certain constituents or  
 8 minerals associated with formation solids. Through time, as fluid-rock geochemistry returns to  
 9 equilibrium, formation minerals will dissolve into solution and return in flowback.

10 Depending upon the formation chemistry and composition of the hydraulic fracturing fluid, the  
 11 hydraulic fracturing fluid may initially have a lower ionic strength than existing formation fluids.  
 12 Consequently, salts, carbonate, sulfate, and silicate minerals may undergo dissolution or  
 13 precipitation. Proppants may also undergo dissolution or serve as nucleation sites for precipitation  
 14 (McLin et al., 2011).

15 Currently, relatively little literature quantitatively explores subsurface dissolution and  
 16 precipitation reactions between hydraulic fracturing fluids and formation solids and water.  
 17 However, the processes that take place will likely be a function of the solubilities of the minerals,  
 18 the chemistry of the fluid, pH, redox conditions, and temperature.

19 Documented dissolution processes in unconventional resources include the dissolution of feldspar  
 20 followed by sodium enrichment in coalbed produced water (Rice et al., 2008). Dissolution of  
 21 barium-rich minerals (barite ( $\text{BaSO}_4$ ) and witherite ( $\text{BaCO}_3$ )), and strontium-rich minerals (celestite  
 22 ( $\text{SrSO}_4$ ) and strontianite ( $\text{SrCO}_3$ )) are known to enrich shale produced waters in barium and  
 23 strontium (Chapman et al., 2012).

24 Known precipitation processes in unconventional resources include the precipitation of carbonate  
 25 and subsequent reduction of calcium and magnesium concentrations in coalbed produced water  
 26 (Rice et al., 2008). Additionally, calcium carbonate precipitation is suspected to cause declines in pH  
 27 and alkalinity levels in shale produced water (Barbot et al., 2013).

*This document is a draft for review purposes only and does not constitute Agency policy.*

1 The subsurface processes associated with fluid-rock interactions take place over a scale of weeks to  
2 months through the generation of flowback and produced water. Note that the types and extent of  
3 subsurface dissolution and precipitation reactions change with time, from injection through  
4 flowback and production. For instance, [Engle and Rowan \(2014\)](#) found that early Marcellus Shale  
5 flowback was under-saturated with respect to gypsum ( $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$ ), halite ( $\text{NaCl}$ ), celestite,  
6 strontianite, and witherite, indicating that these minerals would dissolve in the subsurface. Fluids  
7 were oversaturated with respect to barite. Saturation indices for gypsum, halite, celestite, and  
8 barite all increased during production. Knowing when dissolution and precipitation will likely  
9 occur is important, because dissolution and precipitation of minerals change formation  
10 permeability and porosity, which can affect production ([André et al., 2006](#)).

11 Additionally, pyrite ( $\text{FeS}_2$ ) is an important minor mineral in reduced sedimentary rocks. Pyrite is  
12 the primary form of sulfur and iron occurrence in shales ([Leventhal and Hosterman, 1982](#)) and is  
13 also a common mineral phase generated in coals in which organic matter is closely associated  
14 ([Ward, 2002](#)). Pyrite content in shales can vary from less than 1% to several percent ([Chermak and](#)  
15 [Schreiber, 2014](#); [Vulgamore et al., 2007](#)). Researchers have found a strong association of trace  
16 metals (i.e., nickel, copper, cadmium, chromium, cobalt, lead, selenium, vanadium, and zinc) with  
17 pyrite in shales ([Chermak and Schreiber, 2014](#); [Tuttle et al., 2009](#); [Leventhal and Hosterman, 1982](#)).

18 Although studies considering pyrite oxidation within the context of hydraulic fracturing are  
19 currently lacking, it is likely that the introduction of oxygenated fluids to freshly exposed surfaces  
20 in the subsurface during hydraulic fracturing can initiate limited, short-term pyrite oxidation or  
21 dissolution. Pyrite dissolution may increase iron and trace element concentrations and acidity in  
22 produced waters ([Nordstrom and Alpers, 1999](#); [Moses and Herman, 1991](#)).

23 The extent to which the oxidative dissolution of pyrite would exert a control on post-injection  
24 subsurface fluid chemistry is unknown, although an ongoing U.S. Geological Survey (USGS) study  
25 anticipates it may be more significant than previously hypothesized ([Li and Brantley, 2011](#)).  
26 Regardless, relative to other reactions contributing to the composition of flowback and produced  
27 water (i.e., dissolution of salts), pyrite oxidation appears to be less significant. Ultimately, reactions  
28 resulting from temporary changes in subsurface redox conditions will be less important relative to  
29 other reactions that are less redox-dependent.

## **E.2.5. Naturally Occurring Radioactive Material (NORM) and Technically Enhanced Naturally Occurring Radioactive Material (TENORM)**

### ***E.2.5.1. Formation Solids Levels of NORM***

30 Elevated uranium levels in formation solids have been used to identify potential areas of natural  
31 gas production for decades ([Fertl and Chilingar, 1988](#)). Marine black shales are estimated to contain  
32 an average of 5–20 ppm uranium depending on depositional conditions, compared to an average of  
33 less than 5 ppm among all shales ([USGS, 1961](#)). Shales that bear significant levels of uranium  
34 include the Barnett in Texas, the Woodford in Oklahoma, the New Albany in the Illinois Basin, the  
35 Chattanooga Shale in the southeastern United States, and a group of black shales in Kansas and  
36 Oklahoma ([Swanson, 1955](#)).

1 [Bank et al. \(2012\)](#) identified Marcellus samples with uranium ranging from 4–72 ppm, with an  
2 average of 30 ppm. Additionally, shale samples taken from three counties within the Marcellus  
3 Shale had uranium concentrations ranging from 8 to 84 ppm ([BTGS, 2011](#); [Hatch and Leventhal,  
4 1981](#)). [Chermak and Schreiber \(2014\)](#) compiled mineralogy and trace element data available in the  
5 literature for nine U.S. hydrocarbon-producing shales. In this combined data set, uranium levels  
6 among different shale plays were found to vary over three orders of magnitude, with samples of the  
7 Utica Shale containing approximately 0–5 ppm uranium and samples of the Woodford Shale  
8 containing uranium in the several-hundred-ppm range.

9 [Vine \(1956\)](#) reported that the principal uranium-bearing coal deposits of the United States are  
10 found in Cretaceous and Tertiary formations in the northern Great Plains and Rocky Mountains; in  
11 some areas of the West, coal deposits have been found with uranium concentrations in the range of  
12 thousands of ppm or greater. In contrast, most Mississippian, Pennsylvanian, and Permian coals in  
13 the north-central and eastern United States contain less than 10 ppm uranium, rarely containing  
14 50 ppm or more.

#### **E.2.5.2. Produced Water Levels of TENORM**

15 Background data on NORM in the Marcellus Shale and Devonian sandstones are given in Table E-8.



**Table E-8. Reported concentrations (in pCi/L) of radioactive constituents in unconventional shale and sandstone produced water, presented as: average (minimum–maximum) or *median* (minimum–maximum).**

Parameter	Marcellus			Devonian Sandstone <sup>a</sup>		
	States	NY, PA <sup>b</sup>	PA NORM STUDY ( <a href="#">PA DEP, 2015</a> )			
			Flowback <sup>c</sup>		Conventional Produced Water <sup>d</sup>	Unconventional Produced Water <sup>e</sup>
Gross alpha		<b>6,845</b> (ND–123,000)	<b>10,700</b> (288–71,000)	<b>1,835</b> (465–2,570)	<b>11,300</b> (2,240–41,700)	-
Gross beta		<b>1,170</b> (ND–12,000)	<b>2,400</b> (742–21,300)	<b>909</b> (402–1,140)	<b>3,445</b> (1.5–7,600)	-
Radium-226		<b>1,869</b> (ND–16,920)	<b>4,500</b> (551–25,500)	<b>243</b> (81 – 819)	<b>6,300</b> (1,700–26,600)	<b>2,367</b> (200–5,000)
Radium-228		<b>557</b> (ND–2,589)	<b>633</b> (248–1,740)	<b>128</b> (26 – 896)	<b>941</b> (366–1,900)	-
Total Radium		<b>2,530</b> (0.192–18,045)	-	<b>371</b> (107 – 1,715)	<b>7,180</b> (2,336–28,500)	-
Uranium <sup>235</sup>		1 (ND–20)	-	-	-	-
Uranium <sup>238</sup>		42 (ND–497)	-	-	-	-

n/a, not applicable; -, no value available; BDL, below detection limit. ***Bolded italic*** numbers are medians.

<sup>a</sup> [Dresel and Rose \(2010\)](#). *n* = 3. Concentrations presented were calculated based on Dresel and Rose's raw data.

<sup>b</sup> [Rowan et al. \(2011\)](#). *n* = 51. Concentrations presented were calculated based on Rowan et al.'s raw data for Marcellus samples. Uranium data from Barbot et al. (2013) *n* = 14.

<sup>c</sup> [PA DEP \(2015\)](#). *n* = 9. Data reported in Table 3-14.

<sup>d</sup> [PA DEP \(2015\)](#). *n* = 9. Values calculated from Table 3-15 for unfiltered samples.

<sup>e</sup> [PA DEP \(2015\)](#). *n* = 4. Values calculated from Table 3-15 for unfiltered samples.

### **E.2.5.3. Mobilization of Naturally Occurring Radioactive Material**

1 Similar to conventional oil and gas production, in unconventional oil and gas production,  
2 radionuclides native to the targeted formation return to the surface with produced water. The  
3 principal radionuclides found in oil and gas produced waters include radium-226 of the uranium-  
4 238 decay series and radium-228 of the thorium-232 decay series ([White, 1992](#)). Levels of  
5 TENORM in produced water are controlled by geologic and geochemical interactions between  
6 injected and formation fluids, and the targeted formation ([Bank, 2011](#)). Mechanisms controlling  
7 NORM mobilization into produced water include (1) the TENORM content of the targeted  
8 formation; (2) factors governing the release of radionuclides, particularly radium, from the  
9 reservoir matrix; and (3) the geochemistry of the produced water ([Choppin, 2007, 2006](#); [Fisher,](#)  
10 [1998](#)).

11 Organic-rich shales and coals are enriched in uranium, thorium, and other trace metals in  
12 concentrations several times above those seen in typical shales or sedimentary rocks ([Diehl et al.,](#)  
13 [2004](#); [USGS, 1997](#); [Wignall and Myers, 1988](#); [Tourtelot, 1979](#); [Vine and Tourtelot, 1970](#)). Unlike  
14 shales and coals, sandstones are generally not organic-rich source rocks themselves. Instead,  
15 hydrocarbons migrate into these formations over long periods of time ([Clark and Veil, 2009](#)). Since  
16 TENORM and organic contents are typically positively correlated due to the original, reduced  
17 depositional environment ([Fertl and Chilingar, 1988](#)), it is unlikely that sandstones would be  
18 enriched in TENORM to the same extent as oil- and gas-bearing shales and coals. Therefore, concern  
19 related to TENORM within produced water is focused on operations targeting shales and coalbeds.

20 Radium is most soluble and mobile in chloride-rich, high-TDS, reducing environments ([Sturchio et](#)  
21 [al., 2001](#); [Zapeczka and Szabo, 1988](#); [Langmuir and Riese, 1985](#)). In formation fluids with high TDS,  
22 calcium, potassium, magnesium, and sodium compete with dissolved radium for sorption sites,  
23 limiting radium sorption onto solids and allowing it to accumulate in solution at higher  
24 concentrations ([Fisher, 1998](#); [Webster et al., 1995](#)). The positive correlation between TDS and  
25 radium is well established and TDS is a useful indicator of radium and TENORM activity within  
26 produced water, especially in lithologically homogenous reservoirs ([Rowan et al., 2011](#); [Sturchio et](#)  
27 [al., 2001](#); [Fisher, 1998](#); [Kraemer and Reid, 1984](#)).

28 Uranium and thorium are poorly soluble under reducing conditions and are therefore more  
29 concentrated in formation solids than in solution ([Fisher, 1998](#); [Kraemer and Reid, 1984](#); [Langmuir](#)  
30 [and Herman, 1980](#)). However, because uranium becomes more soluble in oxidizing environments,  
31 the introduction of relatively oxygen-rich fracturing fluids may promote the temporary  
32 mobilization of uranium during hydraulic fracturing and early flowback. In addition, the physical  
33 act of hydraulic fracturing creates fresh fractures and exposes organic-rich and highly reduced  
34 surfaces from which radionuclides could be released from the rock into formation fluids.

35 Produced water geochemistry determines, in part, the fate of subsurface radionuclides, particularly  
36 radium. Radium may remain in the host mineral or it may be released into formation fluids, where  
37 it can remain in solution as the dissolved  $Ra^{2+}$  ion, be adsorbed onto oxide grain coatings or clay  
38 particles by ion exchange, substitute for other cations during the precipitation of minerals, or form

1 complexes with chloride, sulfate, and carbonate ions ([Rowan et al., 2011](#); [Sturchio et al., 2001](#);  
2 [Langmuir and Riese, 1985](#)). Uranium- and thorium-containing materials with a small grain size, a  
3 large surface-to-volume ratio, and the presence of uranium and thorium near grain surfaces  
4 promote the escape of radium into formation fluids. [Vinson et al. \(2009\)](#) point to alpha decay along  
5 fracture surfaces as a primary control on radium mobilization in crystalline bedrock aquifers.  
6 Radium may also occur in formation fluids due to other processes, such as the decay of dissolved  
7 parent isotopes and adsorption-desorption reactions on formation surfaces ([Sturchio et al., 2001](#)).

8 Preliminary results from fluid-rock interaction studies ([Bank, 2011](#)) indicate that a significant  
9 percentage of uranium in the Marcellus Shale may be subject to mobilization by hydrochloric acid,  
10 which is used as a fracturing fluid additive. Understanding these processes will determine the  
11 extent to which such processes might influence the TENORM content of flowback and produced  
12 water.

#### **E.2.6. Organics**

13 Background data on organics in seven formations is given in Table E-9.

**Table E-9. Concentrations of select organic parameters from unconventional shale, a tight formation, and coalbed produced water, presented as: average (minimum–maximum) or *median* (minimum–maximum).**

Parameter	Unit	Shale			Tight Formation	Coal			
		Barnett <sup>a</sup>	Marcellus		Cotton Valley Group <sup>d</sup>	Powder River <sup>e</sup>	Raton <sup>e</sup>	San Juan <sup>e</sup>	Black Warrior <sup>f</sup>
States	n/a	TX	PA <sup>b</sup>	PA, WV <sup>c</sup>	LA, TX	MT, WY	CO, NM	AZ, CO, NM, UT	AL, MS
<b>TOC</b>	mg/L	<b>9.75</b> (6.2–36.2)	160 (1.2–1,530)	<b>89.2</b> (1.2–5680)	198 (184–212)	3.52 (2.07–6.57)	1.74 (0.25–13.00)	2.91 (0.95–9.36)	6.03 (0.00–103.00)
<b>DOC</b>	mg/L	<b>11.2</b> (5.5–65.3)	43 (5–695)	<b>117</b> (3.3–5,960)	-	3.18 (1.09–8.04)	1.26 (0.30–8.54)	3.21 (0.89–11.41)	3.37 (0.53–61.41)
<b>BOD</b>	mg/L	<b>582</b> (101–2,120)	-	<b>141</b> (2.8–12,400)	-	-	-	-	-
<b>Oil and grease</b>	mg/L	<b>163.5</b> (88.2–1,430)	74 (5–802)	<b>16.9</b> (4.7–802)	-	-	9.10 (0.60–17.6)	-	-
<b>Benzene</b>	µg/L	680 (49–5,300)	-	<b>220</b> (5.8–2,000)	-	-	4.7 (BDL–220.0)	149.7 (BDL–500.0)	-
<b>Toluene</b>	µg/L	760 (79–8,100)	-	<b>540</b> (5.1–6,200)	-	-	4.7 (BDL–78.0)	1.7 (BDL–6.2)	-
<b>Ethylbenzene</b>	µg/L	29 (2.2–670)	-	<b>42</b> (7.6–650)	-	-	0.8 (BDL–18.0)	10.5 (BDL–24.0)	-

*This document is a draft for review purposes only and does not constitute Agency policy.*

Parameter	Unit	Shale			Tight Formation	Coal			
		Barnett <sup>a</sup>	Marcellus		Cotton Valley Group <sup>d</sup>	Powder River <sup>e</sup>	Raton <sup>e</sup>	San Juan <sup>e</sup>	Black Warrior <sup>f</sup>
States	n/a	TX	PA <sup>b</sup>	PA, WV <sup>c</sup>	LA, TX	MT, WY	CO, NM	AZ, CO, NM, UT	AL, MS
Xylenes	µg/L	360 (43–1,400)	-	<b>300</b> (15–6,500)	-	-	9.9 (BDL–190.0)	121.2 (BDL–327.0)	-
Average total BTEX <sup>g</sup>	µg/L	1,829	2,910	1,102	-	-	20.1	283.1	-

n/a, not applicable; -, no value available; BDL, below detection limit. ***Bolded italic*** numbers are medians.

<sup>a</sup> [Hayes and Severin \(2012b\)](#). *n* = 16. This data source reported concentrations without presentation of raw data.

<sup>b</sup> [Barbot et al. \(2013\)](#). *n* = 55; no presentation of raw data.

<sup>c</sup> [Hayes \(2009\)](#) *n* = 13-67. Concentrations were calculated based on Hayes' raw data. Both flowback and produced water included. Non-detects and contaminated blanks omitted.

<sup>d</sup> [Blondes et al. \(2014\)](#). *n* = 2. Concentrations were calculated based on raw data presented in the USGS National Produced Water Database v2.0.

<sup>e</sup> [Dahm et al. \(2011\)](#). Powder River, *n* = 31; Raton, *n* = 40; San Juan, *n* = 20. This data source reported concentrations without presentation of raw data.

<sup>f</sup> [DOE \(2014\)](#). *n* = 206. Concentrations were calculated based on the authors' raw data.

<sup>g</sup> Average total BTEX was calculated by summing the average/median concentrations of benzene, toluene, ethylbenzene, and xylenes for a unique formation or basin. Minimum to maximum ranges were not calculated due to inaccessible raw data.

1 Several classes of naturally occurring organic chemicals are present in conventional and  
2 unconventional produced waters, with large concentration ranges ([Lee and Neff, 2011](#)). These  
3 organic classes include total organic carbon (TOC); saturated hydrocarbons; BTEX (benzene,  
4 toluene, ethylbenzene, and xylenes); and polyaromatic hydrocarbons (PAHs) (see Table E-9). While  
5 TOC concentrations in produced water are detected at the milligrams to grams per liter level,  
6 concentrations of individual organic compounds are typically detected at the micrograms to  
7 milligrams per liter level.

8 TOC indicates the level of dissolved and undissolved organics in produced water, including non-  
9 volatile and volatile organics ([Acharya et al., 2011](#)). TOC concentrations in conventional produced  
10 water vary widely from less than 0.1 mg/L to more than 11,000 mg/L. Average TOC concentrations  
11 in unconventional produced water range from less than 2.00 mg/L in the Raton CBM basin to  
12 approximately 200 mg/L in the Cotton Valley Group sandstones, although individual measurements  
13 have exceeded 5,000 mg/L in the Marcellus Shale (see Table E-9).

14 Dissolved organic carbon (DOC) is a general indicator of organic loading and is the fraction of  
15 organic carbon available for complexing with metals and supporting microbial growth. DOC values  
16 in unconventional produced water range from less than 1.50 mg/L (average) in the Raton Basin to  
17 more than 115 mg/L (median) in the Marcellus Shale (see Table E-9). Individual DOC  
18 concentrations in the Marcellus Shale produced water approach 6,000 mg/L. For comparison, DOC  
19 levels in fresh water systems are typically below 5 mg/L, while raw wastewater can exceed  
20 50 mg/L ([Katsoyiannis and Samara, 2007](#); [Muylaert et al., 2005](#)).

21 Biochemical oxygen demand (BOD) is a conventional pollutant under the U.S. Clean Water Act. It is  
22 an indirect measure of biodegradable organics in produced water and an estimate of the oxygen  
23 demand on a receiving water. Median BOD levels for Barnett and Marcellus Shales produced water  
24 exceed 30 mg/L, and both reported maximum concentrations exceeding 12,000 mg/L (Table E-9).  
25 In some circumstances wide variation in produced water median BOD levels may be reflective of  
26 flowback reuse in fracturing fluids ([Hayes, 2009](#)).

27 Lastly, BTEX is associated with petroleum. Benzene was found in produced water from several  
28 basins: average produced water benzene concentration from the Barnett Shale was 680 µg/L, from  
29 the Marcellus Shale was 220 µg/L (median), and from the San Juan Basin was 150 µg/L (see Table  
30 E-9). Total BTEX concentrations for conventional produced water vary widely from less than  
31 100 µg/L to nearly 580,000 µg/L. For comparison, average total BTEX concentrations in  
32 unconventional produced water range from 20 µg/L in the Raton Basin to nearly 3,000 µg/L in the  
33 Marcellus play (see Table E-9). From these data, average total BTEX levels in shale produced water  
34 are one to two orders of magnitude higher than those in CBM produced water.

35 In addition to abundant BTEX, a variety of volatile and semi-volatile organic compounds VOCs and  
36 SVOCs have been detected in shale and coalbed produced water. Shale produced water contains  
37 naphthalene, alkylated toluenes, and methylated aromatics in the form of several benzene and  
38 phenol compounds, as shown in Table E-10. Like BTEX, naphthalene, methylated phenols, and  
39 acetophenone are associated with petroleum. Detected shale produced water organics such as

- 1 acetone, 2-butanone, carbon disulfide, and pyridine are potential remnants of chemical additives  
 2 used as friction reducers or industrial solvents ([Hayes, 2009](#)).

**Table E-10. Reported concentrations ( $\mu\text{g/L}$ ) of organic constituents in produced water for two unconventional shale formations, presented as: average (minimum–maximum) or median (minimum–maximum).**

Parameter	Barnett <sup>a</sup>	Marcellus <sup>b</sup>
	States TX	MD, NY, OH, PA, VA, WY
Acetone	145 (27–540)	<b>83</b> (14–5,800)
Carbon disulfide	-	<b>400</b> (19–7,300)
Chloroform	-	28
Isopropylbenzene	35 (0.8–69)	<b>120</b> (86–160)
Naphthalene	238 (4.8–3,100)	<b>195</b> (14–1,400)
Phenolic compounds	<b>119.65</b> (9.3–230)	-
1,2,4-Trimethylbenzene	173 (6.9–1,200)	<b>66.5</b> (7.7–4,000)
1,3,5-Trimethylbenzene	59 (6.4–300)	<b>33</b> (5.2–1,900)
1,2-Diphenylhydrazine	4.2 (0.5–7.8)	-
1,4-Dioxane	6.5 (3.1–12)	-
2-Methylnaphthalene	1,362 (5.4–20,000)	<b>3.4</b> (2–120)
2-Methylphenol	28.3 (5.8–76)	<b>13</b> (11–15)
2,4-Dichlorophenol	(ND–15)	-
2,4-Dimethylphenol	14.5 (8.3–21)	12
3-Methylphenol and 4-Methylphenol	41 (7.8–100)	<b>11.5</b> (0.35–16)
Acetophenone	(ND–4.6)	<b>13</b> (10–22)
Benzidine	(ND–35)	-
Benzo(a)anthracene	(ND–17.0)	-
Benzo(a)pyrene	(ND–130.0)	6.7
Benzo(b)fluoranthene	42.2 (0.5–84.0)	10
Benzo(g,h,i)perylene	42.3 (0.7–84.0)	6.9
Benzo(k)fluoranthene	32.8 (0.6–65.0)	5.9
Benzyl alcohol	81.5 (14.0–200)	<b>41</b> (17–750)
Bis(2-Ethylhexyl) phthalate	210 (4.8–490)	<b>20</b> (9.6–870)
Butyl benzyl phthalate	34.3 (1.9–110)	-

*This document is a draft for review purposes only and does not constitute Agency policy.*

Parameter	Barnett <sup>a</sup>	Marcellus <sup>b</sup>
States	TX	MD, NY, OH, PA, VA, WY
Chrysene	120 (0.57–240)	-
Di-n-octyl phthalate	(ND–270)	15
Di-n-butyl phthalate	41 (1.5–120)	<b>14</b> (11–130)
Dibenz(a,h)anthracene	77 (3.2–150)	<b>3.2</b> (2.3–11)
Diphenylamine	5.3 (0.6–10.0)	-
Fluoranthene	(ND–0.18)	6.1
Fluorene	0.8 (0.46–1.3)	8.4
Indeno(1,2,3-cd)pyrene	71 (2.9–140)	<b>3.1</b> (2.4–9.5)
N-Nitrosodiphenylamine	8.9 (7.8–10)	2.7
N-Nitrosomethylethylamine	(ND–410)	-
Phenanthrene	107 (0.52–1,400)	<b>9.75</b> (3–22)
Phenol	63 (17–93)	<b>10</b> (2.4–21)
Pyrene	0.2 (ND–0.18)	13
Pyridine	413 (100–670)	<b>250</b> (10–2,600)

-, no value available; ND, not detected.

<sup>a</sup> [Hayes and Severin \(2012b\)](#). *n* = 16. Data from days 1–23 of flowback. This data source reported concentrations without presentation of raw data.

<sup>b</sup> [Hayes \(2009\)](#). *n* = 1–35. Data from days 1–90 of flowback. Concentrations were calculated from Hayes' raw data. Non-detects and contaminated blanks omitted.

1 The organic profile of CBM produced water is characterized by high levels of aromatic and  
2 halogenated compounds compared to other unconventional produced waters ([Sirivedhin and](#)  
3 [Dallbauman, 2004](#)). PAHs and phenols are the most common organic compounds found in coalbed  
4 produced water. Produced water from coalbeds in the Black Warrior Basin mainly contains  
5 phenols, multiple naphthalic PAHs, and various decanoic and decenoic fatty acids (see Table E-11).  
6 CBM-associated organics are also known to include biphenyls, alkyl aromatics, hydroxypyridines,  
7 aromatic amines, and nitrogen-, oxygen-, and sulfur-bearing heterocyclics ([Orem et al., 2014](#);  
8 [Pashin et al., 2014](#); [Benko and Drewes, 2008](#); [Orem et al., 2007](#); [Fisher and Santamaria, 2002](#)).

*This document is a draft for review purposes only and does not constitute Agency policy.*



**Table E-11. Reported concentrations of organic constituents in 65 samples of produced water from the Black Warrior CBM Basin, presented as average (minimum–maximum).**

Parameter	Number of observations	Concentration (µg/L) <sup>a</sup>
States	-	AL, MS
Benzothiazole	45	0.25 (0.01–3.04)
Caprolactam	10	0.75 (0.02–2.39)
Cyclic octaatomic sulfur	29	1.06 (0.10–9.63)
Dimethyl-naphthalene	39	0.79 (0.01–9.51)
Diethyl phthalate	57	0.21 (0.01–2.30)
Dodecanoic acid	30	1.13 (0.67–2.52)
Hexadecanoic acid	50	1.58 (1.17–3.02)
Hexadecenoic acid	25	1.69 (1.13–8.37)
Methyl-biphenyl	18	0.25 (0.01–2.13)
Methyl-naphthalene	52	0.77 (0.01–15.55)
Methyl-quinoline	31	0.96 (0.03–3.75)
Naphthalene	49	0.41 (0.01–6.57)
Octadecanoic acid	32	1.95 (1.62–3.73)
Octadecenoic acid	29	1.87 (1.60–3.47)
Phenol, 2,4-bis(1,1-dimethyl)	21	0.45 (0.01–4.94)
Phenol, 4-(1,1,3,3-tetramethyl)	17	1.65 (0.01–18.34)
Phenolic compounds	-	19.06 (ND–192.00)
Tetradecanoic acid	53	1.51 (0.94–5.32)
Tributyl phosphate	23	0.26 (0.01–2.66)
Trimethyl-naphthalene	23	0.65 (0.01–4.49)
Triphenyl phosphate	6	1.18 (0.01–6.77)

-, no value available.

<sup>a</sup> [DOE \(2014\)](#). Concentrations were calculated based on the authors' raw data.

1 [Hayes \(2009\)](#) characterized the content of Marcellus Shale produced water including organics (see  
2 Table E-10). The author tested for the majority of VOCs and SVOCs, pesticides and PCBs, based on  
3 the recommendation of the Pennsylvania and West Virginia Departments of Environmental  
4 Protection. Only 0.5% of VOCs and 0.03% of SVOCs in the produced water were detected above  
5 1 mg/L. Approximately 96% of VOCs, 98% of SVOCs, and virtually all pesticides and PCBs were at  
6 nondetectable levels.

*This document is a draft for review purposes only and does not constitute Agency policy.*

### E.2.7. Chemical Reactions

1 Section E.2.7.1 describes general aspects of subsurface chemical reactions that might occur during  
2 hydraulic fracturing operations. Here we augment the discussion by describing subsurface chemical  
3 processes.

#### E.2.7.1. Injected Chemical Processes

4 Hydraulic fracturing injects relatively oxygenated fluids into a reducing environment, which may  
5 mobilize trace or major constituents into solution. Injection of oxygenated fluids may lead to  
6 short-term changes in the subsurface redox state, as conditions may shift from reducing to  
7 oxidizing. The chemical environment in hydrocarbon-rich unconventional reservoirs, such as black  
8 shales, is generally reducing, as evidenced by the presence of pyrite and methane ([Engle and  
9 Rowan, 2014](#); [Dresel and Rose, 2010](#)). For black shales, reducing conditions are a product of  
10 original accumulations of organic matter whose decay depleted oxygen to create rich organic  
11 sediments within oil- and gas-producing formations ([Tourtelot, 1979](#); [Vine and Tourtelot, 1970](#)).  
12 Yet reactions resulting from temporary redox shifts are likely to be less important than those  
13 resulting from other longer-term physical and geochemical processes. Temporary subsurface redox  
14 shifts may be due to the short timeframe for fluid injection (a few days to a few weeks) and the use  
15 of oxygen scavengers to prevent downhole equipment corrosion.

16 Hydraulic fracturing fluid injection introduces novel chemicals into the subsurface.<sup>1</sup> As such, the  
17 geochemistry of injected and native fluids will not be in equilibrium. Over the course of days to  
18 months, a complex series of reactions will equilibrate disparate fluid chemistries. The evolution of  
19 flowback and produced water geochemistry are dependent upon the exposure of formation solids  
20 and fluids to novel chemicals within hydraulic fracturing fluid. Chemical additives interact with  
21 reservoir solids and either mobilize constituents or themselves become adsorbed to solids. Such  
22 additives include metallic salts, elemental complexes, salts of organic acids, organometallics, and  
23 other metal compounds ([Montgomery, 2013](#); [House of Representatives, 2011](#)).

24 The salts, elemental complexes, organic acids, organometallics, and other metal-containing  
25 compounds may interact with metals and metalloids in the target formation through processes  
26 such as ion exchange, adsorption, desorption, chelation, and complexation. For instance, natural  
27 organic ligands (e.g., citrate) are molecules that can form coordination compounds with heavy  
28 metals such as cadmium, copper, and lead ([Martinez and McBride, 2001](#); [Stumm and Morgan, 1981](#);  
29 [Bloomfield et al., 1976](#)). Citrate-bearing compounds are used in hydraulic fracturing fluids as  
30 surfactants, iron control agents, and biocides. Studies of the additives' interactions with formation  
31 solids at concentrations representative of hydraulic fracturing fluids are lacking.

32 Furthermore, pH will likely play a role in the nature and extent of these processes, as the low pH of  
33 hydraulic fracturing fluids may mobilize trace constituents. The pH of injected fluids may differ  
34 from existing subsurface conditions due to the use of dilute acids (e.g., hydrochloric or acetic) used  
35 for cleaning perforations and fractures during hydraulic fracturing treatments ([Montgomery, 2013](#);

---

<sup>1</sup> For more information on chemical additive usage, refer to Chapter 5 (Chemical Mixing).

1 [GWPC and ALL Consulting, 2009](#)). Metals within formation solids may be released through the  
2 dissolution of acid-soluble phases such as iron and manganese oxides or hydroxides ([Yang et al.,](#)  
3 [2009](#); [Kashem et al., 2007](#); [Filgueiras et al., 2002](#)). Thus, the pH of hydraulic fracturing fluids, or  
4 changes in system pH that may occur as fluid recovery begins, may influence which metals and  
5 metalloids are likely to be retained within the formation and which may be recovered in flowback.  
6 Ultimately, more research is needed to fully understand how the injection of hydraulic fracturing  
7 fluids affects subsurface geochemistry and resultant flowback and produced water chemistry.

### **E.2.8. Microbial Community Processes and Content**

8 By design, hydraulic fracturing releases hydrocarbons and other reduced mineral species from  
9 freshly fractured shale, sandstone, and coal, resulting in saltier in situ fluids, the release of  
10 formation solids, and increased interconnected fracture networks with rich colonization surfaces  
11 that are ideal for microbial growth ([Wuchter et al., 2013](#); [Curtis, 2002](#)). Depending upon the  
12 formation, microorganisms may be native to the subsurface and/or introduced from non-sterile  
13 equipment and fracturing fluids. Additionally, microorganisms compete for novel organics in the  
14 form of chemical additives ([Wuchter et al., 2013](#); [Arthur et al., 2009](#)). Since large portions of  
15 hydraulic fracturing fluid can remain emplaced in the targeted formation, long-term microbial  
16 activity is supported through these novel carbon and energy resources ([Orem et al., 2014](#); [Murali](#)  
17 [Mohan et al., 2013a](#); [Struchtemeyer and Elshahed, 2012](#); [Bottero et al., 2010](#)). Such physical and  
18 chemical changes to the environment at depth stimulate microbial activity and influence flowback  
19 and produced water content in important ways.

20 Several studies characterizing produced water from unconventional formations (i.e., the Barnett,  
21 Marcellus, Utica, and Antrim Shales) indicate that taxa with recurring physiologies compose shale  
22 flowback and produced water microbial communities ([Murali Mohan et al., 2013b](#); [Wuchter et al.,](#)  
23 [2013](#)). Such physiologies include sulfur cyclers (e.g., sulfidogens: sulfur , sulfate , and thiosulfate  
24 reducers); fermenters; acetogens; hydrocarbon oxidizers; methanogens; and iron, manganese, and  
25 nitrate reducers ([Davis et al., 2012](#)).

26 Based on their physiologies, microorganisms cycle substrates at depth by mobilizing or  
27 sequestering constituents in and out of solution. Mobilization can occur through biomethylation,  
28 complexation, and leaching. Sequestration can occur through intracellular sequestration,  
29 precipitation, and sorption to biomass.

30 The extent to which constituents are mobilized or sequestered depends upon the prevailing  
31 geochemical environment after hydraulic fracturing and through production. Significant  
32 environmental factors that influence the extent of microbially mediated reactions are increases in  
33 ionic content (i.e., salinity, conductivity, total nitrogen, bromide, iron, and potassium); decreases in  
34 acidity, and organic and inorganic carbon; the availability of diverse electron acceptors and donors;  
35 and the availability of sulfur-containing compounds ([Cluff et al., 2014](#); [Murali Mohan et al., 2013b](#);  
36 [Davis et al., 2012](#)). Examples follow that illustrate how subsurface microbial activity influences the  
37 content of produced water.

1 Under prevailing anaerobic and reducing conditions, microorganisms can mobilize or sequester  
2 metals found in unconventional produced water ([Gadd, 2004](#)). Microbial enzymatic reduction  
3 carried out by chromium-, iron-, manganese-, and uranium-reducing bacteria can both mobilize and  
4 sequester metals ([Vanengelen et al., 2008](#); [García et al., 2004](#); [Mata et al., 2002](#); [Gauthier et al.,](#)  
5 [1992](#); [Myers and Nealson, 1988](#); [Lovley and Phillips, 1986](#)). For instance, iron and manganese  
6 species go into solution when reduced, while chromium and uranium species precipitate when  
7 reduced ([Gadd, 2004](#); [Newman, 2001](#); [Ahmann et al., 1994](#)).

8 Metals can also be microbially solubilized by complexing with extracellular metabolites,  
9 siderophores (metal-chelating compounds), and microbially generated bioligands (e.g., organic  
10 acids) ([Glorius et al., 2008](#); [Francis, 2007](#); [Gadd, 2004](#); [Hernlem et al., 1999](#)). For example,  
11 *Pseudomonas* spp. secrete acids that act as bioligands to form complexes with uranium(VI) ([Glorius](#)  
12 [et al., 2008](#)).

13 Many sulfur-cycling taxa have been found in hydraulic fracturing flowback and produced water  
14 communities ([Murali Mohan et al., 2013b](#); [Mohan et al., 2011](#)). Immediately following injection,  
15 microbial sulfate reduction is stimulated by diluting high-salinity formation waters with fresh  
16 water (high salinities inhibit sulfate reduction). Microbial sulfate reduction oxidizes organic matter  
17 and decreases aqueous sulfate concentrations, thereby increasing the solubility of barium ([Cheung](#)  
18 [et al., 2010](#); [Lovley and Chapelle, 1995](#)).

19 Sulfidogens also reduce sulfate, as well as elemental sulfur and other sulfur species (e.g.,  
20 thiosulfate) prevalent in the subsurface, contributing to biogenic sulfide or hydrogen sulfide gas in  
21 produced water ([Alain et al., 2002](#); [Ravot et al., 1997](#)). Sulfide can also sequester metals in sulfide  
22 phases ([Ravot et al., 1997](#); [Lovley and Chapelle, 1995](#)). Sources of sulfide also include formation  
23 solids (e.g., pyrite in shale) and remnants of drilling muds (e.g., barite and sulfonates), or other  
24 electron donor sources ([Davis et al., 2012](#); [Kim et al., 2010](#); [Collado et al., 2009](#); [Grabowski et al.,](#)  
25 [2005](#)).

26 Additionally, anaerobic hydrocarbon oxidizers associated with shale produced water can readily  
27 degrade simple and complex carbon compounds across a considerable salinity and redox range  
28 ([Murali Mohan et al., 2013b](#); [Fichter et al., 2012](#); [Timmis, 2010](#); [Lalucat et al., 2006](#); [Yakimov et al.,](#)  
29 [2005](#); [McGowan et al., 2004](#); [Hedlund et al., 2001](#); [Cayol et al., 1994](#); [Gauthier et al., 1992](#); [Zeikus et](#)  
30 [al., 1983](#)).

31 Lastly, microbial fermentation produces organic acids, alcohols, and gases under anaerobic  
32 conditions, as is the case during methanogenesis. Some nitrogen-cycling genera have been  
33 identified in unconventional shale gas systems. These include genera involved in nitrate reduction  
34 and denitrification ([Kim et al., 2010](#); [Yoshizawa et al., 2010](#); [Yoshizawa et al., 2009](#); [Lalucat et al.,](#)  
35 [2006](#)). These genera likely couple sugar, organic carbon, and sulfur species oxidation to nitrate  
36 reduction and denitrification processes.

1 Consequently, using a variety of recurring physiologies, microorganisms mobilize and sequester  
2 constituents in and out of solution to influence the content of flowback and produced water in  
3 important ways.

### E.3. Produced Water Content Spatial Trends

#### E.3.1. Variability between Plays of the Same Rock Type

##### E.3.1.1. Shale Formation Variability

4 The content of shale produced water varies geographically, as shown by data from four formations  
5 (the Bakken, Barnett, Fayetteville, and Marcellus Shales; see Table E-2, Table E-4, Table E-6, Table  
6 E-9, Table E-10). For several constituents, variability between shale formations is common. The  
7 average/median TDS concentrations in the Marcellus (87,800 to 106,390 mg/L ) and Bakken  
8 (196,000 mg/L) Shales are one order of magnitude greater than the average TDS concentrations  
9 reported for the Barnett and Fayetteville Shales (see Table E-2). As Fayetteville produced water  
10 contains the lowest reported average TDS concentration (13,290 mg/L), average concentrations for  
11 many inorganics (i.e., bromide, calcium, chloride, magnesium, sodium, and strontium) that  
12 contribute to dissolved solids loads are the lowest compared to average concentrations for the  
13 same inorganics in Bakken, Barnett, and Marcellus produced water (see Table E-4 and Table E-6).  
14 Average concentrations for metals reported within Bakken and Marcellus produced water are also  
15 higher than those within the Barnett or Fayetteville formations (see Table E-6).

16 Additionally, Marcellus produced water is enriched in barium (average concentration of 2,224 mg/l  
17 in [Barbot et al. \(2013\)](#) or median calculated from [Hayes \(2009\)](#) of 542.5 mg/L) and strontium  
18 (average concentration of 1,695 mg/L ([Barbot et al., 2013](#)) or median calculated from [Hayes](#)  
19 [\(2009\)](#) of 1,240 mg/L) by one to three orders of magnitude compared to Bakken, Barnett, and  
20 Fayetteville produced water (see Table E-6). Subsequently, radionuclide variability expressed as  
21 isotopic ratios (e.g., radium-228/radium-226, strontium-87/strontium-86) are being used to  
22 determine the reservoir source for produced water ([Chapman et al., 2012](#); [Rowan et al., 2011](#);  
23 [Blauch et al., 2009](#)). Lastly, Barnett and Bakken produced waters are enriched in sulfate.

24 Although organic data are limited, average BTEX concentrations are higher in Marcellus compared  
25 to Barnett produced water by one order of magnitude, whereas concentrations of benzene alone  
26 are marginally higher in Barnett compared to Marcellus produced water (see Table E-9 and Table  
27 E-10).

##### E.3.1.2. Tight Formation Variability

28 The average concentrations for various constituents in tight formation produced water vary  
29 geographically between sandstone formations (the Cotton Valley Group, Devonian sandstone, and  
30 the Mesaverde and Oswego), as shown in Table E-2, Table E-4, and Table E-6. The average TDS  
31 concentrations in the Devonian sandstone (235,125 mg/L) and Cotton Valley Group  
32 (164,683 mg/L) are one to two orders of magnitude greater than the average TDS concentrations  
33 reported for the Mesaverde (15,802 mg/L) and Oswego Formations (73,082 mg/L) (see Table E-2).

1 Mesaverde produced water also contained the lowest average concentrations for many of the  
2 inorganic components of TDS (i.e., calcium, chloride, iron, magnesium, and sodium; see Table E-4  
3 and Table E-6).

4 Little variability was reported in pH between these four tight formations (see Table E-2).  
5 Mesaverde produced water was enriched in sulfate, with an average concentration of 837 mg/L  
6 (see Table E-4), whereas Devonian produced water was enriched in barium, which had an average  
7 concentration of 1,488 mg/L (see Table E-6).

### **E.3.1.3. Coalbed Variability**

8 Geochemical analysis showed that the Powder River Basin is predominately characterized by  
9 bicarbonate water types with a large intrusion of sodium-type waters across a large range of  
10 magnesium and calcium concentrations ([Dahm et al., 2011](#)).<sup>1</sup> In contrast, the Raton Basin is typified  
11 by sodium-type waters with low calcium and magnesium concentrations. A combination of Powder  
12 River and Raton produced water compositional characteristics typifies the San Juan Basin ([Dahm et  
13 al., 2011](#)). Lastly, Black Warrior Basin produced water is differentiated based upon its sodium  
14 bicarbonate- or sodium chloride-type waters ([DOE, 2014](#); [Pashin et al., 2014](#)).

15 Regional variability is observed in average produced water concentrations for various constituents  
16 of four CBM basins (Powder River, Raton, San Juan, and Black Warrior; see Table E-3, Table E-5,  
17 Table E-7, Table E-9, and Table E-11), but particularly between produced water of the Black  
18 Warrior Basin and the others. As the average TDS concentration in Black Warrior Basin produced  
19 water (14,319 mg/L) is one to two orders of magnitude higher than that of the other three  
20 presented in Table E-3, average concentrations for TDS contributing ions (i.e., calcium, chloride,  
21 and sodium) were also higher than in the Powder River, Raton, and San Juan Basins. These high  
22 levels follow from the marine depositional environment of the Black Warrior Basin ([Horsey, 1981](#)).

23 Powder River Basin produced water has the lowest average TDS concentration (997 mg/L), which  
24 is consistent with [Dahm et al. \(2011\)](#) reporting that nearly a quarter of all the produced water  
25 sampled from the Powder River Basin meets the U.S. drinking water secondary standard for TDS  
26 (less than 500 mg/L).<sup>2</sup> In addition, the Black Warrior Basin appears to be slightly enriched in  
27 barium, compared to the other three CBM basins (see Table E-5). Lastly, the three western CBM  
28 basins (Powder River, Raton, and San Juan) are much more alkaline and enriched in bicarbonate  
29 than their eastern counterpart (the Black Warrior Basin; see Table E-3).

---

<sup>1</sup> Water is classified as a “type” if the dominant dissolved ion is greater than 50% of the total. A sodium-type water contains more than 50% of the cation milliequivalents (mEq) as sodium. Similarly, a sodium-bicarbonate water contains 50% of the cation mEq as sodium, and 50% of the anion mEq as bicarbonate ([USGS, 2002](#)).

<sup>2</sup> MCL refers to the highest level of a contaminant that is allowed in drinking water. MCLs are enforceable standards. These include primary MCLs for barium, cadmium, chromium, lead, mercury, and selenium. National Secondary Drinking Water Regulations (NSDWRs or secondary standards) are non-enforceable guidelines regulating contaminants that may cause cosmetic effects (such as skin or tooth discoloration) or aesthetic effects (such as taste, odor, or color) in drinking water. Secondary MCLs are recommended for aluminum, chloride, copper, iron, manganese, pH, silver, sulfate, TDS, and others. See <http://water.epa.gov/drink/contaminants/index.cfm#Primary> for more information.



1 Average concentrations of benzene, ethylbenzene, and xylenes are higher in San Juan compared to  
2 Raton produced water by two orders of magnitude, whereas concentrations of toluene are  
3 marginally higher in Raton compared to San Juan produced water (see Table E-9).

### E.3.2. Local Variability

4 Spatial variability of produced water content frequently exists within a single producing formation.  
5 For instance, Marcellus Shale barium levels increase along a southwest to northeast transect  
6 ([Barbot et al., 2013](#)). Additionally, produced water from the northern and southern portions of the  
7 San Juan Basin differ in TDS, due to ground water recharge in the northern basin leading to higher  
8 chloride concentrations than in the southern portion ([Dahm et al., 2011](#); [Van Voast, 2003](#)).

9 Spatial variability of produced water content also exists at a local level due to the stratigraphy  
10 surrounding the producing formation. For example, deep saline aquifers, if present in the over- or  
11 underlying strata, may over geologic time encroach upon shales, coals, and sandstones via fluid  
12 intrusion processes ([Blauch et al., 2009](#)). Evidence of deep brine migration from adjacent strata into  
13 shallow aquifers via natural faults and fractures has been noted previously in the Michigan Basin  
14 and the Marcellus Shale ([Vengosh et al., 2014](#); [Warner et al., 2012](#); [Weaver et al., 1995](#)). By  
15 extension, in situ hydraulic connectivity, which is stimulated by design during hydraulic fracturing,  
16 may lead to the migration of brine-associated constituents in under- and overlying strata into  
17 producing formations, as discussed in Chapter 6.

18 As hydrocarbon source rocks often form repeating sedimentary sequences, contact between these  
19 layers presents opportunities for an exchange of organics and inorganics ([Fredrickson and Balkwill,  
20 2006](#); [U.S. EPA, 2004](#)). For instance, diffusion of carbon sources and electron donors occurs at  
21 subsurface shale-sandstone interfaces, suggesting a stratigraphic role in the exchange of  
22 constituents between formations ([Fredrickson and Balkwill, 2006](#)).

## E.4. Example Calculation for Roadway Transport

23 This section provides background information for the roadway transport calculation appearing in  
24 Chapter 7.

### E.4.1. Estimation of Transport Distance

25 In a study of wastewater management for the Marcellus Shale, [Rahm et al. \(2013\)](#) used data  
26 reported to the Pennsylvania Department of Environmental Protection (PA DEP) to estimate the  
27 average distance wastewater was transported. For the period from 2008 to 2010, the distance  
28 transported was approximately 100 km, but it was reduced by 30% for 2011. The reduction was  
29 attributed to increased treatment infrastructure in Lycoming County, an area of intensive hydraulic  
30 fracturing operations in northeastern Pennsylvania. For the part of Pennsylvania within the  
31 Susquehanna River Basin, [Gilmore et al. \(2013\)](#) estimated the likely transport distances for drilling  
32 waste to landfills (256 km or 159 mi); produced water to disposal wells (388 km or 241 mi); and  
33 commercial wastewater treatment plants (CWTPs) (158 km or 98 mi). These distances are longer

1 than the values from [Rahm et al. \(2013\)](#), in part, because wells in the Susquehanna Basin are  
 2 further to the east of Ohio disposal wells and some CWTPs.

#### E.4.2. Estimation of Wastewater Volumes

3 In an example water balance calculation, [Gilmore et al. \(2013\)](#) used 380,000 gal of flowback as the  
 4 volume transported to CWTPs, 450,000 gal of flowback transported to injection wells, and 130,000  
 5 gal of un-reusable treated water also transported to injection wells for a total estimated wastewater  
 6 volume of 960,000 gal per well.

#### E.4.3. Estimation of Roadway Accidents

7 The U.S. Department of Transportation (DOT) published statistics on roadway accidents ([U.S.  
 8 Department of Transportation, 2012](#)) which indicate that the combined total of combination truck  
 9 crashes in 2012 was 179,736, or 110 per 100 million vehicle miles (1.77 million km) (see Table  
 10 E-12). As an indicator of the uncertainty of these data, DOT reported 122,240 large truck crashes  
 11 from a differing set of databases (see Table E-13), with a rate of 75 per 100 million vehicle miles,  
 12 which is 68% of the number of combination truck crashes.

**Table E-12. Combination truck crashes in 2012 for the 2,469,094 registered combination trucks, which traveled 163,458 million miles (U.S. Department of Transportation, 2012).<sup>a</sup>**

Type of crash	Combination trucks involved in crashes	Rates per 100 million vehicle miles traveled by combination trucks
Property damage only	135,000	82.8
Injury	42,000	25.5
Fatal	2,736	1.74
Total	179,736	110

<sup>a</sup> A combination truck is defined as a truck tractor pulling any number of trailers ([U.S. Department of Transportation, 2012](#)).



**Table E-13. Large truck crashes in 2012 (U.S. Department of Transportation, 2012).<sup>a</sup>**

Type of crash	Total crashes	Large trucks with cargo tanks	
		Number	Percentage
Towaway crashes	72,644	4,364	6.0%
Injury	45,794	3,245	7.1%
Fatal	3,802	360	9.5%
Totals	122,240	7,969	6.5%

<sup>a</sup> A large truck is defined as a truck with a gross vehicle weight rating greater than 10,000 pounds ([U.S. Department of Transportation, 2012](#)).

#### E.4.4. Estimation of Material Release Rates in Crashes

1 Estimates ranging from 5.6% to 36% have been made for the probability of material releases from  
 2 crashed trucks. [Craft \(2004\)](#) used data from three databases to estimate the probability of spills in  
 3 fatality accidents at 36%, which may overestimate the probability for all types of accidents ([Rozell  
 4 and Reaven, 2012](#)).<sup>1</sup> The [U.S. Department of Transportation \(2012\)](#) provides estimates of  
 5 hazardous materials releases from large truck crashes. For all types of hazardous materials carried,  
 6 408 of 2,903 crashes, or 14%, were known to have hazardous materials releases. The occurrence of  
 7 a release was unknown for 18% of the crashes. These crashes were not distinguished by truck type,  
 8 so they likely overestimated the number of tanker crashes. [Harwood et al. \(1993\)](#) used accident  
 9 data from three states (California, Illinois, and Michigan) to develop hazardous materials release  
 10 rate estimates for different types of roadways, accidents, and settings (urban or rural). For  
 11 roadways in rural settings the probability of release ranged from 8.1% to 9.0%, while in urban  
 12 settings the probability ranged from 5.6% to 6.9%.

#### E.4.5. Estimation of Volume Released in Accidents

13 Based on the estimated volume (960,000 gal (3.63 million L) per well) and disposal distances used  
 14 by [Rahm et al. \(2013\)](#) and [Gilmore et al. \(2013\)](#), and an assumed 20,000 L (5,300 gal)-containing  
 15 truck ([Gilmore et al., 2013](#)), the total travel distance by trucks ranges from 9,620 miles (14,900 km)  
 16 to 17,760 miles (28,570 km) per well (see Table E-14).

<sup>1</sup> The three databases were the Trucks Involved in Fatal Accidents developed by the Center for National Truck Statistics at the University of Michigan, the National Automotive Sampling System's General Estimates System (GES) produced by the National Highway Transportation Safety Agency, and the Motor Carrier Management Information System (MCMIS) Crash File produced by the Federal Motor Carrier Safety Administration.

**Table E-14. Estimate of total truck-travel miles per well in the Susquehanna River Basin based on the transport analysis performed by Gilmore et al. (2013).**

Action	Waste per well (million gal)	Trucks (20 m <sup>3</sup> /truck)	Miles traveled per truck	Total miles traveled (per well)	Material release rate bounds			
					5.6%		36%	
					Crashes per 100 million miles			
					75	110	75	110
<b><i>Gilmore et al. (2013) distance estimates</i></b>								
Produced water to CWTP	0.38	72	26.9	1,937				
Produced water to disposal well	0.45	85	147	12,495				
CWTP effluent to disposal well	0.13	25	133	3,325				
Total	0.96	182		17,757	3	4	18	27
<b><i>Rahm et al. (2013) distance estimates</i></b>								
Transport 100 km	0.96	182	62.1	11,300	2	3	12	17
Transport 70 km	0.96	182	43.5	9,620	1	2	8	12

- 1 The Susquehanna River Basin Commission reported 1,928 well pads permitted within the basin  
2 ([SRBC, 2012](#)). Assuming two wells per pad, the total distance traveled to haul hydraulic fracturing  
3 wastewater is 68.4 million miles (110 million km).
- 4 Combining these data with the DOT crash data gives an estimated 76 crashes per year using the  
5 combination truck crash rate or 52 per year using the DOT large truck crash rate. Based on the  
6 various assumptions of travel distances, crash rates, and estimated minimum and maximum  
7 material release rates, the number of crashes with releases ranges from 1 to 27 (see Table E-14).
- 8 Several limitations are inherent in this analysis, including differing rural road accident rates and  
9 highway rates, differing wastewater endpoints, and differing amounts of produced water transport.  
10 Further, the estimates present an upper bound on impacts, because not all releases of wastewater  
11 would reach or impact drinking water resources.

## E.5. References for Appendix E

[Acharya, HR; Henderson, C; Matis, H; Kommepalli, H; Moore, B; Wang, H.](#) (2011). Cost effective recovery of low-TDS frac flowback water for reuse. (Department of Energy: DE-FE0000784). Niskayuna, NY: GE Global Research. [http://www.netl.doe.gov/file%20library/Research/oil-gas/FE0000784\\_FinalReport.pdf](http://www.netl.doe.gov/file%20library/Research/oil-gas/FE0000784_FinalReport.pdf)

- [Ahmann, D; Roberts, AL; Krumholz, LR; Morel, FM.](#) (1994). Microbe grows by reducing arsenic [Letter]. Nature 371: 750. <http://dx.doi.org/10.1038/371750a0>
- [Alain, K; Pignet, P; Zbinden, M; Quillevere, M; Duchiron, F; Donval, JP; Lesongeur, F; Raguene, G; Crassous, P; Querellou, J; Cambon-Bonavita, MA.](#) (2002). Caminicella sporogenes gen. nov., sp. nov., a novel thermophilic spore-forming bacterium isolated from an East-Pacific Rise hydrothermal vent. Int J Syst Evol Microbiol 52: 1621-1628.
- [André, L; Rabemanana, V; Vuataz, FD.](#) (2006). Influence of water-rock interactions on fracture permeability of the deep reservoir at Soultz-sous-Forêts, France. Geothermics 35: 507-531. <http://dx.doi.org/10.1016/j.geothermics.2006.09.006>
- [Arthur, JD; Bohm, B; Cornue, D.](#) (2009). Environmental considerations of modern shale gas development. Paper presented at SPE Annual Technical Conference and Exhibition, October 4-7, 2009, New Orleans, LA.
- [Bank, T.](#) (2011). Trace metal geochemistry and mobility in the Marcellus shale. In Proceedings of the Technical Workshops for the Hydraulic Fracturing Study: Chemical & Analytical Methods. Bank, T. <http://www2.epa.gov/sites/production/files/documents/tracemetalgeochemistryandmobilityinthemarcellusformation1.pdf>
- [Bank, T; Fortson, LA; Malizia, TR; Benelli, P.](#) (2012). Trace metal occurrences in the Marcellus Shale [Abstract]. Geological Society of America Abstracts with Programs 44: 313.
- [Barbot, E; Vidic, NS; Gregory, KB; Vidic, RD.](#) (2013). Spatial and temporal correlation of water quality parameters of produced waters from Devonian-age shale following hydraulic fracturing. Environ Sci Technol 47: 2562-2569.
- [Benko, KL; Drewes, JE.](#) (2008). Produced water in the Western United States: Geographical distribution, occurrence, and composition. Environ Eng Sci 25: 239-246.
- [Blauch, ME; Myers, RR; Moore, TR; Lipinski, BA.](#) (2009). Marcellus shale post-frac flowback waters - where is all the salt coming from and what are the implications? In Proceedings of the SPE Eastern Regional Meeting. Richardson, TX: Society of Petroleum Engineers.
- [Blondes, MS; Gans, KD; Thordsen, JJ; Reidy, ME; Thomas, B; Engle, MA; Kharaka, YK; Rowan, EL.](#) (2014). Data: U.S. Geological Survey National Produced Waters Geochemical Database v2.0 (Provisional) [Database]: U.S. Geological Survey :: USGS. Retrieved from <http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsofEnergyProductionandUse/ProducedWaters.aspx#3822349-data>
- [Bloomfield, C; Kelson, W; Pruden, G.](#) (1976). Reactions between metals and humidified organic matter. Journal of Soil Science 27: 16-31. <http://dx.doi.org/10.1111/j.1365-2389.1976.tb01971.x>
- [Bottero, S; Picioreanu, C; Delft, TU; Enzien, M; van Loosdrecht, MCM; Bruining, H; Heimovaara, T.](#) (2010). Formation damage and impact on gas flow caused by biofilms growing within proppant packing used in hydraulic fracturing. Paper presented at SPE International Symposium and Exhibit on Formation Damage Control, February 10-12, 2010, Lafayette, Louisiana.
- [BTGS](#) (Bureau of Topographic and Geologic Survey). (2011). Geochemical analyses of selected lithologies from geologic units in central, north-central, and southeastern Pennsylvania. (OFMI 1101.0). Middletown, PA: Bureau of Topographic and Geologic Survey, Pennsylvania Geological Survey.
- [Cayol, JL; Ollivier, B; Lawson anani soh, A; Fardeau, ML; Ageron, E; Grimont, PAD; Prensier, G; Guezennec, J; Magot, M; Garcia, JL.](#) (1994). Haloincola saccharolytica subsp. senegalensis subsp. nov., Isolated from the sediments of a Hypersaline lake, and emended description of Haloincola saccharolytica. International Journal of Systematic Bacteriology 44: 805-811. <http://dx.doi.org/10.1099/00207713-44-4-805>
- [Chapman, EC; Capo, RC; Stewart, BW; Kirby, CS; Hammack, RW; Schroeder, KT; Edenborn, HM.](#) (2012). Geochemical and strontium isotope characterization of produced waters from Marcellus Shale natural gas extraction. Environ Sci Technol 46: 3545-3553.

- [Chermak, JA; Schreiber, ME.](#) (2014). Mineralogy and trace element geochemistry of gas shales in the United States: Environmental implications. *Int J Coal Geol* 126: 32-44.  
<http://dx.doi.org/10.1016/j.coal.2013.12.005>
- [Cheung, K; Klassen, P; Mayer, B; Goodarzi, F; Aravena, R.](#) (2010). Major ion and isotope geochemistry of fluids and gases from coalbed methane and shallow groundwater wells in Alberta, Canada. *Appl Geochem* 25: 1307-1329. <http://dx.doi.org/10.1016/j.apgeochem.2010.06.002>
- [Choppin, GR.](#) (2006). Actinide speciation in aquatic systems. *Mar Chem* 99: 83-92.  
<http://dx.doi.org/10.1016/j.marchem.2005.003.011>
- [Choppin, GR.](#) (2007). Actinide speciation in the environment. *Journal of Radioanal Chem* 273: 695-703.  
<http://dx.doi.org/10.1007/s10967-007-0933-3>
- [Clark, CE; Veil, JA.](#) (2009). Produced water volumes and management practices in the United States (pp. 64). (ANL/EVS/R-09/1). Argonne, IL: Argonne National Laboratory.  
[http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL\\_EVS\\_R09\\_produced\\_water\\_volume\\_report\\_2437.pdf](http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL_EVS_R09_produced_water_volume_report_2437.pdf)
- [Cluff, M; Hartsock, A; Macrae, J; Carter, K; Mouser, PJ.](#) (2014). Temporal changes in microbial ecology and geochemistry in produced water from hydraulically fractured Marcellus Shale Gas Wells. *Environ Sci Technol* 48: 6508-6517. <http://dx.doi.org/10.1021/es501173p>
- [Collado, L; Cleenwerck, I; Van Trappen, S; De Vos, P; Figueras, MJ.](#) (2009). *Arcobacter mytili* sp. nov., an indoxyl acetate-hydrolysis-negative bacterium isolated from mussels. *Int J Syst Evol Microbiol* 59: 1391-1396. <http://dx.doi.org/10.1099/ijs.0.003749-0>
- [Craft, R.](#) (2004). Crashes involving trucks carrying hazardous materials. (FMCSA-RI-04-024). Washington, D.C.: U.S. Department of Transportation. <http://ntl.bts.gov/lib/51000/51300/51302/fmcsa-ri-04-024.pdf>
- [Curtis, JB.](#) (2002). Fractured shale-gas systems. *AAPG Bulletin* 86: 1921-1938.  
<http://dx.doi.org/10.1306/61EEDDBE-173E-11D7-8645000102C1865D>
- [Dahm, KG; Guerra, KL; Xu, P; Drewes, JE.](#) (2011). Composite geochemical database for coalbed methane produced water quality in the Rocky Mountain region. *Environ Sci Technol* 45: 7655-7663.  
<http://dx.doi.org/10.1021/es201021n>
- [Davis, IP; Struchtemeyer, CG; Elshahed, MS.](#) (2012). Bacterial communities associated with production facilities of two newly drilled thermogenic natural gas wells in the Barnett Shale (Texas, USA). *Microb Ecol* 64: 942-954. <http://dx.doi.org/10.1007/s00248-012-0073-3>
- [Diehl, SF; Goldhaber, MB; Hatch, JR.](#) (2004). Modes of occurrence of mercury and other trace elements in coals from the warrior field, Black Warrior Basin, Northwestern Alabama. *Int J Coal Geol* 59: 193-208.  
<http://dx.doi.org/10.1016/j.coal.2004.02.003>
- [DOE](#) (U.S. Department of Energy). (2014). Water management strategies for improved coalbed methane production in the Black Warrior Basin. Available online at <http://www.netl.doe.gov/research/oil-and-gas/project-summaries/natural-gas-resources/de-fe0000888>
- [Dresel, PE; Rose, AW.](#) (2010). Chemistry and origin of oil and gas well brines in western Pennsylvania (pp. 48). (Open-File Report OFOG 1001.0). Harrisburg, PA: Pennsylvania Geological Survey, 4th ser.  
<http://www.marcellus.psu.edu/resources/PDFs/brines.pdf>
- [Engle, MA; Rowan, EL.](#) (2014). Geochemical evolution of produced waters from hydraulic fracturing of the Marcellus Shale, northern Appalachian Basin: A multivariate compositional data analysis approach. *Int J Coal Geol* 126: 45-56. <http://dx.doi.org/10.1016/j.coal.2013.11.010>
- [Fertl, WH; Chilingar, GV.](#) (1988). Total organic carbon content determined from well logs. *SPE Formation Evaluation* 3: 407-419. <http://dx.doi.org/10.2118/15612-PA>

- [Fichter, J; Moore, R; Braman, S; Wunch, K; Summer, E; Holmes, P.](#) (2012). How hot is too hot for bacteria? A technical study assessing bacterial establishment in downhole drilling, fracturing, and stimulation operations. Paper presented at NACE International Corrosion Conference & Expo, March 11-15, 2012, Salt Lake City, UT.
- [Filgueiras, AV; Lavilla, I; Bendicho, C.](#) (2002). Chemical sequential extraction for metal partitioning in environmental solid samples. *J Environ Monit* 4: 823-857. <http://dx.doi.org/10.1039/b207574c>
- [Fisher, JG; Santamaria, A.](#) (2002). Dissolved organic constituents in coal-associated waters and implications for human and ecosystem health. Paper presented at 9th Annual International Petroleum Environmental Conference, October 22-25, 2002, Albuquerque, NM.
- [Fisher, RS.](#) (1998). Geologic and geochemical controls on naturally occurring radioactive materials (NORM) in produced water from oil, gas, and geothermal operations. *Environmental Geosciences* 5: 139-150. <http://dx.doi.org/10.1046/j.1526-0984.1998.08018.x>
- [Francis, AJ.](#) (2007). Microbial mobilization and immobilization of plutonium. *J Alloy Comp* 444: 500-505. <http://dx.doi.org/10.1016/j.jallcom.2007.01.132>
- [Fredrickson, JK; Balkwill, DL.](#) (2006). Geomicrobial processes and biodiversity in the deep terrestrial subsurface. *Geomicrobiology Journal* 23: 345-356. <http://dx.doi.org/10.1080/01490450600875571>
- [Gadd, GM.](#) (2004). Microbial influence on metal mobility and application for bioremediation. *Geoderma* 122: 109-119. <http://dx.doi.org/10.1016/j.geoderma.2004.01.002>
- [García, MT; Mellado, E; Ostos, JC; Ventosa, A.](#) (2004). *Halomonas organivorans* sp. nov., a moderate halophile able to degrade aromatic compounds. *Int J Syst Evol Microbiol* 54: 1723-1728. <http://dx.doi.org/10.1099/ijs.0.63114-0>
- [Gauthier, MJ; Lafay, B; Christen, R; Fernandez, L; Acquaviva, M; Bonin, P; Bertrand, JC.](#) (1992). *Marinobacter hydrocarbonoclasticus* gen. nov., sp. nov., a New, Extremely Halotolerant, Hydrocarbon-Degrading Marine Bacterium. *International Journal of Systematic Bacteriology* 42: 568-576. <http://dx.doi.org/10.1099/00207713-42-4-568>
- [Gilmore, K; Hupp, R; Glathar, J.](#) (2013). Transport of Hydraulic Fracturing Water and Wastes in the Susquehanna River Basin, Pennsylvania. *J Environ Eng* 140: B4013002. [http://dx.doi.org/10.1061/\(ASCE\)EE.1943-7870.0000810](http://dx.doi.org/10.1061/(ASCE)EE.1943-7870.0000810)
- [Glorius, M; Moll, H; Geipel, G; Bernhard, G.](#) (2008). Complexation of uranium(VI) with aromatic acids such as hydroxamic and benzoic acid investigated by TRLFS. *Journal of Radioanal Chem* 277: 371-377. <http://dx.doi.org/10.1007/s10967-007-7082-6>
- [Grabowski, A; Nercessian, O; Fayolle, F; Blanchet, D; Jeanthon, C.](#) (2005). Microbial diversity in production waters of a low-temperature biodegraded oil reservoir. *FEMS Microbiol Ecol* 54: 427-443. <http://dx.doi.org/10.1016/j.femsec.2005.05.007>
- [GWPC and ALL Consulting](#) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>
- [Haluszczak, LO; Rose, AW; Kump, LR.](#) (2013). Geochemical evaluation of flowback brine from Marcellus gas wells in Pennsylvania, USA. *Appl Geochem* 28: 55-61. <http://dx.doi.org/10.1016/j.apgeochem.2012.10.002>
- [Harwood, DW; Viner, JG; Russell, ER.](#) (1993). Procedure for developing truck accident and release rates for hazmat routing. *Journal of Transportation Engineering* 119: 189-199. [http://dx.doi.org/10.1061/\(ASCE\)0733-947X\(1993\)119:2\(189\)](http://dx.doi.org/10.1061/(ASCE)0733-947X(1993)119:2(189))



- [Hatch, JR; Leventhal, JS.](#) (1981). Geochemistry of organic-rich shales and coals from middle Pennsylvanian Cherokee group and lower part of Marmaton group, Oklahoma, Kansas, Missouri, and Iowa [Abstract]. AAPG Bulletin 65: 936.
- [Hayes, T.](#) (2009). Sampling and analysis of water streams associated with the development of Marcellus shale gas. Des Plaines, IL: Marcellus Shale Coalition. <http://eidmarcellus.org/wp-content/uploads/2012/11/MSCCommission-Report.pdf>
- [Hayes, T; Severin, BF.](#) (2012b). Evaluation of the aqua-pure mechanical vapor recompression system in the treatment of shale gas flowback water - Barnett and Appalachian shale water management and reuse technologies. (08122-05.11). Hayes, T; Severin, BF. <http://barnettshalewater.org/documents/08122-05.11-EvaluationofMVR-3-12-2012.pdf>
- [Hedlund, BP; Geiselbrecht, AD; Staley, JT.](#) (2001). Marinobacter strain NCE312 has a Pseudomonas-like naphthalene dioxygenase. FEMS Microbiol Lett 201: 47-51.
- [Hernlem, BJ; Vane, LM; Sayles, GD.](#) (1999). The application of siderophores for metal recovery and waste remediation: Examination of correlations for prediction of metal affinities. Water Res 33: 951-960.
- [Horse, CA.](#) (1981). Depositional environments of the Pennsylvanian Pottsville Formation in the Black Warrior Basin of Alabama. Journal of Sedimentary Research 51: 799-806. <http://dx.doi.org/10.1306/212F7DB5-2B24-11D7-8648000102C1865D>
- [House of Representatives](#) (U.S. House of Representatives). (2011). Chemicals used in hydraulic fracturing. Washington, D.C.: U.S. House of Representatives, Committee on Energy and Commerce, Minority Staff. <http://democrats.energycommerce.house.gov/sites/default/files/documents/Hydraulic-Fracturing-Chemicals-2011-4-18.pdf>
- [Kashem, MA; Singh, BR; Kondo, T; Huq, SMI; Kawai, S.](#) (2007). Comparison of extractability of Cd, Cu, Pb and Zn with sequential extraction in contaminated and non-contaminated soils. Int J Environ Sci Tech 4: 169-176. <http://dx.doi.org/10.1007/BF03326270>
- [Katsoyiannis, A; Samara, C.](#) (2007). The fate of dissolved organic carbon (DOC) in the wastewater treatment process and its importance in the removal of wastewater contaminants. Environ Sci Pollut Res Int 14: 284-292. <http://dx.doi.org/10.1065/espr2006.05.302>
- [Kim, HM; Hwang, CY; Cho, BC.](#) (2010). Arcobacter marinus sp. nov. Int J Syst Evol Microbiol 60: 531-536. <http://dx.doi.org/10.1099/ijs.0.007740-0>
- [Kraemer, TF; Reid, DF.](#) (1984). The occurrence and behavior of radium in saline formation water of the U.S. Gulf Coast region. Isotope Geoscience 2: 153-174.
- [Lalucat, J; Bennasar, A; Bosch, R; Garcia-Valdes, E; Palleroni, NJ.](#) (2006). Biology of Pseudomonas stutzeri [Review]. Microbiol Mol Biol Rev 70: 510-547. <http://dx.doi.org/10.1128/MMBR.00047-05>
- [Langmuir, D; Herman, JS.](#) (1980). The mobility of thorium in natural waters at low temperatures. Geochim Cosmo Act 44: 1753-1766. [http://dx.doi.org/10.1016/0016-7037\(80\)90226-4](http://dx.doi.org/10.1016/0016-7037(80)90226-4)
- [Langmuir, D; Riese, AC.](#) (1985). THE THERMODYNAMIC PROPERTIES OF RADIUM. Geochim Cosmo Act 49: 1593-1601.
- [Lee, K; Neff, J.](#) (2011). Produced water: Environmental risks and advances in mitigation technologies. New York, NY: Springer. <http://dx.doi.org/10.1007/978-1-4614-0046-2>
- [Leventhal, JS; Hosterman, JW.](#) (1982). Chemical and mineralogical analysis Of Devonian black-shale samples from Martin County, Kentucky - Carroll and Washington counties, Ohio - Wise County, Virginia - and Overton County, Tennessee, USA. Chem Geol 37: 239-264.
- [Li, L; Brantley, SL.](#) (2011). Development of a subsurface reactive transport model for predicting potential water quality problems at Marcellus shale. (USGS Project 2011PA159B). Li, L; Brantley, SL. <http://water.usgs.gov/wrri/2011grants/progress/2011PA159B.pdf>

- [Lovley, DR; Chapelle, FH.](#) (1995). Deep subsurface microbial processes. *Rev Geophys* 33: 365-381. <http://dx.doi.org/10.1029/95RG01305>
- [Lovley, DR; Phillips, EJ.](#) (1986). Organic matter mineralization with reduction of ferric iron in anaerobic sediments. *Appl Environ Microbiol* 51: 683-689.
- [Martinez, CE; McBride, MB.](#) (2001). Cd, Cu, Pb, and Zn coprecipitates in Fe oxide formed at different pH: Aging effects on metal solubility and extractability by citrate. *Environ Toxicol Chem* 20: 122-126. <http://dx.doi.org/10.1002/etc.5620200112>
- [Mata, JA; Martínez-Cánovas, J; Quesada, E; Béjar, V.](#) (2002). A detailed phenotypic characterisation of the type strains of *Halomonas* species. *Syst Appl Microbiol* 25: 360-375. <http://dx.doi.org/10.1078/0723-2020-00122>
- [Maxwell, SC.](#) (2011). Hydraulic fracture height growth. *Recorder* 36: 18-22.
- [McGowan, L; Herbert, R; Muiyzer, G.](#) (2004). A comparative study of hydrocarbon degradation by *Marinobacter* sp., *Rhodococcus* sp. and *Corynebacterium* sp. isolated from different mat systems. *Ophelia* 58: 271-281. <http://dx.doi.org/10.1080/00785236.2004.10410235>
- [McLin, K; Brinton, D; Moore, J.](#) (2011). Geochemical modeling of water-rock-proppant interactions. Thirty-Sixth Workshop on Geothermal Reservoir Engineering, January 31 - February 2, 2011, Stanford University, Stanford, California.
- [Mohan, AM; Gregory, KB; Vidic, RD; Miller, P; Hammack, RW.](#) (2011). Characterization of microbial diversity in treated and untreated flowback water impoundments from gas fracturing operations. Paper presented at SPE Annual Technical Conference and Exhibition, October 30 - November 2, 2011, Denver, CO.
- [Montgomery, C.](#) (2013). Fracturing fluid components. In A Bunder; J McLennon; R Jeffrey (Eds.), *Effective and Sustainable Hydraulic Fracturing*. Croatia: InTech. <http://dx.doi.org/10.5772/56422>
- [Moses, CO; Herman, JS.](#) (1991). Pyrite oxidation at circumneutral pH. *Geochim Cosmo Acta* 55: 471-482.
- [Murali Mohan, A; Hartsock, A; Bibby, KJ; Hammack, RW; Vidic, RD; Gregory, KB.](#) (2013a). Microbial community changes in hydraulic fracturing fluids and produced water from shale gas extraction. *Environ Sci Technol* 47: 13141-13150. <http://dx.doi.org/10.1021/es402928b>
- [Murali Mohan, A; Hartsock, A; Hammack, RW; Vidic, RD; Gregory, KB.](#) (2013b). Microbial communities in flowback water impoundments from hydraulic fracturing for recovery of shale gas. *FEMS Microbiol Ecol.* <http://dx.doi.org/10.1111/1574-6941.12183>
- [Muylaert, K; Dasseville, R; De Brabandere, L; Dehairs, F; Vyverman, W.](#) (2005). Dissolved organic carbon in the freshwater tidal reaches of the Schelde estuary. *Estuar Coast Shelf Sci* 64: 591-600. <http://dx.doi.org/10.1016/j.ecss.2005.04.010>
- [Myers, CR; Nealson, KH.](#) (1988). Bacterial manganese reduction and growth with manganese oxide as the sole electron acceptor. *Science* 240: 1319-1321. <http://dx.doi.org/10.1126/science.240.4857.1319>
- [Newman, DK.](#) (2001). Microbiology - How bacteria respire minerals. *Science* 292: 1312-1313. <http://dx.doi.org/10.1126/science.1060572>
- [Nordstrom, DK; Alpers, CN.](#) (1999). Geochemistry of acid mine waters. In GS Plumlee; MJ Logsdon (Eds.), *The Environmental Geochemistry of Mineral Deposits Part A: Processes, Techniques, and Health Issues* Society of Economic Geologists, Denver (pp. 133-160). Littleton, CO: Society of Economic Geologists.
- [Orem, W; Tatu, C; Varonka, M; Lerch, H; Bates, A; Engle, M; Crosby, L; McIntosh, J.](#) (2014). Organic substances in produced and formation water from unconventional natural gas extraction in coal and shale. *Int J Coal Geol* 126: 20-31. <http://dx.doi.org/10.1016/j.coal.2014.01.003>

- [Orem, WH; Tatu, CA; Lerch, HE; Rice, CA; Bartos, TT; Bates, AL; Tewalt, S; Corum, MD.](#) (2007). Organic compounds in produced waters from coalbed natural gas wells in the Powder River Basin, Wyoming, USA. *Appl Geochem* 22: 2240-2256. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.010>
- [PA DEP](#) (Pennsylvania Department of Environmental Protection). (2015). Technologically enhanced naturally occurring radioactive materials (TENORM) study report. Harrisburg, PA. [http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study\\_Report\\_Rev\\_0\\_01-15-2015.pdf](http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study_Report_Rev_0_01-15-2015.pdf)
- [Pashin, JC; Mcintyre-Redden, MR; Mann, SD; Kopaska-Merkel, DC; Varonka, M; Orem, W.](#) (2014). Relationships between water and gas chemistry in mature coalbed methane reservoirs of the Black Warrior Basin. *Int J Coal Geol* 126: 92-105. <http://dx.doi.org/10.1016/j.coal.2013.10.002>
- [Rahm, BG; Bates, JT; Bertoia, LR; Galford, AE; Yoxthheimer, DA; Riha, SJ.](#) (2013). Wastewater management and Marcellus Shale gas development: trends, drivers, and planning implications. *J Environ Manage* 120: 105-113. <http://dx.doi.org/10.1016/j.jenvman.2013.02.029>
- [Ravot, G; Magot, M; Ollivier, B; Patel, BK; Ageron, E; Grimont, PA; Thomas, P; Garcia, JL.](#) (1997). *Haloanaerobium congolense* sp. nov., an anaerobic, moderately halophilic, thiosulfate- and sulfur-reducing bacterium from an African oil field. *FEMS Microbiol Lett* 147: 81-88.
- [Rice, CA; Flores, RM; Stricker, GD; Ellis, MS.](#) (2008). Chemical and stable isotopic evidence for water/rock interaction and biogenic origin of coalbed methane, Fort Union Formation, Powder River Basin, Wyoming and Montana USA. *Int J Coal Geol* 76: 76-85. <http://dx.doi.org/10.1016/j.coal.2008.05.002>
- [Rowan, EL; Engle, MA; Kirby, CS; Kraemer, TF.](#) (2011). Radium content of oil- and gas-field produced waters in the northern Appalachian Basin (USA): Summary and discussion of data. (Scientific Investigations Report 201115135). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2011/5135/>
- [Rozell, DJ; Reaven, SJ.](#) (2012). Water pollution risk associated with natural gas extraction from the Marcellus Shale. *Risk Anal* 32: 13821393. <http://dx.doi.org/10.1111/j.1539-6924.2011.01757.x>
- [Sirivedhin, T; Dallbauman, L.](#) (2004). Organic matrix in produced water from the Osage-Skiatook petroleum environmental research site, Osage county, Oklahoma. *Chemosphere* 57: 463-469.
- [SRBC.](#) (2012). Flowback and Produced Water Volume.
- [Stepan, DJ; Shockey, RE; Kurz, BA; Kalenze, NS; Cowan, RM; Ziman, JJ; Harju, JA.](#) (2010). Bakken water opportunities assessment: Phase I. (2010-EERC-04-03). Bismarck, ND: North Dakota Industrial Commission. <http://www.nd.gov/ndic/ogrp/info/g-018-036-fi.pdf>
- [Struchtemeyer, CG; Elshahed, MS.](#) (2012). Bacterial communities associated with hydraulic fracturing fluids in thermogenic natural gas wells in North Central Texas, USA. *FEMS Microbiol Ecol* 81: 13-25. <http://dx.doi.org/10.1111/j.1574-6941.2011.01196.x>
- [Stumm, W; Morgan, JJ.](#) (1981). *Aquatic chemistry: An introduction emphasizing chemical equilibria in natural waters* (2nd ed.). New York, NY: Wiley.
- [Sturchio, NC; Banner, JL; Binz, CM; Heraty, LB; Musgrove, M.](#) (2001). Radium geochemistry of ground waters in Paleozoic carbonate aquifers, midcontinent, USA. *Appl Geochem* 16: 109-122.
- [Swanson, VE.](#) (1955). Uranium in marine black shales of the United States. In *Contributions to the geology of uranium and thorium by the United States Geological Survey and Atomic Energy Commission for the United Nations International Conference on Peaceful Uses of Atomic Energy*, Geneva, Switzerland, 1955 (pp. 451-456). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/pp/0300/report.pdf>
- [Timmis, KN.](#) (2010). *Handbook of hydrocarbon and lipid microbiology*. Berlin, Germany: Springer-Verlag. <http://www.springer.com/life+sciences/microbiology/book/978-3-540-77584-3>
- [Tourtelot, HA.](#) (1979). Black shale - its deposition and diagenesis. *Clays and Clay Minerals* 27: 313-321. <http://dx.doi.org/10.1346/CCMN.1979.0270501>



- [Tuttle, MLW; Breit, GN; Goldhaber, MB.](#) (2009). Weathering of the New Albany Shale, Kentucky: II. Redistribution of minor and trace elements. *Appl Geochem* 24: 1565-1578. <http://dx.doi.org/10.1016/j.apgeochem.2009.04.034>
- [U.S. Department of Transportation.](#) (2012). Large truck and bus crash facts 2012. Washington, D.C.: Federal Motor Carrier Safety Administration, U.S. Department of Transportation. <http://ai.fmcsa.dot.gov/CarrierResearchResults/PDFs/LargeTruckandBusCrashFacts2012.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2004). Evaluation of impacts to underground sources of drinking water by hydraulic fracturing of coalbed methane reservoirs. (EPA/816/R-04/003). Washington, DC.: U.S. Environmental Protection Agency, Office of Solid Waste.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015g). Technical development document for proposed effluent limitation guidelines and standards for oil and gas extraction. (EPA-821-R-15-003). Washington, D.C. <http://water.epa.gov/scitech/wastetech/guide/oilandgas/unconv.cfm>
- [USGS](#) (U.S. Geological Survey). (1961). Geology and geochemistry of uranium in marine black shales: a review. (U.S. Geological Survey Professional Paper 356-C). Reston, VA. <http://pubs.usgs.gov/pp/0356c/report.pdf>
- [USGS](#) (U.S. Geological Survey). (1997). Radioactive elements in coal and fly ash: Abundance, forms, and environmental significance [Fact Sheet]. (U.S. Geological Survey Fact Sheet FS-163-97). <http://pubs.usgs.gov/fs/1997/fs163-97/FS-163-97.pdf>
- [USGS](#) (U.S. Geological Survey). (2002). Water quality and environmental isotopic analyses of ground-water samples collected from the Wasatch and Fort Union formations in areas of coalbed methane development: implications to recharge and groundwater flow, eastern Powder river basin, Wyoming. (Report 02-4045). Reston, VA. <http://pubs.usgs.gov/wri/wri024045/>
- [Van Voast, WA.](#) (2003). Geochemical signature of formation waters associated with coalbed methane. *AAPG Bulletin* 87: 667-676.
- [Vanengelen, MR; Peyton, BM; Mormile, MR; Pinkart, HC.](#) (2008). Fe(III), Cr(VI), and Fe(III) mediated Cr(VI) reduction in alkaline media using a *Halomonas* isolate from Soap Lake, Washington. *Biodegradation* 19: 841-850. <http://dx.doi.org/10.1007/s10532-008-9187-1>
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A.](#) (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. *Environ Sci Technol* 48: 36-52. <http://dx.doi.org/10.1021/es405118y>
- [Vine, JD.](#) (1956). Uranium-bearing coal in the United States. In *Contributions to the geology of uranium and thorium by the United States Geological Survey and Atomic Energy Commission for the United Nations International Conference on Peaceful Uses of Atomic Energy*, Geneva, Switzerland, 1955. Reston, VA: U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/pp300>
- [Vine, JD; Tourtelot, EB.](#) (1970). Geochemistry of black shale deposits; A summary report. *Econ Geol* 65: 253-272. <http://dx.doi.org/10.2113/gsecongeo.65.3.253>
- [Vinson, DS; Vengosh, A; Hirschfeld, D; Dwyer, GS.](#) (2009). Relationships between radium and radon occurrence and hydrochemistry in fresh groundwater from fractured crystalline rocks, North Carolina (USA). *Chem Geol* 260: 159-171. <http://dx.doi.org/10.1016/j.chemgeo.2008.10.022>
- [Vulgamore, TB; Clawson, TD; Pope, CD; Wolhart, SL; Mayerhofer, MJ; Machovoe, SR; Waltman, CK.](#) (2007). Applying hydraulic fracture diagnostics to optimize stimulations in the Woodford Shale. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/110029-MS>
- [Ward, CR.](#) (2002). Analysis and significance of mineral matter in coal seams. *Int J Coal Geol* 50: 135-168. [http://dx.doi.org/10.1016/S0166-5162\(02\)00117-9](http://dx.doi.org/10.1016/S0166-5162(02)00117-9)

- [Warner, NR; Christie, CA; Jackson, RB; Vengosh, A.](#) (2013). Impacts of shale gas wastewater disposal on water quality in western Pennsylvania. *Environ Sci Technol* 47: 11849-11857. <http://dx.doi.org/10.1021/es402165b>
- [Warner, NR; Jackson, RB; Darrah, TH; Osborn, SG; Down, A; Zhao, K; White, A; Vengosh, A.](#) (2012). Reply to Engelder: Potential for fluid migration from the Marcellus Formation remains possible. *PNAS* 109: E3626-E3626. <http://dx.doi.org/10.1073/pnas.1217974110>
- [Weaver, TR; Frappe, SK; Cherry, JA.](#) (1995). Recent cross-formational fluid flow and mixing in the shallow Michigan Basin. *Geol Soc Am Bulletin* 107: 697-707. [http://dx.doi.org/10.1130/0016-7606\(1995\)107<0697:RCFFFA>2.3.CO;2](http://dx.doi.org/10.1130/0016-7606(1995)107<0697:RCFFFA>2.3.CO;2)
- [Webster, IT; Hancock, GJ; Murray, AS.](#) (1995). Modelling the effect of salinity on radium desorption from sediments. *Geochim Cosmo Acta* 59: 2469-2476. [http://dx.doi.org/10.1016/0016-7037\(95\)00141-7](http://dx.doi.org/10.1016/0016-7037(95)00141-7)
- [White, GJ.](#) (1992). Naturally occurring radioactive materials (NORM) in oil and gas industry equipment and wastes: A literature review. (DOE/ID/01570-T158). Bartlesville, OK: U.S. Department of Energy.
- [Wignall, PG; Myers, KJ.](#) (1988). Interpreting benthic oxygen levels in mudrocks: A new approach. *Geology* 16: 452-455. [http://dx.doi.org/10.1130/0091-7613\(1988\)016<0452:IBOLIM>2.3.CO;2](http://dx.doi.org/10.1130/0091-7613(1988)016<0452:IBOLIM>2.3.CO;2)
- [Wuchter, C; Banning, E; Mincer, TJ; Drenzek, NJ; Coolen, MJ.](#) (2013). Microbial diversity and methanogenic activity of Antrim Shale formation waters from recently fractured wells. *FMICB* 4: 1-14. <http://dx.doi.org/10.3389/fmicb.2013.00367>
- [Yakimov, MM; Denaro, R; Genovese, M; Cappello, S; D'Auria, G; Chernikova, TN; Timmis, KN; Golyshin, PN; Giluliano, L.](#) (2005). Natural microbial diversity in superficial sediments of Milazzo Harbor (Sicily) and community successions during microcosm enrichment with various hydrocarbons. *Environ Microbiol* 7: 1426-1441. <http://dx.doi.org/10.1111/j.1462-5822.2005.00829.x>
- [Yang, JS; Lee, JY; Baek, K; Kwon, TS; Choi, J.](#) (2009). Extraction behavior of As, Pb, and Zn from mine tailings with acid and base solutions. *J Hazard Mater* 171: 1-3. <http://dx.doi.org/10.1016/j.jhazmat.2009.06.021>
- [Yoshizawa, S; Wada, M; Kita-Tsukamoto, K; Ikemoto, E; Yokota, A; Kogure, K.](#) (2009). *Vibrio azureus* sp. nov., a luminous marine bacterium isolated from seawater. *Int J Syst Evol Microbiol* 59: 1645-1649. <http://dx.doi.org/10.1099/ijs.0.004283-0>
- [Yoshizawa, S; Wada, M; Yokota, A; Kogure, K.](#) (2010). *Vibrio sagamiensis* sp. nov., luminous marine bacteria isolated from sea water. *J Gen Appl Microbiol* 56: 499-507.
- [Zapecza, OS; Szabo, Z.](#) (1988). Natural radioactivity in ground water: a review. In *National Water Summary 1986 Hydrologic Events and Ground-Water Quality*, Water-Supply Paper 2325. Reston, VA: U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/wsp2325>
- [Zeikus, JG; Hegge, PW; Thompson, TE; Phelps, TJ; Langworthy, TA.](#) (1983). Isolation and description of *Haloanaerobium praevalens* gen. nov. and sp. nov., an obligately anaerobic halophile common to Great Salt Lake sediments. *Curr Microbiol* 9: 225-233. <http://dx.doi.org/10.1007/BF01567586>

## Appendix F

---

# Wastewater Treatment and Waste Disposal Supplemental Information

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

## Appendix F. Wastewater Treatment and Waste Disposal Supplemental Information

1 This appendix provides additional information for context and background to support the  
2 discussions of hydraulic fracturing wastewater management and treatment in Chapter 8 of the  
3 Hydraulic Fracturing Drinking Water Assessment. Information in this appendix includes: estimates  
4 compiled for several states for volumes of wastewater generated in regions where hydraulic  
5 fracturing is occurring; an overview of the technologies that can be used to treat hydraulic  
6 fracturing wastewater; calculations of estimated treatment process effluent concentrations for  
7 example constituents; a description of the different discharge options for centralized waste  
8 treatment plants; and the water quality needed for wastewater to be reused for hydraulic  
9 fracturing. Discussion is also provided on difficulties that can arise during treatment of hydraulic  
10 fracturing wastewaters: the potential impacts of hydraulic fracturing wastewater on biological  
11 treatment processes; and an overview of the formation of disinfection byproducts.

### F.1. Estimates of Wastewater Production in Regions where Hydraulic Fracturing is Occurring

12 Table F-1 presents estimated wastewater volumes for several states in areas with hydraulic  
13 fracturing activity. These data were compiled from production data available on state databases  
14 and were tabulated by year. For California, data were compiled for Kern County, where about 95%  
15 of hydraulic fracturing is taking place ([CCST, 2015](#)). Production records from Colorado, Utah, and  
16 Wyoming include the producing formation for each well reported; data from these states were  
17 filtered to select data from formations indicated in the literature as targets for hydraulic fracturing.  
18 Data presented for these three states include statewide estimates as well as estimates for selected  
19 basins. Data from New Mexico are available from the states in files for three basins as well as for the  
20 state; these data were not filtered further.

21 Results in Table F-1 illustrate some of the challenges associated with obtaining estimates of  
22 hydraulic fracturing wastewater volumes, especially using publicly available data. Some of the  
23 values likely include reported values from conventional wells (wells that may not be hydraulically  
24 fractured, and are typically not subject to modern, high volume hydraulic fracturing). For example,  
25 the well counts for California, Colorado, Utah, and Wyoming were in the thousands or tens of  
26 thousands at least as early as 2000, several years before the surge of modern hydraulic fracturing  
27 began in the mid-2000s. The data used for California were from Kern County but are not specific to  
28 hydraulic fracturing activity. Where producing formations are provided, the accuracy of the  
29 estimates will depend upon correct selection of hydraulically fractured formations. Thus, both  
30 underestimation and overestimation may be possible because of a lack of clear indication of which  
31 wells were hydraulically fractured.

**Table F-1. Estimated volumes (millions of gallons) of wastewater based on state data for selected years and numbers of wells producing fluid.**

State	Basin	Principal lithologies	Data type	2000	2004	2008	2010	2011	2012	2013	2014	Comments
California	San Joaquin <sup>a</sup>	Shale, unconsolidated sands	Produced water	46,000	48,000	58,000	65,000	71,000	75,000	74,000	-	Data from CA Department of Conservation, Oil and Gas Division. <sup>a</sup> Produced water data compiled for Kern County. Data may also represent contributions from production without hydraulic fracturing.
			Wells	33,695	39,088	46,519	49,201	51,031	51,567	52,763	-	
Colorado	All basins with hydraulically fractured formations	-	Produced water	7,300	11,000	21,000	14,000	12,000	12,000	7,700	-	Data from CO Oil and Gas Conservation Commission. <sup>b</sup> Produced water includes flowback. Data filtered for formations indicated in literature as undergoing hydraulic fracturing and matched to corresponding basins. Example counties selected for presentation as well as estimated state total.
			Wells	11,264	14,934	28,282	33,929	35,999	38,371	37,618	-	
	Denver	Sandstone, shale	Produced water	140	160	170	160	160	150	110	-	
			Wells	1,829	1,511	1,277	1,204	1,193	1,131	1,072	-	
	Piceance	Sandstone	Produced water	3,500	5,800	9,300	6,900	6,500	6,800	4,300	-	
			Wells	1,134	2,478	6,486	9,105	10,057	10,868	10,954	-	

*This document is a draft for review purposes only and does not constitute Agency policy.*

State	Basin	Principal lithologies	Data type	2000	2004	2008	2010	2011	2012	2013	2014	Comments	
Colorado, cont.	Raton	Coalbed methane	Produced water	2,400	4,100	8,900	4,300	3,200	2,700	2,100	-		
			Wells	681	1,634	2,795	2,734	2,778	2,710	2,545	-		
	San Juan	Coalbed methane	Produced water	1,000	1,100	1,300	2,000	1,200	1,100	650	-		
			Wells	1,183	1,605	1,975	2,220	2,308	2,328	2,333	-		
New Mexico	Permian	Shale, sandstone	Produced water	-	-	-	-	-	31,000	31,000	20,000	Data from New Mexico Oil Conservation Division. <sup>c</sup> Data provided by the state by basin and for the entire state. Unclear how much contribution from production without hydraulic fracturing. Produced water includes flowback.	
			Wells	-	-	-	-	-	29,839	30,386	30,287		
	Raton	Coalbed methane	Produced water	-	-	-	-	-	510	540	310		
			Wells	-	-	-	-	-	1,495	1,502	1,526		
	San Juan	Coalbed methane	Produced water	-	-	-	-	-	1,700	2,000	1,100		
			Wells	-	-	-	-	-	22,492	22,349	22,076		
	Total	-		Produced water	-	-	-	-	-	33,000	34,000	22,000	
				Wells	-	-	-	-	-	53,826	54,237	53,889	

This document is a draft for review purposes only and does not constitute Agency policy.

State	Basin	Principal lithologies	Data type	2000	2004	2008	2010	2011	2012	2013	2014	Comments	
Utah	All basins with hydraulically fractured formations	-	Produced water	1,200	1,200	2,300	2,400	2,700	2,900	3,400	2,800	Data from State of Utah Oil and Gas Program. <sup>d</sup> Produced water includes flowback. Data filtered by formation indicated in the literature as hydraulically fractured and matched to basins. Data presented for selected basins as well as for all formations likely to be hydraulically fractured.	
			Wells	3,080	4,377	7,409	8,432	9,101	10,075	10,661	10,900		
	Kaiparowits/Uinta	Coalbed methane	Produced water	860	740	1,300	1,400	1,800	2,000	2,400	1,900		
			Wells	1,718	2,517	3,761	4,329	4,838	5,538	6,046	6,334		
	San Juan/Uinta	Coalbed methane	Produced water	2	49	350	270	240	230	190	120		
			Wells	62	223	910	933	959	951	867	870		
	Uinta	Shale/sandstone	Produced water	350	420	560	680	700	640	830	790		
			Wells	1,067	1,396	2,282	2,745	2,888	3,115	3,257	3,223		
	Wyoming	All basins with hydraulically fractured formations	-	Produced water	1,300	1,400	1,300	1,500	1,600	1,700	1,600	1,800	Data from Wyoming Oil and Gas Conservation Commission. <sup>e</sup> Produced water may include flowback. Data filtered by formation indicated in the literature as hydraulically fractured and matched to basins. Data presented for selected basins as well as for all formations likely to be hydraulically fractured.

This document is a draft for review purposes only and does not constitute Agency policy.



State	Basin	Principal lithologies	Data type	2000	2004	2008	2010	2011	2012	2013	2014	Comments
Wyoming, cont.			Wells	3,470	3,378	3,585	3,620	3,728	3,843	4,030	4,213	
	Big Horn	Sandstone	Produced water	380	350	350	380	430	440	420	440	
			Wells	365	359	387	397	412	414	407	403	
	Denver	Sandstone	Produced water	54	44	49	59	76	90	97	170	
			Wells	142	118	124	140	167	204	230	278	
	Green River	Sandstone/ shale	Produced water	0	1	2	8	5	5	9	15	
			Wells	44	44	60	67	67	59	64	67	
	Powder River	Coalbed methane	Produced water	690	630	620	660	700	840	970	1,100	
			Wells	1,953	1,900	2,001	2,028	2,119	2,207	2,352	2,565	
	Wind River/ Powder River	Sandstone/ shale	Produced water	130	330	330	400	420	290	110	41	
			Wells	966	957	1,013	988	963	959	977	900	

<sup>a</sup> California Department of Conservation, Oil and Gas Division. Oil & Gas – Online Data. Monthly Production and Injection Databases: [ftp://ftp.consrv.ca.gov/pub/oil/new\\_database\\_format/](ftp://ftp.consrv.ca.gov/pub/oil/new_database_format/).

<sup>b</sup> Colorado Oil and Gas Conservation Commission. Data: Downloads: Production Data: <http://cogcc.state.co.us/data2.html#/downloads>.

<sup>c</sup> New Mexico Oil Conservation Division. Production Data. Production Summaries: All Wells Data: [http://gotech.nmt.edu/gotech/Petroleum\\_Data/allwells.aspx](http://gotech.nmt.edu/gotech/Petroleum_Data/allwells.aspx).

<sup>d</sup> Utah Department of Natural Resources. Division of Oil, Gas, and Mining. Data Research Center. Database Download Files: [http://oilgas.ogm.utah.gov/Data\\_Center/DataCenter.cfm#production](http://oilgas.ogm.utah.gov/Data_Center/DataCenter.cfm#production).

<sup>e</sup> Wyoming Oil and Gas Conservation Commission. Production files by county and year: <http://wogcc.state.wy.us/productioncountyyear.cfm?Oops=#oops#&RequestTimeOut=6500>.

*This document is a draft for review purposes only and does not constitute Agency policy.*

## F.2. Overview of Treatment Processes for Treating Hydraulic Fracturing Wastewater

1 Treatment technologies discussed in this appendix are classified as basic or advanced. Basic  
2 treatment technologies are ineffective for reducing total dissolved solids (TDS) and are typically not  
3 labor intensive. Advanced treatment technologies can remove TDS and/or are complex in nature  
4 (e.g., energy- and labor-intensive).

### F.2.1. Basic Treatment

5 Basic treatment technologies include physical separation, coagulation/oxidation,  
6 electrocoagulation, sedimentation, and disinfection. These technologies are effective at removing  
7 total suspended solids (TSS), oil and grease, scale-forming compounds, and metals, and they can  
8 minimize microbial activity. Basic treatment is typically incorporated in a permanent treatment  
9 facility (i.e., fixed location) but can also be part of a mobile unit for onsite treatment applications.

#### F.2.1.1. Physical Separation

10 The most basic treatment need for oil and gas wastewaters, including those from hydraulic  
11 fracturing operations, is separation to remove suspended solids, and oil and grease. The separation  
12 method largely depends on the type of resource(s) targeted by the hydraulic fracturing operation.  
13 Down-hole separation techniques, including mechanical blocking devices and water shut-off  
14 chemicals to prevent or minimize water flow to the well, may be used during production in shale  
15 plays containing greater amounts of liquid hydrocarbons. To treat water at the surface, separation  
16 technologies such as hydrocyclones, dissolved air or induced gas flotation systems, media (sand)  
17 filtration, and biological aerated filters can remove suspended solids and some organics from  
18 hydraulic fracturing wastewater.

19 Media filtration can also remove hardness and some metals if chemical precipitation (i.e.,  
20 coagulation, lime softening) is also employed ([Boschee, 2014](#)). An example of a centralized waste  
21 treatment facility (CWT) that uses chemical precipitation and media filtration to treat hydraulic  
22 fracturing waste is the Water Tower Square Gas Well Wastewater Processing Facility in  
23 Pennsylvania (see Table 8-7). One or more of these technologies is typically used prior to advanced  
24 treatment such as reverse osmosis (RO) because advanced treatment processes foul, scale, or  
25 otherwise do not operate effectively in the presence of TSS, certain organics, and/or some metals  
26 and metalloid compounds ([Boschee, 2014](#); [Drewes et al., 2009](#)). The biggest challenge associated  
27 with use of these separation technologies is solids disposal from the resulting sludge ([Igunnu and](#)  
28 [Chen, 2014](#)).

#### F.2.1.2. Coagulation/Oxidation

29 Coagulation is the process of agglomerating small, un-settleable particles into larger particles to  
30 promote settling. Chemical coagulants such as alum, iron chloride, and polymers can be used to  
31 precipitate TSS, some dissolved solids (except monovalent ions such as sodium and chloride), and  
32 metals from hydraulic fracturing wastewater. Adjusting the pH using chemicals such as lime or  
33 caustic soda can increase the potential for some constituents, including dissolved metals, to form  
34 precipitates. Chemical precipitation is often used in industrial wastewater treatment as a

1 pretreatment step to decrease the pollutant loading on subsequent advanced treatment  
2 technologies; this strategy can save time, money, energy consumption and the lifetime of the  
3 infrastructure.

4 Processes using advanced oxidation and precipitation have been applied to hydraulic fracturing  
5 wastewaters in on-site and mobile systems. Hydroxyl radicals generated by cavitation processes  
6 and the addition of ozone can degrade organic compounds and inactivate micro-organisms. The  
7 process can also aid in the precipitation of elements, which cause hardness and scaling in the  
8 treated water (e.g. calcium, magnesium). The process can also reduce sulfate and carbonate  
9 concentrations in the treated water. This type of treatment can be very effective for on-site reuse of  
10 wastewater ([Ely et al., 2011](#)).

11 The produced solid residuals from coagulation/oxidation processes typically require further  
12 treatment, such as de-watering ([Duraisamy et al., 2013](#); [Hammer and VanBriesen, 2012](#)).

### **F.2.1.3. Electrocoagulation**

13 Electrocoagulation (EC) (Figure F-1) combines the principles of coagulation and electrochemistry  
14 into one process ([Gomes et al., 2009](#)). An electrical current added to the wastewater produces  
15 coagulants that then neutralize the charged particles, causing them to destabilize, precipitate, and  
16 settle. EC may be used in place of, or in addition to, chemical coagulation. EC can be effective for  
17 removal of organics, TSS, and metals, but it is less effective for removing TDS and sulfate. Although  
18 it is still considered an emerging technology for unconventional oil and gas wastewater treatment,  
19 EC has been used in mobile treatment systems to treat hydraulic fracturing wastewaters  
20 ([Halliburton, 2014](#); [Igunnu and Chen, 2014](#)). Limitations with this technology are the potential for  
21 scaling, corrosion, and bacterial growth ([Gomes et al., 2009](#)).



**Figure F-1. Electrocoagulation unit.**

Source: [Dunkel \(2013\)](#).

#### **F.2.1.4. Sedimentation**

1 Treatment plants may include sedimentation tanks, clarifiers, or some other form of settling basin  
2 to allow larger particles to settle out of the water where they can eventually be collected,  
3 dewatered, and disposed of. These types of tanks/basins all serve the same purpose – to reduce the  
4 amount of solids going to subsequent processes (i.e., overload the media filters).

#### **F.2.1.5. Disinfection**

5 Some hydraulic fracturing applications may require disinfection to kill bacteria after treatment and  
6 prior to reuse. Chlorine is a common disinfectant. Chlorine dioxide, ozone, or ultraviolet light can  
7 also be used. This is an important step for reused water because bacteria can cause problems for  
8 further hydraulic fracturing operations by multiplying rapidly and causing build-up in the well  
9 bore, which decreases gas extraction efficiency.

### **F.2.2. Advanced Treatment**

10 Advanced treatment technologies consist of membranes (reverse osmosis (RO), nanofiltration,  
11 ultrafiltration, microfiltration, electrodialysis, forward osmosis, and membrane distillation),  
12 thermal distillation technologies, crystallizers, ion exchange, and adsorption. These technologies  
13 are effective for removing TDS and/or targeted compounds. They typically require pretreatment to  
14 remove solids and other constituents that may damage or otherwise impede the technology from  
15 operating as designed. Advanced treatment technologies can be energy intensive and are typically  
16 employed when a purified water effluent is necessary for direct discharge, indirect discharge, or  
17 reuse. In some instances, these water treatment technologies can make use of methane generated  
18 by the gas well as an energy source. Some advanced treatment technologies can be made mobile for  
19 on-site treatment.

#### **F.2.2.1. Membranes**

20 Pressure-driven membrane processes including microfiltration, ultrafiltration, nanofiltration, and  
21 RO (Figure F-2) are being used in some settings to treat oil and gas wastewater. These processes  
22 use hydraulic pressure to overcome the osmotic pressure of the influent waste stream, forcing clean  
23 water through the membrane ([Drewes et al., 2009](#)). Microfiltration and ultrafiltration processes do  
24 not reduce TDS but can remove TSS and some metals and organics ([Drewes et al., 2009](#)). RO and  
25 nanofiltration are capable of removing TDS, including anions and radionuclides. RO, however, may  
26 be limited to treating TDS levels of approximately 40,000 mg/L TDS ([Shaffer et al., 2013](#); [Younos  
27 and Tulou, 2005](#)).



**Figure F-2. Photograph of reverse osmosis system.**

Source: Thinkstock.

#### ***F.2.2.2. Electrodialysis***

- 1 Electrodesialysis relies on positively and negatively charged particles and coated membranes to
- 2 separate contaminants from the water (Figure F-3). Electrodesialysis has been considered for use by
- 3 the shale gas industry, but it is not currently widely utilized ([ALL Consulting, 2013](#)). TDS
- 4 concentrations above 15,000 mg/L are difficult to treat by electrodesialysis ([ALL Consulting, 2013](#)),
- 5 and oil and divalent cations (e.g. Ca, Fe, Mg) can foul the membranes ([Hayes and Severin, 2012b](#);
- 6 [Guolin et al., 2008](#)).





**Figure F-3. Picture of mobile electro dialysis units in Wyoming.**

Source: [DOE \(2006\)](#). Permission: ALL Consulting.

#### **F.2.2.3. Forward Osmosis/Membrane Distillation**

1 Forward osmosis, an emerging technology for treating hydraulic fracturing wastewater, uses an  
2 osmotic pressure gradient across a membrane to draw the contaminants from a low osmotic  
3 solution (the feed water) to a high osmotic solution ([Drewes et al., 2009](#)). The selection of the  
4 constituents for the draw solution is very important as the constituents should be more easily  
5 removed from solution than the compounds (e.g. salts) in the feed. Alternatively, draw solutions can  
6 contain components that are more easily reused or recycled. Another emerging technology,  
7 membrane distillation, relies on a thermal gradient across a membrane surface to volatilize pure  
8 water and capture it in the distillate ([Drewes et al., 2009](#)).

#### **F.2.2.4. Thermal Distillation**


9 Thermal distillation technologies, such as mechanical vapor recompression (MVR) (Figure F-4) and  
10 dewvaporation, use liquid-vapor separation by applying heat to the waste stream, vaporizing the  
11 water to separate out impurities, and condensing the vapor into distilled water ([Drewes et al.,  
12 2009](#); [LEau LLC, 2008](#); [Hamieh and Beckman, 2006](#)). MVR and dewvaporation can treat high-TDS  
13 waters and have been proven in the field as effective for treating oil and gas wastewater ([Hayes and  
14 Severin, 2012b](#); [Drewes et al., 2009](#)). Like RO, these processes are energy intensive and are used  
15 when the objective is very clean water (i.e., TDS less than 500 mg/L) for direct/indirect discharge  
16 or if clean water is needed for reuse. As with membrane processes, scaling is an issue with these  
17 technologies, and scale inhibitors may be needed for them to operate effectively ([Igunnu and Chen,  
18 2014](#)).



**Figure F-4. Picture of a mechanical vapor recompression unit near Decatur, Texas.**

Source: [Drewes et al. \(2009\)](#). Permission provided.

- 1 CWTs such as the Judsonia Central Water Treatment Facility in Arkansas, and the Casella-Altela
- 2 Regional Environmental Services and Clarion Altela Environmental Services, both in Pennsylvania,
- 3 have NPDES permits and use MVR or thermal distillation for TDS removal. Figure F-5 shows a
- 4 diagram of the treatment train at another facility, the Maggie Spain facility in Texas, which uses
- 5 MVR in its treatment of Barnett Shale wastewater ([Hayes and Severin, 2012a](#)).

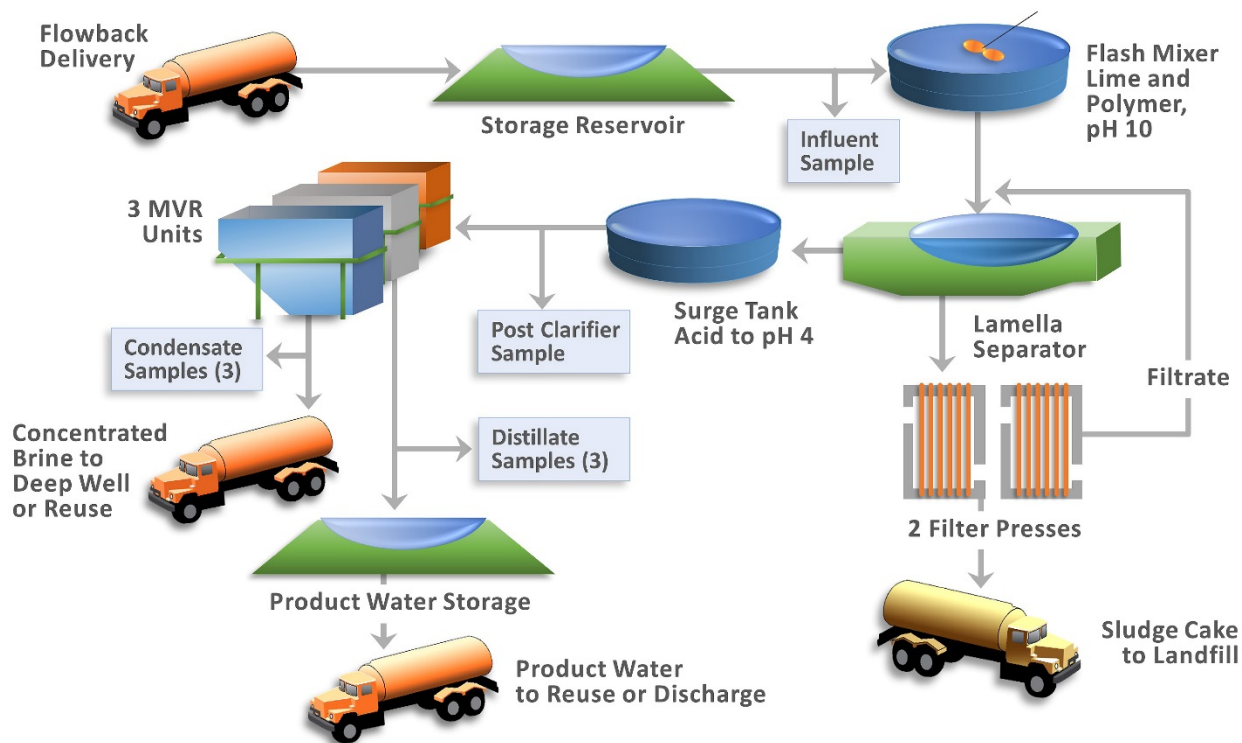

**Figure F-5. Mechanical vapor recompression process design – Maggie Spain Facility.**

Adapted from: [Hayes and Severin \(2012a\)](#).

1 Crystallizers can be employed at CWTs to treat high-TDS waters or to further concentrate the waste  
 2 stream from a distillation process, reducing residual waste disposal volumes. The crystallized salt  
 3 can be landfilled, deep-well injected, or used to produce pure salt products that may be salable  
 4 ([Ertel et al., 2013](#)).

5 Another thermal method, freeze-thaw evaporation, involves spraying wastewater onto a freezing  
 6 pad, allowing ice crystals to form, and the brine mixture that remains in solution to drain from the  
 7 ice ([Drewes et al., 2009](#)). In warmer weather, the ice thaws and the purified water is collected. This  
 8 technology cannot treat waters with high methanol concentrations and is only suitable for areas  
 9 where the temperature is below freezing in the winter months ([Igunnu and Chen, 2014](#)). In  
 10 addition, freeze-thaw evaporation can only reduce TDS concentrations to approximately 1,000  
 11 mg/L, which is higher than the 500 mg/L TDS surface water discharge limit required by most  
 12 permits ([Igunnu and Chen, 2014](#)).

#### **F.2.2.5. Ion Exchange and Adsorption**

13 Ion exchange (Figure F-6) is the process of exchanging ions on a media referred to as resin for  
 14 unwanted ions in the water. Ion exchange is used to treat for target ions that may be difficult to  
 15 remove by other treatment technologies or that may interfere with the effectiveness of advanced  
 16 treatment processes.





**Figure F-6. Picture of a compressed bed ion exchange unit.**

Source: [Drewes et al. \(2009\)](#). Permission provided.

- 1 Adsorption is the process of adsorbing contaminants onto a charged granular media surface.
- 2 Adsorption technologies can effectively remove organics, heavy metals, and some anions ([Igunnu](#)
- 3 [and Chen, 2014](#)). With ion exchange and adsorption processes, the type of resin or adsorptive
- 4 media used (e.g., activated carbon, organoclay, zeolites) dictates the specific contaminants that will
- 5 be removed from the water ([Drewes et al., 2009](#); [Fakhru'l-Razi et al., 2009](#)).
  
- 6 Because they can be easily overloaded by contaminants, ion exchange and adsorption treatment
- 7 processes are generally used as a polishing step following other treatment processes or as a unit
- 8 process in a treatment train rather than as stand-alone treatment ([Drewes et al., 2009](#)). Stand-alone
- 9 units require more frequent regeneration and/or replacement of the spent media making these
- 10 technologies more costly to operate ([Igunnu and Chen, 2014](#)). Figure F-7 shows a schematic of the
- 11 Pinedale Anticline Water Reclamation Facility located in Wyoming, which uses an ion exchange unit
- 12 with boron-selective resin as a polishing step to treat hydraulic fracturing wastewater specifically
- 13 for boron ([Boschee, 2012](#)).

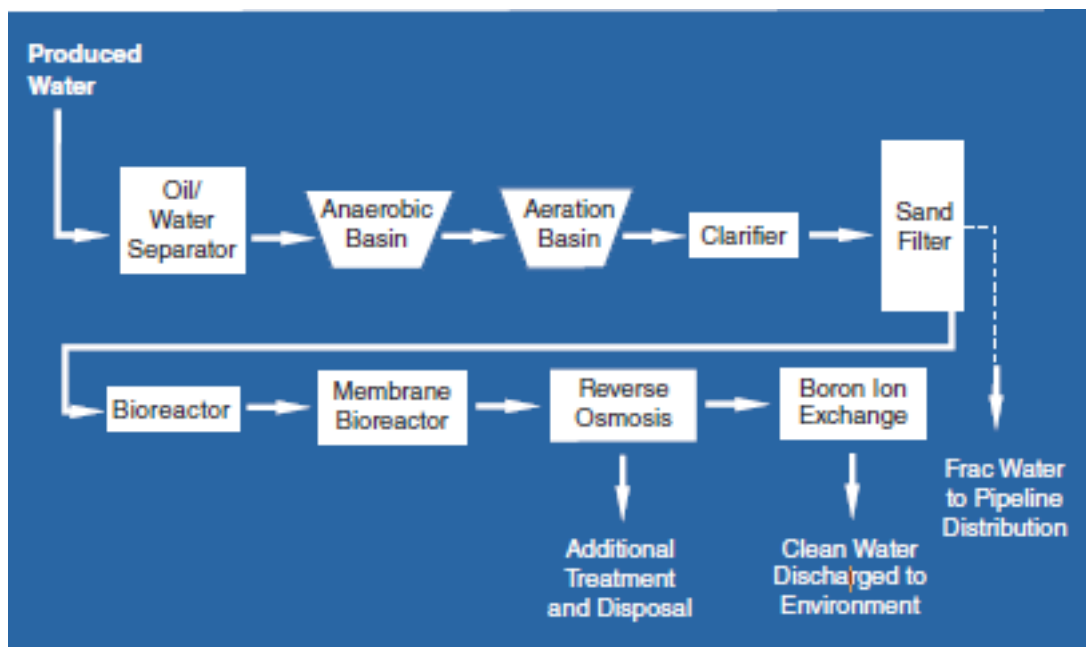


Figure F-7. Discharge water process used in the Pinedale Anticline field.

Source: [Boschee \(2012\)](#).

### F.3. Treatment Technology Removal Capabilities

1 Table F-2 provides removal efficiencies for common hydraulic fracturing wastewater constituents  
 2 by treatment technology. With the exception of TSS and TDS, the studies cited demonstrate removal  
 3 for a subset of constituents in a category (e.g., [Gomes et al., 2009](#)) reported that electro dialysis was  
 4 an effective treatment for oil and grease, not all organics). The removal efficiencies include ranges  
 5 of 1 to 33% (denoted by +), 34% to 66% (denoted by ++), and greater than 66% removal (denoted  
 6 by +++). Cells denoted with "--" indicate that the treatment technology is not suitable for removal of  
 7 that constituent or group of constituents. If a particular treatment technology only lists removal  
 8 efficiencies for TDS, it can be assumed that in some cases, cations and anions would also be  
 9 removed by that technology; therefore, where specific results were not provided in literature, cells  
 10 denoted with "Assumed" refer to cations and anions that comprise TDS.

**Table F-2. Removal efficiency of different hydraulic fracturing wastewater constituents using various wastewater treatment technologies.<sup>a</sup>**

Treatment Technology	Hydraulic Fracturing Wastewater Constituents					
	TSS	TDS	Anions	Metals	Radio-nuclides	Organics
Hydrocyclones	+++ ( <a href="#">Duraisamy et al., 2013</a> )	--	--	--	--	++ ( <a href="#">Duraisamy et al., 2013</a> )
Evaporation (freeze-thaw evaporation)	+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Drewes et al., 2009</a> )	+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Drewes et al., 2009</a> ; <a href="#">Arthur et al., 2005</a> )	Assumed	+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Drewes et al., 2009</a> ; <a href="#">Arthur et al., 2005</a> )	--	+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Duraisamy et al., 2013</a> ; <a href="#">Drewes et al., 2009</a> )
Filtration (granular media)	+++ ( <a href="#">Barrett, 2010</a> )	--	--	+++ <sup>b</sup> ( <a href="#">Duraisamy et al., 2013</a> )	--	+++ ( <a href="#">Shafer, 2011</a> ; <a href="#">Drewes et al., 2009</a> )
Chemical precipitation	+++ ( <a href="#">Fakhru'l-Razi et al., 2009</a> )	--	--	+++ ( <a href="#">Fakhru'l-Razi et al., 2009</a> ; <a href="#">AWWA, 1999</a> )	+++ <sup>c</sup> ( <a href="#">Zhang et al., 2014</a> )	+++ ( <a href="#">Fakhru'l-Razi et al., 2009</a> )
Sedimentation (clarifier)	++ ( <a href="#">NMSU DACC WUTAP, 2007</a> )	--	--	--	--	--
Dissolved air flotation	+++ ( <a href="#">Shammas, 2010</a> )	--	--	--	--	++/+++ ( <a href="#">Duraisamy et al., 2013</a> ; <a href="#">Fakhru'l-Razi et al., 2009</a> )
Electro-coagulation	+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Bukhari, 2008</a> )	--	--	+ ( <a href="#">Igunnu and Chen, 2014</a> )	--	+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Duraisamy et al., 2013</a> ; <a href="#">Fakhru'l-Razi et al., 2009</a> )
Advanced oxidation and precipitation	--	+ ( <a href="#">Abrams, 2013</a> )	--	+ /+++ ( <a href="#">Abrams, 2013</a> )	--	+++ <sup>d</sup> ( <a href="#">Duraisamy et al., 2013</a> ) ( <a href="#">Fakhru'l-Razi et al., 2009</a> )

*This document is a draft for review purposes only and does not constitute Agency policy.*

Treatment Technology	Hydraulic Fracturing Wastewater Constituents					
	TSS	TDS	Anions	Metals	Radio-nuclides	Organics
Reverse osmosis	--	++/+++ <sup>e</sup> ( <a href="#">Alzahrani et al., 2013</a> ; <a href="#">Drewes et al., 2009</a> )	+++ ( <a href="#">Alzahrani et al., 2013</a> ) ( <a href="#">Arthur et al., 2005</a> )	++/+++ <sup>f</sup> ( <a href="#">Alzahrani et al., 2013</a> ) ( <a href="#">Drewes et al., 2009</a> ; <a href="#">AWWA, 1999</a> )	+++ ( <a href="#">Drewes et al., 2009</a> )	+//+/+++ <sup>g</sup> ( <a href="#">Drewes et al., 2009</a> ; <a href="#">Munter, 2000</a> )
Membrane filtration (UF/MF)	+++ ( <a href="#">Arthur et al., 2005</a> )	--	--	+++ ( <a href="#">Fakhru'l-Razi et al., 2009</a> )	--	++/+++ ( <a href="#">Duraisamy et al., 2013</a> ; <a href="#">Fakhru'l-Razi et al., 2009</a> ; <a href="#">Hayes and Arthur, 2004</a> ; <a href="#">AWWA, 1999</a> ) <sup>h</sup>
Forward osmosis	--	+++ ( <a href="#">Drewes et al., 2009</a> )	Assumed	Assumed	--	--
Distillation, including thermal distillation (e.g., mechanical vapor recompression (MVR))		+++ <sup>i</sup> ( <a href="#">Hayes et al., 2014</a> ; <a href="#">Bruff and Jikich, 2011</a> ; <a href="#">Drewes et al., 2009</a> )	+++ ( <a href="#">Bruff and Jikich, 2011</a> ; <a href="#">Drewes et al., 2009</a> )	+++ ( <a href="#">Hayes et al., 2014</a> ; <a href="#">Bruff and Jikich, 2011</a> ; <a href="#">Drewes et al., 2009</a> )	+++ ( <a href="#">Bruff and Jikich, 2011</a> ; <a href="#">Drewes et al., 2009</a> )	+//+/+++ ( <a href="#">Hayes et al., 2014</a> ; <a href="#">Duraisamy et al., 2013</a> ; <a href="#">Drewes et al., 2009</a> ; <a href="#">Fakhru'l-Razi et al., 2009</a> )
Ion exchange	--	--	+++ ( <a href="#">Drewes et al., 2009</a> )	+++ ( <a href="#">Drewes et al., 2009</a> ; <a href="#">Arthur et al., 2005</a> )	+++ ( <a href="#">Drewes et al., 2009</a> )	+//+/+++ ( <a href="#">Fakhru'l-Razi et al., 2009</a> ; <a href="#">Munter, 2000</a> ) <sup>j</sup>
Crystallization	--	+++ ( <a href="#">ER, 2014</a> )	Assumed	Assumed	--	--
Electrodialysis	--	+++ <sup>k</sup> ( <a href="#">Drewes et al., 2009</a> ; <a href="#">Gomes et al., 2009</a> ; <a href="#">Arthur et al., 2005</a> )	++/+++ ( <a href="#">Banasiak and Schäfer, 2009</a> )	+//+/+++ ( <a href="#">Banasiak and Schäfer, 2009</a> )	--	+++ ( <a href="#">Gomes et al., 2009</a> )
Capacitive deionization (emerging technology)	--	+++ <sup>l</sup> ( <a href="#">Drewes et al., 2009</a> )	--	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Treatment Technology	Hydraulic Fracturing Wastewater Constituents					
	TSS	TDS	Anions	Metals	Radio-nuclides	Organics
Adsorption <sup>m</sup>	--	--	+ /++ /+++ <sup>n</sup> ( <a href="#">Habuda-Stanic et al., 2014</a> )	+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Drewes et al., 2009</a> )	--	+ /++ /+++ ( <a href="#">Arthur et al., 2005</a> ; <a href="#">Hayes and Arthur, 2004</a> ; <a href="#">Munter, 2000</a> )
Biological treatment	+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Drewes et al., 2009</a> )	--	--	--	--	+ /++ /+++ ( <a href="#">Igunnu and Chen, 2014</a> ; <a href="#">Drewes et al., 2009</a> ; <a href="#">Fakhru'l-Razi et al., 2009</a> )
Constructed wetland/reed beds	++ /+++ ( <a href="#">Manios et al., 2003</a> )	+ ( <a href="#">Arthur et al., 2005</a> )	--	++ /+++ ( <a href="#">Fakhru'l-Razi et al., 2009</a> )	--	+ /+++ ( <a href="#">Fakhru'l-Razi et al., 2009</a> ; <a href="#">Arthur et al., 2005</a> )

<sup>a</sup> To the extent possible, removal efficiencies are based on an individual treatment technology that does not assume extensive pretreatment or combined treatment processes. However, it should be noted that some processes cannot effectively operate without pretreatment (e.g., RO, media filtration, sedimentation).

<sup>b</sup> Pretreatment (pH adjustment, aeration, solids separation) required.

<sup>c</sup> Radium co-precipitation with barium sulfate.

<sup>d</sup> The Fenton process.

<sup>e</sup> Typically requires pretreatment. Not a viable technology if TDS influent >50,000 mg/L.

<sup>f</sup> Iron and manganese oxides will foul the membranes.

<sup>g</sup> Some organics will foul the membranes (e.g., organic acids).

<sup>h</sup> Ultrafiltration membrane was modified with nanoparticles.

<sup>i</sup> Can typically handle high TDS concentrations.

<sup>j</sup> Resin consisted of modified zeolites that targeted removal of BTEX.

<sup>k</sup> Influent TDS for this technology should be <8,000 mg/L.

<sup>l</sup> Specific technology was an electronic water purifier which is a hybrid of capacitive deionization. Influent TDS for this technology should be <3,000 mg/L.

<sup>m</sup> Typically polishing step, otherwise can overload bed quickly with organics.

<sup>n</sup> Removal efficiency is dependent on the type of adsorbent used and the water quality characteristics (e.g., pH).

- 1 Given the variety of properties among classes of organic constituents, different treatment processes
- 2 may be required depending upon the types of organic compounds needing removal. Table F-3 lists
- 3 treatment processes and the classes of organic compounds they can treat.

**Table F-3. Treatment processes for hydraulic fracturing wastewater organic constituents.**

Treatment processes	Organic compounds removed	References
Adsorption with activated carbon	Soluble organic compounds	<a href="#">Fakhru'l-Razi et al. (2009)</a>
Adsorption with organoclay media	Insoluble organic compounds	<a href="#">Fakhru'l-Razi et al. (2009)</a>
Aeration	Volatile organic compounds	<a href="#">Tchobanoglous et al. (2013)</a>
Dissolved air flotation	Volatile organic compounds, dispersed oil	<a href="#">Drewes et al. (2009)</a>
Freeze/thaw evaporation <sup>a</sup>	TPH, volatile organic compounds, semi-volatile organic compounds	<a href="#">Duraismy et al. (2013)</a> ; <a href="#">Drewes et al. (2009)</a>
Ion exchange (with modified zeolites)	BTEX, chemical oxygen demand, biochemical oxygen demand	<a href="#">Hayes et al. (2014)</a> ; <a href="#">Duraismy et al. (2013)</a> ; <a href="#">Drewes et al. (2009)</a> ; <a href="#">Fakhru'l-Razi et al. (2009)</a> ; <a href="#">Munter (2000)</a>
Distillation	BTEX, polycyclic aromatic hydrocarbons (PAHs)	<a href="#">Hayes et al. (2014)</a> ; <a href="#">Duraismy et al. (2013)</a> ; <a href="#">Drewes et al. (2009)</a> ; <a href="#">Fakhru'l-Razi et al. (2009)</a> .
Chemical precipitation	Oil & grease	<a href="#">Drewes et al. (2009)</a> ; <a href="#">Fakhru'l-Razi et al. (2009)</a>
Chemical Oxidation	Oil & grease	<a href="#">Drewes et al. (2009)</a> ; <a href="#">Fakhru'l-Razi et al. (2009)</a>
Media filtration (walnut shell media or sand)	Oil & grease	<a href="#">Drewes et al. (2009)</a> ; <a href="#">Fakhru'l-Razi et al. (2009)</a>
Microfiltration	Oil & grease	<a href="#">Drewes et al. (2009)</a> ; <a href="#">Fakhru'l-Razi et al. (2009)</a>
Ultrafiltration	Oil & grease, BTEX	<a href="#">Drewes et al. (2009)</a> ; <a href="#">Fakhru'l-Razi et al. (2009)</a>
Reverse osmosis <sup>b</sup>	Dissolved organics	<a href="#">Drewes et al. (2009)</a> ; <a href="#">U.S. EPA (2005)</a>
Electrocoagulation	Chemical oxygen demand, Biochemical oxygen demand	<a href="#">Fakhru'l-Razi et al. (2009)</a>
Biologically aerated filters	Oil & grease, TPH, BTEX	<a href="#">Fakhru'l-Razi et al. (2009)</a>
Reed bed technologies	Oil & grease, TPH, BTEX	<a href="#">Fakhru'l-Razi et al. (2009)</a>
Hydrocyclone separators	Dispersed oil	<a href="#">Drewes et al. (2009)</a>

<sup>a</sup> Technology cannot be used if the methanol concentration in the hydraulic fracturing wastewater exceeds 5%.

<sup>b</sup> RO will remove specific classes of organic compounds with removal efficiencies dependent on the compound's structure and the physical and chemical properties of the hydraulically fractured wastewater. Organoacids will foul membranes.

- 1 Table F-4 presents estimated effluent concentrations that could be produced by a variety of unit
- 2 treatment processes for several example constituents and for various influent concentrations. This

1 analysis uses treatment process removal efficiencies from literature used to develop Table F-2 and  
2 average wastewater concentrations of several constituents presented in Chapter 7 and Appendix E.  
3 These estimates were done to illustrate the combined effects of influent wastewater composition  
4 and treatment process choice on achievable effluent concentrations. The removal efficiencies  
5 represent a variety of studies, primarily at bench and pilot scale, and done with either conventional  
6 or hydraulic fracturing wastewater. Removal efficiency for a given treatment process can vary due  
7 to a number of factors, and constituent removal may be different in a full-scale facility that uses  
8 several processes. Thus, the calculations shown in Table F-4 are intended to be rough  
9 approximations for illustrative purposes.





Shale/ Sandstone Play	Contaminant	MCL	Avg. Influent Conc.	Units	Freeze-Thaw Evaporation	Media Filtration	Chemical Precipitation	Flotation (DAF)	Electro-coagulation	Advanced Oxidation and precipitation	Reverse osmosis	Membrane Filtration (UF/MF)	Distillation	Ion exchange	Electrodialysis	Adsorption	Biological Treatment (bioreactors, BAFs)	Constructed Wetland
Devonian Sandstone	Radium 226	--	2400	pCi/L			120 - 1700				24		24 - 71	170				
Marcellus	Radium 228	--	120	pCi/L			6.2 - 85				1.2		1.2 - 3.6	8.4				
Marcellus	Total Radium	<b>5</b>	2500	pCi/L			130 - 1800				25		25 - 76	180				
Barnett	TOC	--	9.8	mg/L								0.2				0.98 - 2.9	2.1 - 4	1
Marcellus	TOC	--	160	mg/L								3.2				16 - 48	35 - 58	16
Cotton Valley	TOC	--	200	mg/L								4				20 - 59	44 - 71	20
Barnett	BOD	--	580	mg/L					58					290 - 440			29 - 87	47
Marcellus	BOD	--	40	mg/L					4					20 - 30			2 - 6	3.2
Barnett	O&G	--	160	mg/L		16						16			8	1.6	43	9.8
Marcellus	O&G	--	74	mg/L		7.4						7.4			3.7	0.74	19	4.4
Barnett	Benzene	<b>5</b>	680	µg/L	68							310	6.8			110		ND
Marcellus	Benzene	<b>5</b>	360	µg/L	36							170	3.6			58		ND
Barnett	Toluene	<b>1,000</b>	760	µg/L	76							350				84		ND
Marcellus	Toluene	<b>1,000</b>	1100	µg/L	110							510				120		ND
Barnett	Ethylbenzene	<b>700</b>	29	µg/L	2.9											3.2		ND
Marcellus	Ethylbenzene	<b>700</b>	150	µg/L	15											17		ND
Barnett	Xylenes	<b>10,000</b>	360	µg/L	36							170				14		ND
Marcellus	Xylenes	<b>10,000</b>	1300	µg/L	130							600				52		ND
Barnett	BTEX	--	1800	µg/L	180				7.3				91	270 - 550	3.7 - 91			

This document is a draft for review purposes only and does not constitute Agency policy.

Shale/ Sandstone Play	Contaminant	MCL	Avg. Influent Conc.	Units	Freeze-Thaw Evaporation	Media Filtration	Chemical Precipitation	Flotation (DAF)	Electro-coagulation	Advanced Oxidation and precipitation	Reverse osmosis	Membrane Filtration (UF/MF)	Distillation	Ion exchange	Electrolysis	Adsorption	Biological Treatment (bioreactors, BAFs)	Constructed Wetland
Marcellus	BTEX	--	2900	µg/L	290					12			150	440 - 870		5.8 - 150		
Barnett	Naphthalene	--	240	µg/L						0.95								
Marcellus	Naphthalene	--	360	µg/L						1.4								
Barnett	1,2,4-Trimethylbenzene	--	170	µg/L						0.69								
Marcellus	1,2,4-Trimethylbenzene	--	430	µg/L						1.7								
Barnett	1,2,4-Trimethylbenzene	--	59	µg/L						0.24								
Marcellus	1,2,4-Trimethylbenzene	--	310	µg/L						1.2								

ND = Non-detect

#### F.4. Centralized Waste Treatment Facilities and Waste Management Options

1 CWTs are designed to treat for site-specific wastewater constituents so that the effluent meets the  
2 requirements of the designated disposal option(s) (i.e., reuse, direct/indirect discharge). The most  
3 basic treatment processes that a CWT might use include ([Easton, 2014](#); [Duhon, 2012](#)):

- 4 • Physical treatment technologies such as dissolved air or gas flotation technologies, media  
5 filtration, hydrocyclones, and clarification;
- 6 • Chemical treatment technologies such as chemical precipitation and chemical oxidation;  
7 and
- 8 • Biological treatment technologies such as biological aerated filter systems and reed beds.

9 While these technologies are effective at removing oil and grease, suspended solids, scale-forming  
10 compounds, and some heavy metals, if TDS should be reduced as required by the intended disposal  
11 option, advanced processes such as RO, thermal distillation, or evaporation are necessary.

##### F.4.1. Discharge Options for CWTs

12 Direct discharge CWTs are allowed to discharge treated wastewater directly to surface waters  
13 under the NPDES permit program. Discharge limitations may be based on water quality standards  
14 in the NPDES and technology-based effluent limitation guidelines under 40 CFR Part 437. In  
15 addition, permitting authorities have permitted facilities for discharge under 40 CFR 435, Subpart  
16 E. Judsonia Central Water Treatment Facility in Sunnydale, Arkansas is permitted to directly  
17 discharge treated effluent from produced and flowback waters from the Fayetteville Shale play to  
18 Byrd pond located on the property. Pinedale Anticline Field Wastewater Treatment Facility in  
19 Wyoming, WY, originally designed to treat produced water from tight gas plays in the Pinedale  
20 Anticline Field to levels suitable for reuse, was upgraded to include RO treatment for discharge to a  
21 local river. CWTs with NPDES discharge permits may also opt to treat oil and gas wastewater for  
22 reuse. Some facilities have the ability to treat wastewater to different qualities (e.g., with or without  
23 TDS removal), which they might do to target various reuse water quality criteria. Both the Judsonia  
24 facility and Pinedale facility discussed above have the ability to employ either TDS- or non-TDS-  
25 removal treatment depending on the customers' needs.

26 Indirect discharge CWTs may treat hydraulic fracturing wastewater and then discharge the treated  
27 wastewater effluent to a POTW. Discharge to the POTW is controlled by an Industrial User  
28 mechanism, which incorporates pretreatment standards established in 40 CFR Part 437. Two  
29 facilities located in Pennsylvania (Eureka Resources) and Ohio (Patriot Water Treatment) include  
30 indirect discharge as an option in wastewater treatment. The Eureka-Williamsport facility accepts  
31 wastewater (primarily from the Marcellus Shale play) and either treats it for reuse or discharges it  
32 to the local POTW. The Patriot facility offers services to hydraulic fracturing operators in the  
33 Marcellus and Utica Shale plays for removal of solids and metals using chemical treatment. As of  
34 March 2015, however, the Patriot facility is limited by the Ohio Environmental Protection Agency in  
35 accepting only "low salinity" (<50,000 mg/L TDS) produced water and may only discharge 100,000  
36 gallons (380,000 L) per day to the Warren Ohio POTW.

1 Zero-discharge CWTs do not discharge treated wastewater; instead, the wastewater is treated and  
 2 reused in subsequent hydraulic fracturing operations. [WVWRI \(2012\)](#) state that this practice  
 3 reduces potential effects on surface drinking water sources by reducing both direct and indirect  
 4 discharges. Zero-discharge facilities may offer different levels of treatment including minimal  
 5 treatment (for example, filtration), low-level treatment (chemical precipitation), and/or advanced  
 6 treatment (evaporation, crystallization). Reserved Environmental Services (RES) Mt. Pleasant,  
 7 Pennsylvania, is a zero liquid discharge facility permitted by PA DEP to treat wastewater from the  
 8 Marcellus Shale play for reuse. Residual solids are dewatered and sent to a landfill. Treated  
 9 wastewater effluent is stored, monitored, and chlorinated for reuse ([ONG Services, 2015](#)).

### F.5. Water Quality for Reuse

10 As of 2015, there is no consensus on the water quality requirements for reuse of wastewater for  
 11 hydraulic fracturing, and operator opinions vary on the minimum standards for the water quality  
 12 needed for fracturing fluids ([Vidic et al., 2013](#); [Acharya et al., 2011](#)). Table F-5 provides a list of  
 13 constituents and the recommended or observed target concentrations for reuse applications. The  
 14 wide concentration ranges for many constituents (e.g., TDS ranges from 500 to 70,000 mg/L),  
 15 suggest that water quality requirements for reuse are dictated by operation-specific requirements,  
 16 including operator preference and selection of fracturing fluid chemistry.

**Table F-5. Water quality requirements for reuse.**

Source: [U.S. EPA \(2015g\)](#).

Constituent	Reasons for Limiting Concentrations	Recommended or observed base fluid target concentrations (mg/L, after blending) <sup>b</sup>
TDS	Fluid stability	500 – 70,000
Chloride	Fluid stability	2,000 – 90,000
Sodium	Fluid stability	2,000 – 5,000
<i>Metals</i>		
Iron	Scaling	1 – 15
Strontium	Scaling	1
Barium	Scaling	2 – 38
Silica	Scaling	20
Calcium	Scaling	50 – 4,200
Magnesium	Scaling	10 – 1,000
Sulfate	Scaling	124 – 1,000
Potassium	Scaling	100 – 500
Scale formers <sup>a</sup>	Scaling	2,500


*This document is a draft for review purposes only and does not constitute Agency policy.*

Constituent	Reasons for Limiting Concentrations	Recommended or observed base fluid target concentrations (mg/L, after blending) <sup>b</sup>
<b>Other</b>		
Phosphate	Not Reported	10
TSS	Plugging	50 – 1,500
Oil	Fluid stability	5 – 25
Boron	Fluid stability	0 – 10
pH (S.U.)	Fluid stability	6.5 – 8.1
Bacteria (counts/mL)	Bacterial growth	0 – 10,000

<sup>a</sup> Includes total of barium, calcium, manganese, and strontium.

<sup>b</sup> Unless otherwise noted.

1 Wastewater quality can be managed for reuse by either blending it with freshwater and allowing  
2 dilution to bring the concentrations of problematic constituents to an acceptable range or through  
3 treatment ([Veil, 2010](#)). Treatment, if needed, can be conducted at facilities that are mobile, semi-  
4 permanent modular systems, or fully permanent CWTs ([Nicot et al., 2012](#)). At a minimum, hydraulic  
5 fracturing service providers generally prefer that the wastewater be treated to remove TSS,  
6 microorganisms, and constituents that form scale or inhibit crosslinking in gelled fluid systems  
7 ([Boschee, 2014](#)). Figure F-8 shows a schematic of a treatment system to treat wastewater for reuse  
8 that can remove suspended solids, hardness, and organic constituents.

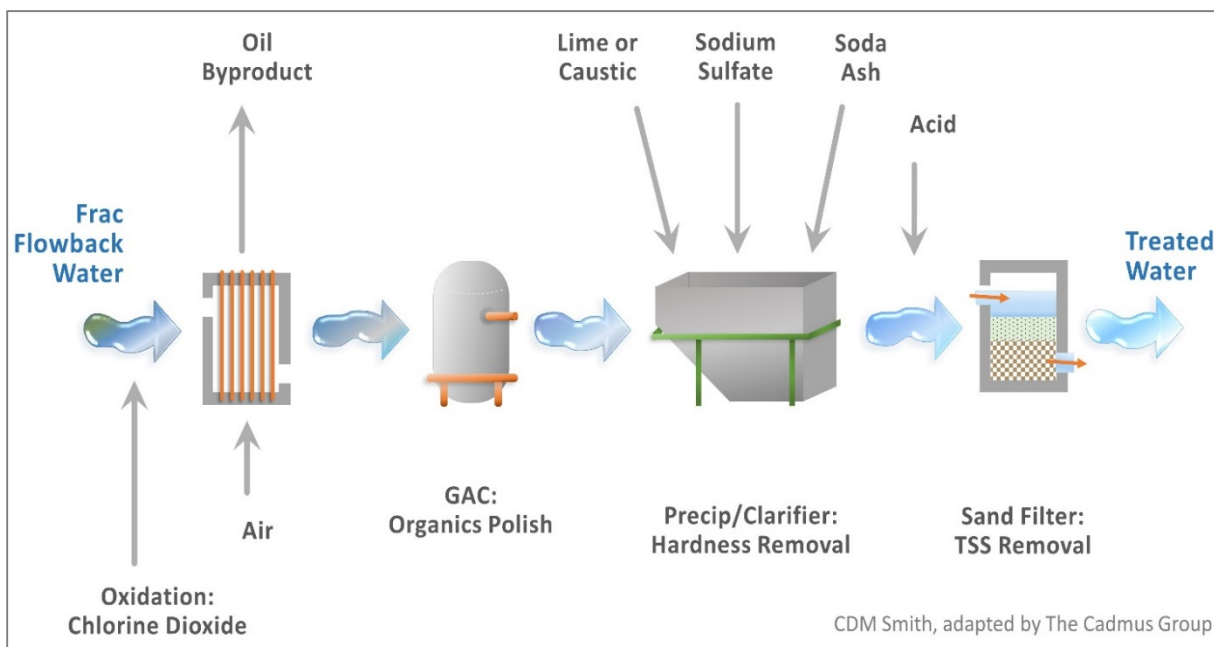

**Figure F-8. Diagram of treatment for reuse of flowback and produced water.**

Source: [Kimball \(2010\)](#).

- 1 In the Marcellus, the wastewater to be reused is first generally treated with oil/gas-water  
 2 separation, filtration, and dilution ([Ma et al., 2014](#)). Although many Marcellus treatment facilities  
 3 only supply basic reuse treatment that removes oil and solids, advanced treatment facilities that  
 4 use techniques such as RO or distillation methods are also in operation ([Veil, 2010](#)).
- 5 Reuse concerns can vary with the type of hydraulic fracturing fluid used (e.g., slickwater, linear gel,  
 6 crosslinked gel, foam) ([Wasylishen and Fulton, 2012](#)) and the anticipated changes in water  
 7 chemistry over time (transition from flowback to produced water) ([Hammer and VanBriesen,  
 8 2012](#)). Elevated TDS is a concern, but residual constituents from previous fluid mixtures (e.g.,  
 9 breakers) may also cause difficulties when reusing water for subsequent fracturing operations  
 10 ([Montgomery, 2013](#); [Walsh, 2013](#)).
- 11 *On-Site Treatment for Reuse*
- 12 On-site systems that treat produced water for reuse can reduce potential impacts to drinking water  
 13 resources associated with transportation and disposal and facilitate the logistics of reuse by  
 14 preparing the water close to well sites. These systems sometimes consist of mobile units containing  
 15 one or more treatment processes that can be moved from site to site to treat waters in newly  
 16 developed sites that are not yet producing at full-scale. Semi-permanent facilities that serve a  
 17 specific area also exist ([Halldorson, 2013](#); [Boschee, 2012](#)).
- 18 Treatment systems are typically tailored for site-specific produced water chemical concentrations  
 19 and desired water quality treatment goals, including whether significant TDS removal is needed. If



1 low TDS water is needed, more advanced treatment will be required (see Section 8.5 of Chapter 8),  
2 which can increase the treatment costs to three to four times higher than for treatment systems  
3 that do not remove TDS ([Halldorson, 2013](#)). On-site facilities may be warranted where truck  
4 hauling or seasonal accessibility to and from a central facility is an issue ([Boschee, 2014](#); [Tiemann  
et al., 2014](#)). Operators may also consider on-site facilities if they have not fully committed to an  
5 area and the well counts are initially low. In those instances, they can later decide to add or remove  
6 units based on changing production volumes ([Boschee, 2014](#)).  
7

## F.6. Hydraulic Fracturing Impacts on POTWs

### F.6.1. Potential Impacts on Treatment Processes

8 Wastewater treatment processes used by POTWs are generally not designed or operated for  
9 wastewater containing high salt concentrations (>0.1-5% salt). Four basic problems for biological  
10 treatment of saline water have been described ([Woolard and Irvine, 1995](#)): 1) microbes in  
11 conventional treatment systems tend to be sensitive to changes in ionic strength, 2) microbial  
12 metabolic functions are disrupted leading to decreased degradation of carbon compounds, 3)  
13 effluent suspended solids are increased due to cell lysis and/or a reduction in organisms that  
14 promote flocculation, and 4) the extent of salt acclimation is limited in conventional systems.

15 Biological pre-treatment may be beneficial as an added process in pre-treatment (e.g. prior to  
16 indirect discharge from a CWT to a POTW) for removal of organic contaminants. Specialized  
17 treatment systems using salt-tolerant bacteria may be beneficial as an additional level of treatment  
18 for pre-treating (or polishing) wastewaters in centralized treatment systems. (These processes  
19 differ from conventional biological processes in standard wastewater treatment, which are not  
20 suitable for large volumes of UOG wastewater.) In particular, membrane bioreactors (MBRs) have  
21 been examined for the treatment of oil and gas wastewater ([Dao et al., 2013](#); [Kose et al., 2012](#);  
22 [Miller, 2011](#)). MBRs provide advantages over conventional aeration basin processes as they can be  
23 implemented into existing treatment trains more easily and have a much smaller footprint than  
24 aeration basins.

25 Because sudden increases in chloride concentration, above 5-8 g/L, may cause problems for  
26 wastewater treatment ([Ludzack and Noran, 1965](#)). POTWs planning to accept indirect discharge in  
27 the future may find it valuable to restrict influent salt concentrations to a level that will not disturb  
28 existing biological treatment processes.

## F.7. Hydraulic Fracturing and DBPs

### F.7.1.1. Disinfection By-Products

29 This section provides background information on disinfection by-products (DBPs) and their  
30 formation to support the discussion in Section 8.6.1 of Chapter 8 regarding impacts on surface  
31 waters and downstream drinking water utilities due to elevated bromide and iodide in hydraulic  
32 fracturing wastewaters.

1 Regulated DBPs are a small subset of the full spectrum of DBPs that include other chlorinated and  
2 brominated DBPs as well as nitrogenous and iodated DBPs. Some of the emerging unregulated  
3 DBPs may be more toxic than their regulated counterparts ([Harkness et al., 2015](#); [McGuire et al.,  
4 2014](#); [Parker et al., 2014](#)). Of the many types of DBPs that can form when drinking water is  
5 disinfected, SDWA's Stage 1 and Stage 2 DBP Rules regulate four total trihalomethanes (TTHMs),  
6 five haloacetic acids (HAA5s), bromate, and chlorite ([U.S. EPA, 2006](#)).

7 Most brominated DBPs form when water containing organic material and bromide reacts with a  
8 disinfectant such as chlorine during drinking water treatment. Parameters that affect DBP  
9 formation include concentration and type of organic material, disinfectant concentration, pH, water  
10 temperature, and disinfectant contact time. In addition, many studies have found that elevated  
11 bromide levels correlate with increased DBP formation ([Singer, 2010](#); [Obolensky and Singer, 2008](#);  
12 [Matamoros et al., 2007](#); [Hua et al., 2006](#); [Yang and Shang, 2004](#)). Some studies found similar results  
13 for iodide as well ([McGuire et al., 2014](#); [Parker et al., 2014](#)). [Pope et al. \(2007\)](#) reported that  
14 increased bromide levels are the second best indicator of DBP formation, with pH being the first.

15 In addition, research finds that higher levels of bromide and iodide contribute to increased  
16 concentrations of the brominated and iodated forms of DBPs (both regulated and unregulated),  
17 which tend to be more cytotoxic, genotoxic, and carcinogenic than chlorinated species ([McGuire et  
18 al., 2014](#); [Parker et al., 2014](#); [States et al., 2013](#); [Krasner, 2009](#); [Richardson et al., 2007](#)). Studies  
19 generally report that the ratios of halogen incorporation into DBPs reflect the ratio of halogen  
20 concentrations in the source water ([Criquet et al., 2012](#); [Jones et al., 2012](#); [Obolensky and Singer,  
21 2008](#)).

22 From a regulatory perspective, elevated bromide levels create difficulties in meeting drinking water  
23 MCLs. When the TTHMs are predominately in the form of brominated DBPs, the higher molecular  
24 weight of bromide (79.9 g/mol) relative to chloride (35.5 g/mol) causes the overall mass of the  
25 TTHM sum to increase. This can lead to elevated concentrations of TTHM, in turn potentially  
26 leading to violations of the TTHM MCL for the drinking water utility ([Francis et al., 2009](#)).

27 High bromide levels are also cited as causing formation of nitrogenous DBP N-  
28 nitrosodimethylamine (NDMA) in water disinfected with chloramines ([Luh and Mariñas, 2012](#)).  
29 Although NDMA is not regulated by the EPA as of early 2015, it is listed as a priority toxic pollutant,  
30 and the EPA is planning to evaluate NDMA and other nitrosamines as candidates for regulation  
31 during the six-year review of the Microbial and Disinfection Byproducts (MDBP) rules ([U.S. EPA,  
32 2014a](#)).

## F.8. References for Appendix F

[Abrams, R.](#) (2013). Advanced oxidation frac water recycling system. Presentation presented at 20th  
International Petroleum Environmental Conference, November 12-14, 2013, San Antonio, TX.

[Acharya, HR; Henderson, C; Matis, H; Kommepalli, H; Moore, B; Wang, H.](#) (2011). Cost effective recovery of  
low-TDS frac flowback water for reuse. (Department of Energy: DE-FE0000784). Niskayuna, NY: GE Global  
Research. [http://www.netl.doe.gov/file%20library/Research/oil-gas/FE0000784\\_FinalReport.pdf](http://www.netl.doe.gov/file%20library/Research/oil-gas/FE0000784_FinalReport.pdf)

- [ALL Consulting](#) (ALL Consulting, LLC). (2013). Water treatment technology fact sheet: Electrodialysis [Fact Sheet]. Tulsa, OK. <http://www.all-llc.com/publicdownloads/ED-EDRFactSheet.pdf>
- [Alzahrani, S; Mohammad, AW; Hilal, N; Abdullah, P; Jaafar, O.](#) (2013). Comparative study of NF and RO membranes in the treatment of produced water-Part I: Assessing water quality. *Desalination* 315: 18-26. <http://dx.doi.org/10.1016/j.desal.2012.12.004>
- [Arthur, JD; Langhus, BG; Patel, C.](#) (2005). Technical summary of oil and gas produced water treatment technologies. Tulsa, OK: ALL Consulting, LLC. <http://www.odinoilandgas.com/Portals/0/TreatmentOptionsReport.pdf>
- [AWWA](#) (American Water Works Association). (1999). Residential end uses of water. In PW Mayer; WB DeOreo (Eds.). Denver, CO: AWWA Research Foundation and American Water Works Association. [http://www.waterrf.org/PublicReportLibrary/RFR90781\\_1999\\_241A.pdf](http://www.waterrf.org/PublicReportLibrary/RFR90781_1999_241A.pdf)
- [Banasiak, LJ; Schäfer, AI.](#) (2009). Removal of boron, fluoride and nitrate by electrodialysis in the presence of organic matter. *J Memb Sci* 334: 101-109. <http://dx.doi.org/10.1016/j.memsci.2009.02.020>
- [Barrett, ME.](#) (2010). Evaluation of sand filter performance. (CRWR Online Report 10-7). Austin, TX: Center for Research in Water Resources, University of Texas at Austin. <http://www.crrw.utexas.edu/reports/pdf/2010/rpt10-07.pdf>
- [Boschee, P.](#) (2012). Handling produced water from hydraulic fracturing. *Oil and Gas Facilities* 1: 23-26.
- [Boschee, P.](#) (2014). Produced and flowback water recycling and reuse: Economics, limitations, and technology. *Oil and Gas Facilities* 3: 16-22.
- [Bruff, M; Jikich, SA.](#) (2011). Field demonstration of an integrated water treatment technology solution in Marcellus shale. Paper presented at SPE Eastern Regional Meeting, August 17-19, 2011, Columbus, OH.
- [Bukhari, AA.](#) (2008). Investigation of the electro-coagulation treatment process for the removal of total suspended solids and turbidity from municipal wastewater. *Bioresour Technol* 99: 914-921. <http://dx.doi.org/10.1016/j.biortech.2007.03.015>
- [CCST](#) (California Council on Science and Technology). (2015). An independent scientific assessment of well stimulation in California, Volume 1: Well stimulation technologies and their past, present, and potential future use in California. Sacramento, CA. <http://www.ccst.us/publications/2015/2015SB4-v1.pdf>
- [Criquet, J; Allard, S; Salhi, E; Joll, CA; Heitz, A; von Gunten, U, rs.](#) (2012). Iodate and Iodo-Trihalomethane Formation during Chlorination of Iodide-Containing Waters: Role of Bromide. *Environ Sci Technol* 46: 7350-7357. <http://dx.doi.org/10.1021/es301301g>
- [Dao, TD; Mericq, JP; Laborie, S; Cabassud, C.](#) (2013). A new method for permeability measurement of hydrophobic membranes in Vacuum Membrane Distillation process. *Water Res* 47: 20962104.
- [DOE](#) (U.S. Department of Energy). (2006). A guide to practical management of produced water from onshore oil and gas operations in the United States. Washington, DC: U.S. Department of Energy, National Petroleum Technology Office. [http://fracfocus.org/sites/default/files/publications/a\\_guide\\_to\\_practical\\_management\\_of\\_produced\\_water\\_from\\_onshore\\_oil\\_and\\_gas\\_operations\\_in\\_the\\_united\\_states.pdf](http://fracfocus.org/sites/default/files/publications/a_guide_to_practical_management_of_produced_water_from_onshore_oil_and_gas_operations_in_the_united_states.pdf)
- [Drewes, J; Cath, T; Debroux, J; Veil, J.](#) (2009). An integrated framework for treatment and management of produced water - Technical assessment of produced water treatment technologies (1st ed.). (RPSEA Project 07122-12). Golden, CO: Colorado School of Mines. [http://aqwatec.mines.edu/research/projects/Tech\\_Assessment\\_PW\\_Treatment\\_Tech.pdf](http://aqwatec.mines.edu/research/projects/Tech_Assessment_PW_Treatment_Tech.pdf)
- [Duhon, H.](#) (2012). Produced water treatment: Yesterday, today, and tomorrow. *Oil and Gas Facilities* 3: 29-31.
- [Dunkel, M.](#) (2013). Reducing fresh water use in upstream oil and gas hydraulic fracturing. In Summary of the technical workshop on wastewater treatment and related modeling (pp. A37-A43). Irving, TX: Pioneer Natural Resources USA, Inc. <http://www2.epa.gov/hfstudy/summary-technical-workshop-wastewater-treatment-and-related-modeling>

- [Duraismy, RT; Beni, AH; Henni, A.](#) (2013). State of the art treatment of produced water. In W Elshorbagy; RK Chowdhury (Eds.), *Water treatment* (pp. 199-222). Rijeka, Croatia: InTech. <http://dx.doi.org/10.5772/53478>
- [Easton, J.](#) (2014). Optimizing fracking wastewater management. *Pollution Engineering* January 13.
- [Ely, JW; Horn, A; Cathey, R; Fraim, M; Jakhete, S.](#) (2011). Game changing technology for treating and recycling frac water. Paper presented at SPE Annual Technical Conference and Exhibition, October 30 - November 2, 2011, Denver, CO.
- [ER](#) (Eureka Resources, LLC). (2014). Crystallization technology. Available online at [http://www.eureka-resources.com/wp-content/uploads/2013/07/EURE-022\\_Crystallization\\_53013.pdf](http://www.eureka-resources.com/wp-content/uploads/2013/07/EURE-022_Crystallization_53013.pdf) (accessed March 4, 2015).
- [Ertel, D; McManus, K; Bogdan, J.](#) (2013). Marcellus wastewater treatment: Case study. In Summary of the technical workshop on wastewater treatment and related modeling (pp. A56-A66). Williamsport, PA: Eureka Resources, LLC. <http://www2.epa.gov/hfstudy/summary-technical-workshop-wastewater-treatment-and-related-modeling>
- [Fakhru'l-Razi, A; Pendashteh, A; Abdullah, LC; Biak, DR; Madaeni, SS; Abidin, ZZ.](#) (2009). Review of technologies for oil and gas produced water treatment [Review]. *J Hazard Mater* 170: 530-551.
- [Francis, RA; Small, MJ; Vanbriesen, JM.](#) (2009). Multivariate distributions of disinfection by-products in chlorinated drinking water. *Water Res* 43: 3453-3468. <http://dx.doi.org/10.1016/j.watres.2009.05.008>
- [Gomes, J; Cocke, D; Das, K; Guttula, M; Tran, D; Beckman, J.](#) (2009). Treatment of produced water by electrocoagulation. Shiner, TX: KASELCO, LLC. <http://www.kaselco.com/index.php/library/industry-white-papers>
- [Guolin, J; Xiaoyu, W; Chunjie, H.](#) (2008). The effect of oilfield polymer-flooding wastewater on anion exchange membrane performance. *Desalination* 220: 386-393.
- [Habuda-Stanic, M; Ravancic, ME; Flanagan, A.](#) (2014). A Review on Adsorption of Fluoride from Aqueous Solution. *Materials* 7: 6317-6366. <http://dx.doi.org/10.3390/ma7096317>
- [Halldorson, B.](#) (2013). Successful oilfield water management: Five unique case studies. Presentation presented at EPA Technical Workshop - Wastewater Treatment and Related Modeling Research, April 18, 2013, Triangle Park, NC.
- [Halliburton.](#) (2014). Hydraulic fracturing 101. Available online at [http://www.halliburton.com/public/projects/pubsdata/hydraulic\\_fracturing/fracturing\\_101.html](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/fracturing_101.html)
- [Hamieh, BM; Beckman, JR.](#) (2006). Seawater desalination using Dewvaporation technique: theoretical development and design evolution. *Desalination* 195: 1-13. <http://dx.doi.org/10.1016/j.desal.2005.09.034>
- [Hammer, R; VanBriesen, J.](#) (2012). In frackings wake: New rules are needed to protect our health and environment from contaminated wastewater. New York, NY: Natural Resources Defense Council. <http://www.nrdc.org/energy/files/fracking-wastewater-fullreport.pdf>
- [Harkness, JS; Dwyer, GS; Warner, NR; Parker, KM; Mitch, WA; Vengosh, A.](#) (2015). Iodide, Bromide, and Ammonium in Hydraulic Fracturing and Oil and Gas Wastewaters: Environmental Implications. *Environ Sci Technol* 49: 1955-1963. <http://dx.doi.org/10.1021/es504654n>
- [Hayes, T; Severin, B.](#) (2012a). Characterization of flowback water from the the Marcellus and the Barnett shale regions. Barnett and Appalachian shale water management and reuse technologies. (08122-05.09; Contract 08122-05). Hayes, T; Severin, B. [http://www.rpsea.org/media/files/project/2146b3a0/08122-05-RT-Characterization\\_Flowback\\_Waters\\_Marcellus\\_Barnett\\_Shale\\_Regions-03-20-12.pdf](http://www.rpsea.org/media/files/project/2146b3a0/08122-05-RT-Characterization_Flowback_Waters_Marcellus_Barnett_Shale_Regions-03-20-12.pdf)

- [Hayes, T; Severin, BF.](#) (2012b). Evaluation of the aqua-pure mechanical vapor recompression system in the treatment of shale gas flowback water - Barnett and Appalachian shale water management and reuse technologies. (08122-05.11). Hayes, T; Severin, BF. <http://barnettshalewater.org/documents/08122-05.11-EvaluationofMVR-3-12-2012.pdf>
- [Hayes, TD; Arthur, D.](#) (2004). Overview of emerging produced water treatment technologies. Paper presented at 11th Annual International Petroleum Environmental Conference, October 12-15, 2004, Albuquerque, NM.
- [Hayes, TD; Halldorson, B; Horner, P; Ewing, J; Werline, JR; Severin, BF.](#) (2014). Mechanical vapor recompression for the treatment of shale-gas flowback water. Oil and Gas Facilities 3: 54-62.
- [Hua, GH; Reckhow, DA; Kim, J.](#) (2006). Effect of bromide and iodide ions on the formation and speciation of disinfection byproducts during chlorination. Environ Sci Technol 40: 3050-3056. <http://dx.doi.org/10.1021/es0519278>
- [Igunnu, ET; Chen, GZ.](#) (2014). Produced water treatment technologies. International Journal of Low-Carbon Technologies 9: 157-177. <http://dx.doi.org/10.1093/ijlct/cts049>
- [Jones, DB; Saglam, A; Song, H; Karanfil, T.](#) (2012). The impact of bromide/iodide concentration and ratio on iodinated trihalomethane formation and speciation. Water Res 46: 11-20. <http://dx.doi.org/10.1016/j.watres.2011.10.005>
- [Kimball, B.](#) (2010). Water treatment technologies for global unconventional gas plays. Presentation presented at US - China Industry Oil and Gas Forum, September 16, 2010, Fort Worth, TX.
- [Kose, B; Ozgun, H; Ersahin, ME; Dizge, N; Koseogulmer, DY; Atay, B; Kaya, R; Altinbas, M; Savili, S; Hoshan, P; Atay, D; Eren, E; Kinaci, C; Koyuncu, I.](#) (2012). Performance evaluation of a submerged membrane bioreactor for the treatment of brackish oil and natural gas field produced water. Desalination 285: 295-300.
- [Krasner, SW.](#) (2009). The formation and control of emerging disinfection by-products of health concern [Review]. Philos Transact A Math Phys Eng Sci 367: 4077-4095. <http://dx.doi.org/10.1098/rsta.2009.010>
- [LEau LLC.](#) (2008). Dew vaporation desalination 5,000-gallon-per-day pilot plant. (Desalination and Water Purification Research and Development Program Report No. 120). Denver, CO: Bureau of Reclamation, U.S. Department of the Interior. <http://www.usbr.gov/research/AWT/reportpdfs/report120.pdf>
- [Ludzack, FJ; Noran, DK.](#) (1965). Tolerance of high salinities by conventional wastewater treatment processes. J Water Pollut Control Fed 37: 1404-1416.
- [Luh, J; Mariñas, BI.](#) (2012). Bromide ion effect on N-nitrosodimethylamine formation by monochloramine. Environ Sci Technol 46: 5085-5092. <http://dx.doi.org/10.1021/es300077x>
- [Ma, G; Geza, M; Xu, P.](#) (2014). Review of flowback and produced water management, treatment, and beneficial use for major shale gas development basins. Shale Energy Engineering Conference 2014, Pittsburgh, Pennsylvania, United States.
- [Manios, T; Stentiford, EI; Millner, P.](#) (2003). Removal of total suspended solids from wastewater in constructed horizontal flow subsurface wetlands. J Environ Sci Health A Tox Hazard Subst Environ Eng 38: 1073-1085. <http://dx.doi.org/10.1081/ESE-120019865>
- [Matamoros, V; Mujeriego, R; Bayona, JM.](#) (2007). Trihalomethane occurrence in chlorinated reclaimed water at full-scale wastewater treatment plants in NE Spain. Water Res 41: 3337-3344. <http://dx.doi.org/10.1016/j.watres.2007.04.021>
- [McGuire, MJ; Karanfil, T; Krasner, SW; Reckhow, DA; Roberson, JA; Summers, RS; Westerhoff, P; Xie, Y.](#) (2014). Not your granddad's disinfection by-product problems and solutions. JAWWA 106: 54-73. <http://dx.doi.org/10.5942/jawwa.2014.106.0128>
- [Miller, P.](#) (2011). Future of hydraulic fracturing depends on effective water treatment. Hydrocarbon Process 90: 13-13.



- [Montgomery, C.](#) (2013). Fracturing fluid components. In A Bunder; J McLennon; R Jeffrey (Eds.), Effective and Sustainable Hydraulic Fracturing. Croatia: InTech. <http://dx.doi.org/10.5772/56422>
- [Munter, R.](#) (2000). Industrial wastewater treatment. In LC Lundin (Ed.), Sustainable water management in the Baltic Sea Basin book II: Water use and management (pp. 195-210). Sida, Sweden: Baltic University Programme Publication. <http://www.balticuniv.uu.se/index.php/boll-online-library/831-swm-2-water-use-and-management>
- [Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.](#) (2012). Oil & gas water use in Texas: Update to the 2011 mining water use report. Nicot, JP; Reedy, RC; Costley, RA; Huang, Y. [http://www.twdb.state.tx.us/publications/reports/contracted\\_reports/doc/0904830939\\_2012Update\\_MiningWaterUse.pdf](http://www.twdb.state.tx.us/publications/reports/contracted_reports/doc/0904830939_2012Update_MiningWaterUse.pdf)
- [NMSU DACC WUTAP](#) (New Mexico State University, Doña Ana Community College, Water Utilities Technical Assistance Program). (2007). New Mexico wastewater systems operator certification study manual - Version 1.1. Santa Fe, NM: New Mexico Environment Department. <http://www.nmrwa.org/sites/nmrwa.org/files/WastewaterOperatorStudyManual.pdf>
- [Obolensky, A; Singer, PC.](#) (2008). Development and interpretation of disinfection byproduct formation models using the Information Collection Rule database. Environ Sci Technol 42: 5654-5660. <http://dx.doi.org/10.1021/es702974f>
- [ONG Services.](#) (2015). ONGList: Reserved Environmental Services. Available online at <http://www.onglist.com/Home/Search?SearchString=Reserved+environmental+services&Distance=&searchAddress=&CategoryTypeID=1&SubCategoryID>
- [Parker, KM; Zeng, T; Harkness, J; Vengosh, A; Mitch, WA.](#) (2014). Enhanced formation of disinfection byproducts in shale gas wastewater-impacted drinking water supplies. Environ Sci Technol 48: 11161-11169. <http://dx.doi.org/10.1021/es5028184>
- [Pope, PG; Martin-Doole, M; Speitel, GE; Collins, MR.](#) (2007). Relative significance of factors influencing DXAA formation during chloramination. JAWWA 99: 144-156.
- [Richardson, SD; Plewa, MJ; Wagner, ED; Schoeny, R; Demarini, DM.](#) (2007). Occurrence, genotoxicity, and carcinogenicity of regulated and emerging disinfection by-products in drinking water: A review and roadmap for research [Review]. Mutat Res 636: 178-242. <http://dx.doi.org/10.1016/j.mrrev.2007.09.00>
- [Shafer, L.](#) (2011). Water recycling and purification in the Pinedale anticline field: results from the anticline disposal project. In 2011 SPE Americas E&P health, safety, security & environmental conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/141448-MS>
- [Shaffer, DL; Arias Chavez, LH; Ben-Sasson, M; Romero-Vargas Castrillón, S; Yip, NY; Elimelech, M.](#) (2013). Desalination and reuse of high-salinity shale gas produced water: drivers, technologies, and future directions. Environ Sci Technol 47: 9569-9583.
- [Shammas, NK.](#) (2010). Wastewater renovation by flotation. In LK Wang; NK Shammas; WA Selke; DB Aulenbach (Eds.), Flotation technology (pp. 327-345). New York, NY: Humana Press. [http://dx.doi.org/10.1007/978-1-60327-133-2\\_9](http://dx.doi.org/10.1007/978-1-60327-133-2_9)
- [Singer, P.](#) (2010). Anomalous DBP speciation patterns: Examples and explanations. Water Quality Technology Conference and Exposition 2010, November, 14-18, 2010, Savannah, GA.
- [States, S; Cyprych, G; Stoner, M; Wydra, F; Kuchta, J; Monnell, J; Casson, L.](#) (2013). Marcellus Shale drilling and brominated THMs in Pittsburgh, Pa., drinking water. J Am Water Works Assoc 105: E432-E448. <http://dx.doi.org/10.5942/jawwa.2013.105.0093>
- [Tchobanoglous, G; Burton, FL; Stensel, HD.](#) (2013). Wastewater engineering: Treatment and reuse. In th (Ed.), (9780070418783 ed.). Boston, MA: McGraw-Hill.

- [Tiemann, M; Folger, P; Carter, NT.](http://nationalaglawcenter.org/wp-content/uploads/assets/crs/R43635.pdf) (2014). Shale energy technology assessment: Current and emerging water practices. Washington, DC: Congressional Research Service. <http://nationalaglawcenter.org/wp-content/uploads/assets/crs/R43635.pdf>
- [U.S. EPA](http://www.epa.gov/ogwdw/disinfection/lt2/pdfs/guide%20membranefiltration%20final.pdf) (U.S. Environmental Protection Agency). (2005). Membrane filtration guidance manual. (EPA 815-R-06-009). Washington, D.C. [http://www.epa.gov/ogwdw/disinfection/lt2/pdfs/guide lt2 membranefiltration final.pdf](http://www.epa.gov/ogwdw/disinfection/lt2/pdfs/guide%20membranefiltration%20final.pdf)
- [U.S. EPA](http://water.epa.gov/lawsregs/rulesregs/sdwa/stage2/) (U.S. Environmental Protection Agency). (2006). National Primary Drinking Water Regulations: Stage 2 Disinfectants and Disinfection Byproducts Rule. <http://water.epa.gov/lawsregs/rulesregs/sdwa/stage2/>
- [U.S. EPA.](https://www.federalregister.gov/articles/2014/10/20/2014-24582/announcement-of-preliminary-regulatory-determinations-for-contaminants-on-the-third-drinking-water#page-62715) [Announcement of preliminary regulatory determinations for contaminants on the third drinking water contaminant candidate list, EPA-HQ-OW-2012-0155 62715 -62750](https://www.federalregister.gov/articles/2014/10/20/2014-24582/announcement-of-preliminary-regulatory-determinations-for-contaminants-on-the-third-drinking-water#page-62715) (62736 pages) (2014a). <https://www.federalregister.gov/articles/2014/10/20/2014-24582/announcement-of-preliminary-regulatory-determinations-for-contaminants-on-the-third-drinking-water#page-62715>
- [U.S. EPA](http://water.epa.gov/scitech/wastetech/guide/oilandgas/unconv.cfm) (U.S. Environmental Protection Agency). (2015g). Technical development document for proposed effluent limitation guidelines and standards for oil and gas extraction. (EPA-821-R-15-003). Washington, D.C. <http://water.epa.gov/scitech/wastetech/guide/oilandgas/unconv.cfm>
- [Veil, JA.](http://fracfocus.org/sites/default/files/publications/water%20management%20in%20the%20marcellus.pdf) (2010). Water management technologies used by Marcellus shale gas producers - Final Report. (DOE Award No.: FWP 49462). Veil, JA. [http://fracfocus.org/sites/default/files/publications/water management in the marcellus.pdf](http://fracfocus.org/sites/default/files/publications/water%20management%20in%20the%20marcellus.pdf)
- [Vidic, RD; Brantley, SL; Vandenbossche, JM; Yoxtheimer, D; Abad, JD.](http://dx.doi.org/10.1126/science.1235009) (2013). Impact of shale gas development on regional water quality [Review]. *Science* 340: 1235009. <http://dx.doi.org/10.1126/science.1235009>
- [Walsh, JM.](#) (2013). Water management for hydraulic fracturing in unconventional resources Part 1. Oil and Gas Facilities 2.
- [Wasylishen, R; Fulton, S.](http://www.ptac.org/projects/151) (2012). Reuse of flowback & produced water for hydraulic fracturing in tight oil. Calgary, Alberta, Canada: The Petroleum Technology Alliance Canada (PTAC). <http://www.ptac.org/projects/151>
- [Woolard, CR; Irvine, RL.](#) (1995). Treatment of hypersaline wastewater in the sequencing batch reactor. *Water Res* 29: 1159-1168.
- [WVWRI](https://www.netl.doe.gov/File%20Library/Research/Oil-Gas/Natural%20Gas/shale%20gas/fe0001466-final-report.pdf) (West Virginia Water Research Institute, West Virginia University). (2012). Zero discharge water management for horizontal shale gas well development. (DE-FE0001466). [https://www.netl.doe.gov/File Library/Research/Oil-Gas/Natural Gas/shale gas/fe0001466-final-report.pdf](https://www.netl.doe.gov/File%20Library/Research/Oil-Gas/Natural%20Gas/shale%20gas/fe0001466-final-report.pdf)
- [Yang, X; Shang, C.](http://dx.doi.org/10.1021/es049580g) (2004). Chlorination byproduct formation in the presence of humic acid, model nitrogenous organic compounds, ammonia, and bromide. *Environ Sci Technol* 38: 4995-5001. <http://dx.doi.org/10.1021/es049580g>
- [Younos, T; Tulou, KE.](http://dx.doi.org/10.1111/j.1936-704X.2005.mp132001002.x) (2005). Overview of desalination techniques. *Journal of Contemporary Water Research & Education* 132: 3-10. <http://dx.doi.org/10.1111/j.1936-704X.2005.mp132001002.x>
- [Zhang, T; Gregory, K; Hammack, RW; Vidic, RD.](http://dx.doi.org/10.1021/es405168b) (2014). Co-precipitation of radium with barium and strontium sulfate and its impact on the fate of radium during treatment of produced water from unconventional gas extraction. *Environ Sci Technol* 48: 4596-4603. <http://dx.doi.org/10.1021/es405168b>

## Appendix G

---

# Identification and Hazard Evaluation of Chemicals across the Hydraulic Fracturing Water Cycle Supplemental Tables and Information



## Appendix G. Identification and Hazard Evaluation of Chemicals across the Hydraulic Fracturing Water Cycle Supplemental Tables and Information

1 Appendix G provides detail and supporting information on the oral reference values (RfVs) and oral  
2 slope factors (OSFs) that were identified in Chapter 9 of this assessment.<sup>1</sup> Section G.1 provides  
3 detail on the criteria used to select sources of RfVs and OSFs for chemicals used or detected in  
4 hydraulic fracturing processes, and lists all sources of RfVs and OSFs that were considered for this  
5 study. Section G.2 provides a glossary of the toxicity value terminology that is used by these various  
6 sources. Lastly, all of the RfVs and OSFs collected from these sources are provided in Table G-1 and  
7 Table G-2. Tables G-1a through G-1d show the available RfVs and OSFs for chemicals used in  
8 hydraulic fracturing fluids, and Tables G-2a through G-2d show the available RfVs and OSFs for  
9 chemicals detected in hydraulic fracturing flowback and wastewater. These tables provide cancer  
10 weight-of-evidence (WOE) characterizations for these chemicals where available, and indicate  
11 whether each chemical has available data on physicochemical properties or occurrence.

### G.1. Criteria for Selection and Inclusion of Reference Value (RfV) and Oral Slope Factor (OSF) Data Sources

12 The criteria listed below were used to evaluate the quality of RfVs and OSFs considered for use in  
13 the hazard analyses conducted in Chapter 9. These criteria were originally outlined in the hydraulic  
14 fracturing research plan ([U.S. EPA, 2011a](#)) and interim progress report ([U.S. EPA, 2012c](#)). Only data  
15 sources that met these criteria were considered of sufficient quality to be included in the analyses.

16 The following criteria had to be met for a source to be deemed of sufficient quality:

- 17 1) The body or organization generating or producing the peer-reviewed RfVs, peer-reviewed OSFs,  
18 or peer reviewed qualitative assessment must be a governmental or intergovernmental body.
  - 19 a. Governmental bodies include sovereign states, and federated states/units.
  - 20 b. Intergovernmental bodies are those whose members are sovereign states, and the  
21 subdivisions or agencies of such intergovernmental bodies. The United Nations is an  
22 example of an intergovernmental body. The International Agency for Research on  
23 Cancer (IARC) is an agency of the World Health Organization (WHO), which is itself an  
24 agency of the United Nations. Thus, IARC is considered a subdivision of the United  
25 Nations.

---

<sup>1</sup> As defined in Chapter 9, the term RfV refers to reference values for noncancer effects occurring via the oral route of exposure and for chronic durations, except where noted.

- 
- 1 2) The data source must include peer-reviewed RfVs, peer-reviewed OSFs, or peer reviewed  
2 qualitative assessments.
- 3 a. A committee that is established to derive the RfVs, OSFs, or qualitative assessments can  
4 have members of that same committee provide the peer review, so long as either the  
5 entire committee, or members of the committee who did not participate in the  
6 derivation of a specific section of a work product, conduct the review.
- 7 b. Peer reviewers who work for grantees of the organization deriving the RfVs, OSFs, or  
8 qualitative assessments are generally allowed, and this will not be considered to  
9 constitute a conflict/duality of interest.
- 10 c. Peer reviewers may work in the same or different office, so long as they did not  
11 participate in any way in the development of the product, and these individuals must be  
12 free of conflicts/duality of interest with respect to the chemical(s) assigned.
- 13 i. For instance, peer reviewers for Program X, conducted by Office A, may also be  
14 employed by Office A so long as they did not participate in the creation of the  
15 Program X product they are reviewing.
- 16 3) The RfVs, OSFs, or qualitative assessments must be based on peer-reviewed scientific data.
- 17 a. There are cases where industry reports that were not published in a peer-reviewed,  
18 scholarly journal may be used, if the industry report has been adequately peer-reviewed  
19 by an external body (external to the group generating the report, and external to the  
20 group generating the peer-reviewed RfVs, peer-reviewed OSFs, or peer-reviewed  
21 qualitative assessment) that is free of conflicts/dualities of interest.
- 22 4) The RfVs, OSFs, or qualitative assessments must be focused on protection of the general public.
- 23 a. Sources that are focused on workers are not appropriate as workers are assumed to  
24 accommodate additional risk than the general public due to their status as workers.
- 25 5) The body generating the values or qualitative assessments must be free of conflicts of interest  
26 with respect to the chemicals for which it derives RfVs, OSFs, or qualitative assessments.
- 27 a. If a body generating the RfVs, OSFs, or qualitative assessments accepts funding from an  
28 interested party (i.e., a company or organization that may be impacted by past, present,  
29 or future values or qualitative assessments), then the body has a conflict of interest.
- 30 b. For instance, if a non-profit organization is funded by an industry trade group, and the  
31 non-profit generates RfVs, OSFs, or qualitative assessments for chemicals that trade  
32 group is interested in, then the non-profit is considered to have a conflict of interest  
33 with respect to those chemicals.
- 34 It is important to note that having a conflict/duality of interest for one chemical is sufficient to  
35 disqualify the entire database, as it is assumed that conflicts/dualities of interest may exist for  
36 other chemicals as well.

### G.1.1. Included Sources

1 We applied our criteria to 16 different sources of RfVs and/or OSFs. After application of our criteria,  
2 we were left with eight sources. For those sources which did not meet our criteria, we provide an  
3 explanation of why they were excluded.

4 The following sources were evaluated, met our criteria, and were selected as sources of reference  
5 doses or cancer slope factors for this analysis:

- 6 • **U.S. EPA Integrated Risk Information System (IRIS)**
- 7 • **U.S. EPA Human Health Benchmarks for Pesticides (HHBP)**
- 8 • **U.S. EPA Provisional Peer-Reviewed Toxicity Values (PPRTVs)**
- 9 • **U.S. Agency for Toxic Substances and Disease Registry (ATSDR) Minimum Risk**  
10 **Levels (MRLs)**
- 11 • **California EPA Toxicity Criteria Database**
- 12 • **International Programme On Chemical Safety (IPCS) Concise International Chemical**  
13 **Assessment Documents (CICAD)**

14 The following sources were evaluated, met our criteria, and were selected as sources of qualitative  
15 cancer classifications:

- 16 • **International Agency for Research on Cancer (IARC)**
- 17 • **US National Toxicology Program Report on Carcinogens (RoC)**

18 RfVs and/or OSFs from these data sources are listed in Tables G-1a through G-1d for chemicals used  
19 in hydraulic fracturing fluid formulation, and Tables G-2a through G-2d for chemicals reported in  
20 hydraulic fracturing flowback and produced water.

21 In addition, Table G-1 and Table G-2 also list the EPA's drinking water maximum contaminant levels  
22 (MCLs) and maximum contaminant goal levels (MCLG) when available. These values are generally  
23 based on IRIS values, and are treatment-based. MCL and MCLG values are listed for reference only,  
24 and were not considered in the hazard analysis presented in Chapter 9.

### G.1.2. Excluded Sources

- 25 • **American Conference of Governmental Industrial Hygienists:** The assessments  
26 derived by this body are specific to workers and are not generalizable to the general  
27 public. In addition, this body is not a governmental or intergovernmental body. Thus, these  
28 values were excluded based on criteria 1 and 4.
- 29 • **European Chemicals Bureau, Classification and Labeling Annex I of Directive**  
30 **67/548/EEC:** These assessments are not based on peer-reviewed values, but are based on  
31 data supplied by manufacturers. Further, the enabling legislation states that  
32 "Manufacturers, importers, and downstream users shall examine the information...to  
33 ascertain whether it is adequate, reliable and scientifically valid for the purpose of the

1 evaluation...” This clearly demonstrates that the data and the evaluation are not required  
2 to be peer-reviewed. Thus, these values were excluded based on criterion 2.

- 3 • **Toxicology Excellence for Risk Assessment’s (TERA’s) International Toxicity**  
4 **Estimates for Risk Assessment (ITER):** The ITER database is developed by TERA a  
5 501(c)(3) non-profit. TERA accepts funding from various sources, including interested  
6 parties that may be impacted by their assessment work. Thus, ITER is excluded based on  
7 criteria 1 and 5.
- 8 • **Other U.S. states:** The EPA evaluated values from all states that had values reported on  
9 their websites. If a state’s values were determined to be largely duplicative of the EPA’s  
10 values (e.g., the state adopts EPA values, such as the regional screening levels, and does  
11 not typically generate its own peer-reviewed values), that state’s values were no longer  
12 considered. The EPA contacted those states whose values were determined to not be  
13 duplicative of EPA’s values, and confirmed whether or not a peer review process was used  
14 to develop the state’s values. The EPA determined that of the states with values not  
15 duplicative of the EPA’s values, only California’s values met all of the EPA’s criteria for this  
16 report. Other states with publicly accessible RfVs and/or OSFs include: Alabama, Florida,  
17 Hawaii, and Texas.
- 18 • **WHO Guidelines for Drinking-Water Quality:** The WHO Guidelines’ values are not RfVs,  
19 but rather drinking water values.

## G.2. Glossary of Toxicity Value Terminology

20 This section defines the toxicity values and qualitative cancer classifications that are frequently  
21 found in the sources identified above.

22 **Lowest-observed-adverse-effect level (LOAEL):** The lowest exposure level at which there are  
23 biologically significant increases in frequency or severity of adverse effects between the exposed  
24 population and its appropriate control group. Source: [U.S. EPA \(2011c\)](#).

25 **Maximum allowable daily level (MADL):** The maximum allowable daily level of a reproductive  
26 toxicant at which the chemical would have no observable adverse reproductive effect, assuming  
27 exposure at 1,000 times that level. Source: [OEHHA \(2012\)](#).

28 **Maximum contaminant level (MCL):** The highest level of a contaminant that is allowed in  
29 drinking water. MCLs are set as close to MCLGs as feasible using the best available treatment  
30 technology and taking cost into consideration. MCLs are enforceable standards. Source: [U.S. EPA](#)  
31 [\(2014b\)](#).

32 **Maximum contaminant level goal (MCLG):** The level of a contaminant in drinking water below  
33 which there is no known or expected risk to health. MCLGs allow for a margin of safety and are  
34 nonenforceable public health goals. Source: [U.S. EPA \(2014b\)](#).

35 **Minimum risk level (MRL):** An ATSDR estimate of daily human exposure to a hazardous substance  
36 at or below which the substance is unlikely to pose a measurable risk of harmful (adverse),

1 noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a  
2 specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of  
3 harmful (adverse) health effects.

- 4 • **Chronic MRL:** Duration of exposure is 365 days or longer.
- 5 • **Intermediate MRL:** Duration of exposure is >14 to 364 days.
- 6 • **Acute MRL:** Duration of exposure is 1 to 14 days.

7 Source: [ATSDR \(2009\)](#).

8 **No-observed-adverse-effect level (NOAEL):** The highest exposure level at which there are no  
9 biologically significant increases in the frequency or severity of adverse effect between the exposed  
10 population and its appropriate control; some effects may be produced at this level, but they are not  
11 considered adverse or precursors of adverse effects. Source: [U.S. EPA \(2011c\)](#).

12 **Oral slope factor (OSF):** An upper-bound, approximating a 95% confidence limit, on the increased  
13 cancer risk from a lifetime oral exposure to an agent. This estimate, usually expressed in units of  
14 proportion (of a population) affected per mg/kg-day, is generally reserved for use in the low-dose  
15 region of the dose-response relationship, that is, for exposures corresponding to risks less than 1 in  
16 100. Source: [U.S. EPA \(2011c\)](#).

17 **Reference dose (RfD) (U.S. EPA IRIS and PPRTV definition):** An estimate (with uncertainty  
18 spanning perhaps an order of magnitude) of a daily oral exposure to the human population  
19 (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects  
20 during a lifetime. It can be derived from a NOAEL, LOAEL, or benchmark dose, with uncertainty  
21 factors generally applied to reflect limitations of the data used. The RfD is generally used in the  
22 EPA's noncancer health assessments.

- 23 • **Chronic RfD:** Duration of exposure is up to a lifetime.
- 24 • **Subchronic RfD (sRfD):** Duration of exposure is up to 10% of an average lifespan.

25 Source: [U.S. EPA \(2011c\)](#).

26 **Reference dose (RfD) (U.S. EPA HHBP definition):** The particular concentration of a chemical  
27 that is known not to cause health problems. A standard that also may be referred to as the  
28 acceptable daily intake. Derived using the same EPA guidance for IRIS and PPRTV RfD  
29 determination. Source: [U.S. EPA \(2015e\)](#).

30 **Tolerable daily intake (TDI):** An estimate of the intake of a substance, expressed on a body mass  
31 basis, to which an individual in a (sub) population may be exposed daily over its lifetime without  
32 appreciable health risk. Source: [WHO \(2015\)](#).

33 **Weight-of-evidence (WOE) characterization for carcinogenicity:** A system used for  
34 characterizing the extent to which the available data support the hypothesis that an agent causes  
35 cancer in humans.

- 1       • **EPA 1986 guidelines:** Under the EPA's 1986 risk assessment guidelines, the WOE was  
2 described by categories "A through E," with Group A for known human carcinogens through  
3 Group E for agents with evidence of noncarcinogenicity. Five standard WOE descriptors  
4 were used:
- 5           ○ A: Human carcinogen
  - 6           ○ B1: Probable human carcinogen—based on limited evidence of carcinogenicity in  
7 humans and sufficient evidence of carcinogenicity in animals
  - 8           ○ B2: Probable human carcinogen—based on sufficient evidence of carcinogenicity in  
9 animals
  - 10          ○ C: Possible human carcinogen
  - 11          ○ D: Not classifiable as to human carcinogenicity
  - 12          ○ E: Evidence of noncarcinogenicity for humans

13       Source: [U.S. EPA \(2011c\)](#).

- 14       • **EPA 1996 proposed guidelines:** The EPA's 1996 proposed guidelines outlined a major  
15 change in the way hazard evidence was weighted in reaching conclusions about the human  
16 carcinogenic potential of agents. These guidelines replaced the WOE letter categories with  
17 the use of standard descriptors of conclusions incorporated into a brief narrative. Three  
18 categories of descriptors with the narrative were used:

- 19           ○ Known/likely
- 20           ○ Cannot be determined
- 21           ○ Not likely

22       Source: [U.S. EPA \(1996\)](#).

- 23       • **EPA 1999 guidelines:** The 1999 guidelines adopted a framework incorporating hazard  
24 identification, dose-response assessment, exposure assessment, and risk characterization  
25 with an emphasis on characterization of evidence and conclusions in each part of the  
26 assessment. Five descriptors summarizing the WOE in the narrative were used:

- 27           ○ Carcinogenic to humans
- 28           ○ Likely to be carcinogenic to humans
- 29           ○ Suggestive evidence of carcinogenicity, but not sufficient to assess human  
30 carcinogenic potential
- 31           ○ Data are inadequate for an assessment of human carcinogenic potential
- 32           ○ Not likely to be carcinogenic to humans

33       Source: [U.S. EPA \(1999\)](#).

- 34       • **EPA 2005 guidelines:** The approach outlined in the EPA's 2005 guidelines for carcinogen  
35 risk assessment considers all scientific information in determining whether and under what  
36 conditions an agent may cause cancer in humans and provides a narrative approach to

1 characterize carcinogenicity rather than categories. Five standard WOE descriptors are  
2 used as part of the narrative:

- 3 ○ Carcinogenic to humans
- 4 ○ Likely to be carcinogenic to humans
- 5 ○ Suggestive evidence of carcinogenic potential
- 6 ○ Inadequate information to assess carcinogenic potential
- 7 ○ Not likely to be carcinogenic to humans

8 Source: [U.S. EPA \(2011c\)](#).

- 9 • **IARC Monographs on the evaluation of carcinogenic risks to humans:** The IARC  
10 classifies carcinogen risk as a matter of scientific judgement that reflects the strength of the  
11 evidence derived from studies in humans, in experimental animals, from mechanistic data,  
12 and from other relevant data. Five WOE classifications are used:

- 13 ○ Group 1: Carcinogenic to humans
- 14 ○ Group 2A: Probably carcinogenic to humans
- 15 ○ Group 2B: Possibly carcinogenic to humans
- 16 ○ Group 3: Not classifiable as to its carcinogenicity to humans
- 17 ○ Group 4: Probably not carcinogenic to humans

18 Source: [IARC \(2015\)](#).

- 19 • **NTP:** The NTP describes the results of individual experiments on a chemical agent and  
20 notes the strength of the evidence for conclusions regarding each study. Negative results, in  
21 which the study animals do not have a greater incidence of neoplasia than control animals,  
22 do not necessarily mean that a chemical is not a carcinogen, inasmuch as the experiments  
23 are conducted under a limited set of conditions. Positive results demonstrate that a  
24 chemical is carcinogenic for laboratory animals under the conditions of the study and  
25 indicate that exposure to the chemical has the potential for hazard to humans. For each  
26 separate experiment, one of the following five categories is selected to describe the findings.  
27 These categories refer to the strength of the experimental evidence and not to potency or  
28 mechanism.

- 29 ○ Clear evidence of carcinogenic activity
- 30 ○ Some evidence of carcinogenic activity
- 31 ○ Equivocal evidence of carcinogenic activity
- 32 ○ No evidence of carcinogenic activity
- 33 ○ Inadequate study of carcinogenic activity

34 Source: [NTP \(2014a\)](#).

- 35 • **The RoC** is a congressionally mandated, science-based, public health report that identifies  
36 agents, substances, mixtures, or exposures (collectively called “substances”) in our



1 environment that may potentially put people in the United States at increased risk for  
2 cancer. NTP prepares the RoC on behalf of the Secretary of the Health and Human Services.  
3 The listing criteria in the RoC Document are:

- 4           ○ Known to be a human carcinogen
- 5           ○ Reasonably anticipated to be a human carcinogen

6 Source: [NTP \(2014b\)](#).

### G.3. Tables

**Table G-1a. Chemicals reported to be used in hydraulic fracturing fluids, with available federal chronic RfVs and OSFs.**

Chemicals from the FracFocus database are listed first, ranked by IRIS reference dose (RfD). The “--” symbol indicates that no value was available from the sources consulted. Additionally, an “x” indicates the availability of usage data from FracFocus ([U.S. EPA, 2015a](http://www.fracfocus.com)) and physicochemical properties data from EPI Suite™ (see Appendix C). Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>			Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)
Acrylamide	79-06-1	x	x	0.002	0.5	"Likely to be carcinogenic to humans"	--	--	--	0.001	--	0	--
Propargyl alcohol	107-19-7	x	x	0.002	--	--	--	--	--	--	--	--	--
Furfural	98-01-1	x	x	0.003	--	--	--	--	--	--	0.01	--	--
<i>Benzene</i>	<i>71-43-2</i>	x	x	<i>0.004</i>	<i>0.015-0.055</i>	<i>A</i>	--	--	--	<i>0.0005</i>	--	<i>0</i>	<i>0.005</i>
<i>Dichloromethane</i>	<i>75-09-2</i>	x	x	<i>0.006</i>	<i>0.002</i>	<i>"Likely to be carcinogenic in humans"</i>	--	--	--	<i>0.06</i>	--	<i>0</i>	<i>0.005</i>
<i>Naphthalene</i>	<i>91-20-3</i>	x	x	<i>0.02</i>	--	<i>"Data are inadequate to assess human carcinogenic potential"</i>	--	--	--	--	--	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
1,4-Dioxane	123-91-1	x	x	0.03	0.1	"Likely to be carcinogenic to humans"	--	--	--	0.1	--	--	--
Sodium chlorite	7758-19-2	x		0.03	--	"Data are inadequate to assess human carcinogenicity"	--	--	--	--	--	1	0.8
Chlorine dioxide	10049-04-4	x		0.03	--	"Data are inadequate to assess human carcinogenicity"	--	--	--	--	--	--	--
1,3-Dichloropropene	542-75-6	x	x	0.03	0.05	"Likely to be a human carcinogen"	--	--	--	0.03	--	--	--
Bisphenol A	80-05-7	x	x	0.05	--	--	--	--	--	--	--	--	--
Toluene	108-88-3	x	x	0.08	--	"Inadequate information to assess the carcinogenic potential"	--	--	--	--	--	1	1
Ethylbenzene	100-41-4	x	x	0.1	--	D	--	--	--	--	--	0.7	0.7

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
1-Butanol	71-36-3	x	x	0.1	--	D	--	--	--	--	--	--	--
<i>Cumene</i>	98-82-8	x	x	0.1	--	D	--	--	--	--	--	--	--
<i>Acetophenone</i>	98-86-2	x	x	0.1	--	D	--	--	--	--	--	--	--
2-Butoxyethanol	111-76-2	x	x	0.1	--	"Not likely to be carcinogenic to humans"	--	--	--	--	--	--	--
<i>Xylenes</i>	1330-20-7	x	x	0.2	--	"Data are inadequate to assess the carcinogenic potential"	--	--	--	0.2	--	10	10
Formaldehyde	50-00-0	x	x	0.2	--	B1	--	--	--	0.2	--	--	--
<i>Phenol</i>	108-95-2	x	x	0.3	--	"Data are inadequate for an assessment of human carcinogenic potential"	--	--	--	--	--	--	--
2-Methyl-1-propanol	78-83-1	x	x	0.3	--	--	--	--	--	--	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Acetone	67-64-1	x	x	0.9	--	"Data are inadequate for an assessment of human carcinogenic potential"	--	--	--	--	--	--	--
Ethyl acetate	141-78-6	x	x	0.9	--	--	--	--	IN	--	--	--	--
Ethylene glycol	107-21-1	x	x	2	--	--	--	--	--	--	--	--	--
Methanol	67-56-1	x	x	2	--	--	--	--	--	--	--	--	--
Benzoic acid	65-85-0	x	x	4	--	D	--	--	--	--	--	--	--
Aniline	62-53-3	x	x	--	0.0057	B2	0.007	--	--	--	--	--	--
Benzyl chloride	100-44-7	x	x	--	0.17	B2	0.002	--	--	--	--	--	--
(E)-Crotonaldehyde	123-73-9	x	x	--	--	C	0.001	--	--	--	--	--	--
N,N-Dimethylformamide	68-12-2	x	x	--	--	--	0.1	--	IN	--	--	--	--
Epichlorohydrin	106-89-8	x	x	--	0.0099	B2	0.006	--	--	--	--	0	--
1,2-Propylene glycol	57-55-6	x	x	--	--	--	20	--	NL	--	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
2-(2-Butoxyethoxy) ethanol	112-34-5	x	x	--	--	--	0.03	--	IN	--	--	--	--
Hexanedioic acid	124-04-9	x	x	--	--	--	2	--	--	--	--	--	--
Quinoline	91-22-5	x	x	--	3	"Likely to be carcinogenic in humans"	--	--	--	--	--	--	--
Ethylenediamine	107-15-3	x	x	--	--	D	0.09	--	IN	--	--	--	--
<i>Formic acid</i>	<i>64-18-6</i>	x	x	--	--	--	<i>0.9</i>	--	<i>IN</i>	--	--	--	--
Sodium chlorate	7775-09-9	x		--	--	--	--	--	--	--	0.03	--	--
Quaternary ammonium compounds, benzyl-C12-16-alkyldimethyl, chlorides	68424-85-1	x		--	--	--	--	--	--	--	0.44	--	--
Benzenesulfonic acid, C10-16-alkyl derivs.	68584-22-5	x		--	--	--	--	--	--	--	0.5	--	--
Ammonium phosphate	7722-76-1	x		--	--	--	49	--	IN	--	--	--	--
Didecyldimethylammonium chloride	7173-51-5	x	x	--	--	--	--	--	--	--	0.1	--	--
2-(Thiocyanomethylthio)benzothiazole	21564-17-0	x	x	--	--	--	--	--	--	--	0.01	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Mineral oil - includes paraffin oil	8012-95-1	x		--	--	--	3	--	IN	--	--	--	--
Trisodium phosphate	7601-54-9	x		--	--	--	49	--	IN	--	--	--	--
Triphosphoric acid, pentasodium salt	7758-29-4	x		--	--	--	49	--	IN	--	--	--	--
<i>Aluminum</i>	7429-90-5	x		--	--	--	1	--	IN	1	--	--	--
Phosphoric acid	7664-38-2	x		--	--	--	48.6	--	IN	--	--	--	--
<i>Iron</i>	7439-89-6	x		--	--	--	0.7	--	IN	--	--	--	--
Tricalcium phosphate	7758-87-4	x		--	--	--	49	--	IN	--	--	--	--
<i>Bis(2-chloroethyl) ether</i>	111-44-4	x	x	--	1.1	B2	--	--	--	--	--	--	--
Dodecylbenzenesulfonic acid	27176-87-0	x	x	--	--	--	--	--	--	--	0.5	--	--
Hydrazine	302-01-2	x		--	3	B2	--	--	--	--	--	--	--
Tetrasodium pyrophosphate	7722-88-5	x		--	--	--	49	--	IN	--	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.



Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Potassium phosphate, tribasic	7778-53-2	x		--	--	--	49	--	IN	--	--	--	--
Sodium trimetaphosphate	7785-84-4	x		--	--	--	49	--	IN	--	--	--	--
Arsenic	7440-38-2			0.0003	1.5	A	--	--	--	0.0003	--	0	0.010
Phosphine	7803-51-2			0.0003	--	D	--	--	--	--	--	--	--
Acrolein	107-02-8		x	0.0005	--	"Data are inadequate for an assessment of human carcinogenic potential"	--	--	--	--	--	--	--
Chromium (VI)	18540-29-9			0.003	--	A (inhaled); D(oral)	--	--	--	0.0009	--	--	--
Di(2-ethylhexyl) phthalate	117-81-7		x	0.02	0.014	B2	--	--	--	0.06	--	0	0.006
Chlorine	7782-50-5			0.1	--	--	--	--	--	--	--	--	--
Styrene	100-42-5		x	0.2	--	--	--	--	--	--	--	0.1	0.1

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Zinc	7440-66-6			0.3	--	"Inadequate information to assess carcinogenic potential"	--	--	--	0.3	--	--	--
Acrylic acid	79-10-7		x	0.5	--	--	--	--	IN	--	--	--	--
Chromium (III)	16065-83-1			1.5	--	"Data are inadequate for an assessment of human carcinogenic potential"	--	--	--	--	--	--	--
Phthalic anhydride	85-44-9		x	2	--	--	--	--	--	--	--	--	--
Cyclohexanone	108-94-1		x	5	--	--	--	--	IN	--	--	--	--
1,2-Propylene oxide	75-56-9		x	--	0.24	B2	--	--	--	--	0.001	--	--
2-(2-Ethoxyethoxy) ethanol	111-90-0		x	--	--	--	0.06	--	IN	--	--	--	--
Tributyl phosphate	126-73-8		x	--	--	--	0.01	0.009	LI	0.08	--	--	--
2-Methoxyethanol	109-86-4		x	--	--	--	0.005	--	IN	--	--	--	--
Polyphosphoric acids, sodium salts	68915-31-1			--	--	--	49	--	IN	--	--	--	--
Phosphoric acid, diammonium salt	7783-28-0			--	--	--	49	--	IN	--	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Frac-Focus data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Sodium pyrophosphate	7758-16-9			--	--	--	49	--	IN	--	--	--	--
Phosphoric acid, aluminium sodium salt	7785-88-8			--	--	--	49	--	IN	--	--	--	--

ATSDR = Agency for Toxic Substances and Disease Registry; CASRN = Chemical Abstract Service Registry Number; IRIS = Integrated Risk Information System; PPRTV = Provisional Peer Reviewed Toxicity Values; HHBP = Human Health Benchmarks for Pesticides

<sup>a</sup> Reference dose (RfD) (IRIS and PPRTV definition): An estimate (with uncertainty spanning perhaps an order of magnitude) of a daily oral exposure to the human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime. It can be derived from a no observed-adverse-effect level (NOAEL), lowest observed-adverse-effect level (LOAEL), or benchmark dose (BMD), with uncertainty factors generally applied to reflect limitations of the data used. The RfD is generally used in the EPA's noncancer health assessments. Chronic RfD: Duration of exposure is up to a lifetime.

<sup>b</sup> Oral slope factor (OSF): An upper-bound, approximating a 95% confidence limit, on the increased cancer risk from a lifetime oral exposure to an agent. This estimate, usually expressed in units of proportion (of a population) affected per mg/kg-day, is generally reserved for use in the low dose region of the dose response relationship, that is, for exposures corresponding to risks less than 1 in 100.

<sup>c</sup> Weight of evidence (WOE) characterization for carcinogenicity: A system used for characterizing the extent to which the available data support the hypothesis that an agent causes cancer in humans. See glossary for details.

<sup>d</sup> Minimum risk level (MRL): An ATSDR estimate of daily human exposure to a hazardous substance at or below which the substance is unlikely to pose a measurable risk of harmful (adverse), noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of harmful (adverse) health effects. Chronic MRL: Duration of exposure is 365 days or longer.

<sup>e</sup> Reference dose (RfD) (HHBP definition): The particular concentration of a chemical that is known not to cause health problems. A standard that also may be referred to as the acceptable daily intake. Derived using the same EPA guidance for RfD determination.

<sup>f</sup> Maximum contaminant level goal (MCLG): The level of a contaminant in drinking water below which there is no known or expected risk to health. MCLGs allow for a margin of safety and are nonenforceable public health goals.

<sup>g</sup> Maximum contaminant level (MCL): The highest level of a contaminant that is allowed in drinking water. MCLs are set as close to MCLGs as feasible using the best available treatment technology and taking cost into consideration. MCLs are enforceable standards.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table G-1b. Chemicals reported to be used in hydraulic fracturing fluids, with available state chronic RfVs and OSFs.**

Chemicals from the FracFocus database are listed first, ranked by California EPA maximum allowable daily level (MADL). The "--" symbol indicates that no value was available from the sources consulted. Additionally, an "x" indicates the availability of usage data from FracFocus ([U.S. EPA, 2015a](#)) and physicochemical properties data from EPI Suite™ (see Appendix C). Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical name	CASRN	FracFocus data available	Physico-chemical data available	California	
				Oral MADL <sup>a</sup> (µg/day)	OSF <sup>b</sup> (per mg/kg-day)
Ethylene oxide	75-21-8	x	x	20	0.31
<i>Benzene</i>	<i>71-43-2</i>	x	x	24	<i>0.1</i>
N-Methyl-2-pyrrolidone	872-50-4	x	x	17000	--
Acrylamide	79-06-1	x	x	140	4.5
Aniline	62-53-3	x	x	--	0.0057
Benzyl chloride	100-44-7	x	x	--	0.17
<i>1,4-Dioxane</i>	<i>123-91-1</i>	x	x	--	<i>0.027</i>
Epichlorohydrin	106-89-8	x	x	--	0.08
<i>Ethylbenzene</i>	<i>100-41-4</i>	x	x	--	<i>0.011</i>
Nitrilotriacetic acid	139-13-9	x	x	--	0.0053
Nitrilotriacetic acid trisodium monohydrate	18662-53-8	x	x	--	0.01
Thiourea	62-56-6	x	x	--	0.072
<i>Bis(2-chloroethyl) ether</i>	<i>111-44-4</i>	x	x	--	<i>2.5</i>
1,3-Butadiene	106-99-0	x	x	--	0.6
Hydrazine	302-01-2	x		--	3
1,3-Dichloropropene	542-75-6	x	x	--	0.091
<i>Dichloromethane</i>	<i>75-09-2</i>	x	x	--	<i>0.014</i>
<i>Lead</i>	<i>7439-92-1</i>			<i>0.5</i>	<i>0.0085</i>
<i>Chromium (VI)</i>	<i>18540-29-9</i>			<i>8.2</i>	<i>0.5</i>
2-Methoxyethanol	109-86-4		x	63	--
2-Ethoxyethanol	110-80-5		x	750	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	FracFocus data available	Physico-chemical data available	California	
				Oral MADL <sup>a</sup> (µg/day)	OSF <sup>b</sup> (per mg/kg-day)
<i>Di(2-ethylhexyl) phthalate</i>	117-81-7		x	20 (neonate male) 58 (infant male) 410 (adult)	0.003
1,2-Propylene oxide	75-56-9		x	--	0.24
<i>Arsenic</i>	7440-38-2			--	9.5

<sup>a</sup> Maximum allowable daily level (MADL): The maximum allowable daily level of a reproductive toxicant at which the chemical would have no observable adverse reproductive effect, assuming exposure at 1,000 times that level.

<sup>b</sup> Oral slope factor (OSF): An upper-bound, approximating a 95% confidence limit, on the increased cancer risk from a lifetime oral exposure to an agent. This estimate, usually expressed in units of proportion (of a population) affected per mg/kg day, is generally reserved for use in the low-dose region of the dose-response relationship, that is, for exposures corresponding to risks less than 1 in 100.

**Table G-1c. Chemicals reported to be used in hydraulic fracturing fluids, with available international chronic RfVs and OSFs.**

Chemicals from the FracFocus database are listed first, ranked by CICAD reference dose (TDI, or tolerable daily intake). An “x” indicates the availability of usage data from FracFocus ([U.S. EPA, 2015a](https://www.epa.gov/fracfocus)) and physicochemical properties data from EPI Suite™ (see Appendix C). Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical name	CASRN	FracFocus data available	Physicochemical data available	IPCS Chronic TDI <sup>a</sup> (mg/kg-day)
D-Limonene	5989-27-5	x	x	0.1
Potassium iodide	7681-11-0	x		0.01
Sodium iodide	7681-82-5	x		0.01
Copper(I) iodide	7681-65-4	x		0.01
Glyoxal	107-22-2	x	x	0.2
<i>Ethylene glycol</i>	<i>107-21-1</i>	x	x	<i>0.05</i>
N-Methyl-2-pyrrolidone	872-50-4	x	x	0.6
Strontium chloride	10476-85-4			0.13
<i>Chromium (VI)</i>	<i>18540-29-9</i>			<i>0.0009</i>

IPCS = International Programme on Chemical Safety; CICAD = Concise International Chemical Assessment Documents

<sup>a</sup> Tolerable daily intake (TDI): An estimate of the intake of a substance, expressed on a body mass basis, to which an individual in a (sub) population may be exposed daily over its lifetime without appreciable health risk.

*This document is a draft for review purposes only and does not constitute Agency policy.*

**Table G-1d. Chemicals reported to be used in hydraulic fracturing fluids, with available less-than-chronic RfVs and OSFs.**

Chemicals from the FracFocus database are listed first, ranked by PPRTV subchronic reference dose (sRfD). The "--" symbol indicates that no value was available from the sources consulted. Additionally, an "x" indicates the availability of usage data from FracFocus ([U.S. EPA, 2015a](#)) and physicochemical properties data from EPI Suite™ (see Appendix C). Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical name	CASRN	FracFocus data available	Physico-chemical data available	PPRTV	ATSDR	
				sRfD <sup>a</sup> (mg/kg-day)	Acute oral MRL <sup>b</sup> (mg/kg-day)	Intermediate oral MRL <sup>c</sup> (mg/kg-day)
Benzyl chloride	100-44-7	x	x	0.002	--	--
Epichlorohydrin	106-89-8	x	x	0.006	--	--
(E)-Crotonaldehyde	123-73-9	x	x	0.01	--	--
<i>Benzene</i>	<i>71-43-2</i>	x	x	<i>0.01</i>	--	--
<i>Ethylbenzene</i>	<i>100-41-4</i>	x	x	<i>0.05</i>	--	<i>0.4</i>
Ethylenediamine	107-15-3	x	x	0.2	--	--
N,N-Dimethylformamide	68-12-2	x	x	0.3	--	--
2-(2-Butoxyethoxy)ethanol	112-34-5	x	x	0.3	--	--
Hexane	110-54-3	x	x	0.3	--	--
<i>Xylenes</i>	<i>1330-20-7</i>	x	x	<i>0.4</i>	<i>1</i>	<i>0.4</i>
Antimony trioxide	1309-64-4	x		0.5	--	--
<i>Iron</i>	<i>7439-89-6</i>	x		<i>0.7</i>	--	--
<i>Toluene</i>	<i>108-88-3</i>	x	x	<i>0.8</i>	<i>0.8</i>	<i>0.02</i>
<i>Formic acid</i>	<i>64-18-6</i>	x	x	<i>0.9</i>	--	--
Hexanedioic acid	124-04-9	x	x	2	--	--
Benzoic acid	65-85-0	x	x	4	--	--
<i>1,2-Propylene glycol</i>	<i>57-55-6</i>	x	x	<i>20</i>	--	--
Mineral oil - includes paraffin oil	8012-95-1	x		30	--	--
Phosphoric acid	7664-38-2	x		48.6	--	--
Ammonium phosphate	7722-76-1	x		49	--	--
Trisodium phosphate	7601-54-9	x		49	--	--
Triphosphoric acid, pentasodium salt	7758-29-4	x		49	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	FracFocus data available	Physico-chemical data available	PPRTV	ATSDR	
				sRfD <sup>a</sup> (mg/kg-day)	Acute oral MRL <sup>b</sup> (mg/kg-day)	Intermediate oral MRL <sup>c</sup> (mg/kg-day)
Tricalcium phosphate	7758-87-4	x		49	--	--
Tetrasodium pyrophosphate	7722-88-5	x		49	--	--
Potassium phosphate, tribasic	7778-53-2	x		49	--	--
Sodium trimetaphosphate	7785-84-4	x		49	--	--
Acrylamide	79-06-1	x	x	--	0.01	0.001
<i>1,4-Dioxane</i>	<i>123-91-1</i>	x	x	--	5	0.5
<i>Ethylene glycol</i>	<i>107-21-1</i>	x	x	--	0.8	0.8
<i>Naphthalene</i>	<i>91-20-3</i>	x	x	--	0.6	0.6
<i>Phenol</i>	<i>108-95-2</i>	x	x	--	1	--
Sodium chlorite	7758-19-2	x		--	--	0.1
<i>Acetone</i>	<i>67-64-1</i>	x	x	--	--	2
2-Butoxyethanol	111-76-2	x	x	--	0.4	0.07
<i>Aluminum</i>	<i>7429-90-5</i>	x		--	--	1
Formaldehyde	50-00-0	x	x	--	--	0.3
1,3-Dichloropropene	542-75-6	x	x	--	--	0.04
<i>Dichloromethane</i>	<i>75-09-2</i>	x	x	--	0.2	--
Antimony trichloride	10025-91-9			0.0004	--	--
2-Methoxyethanol	109-86-4		x	0.02	--	--
Tributyl phosphate	126-73-8		x	0.03	1.1	0.08
Acrylic acid	79-10-7		x	0.2	--	--
2-(2-Ethoxyethoxy) ethanol	111-90-0		x	0.6	--	--
Cyclohexanone	108-94-1		x	2	--	--
Polyphosphoric acids, sodium salts	68915-31-1			49	--	--
Phosphoric acid, diammonium salt	7783-28-0			49	--	--
Sodium pyrophosphate	7758-16-9			49	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	FracFocus data available	Physico-chemical data available	PPRTV	ATSDR	
				sRfD <sup>a</sup> (mg/kg-day)	Acute oral MRL <sup>b</sup> (mg/kg-day)	Intermediate oral MRL <sup>c</sup> (mg/kg-day)
Phosphoric acid, aluminium sodium salt	7785-88-8			49	--	--
<i>Acrolein</i>	107-02-8		x	--	--	0.004
<i>Di(2-ethylhexyl) phthalate</i>	117-81-7		x	--	--	0.1
Styrene	100-42-5		x	--	0.1	--
<i>Arsenic</i>	7440-38-2			--	0.005	--
<i>Chromium (VI)</i>	18540-29-9			--	--	0.005
<i>Copper</i>	7440-50-8			--	0.01	0.01
<i>Zinc</i>	7440-66-6			--	--	0.3

<sup>a</sup> Reference dose (RfD): An estimate (with uncertainty spanning perhaps an order of magnitude) of a daily oral exposure to the human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime. It can be derived from a no observed-adverse-effect level (NOAEL), lowest observed-adverse-effect level (LOAEL), or benchmark dose (BMD), with uncertainty factors generally applied to reflect limitations of the data used. The RfD is generally used in the EPA's noncancer health assessments. Subchronic RfD (sRfD): Duration of exposure is up to 10% of an average lifespan.

<sup>b</sup> Minimum risk level (MRL): An ATSDR estimate of daily human exposure to a hazardous substance at or below which the substance is unlikely to pose a measurable risk of harmful (adverse), noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of harmful (adverse) health effects. Acute MRL: Duration of exposure is 1 to 14 days.

<sup>c</sup> Minimum risk level (MRL): An ATSDR estimate of daily human exposure to a hazardous substance at or below which the substance is unlikely to pose a measurable risk of harmful (adverse), noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of harmful (adverse) health effects. Intermediate MRL: Duration of exposure is >14 to 364 days.

*This document is a draft for review purposes only and does not constitute Agency policy.*



**Table G-2a. Chemicals reported to be detected in flowback or produced water, with available federal chronic RfVs and OSFs.**

Chemicals are ranked by IRIS reference dose (RfD). The "--" symbol indicates that no value was available from the sources consulted. Additionally, an "x" indicates the availability of measured concentration data in flowback or produced water (see Appendix E) and physicochemical properties data from EPI Suite™ (see Appendix C). Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical Name	CASRN	Concentration data available	Physicochemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Heptachlor epoxide	1024-57-3		x	0.000013	9.1	B2	--	--	--	--	--	0	0.0002
Phosphorus	7723-14-0	x		0.00002	--	D	--	--	--	--	--	--	--
Aldrin	309-00-2		x	0.00003	17	B2	--	--	--	0.00003	--	--	--
Dieldrin	60-57-1		x	0.00005	16	B2	--	--	--	0.00005	--	--	--
<i>Arsenic</i>	<i>7440-38-2</i>	x		<i>0.0003</i>	<i>1.5</i>	<i>A</i>	--	--	--	<i>0.0003</i>	--	<i>0</i>	<i>0.010</i>
Lindane	58-89-9		x	0.0003	--	--	--	--	--	--	--	0.0002	0.0002
Antimony	7440-36-0	x		0.0004	--	--	--	--	IN	--	--	0.006	0.006
<i>Acrolein</i>	<i>107-02-8</i>		x	<i>0.0005</i>	--	<i>"Data are inadequate for an assessment of human carcinogenic potential"</i>	--	--	--	--	--	--	--
Cadmium	7440-43-9	x		0.0005 (water)	--	B1	--	--	--	0.0001	--	0.005	0.005
Heptachlor	76-44-8		x	0.0005	4.5	B2	--	--	--	--	--	0	0.0004

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical Name	CASRN	Concentration data available	Physico-chemical data available	IRIS			PPRTV			ATSDR Chronic oral MRL <sup>d</sup> (mg/kg-day)	HHBP Chronic RfD <sup>e</sup> (mg/kg-day)	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>			Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Cyanide	57-12-5		x	0.0006	--	"Inadequate information to assess the carcinogenic potential"	--	--	--	--	--	0.2	0.2
Pyridine	110-86-1	x	x	0.001	--	--	--	--	--	--	--	--	--
Methyl bromide	74-83-9		x	0.0014	--	D	--	--	--	--	0.02	--	--
Beryllium	7440-41-7	x		0.002	--	B1	--	--	--	0.002	--	0.004	0.004
Chromium (VI)	18540-29-9			0.003	--	A (inhaled); D(oral)	--	--	--	0.0009	--	--	--
Benzene	71-43-2	x	x	0.004	0.015-0.055	A	--	--	--	0.0005	--	0	0.005
2-Methylnaphthalene	91-57-6	x	x	0.004	--	"Data are inadequate to assess human carcinogenic potential"	--	--	--	0.04	--	--	--
Molybdenum	7439-98-7	x		0.005	--	--	--	--	--	--	--	--	--
Silver	7440-22-4	x		0.005	--	D	--	--	--	--	--	--	--
Selenium	7782-49-2	x		0.005	--	D	--	--	--	0.005	--	0.05	0.05
Dichloromethane	75-09-2		x	0.006	0.002	"Likely to be carcinogenic in humans"	--	--	--	0.06	--	0	0.005

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Concentration data available	Physico-chemical data available	IRIS			PPRTV			ATSDR Chronic oral MRL <sup>d</sup> (mg/kg-day)	HHBP Chronic RfD <sup>e</sup> (mg/kg-day)	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>			Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
1,2,4-Trichlorobenzene	120-82-1		x	0.01	--	D	--	0.029	LI	0.1	--	0.07	0.07
Tetrachloroethylene	127-18-4		x	0.006	0.0021	"Likely to be carcinogenic in humans"	--	--	--	0.008	--	0	0.005
Chloroform	67-66-3	x	x	0.01	--	B2	--	--	--	0.01	--	--	--
<i>Di(2-ethylhexyl) phthalate</i>	117-81-7	x	x	0.02	0.014	B2	--	--	--	0.06	--	0	0.006
<i>Naphthalene</i>	91-20-3	x	x	0.02	--	"Data are inadequate to assess human carcinogenic potential"	--	--	--	--	--	--	--
2,4-Dimethylphenol	105-67-9	x	x	0.02	--	--	--	--	IN	--	--	--	--
Chlorodibromomethane	124-48-1		x	0.02	0.084	C	--	--	--	0.09	--	--	--
Bromoform	75-25-2		x	0.02	0.0079	B2	--	--	--	0.02	--	--	--
Bromodichloromethane	75-27-4		x	0.02	0.062	B2	--	--	--	0.02	--	--	--
Diphenylamine	122-39-4	x	x	0.025	--	--	--	--	IN	--	0.1	--	--
<i>1,4-Dioxane</i>	123-91-1	x	x	0.03	0.1	"Likely to be carcinogenic to humans"	--	--	--	0.1	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Concentration data available	Physico-chemical data available	IRIS			PPRTV			ATSDR Chronic oral MRL <sup>d</sup> (mg/kg-day)	HHBP Chronic RfD <sup>e</sup> (mg/kg-day)	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>			Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Pyrene	129-00-0	x	x	0.03	--	D	--	--	--	--	--	--	--
Fluoranthene	206-44-0	x	x	0.04	--	D	--	--	IN	--	--	--	--
Fluorene	86-73-7	x	x	0.04	--	D	--	--	--	--	--	--	--
m-Cresol	108-39-4	x	x	0.05	--	C	--	--	--	--	--	--	--
o-Cresol	95-48-7	x	x	0.05	--	C	--	--	IN	--	--	--	--
<i>Toluene</i>	<i>108-88-3</i>	<i>x</i>	<i>x</i>	<i>0.08</i>	<i>--</i>	<i>"Inadequate information to assess the carcinogenic potential"</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>1</i>	<i>1</i>
<i>Chlorine</i>	<i>7782-50-5</i>			<i>0.1</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>
<i>Ethylbenzene</i>	<i>100-41-4</i>	<i>x</i>	<i>x</i>	<i>0.1</i>	<i>--</i>	<i>D</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>0.7</i>	<i>0.7</i>
<i>Cumene</i>	<i>98-82-8</i>	<i>x</i>	<i>x</i>	<i>0.1</i>	<i>--</i>	<i>D</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>
<i>Acetophenone</i>	<i>98-86-2</i>	<i>x</i>	<i>x</i>	<i>0.1</i>	<i>--</i>	<i>D</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>
Carbon disulfide	75-15-0	x	x	0.1	--	--	--	--	--	--	--	--	--
Dibutyl phthalate	84-74-2	x	x	0.1	--	D	--	--	--	--	--	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical Name	CASRN	Concentration data available	Physico-chemical data available	IRIS			PPRTV			ATSDR Chronic oral MRL <sup>d</sup> (mg/kg-day)	HHBP Chronic RfD <sup>e</sup> (mg/kg-day)	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>			Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Nitrite	14797-65-0	x		0.1	--	--	--	--	--	--	--	1	1
Manganese	7439-96-5	x		0.14	--	D	--	--	--	--	--	--	--
Xylenes	1330-20-7	x	x	0.2	--	"Data are inadequate to assess the carcinogenic potential"	--	--	--	0.2	--	10	10
Barium	7440-39-3	x		0.2	--	"Not likely to be carcinogenic to humans"	--	--	--	0.2	--	2	2
Boron	7440-42-8	x		0.2	--	"Data are inadequate to assess the carcinogenic potential"	--	--	--	--	--	--	--
Zinc	7440-66-6	x		0.3	--	"Inadequate information to assess carcinogenic potential"	--	--	--	0.3	--	--	--
Phenol	108-95-2	x	x	0.3	--	"Data are inadequate to assess human carcinogenicity"	--	--	--	--	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Concentration data available	Physico-chemical data available	IRIS			PPRTV			ATSDR Chronic oral MRL <sup>d</sup> (mg/kg-day)	HHBP Chronic RfD <sup>e</sup> (mg/kg-day)	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>			Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Strontium	7440-24-6	x		0.6	--	--	--	--	--	--	--	--	--
Methyl ethyl ketone	78-93-3		x	0.6	--	"Data are inadequate to assess carcinogenic potential"	--	--	--	--	--	--	--
Diethyl phthalate	84-66-2		x	0.8	--	D	--	--	--	--	--	--	--
Acetone	67-64-1	x	x	0.9	--	"Data are inadequate to assess human carcinogenicity"	--	--	--	--	--	--	--
Chromium (III)	16065-83-1			1.5	--	"Data are inadequate to assess human carcinogenicity"	--	--	--	--	--	--	--
Nitrate	14797-55-8	x		1.6	--	--	--	--	--	--	--	10	10
Ethylene glycol	107-21-1		x	2	--	--	--	--	--	--	--	--	--
Methanol	67-56-1		x	2	--	--	--	--	--	--	--	--	--
1,2-Propylene glycol	57-55-6		x	--	--	--	20	--	NL	--	--	--	--
Formic acid	64-18-6		x	--	--	--	0.9	--	IN	--	--	--	--
Aluminum	7429-90-5	x		--	--	--	1	--	IN	1	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Concentration data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)	Public health goal <sup>f</sup> (MCLG) (mg/L)	MCL <sup>g</sup> (mg/L)
Iron	7439-89-6	x		--	--	--	0.7	--	IN	--	--	--	--
Bis(2-chloroethyl) ether	111-44-4		x	--	1.1	B2	--	--	--	--	--	--	--
Benzyl alcohol	100-51-6	x	x	--	--	--	0.1	--	IN	--	--	--	--
Butylbenzene	104-51-8		x	--	--	--	0.05	--	IN	--	--	--	--
Acrylonitrile	107-13-1		x	--	0.54	B1	--	--	--	0.04	--	--	--
Phorate	298-02-2		x	--	--	--	--	--	--	--	0.0005	--	--
beta-Hexachloro cyclohexane	319-85-7		x	--	1.8	C	--	--	--	--	--	--	--
Benzo(a)pyrene	50-32-8	x	x	--	7.3	B2	--	--	--	--	--	0	0.0002
p,p'-DDE	72-55-9		x	--	0.34	B2	--	--	--	--	--	--	--
Lithium	7439-93-2	x		--	--	--	0.002	--	IN	--	--	--	--

This document is a draft for review purposes only and does not constitute Agency policy.

Chemical Name	CASRN	Concentration data available	Physico-chemical data available	IRIS			PPRTV			ATSDR	HHBP	National Primary Drinking Water Regulations	
				Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>	Chronic RfD <sup>a</sup> (mg/kg-day)	OSF <sup>b</sup> (per mg/kg-day)	Cancer WOE characterization <sup>c</sup>			Chronic oral MRL <sup>d</sup> (mg/kg-day)	Chronic RfD <sup>e</sup> (mg/kg-day)
Cobalt	7440-48-4	x		--	--	--	0.0003	--	LI	--	--	--	--
Vanadium	7440-62-2	x		--	--	--	0.00007	--	IN	--	--	--	--
N-Nitrosodiphenylamine	86-30-6	x	x	--	0.0049	B2	--	--	--	--	--	--	--

ATSDR = Agency for Toxic Substances and Disease Registry; CASRN = Chemical Abstract Service Registry Number; IRIS = Integrated Risk Information System; PPRTV = Provisional Peer Reviewed Toxicity Values; HHBP = Human Health Benchmarks for Pesticides

<sup>a</sup> Reference dose (RfD) (IRIS and PPRTV definition): An estimate (with uncertainty spanning perhaps an order of magnitude) of a daily oral exposure to the human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime. It can be derived from a no observed-adverse-effect level (NOAEL), lowest observed-adverse-effect level (LOAEL), or benchmark dose (BMD), with uncertainty factors generally applied to reflect limitations of the data used. The RfD is generally used in the EPA's noncancer health assessments. Chronic RfD: Duration of exposure is up to a lifetime.

<sup>b</sup> Oral slope factor (OSF): An upper-bound, approximating a 95% confidence limit, on the increased cancer risk from a lifetime oral exposure to an agent. This estimate, usually expressed in units of proportion (of a population) affected per mg/kg day, is generally reserved for use in the low dose region of the dose response relationship, that is, for exposures corresponding to risks less than 1 in 100.

<sup>c</sup> Weight of evidence (WOE) characterization for carcinogenicity: A system used for characterizing the extent to which the available data support the hypothesis that an agent causes cancer in humans. See glossary for details.

<sup>d</sup> Minimum risk level (MRL): An ATSDR estimate of daily human exposure to a hazardous substance at or below which the substance is unlikely to pose a measurable risk of harmful (adverse), noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of harmful (adverse) health effects. Chronic MRL: Duration of exposure is 365 days or longer.

<sup>e</sup> Reference dose (RfD) (HHBP definition): The particular concentration of a chemical that is known not to cause health problems. A standard that also may be referred to as the acceptable daily intake. Derived using the same EPA guidance for RfD determination.

<sup>f</sup> Maximum contaminant level goal (MCLG): The level of a contaminant in drinking water below which there is no known or expected risk to health. MCLGs allow for a margin of safety and are nonenforceable public health goals.

<sup>g</sup> Maximum contaminant level (MCL): The highest level of a contaminant that is allowed in drinking water. MCLs are set as close to MCLGs as feasible using the best available treatment technology and taking cost into consideration. MCLs are enforceable standards.



**Table G-2b. Chemicals reported to be detected in flowback or produced water, with available state chronic RfVs and OSFs.**

Chemicals are ranked by California EPA maximum allowable daily level (MADL). The "--" symbol indicates that no value was available from the sources consulted. Additionally, an "x" indicates the availability of measured concentration data in flowback or produced water (see Appendix E) and physicochemical properties data from EPI Suite™ (see Appendix C). Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical name	CASRN	Concentration data available	Physico-chemical data available	California	
				Oral MADL <sup>a</sup> (µg/day)	OSF <sup>b</sup> (per mg/kg-day)
<i>Lead</i>	7439-92-1	x		0.5	0.0085
Cadmium	7440-43-9	x		4.1	15
<i>Chromium (VI)</i>	18540-29-9			8.2	0.5
Dibutyl phthalate	84-74-2	x	x	8.7	--
<i>Benzene</i>	71-43-2	x	x	24	0.1
Acrylonitrile	107-13-1		x	--	1
<i>1,4-Dioxane</i>	123-91-1	x	x	--	0.027
<i>Ethylbenzene</i>	100-41-4	x	x	--	0.011
<i>Di(2-ethylhexyl) phthalate</i>	117-81-7	x	x	20 (neonate male) 58 (infant male) 410 (adult)	0.003
<i>Arsenic</i>	7440-38-2	x		--	9.5
<i>Bis(2-chloroethyl) ether</i>	111-44-4		x	--	2.5
Heptachlor epoxide	1024-57-3		x	--	5.5
1,2,4-Trichlorobenzene	120-82-1		x	--	0.0036
Tetrachloroethylene	127-18-4		x	--	0.051
Indeno(1,2,3-cd)pyrene	193-39-5	x	x	--	1.2
Benzo(b)fluoranthene	205-99-2	x	x	--	1.2
Benzo(k)fluoranthene	207-08-9	x	x	--	1.2
Aldrin	309-00-2		x	--	17
beta-Hexachlorocyclohexane	319-85-7		x	--	1.5
Benzo(a)pyrene	50-32-8	x	x	--	2.9
Dibenz(a,h)anthracene	53-70-3	x	x	--	4.1
7,12-Dimethylbenz(a)anthracene	57-97-6		x	--	250
Lindane	58-89-9		x	--	1.1
Dieldrin	60-57-1		x	--	16
Chloroform	67-66-3	x	x	--	0.019

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Concentration data available	Physico-chemical data available	California	
				Oral MADL <sup>a</sup> (µg/day)	OSF <sup>b</sup> (per mg/kg-day)
p,p'-DDE	72-55-9		x	--	0.34
Bromoform	75-25-2		x	--	0.011
Bromodichloromethane	75-27-4		x	--	0.13
Heptachlor	76-44-8		x	--	4.1
N-Nitrosodiphenylamine	86-30-6	x	x	--	0.009
Safrole	94-59-7		x	--	0.22
<i>Dichloromethane</i>	<i>75-09-2</i>		x	--	<i>0.014</i>

<sup>a</sup> Maximum allowable daily level (MADL): The maximum allowable daily level of a reproductive toxicant at which the chemical would have no observable adverse reproductive effect, assuming exposure at 1,000 times that level.

<sup>b</sup> Oral slope factor (OSF): An upper-bound, approximating a 95% confidence limit, on the increased cancer risk from a lifetime oral exposure to an agent. This estimate, usually expressed in units of proportion (of a population) affected per mg/kg day, is generally reserved for use in the low-dose region of the dose-response relationship, that is, for exposures corresponding to risks less than 1 in 100.

**Table G-2c. Chemicals reported to be detected in flowback or produced water, with available international chronic RfVs and OSFs.**

Chemicals are ranked by CICAD reference dose (TDI – Tolerable Daily Intake). An “x” indicates the availability of measured concentration data in flowback or produced water (see Appendix E) and physicochemical properties data from EPI Suite™ (see Appendix C). Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical name	CASRN	Concentration data available	Physicochemical data available	IPCS Chronic TDI <sup>a</sup> (mg/kg-day)
Heptachlor	76-44-8		x	0.0001
Strontium	7440-24-6	x		0.13
Chloroform	67-66-3	x	x	0.015
Mercury	7439-97-6	x		0.002
Barium	7440-39-3	x		0.02
Beryllium	7440-41-7	x		0.002
<i>Ethylene glycol</i>	<i>107-21-1</i>		x	<i>0.05</i>
Tetrachloroethene	127-18-4		x	0.05
<i>Chromium (VI)</i>	<i>18540-29-9</i>			<i>0.0009</i>
Diethyl phthalate	84-66-2		x	5

IPCS = International Programme on Chemical Safety; CICAD = Concise International Chemical Assessment Documents

<sup>a</sup> Tolerable Daily Intake (TDI): An estimate of the intake of a substance, expressed on a body mass basis, to which an individual in a (sub) population may be exposed daily over its lifetime without appreciable health risk.

**Table G-2d. Chemicals reported to be detected in flowback or produced water, with available less-than-chronic RfVs and OSFs.**

Chemicals are ranked by PPRTV subchronic reference dose (sRfD). The "--" symbol indicates that no value was available from the sources consulted. Additionally, an "x" indicates the availability of measured concentration data in flowback or produced water (see Appendix E) and physicochemical properties data from EPI Suite™ (see Appendix C). Italicized chemicals are found in both fracturing fluids and flowback/produced water.

Chemical name	CASRN	Concentration data available	Physico-chemical data available	PPRTV	ATSDR	
				sRfD <sup>a</sup> (mg/kg-day)	Acute oral MRL <sup>b</sup> (mg/kg-day)	Intermediate oral MRL <sup>c</sup> (mg/kg-day)
Aldrin	309-00-2		x	0.00004	0.002	--
Antimony	7440-36-0	x		0.0004	--	--
Vanadium	7440-62-2	x		0.0007	--	0.01
Lithium	7439-93-2	x		0.002	--	--
Cobalt	7440-48-4	x		0.003	--	0.01
2-Methylnaphthalene	91-57-6	x	x	0.004	--	--
Methyl bromide	74-83-9		x	0.005	--	0.003
Bromodichloromethane	75-27-4		x	0.008	0.04	--
1,2,3-Trichlorobenzene	87-61-6		x	0.008	--	--
<i>Benzene</i>	<i>71-43-2</i>	x	x	<i>0.01</i>	--	--
p-Cresol	106-44-5	x	x	0.02	--	--
Bromoform	75-25-2		x	0.03	0.7	0.2
<i>Ethylbenzene</i>	<i>100-41-4</i>	x	x	<i>0.05</i>	--	<i>0.4</i>
2,4-Dimethylphenol	105-67-9	x	x	0.05	--	--
Chlorodibromomethane	124-48-1		x	0.07	0.1	--
1,2,4-Trichlorobenzene	120-82-1		x	0.09	--	0.1
Butylbenzene	104-51-8		x	0.1	--	--
Benzyl alcohol	100-51-6	x	x	0.3	--	--
Pyrene	129-00-0	x	x	0.3	--	--
<i>Xylenes</i>	<i>1330-20-7</i>	x	x	<i>0.4</i>	<i>1</i>	<i>0.4</i>
<i>Iron</i>	<i>7439-89-6</i>	x		<i>0.7</i>	--	--
<i>Toluene</i>	<i>108-88-3</i>	x	x	<i>0.8</i>	<i>0.8</i>	<i>0.02</i>
<i>Formic acid</i>	<i>64-18-6</i>		x	<i>0.9</i>	--	--
<i>1,2-Propylene glycol</i>	<i>57-55-6</i>		x	<i>20</i>	--	--

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Concentration data available	Physico-chemical data available	PPRTV	ATSDR	
				sRfD <sup>a</sup> (mg/kg-day)	Acute oral MRL <sup>b</sup> (mg/kg-day)	Intermediate oral MRL <sup>c</sup> (mg/kg-day)
Acrolein	107-02-8		x	--	--	0.004
1,4-Dioxane	123-91-1	x	x	--	5	0.5
Ethylene glycol	107-21-1		x	--	0.8	0.8
Di(2-ethylhexyl) phthalate	117-81-7	x	x	--	--	0.1
Naphthalene	91-20-3	x	x	--	0.6	0.6
Phenol	108-95-2	x	x	--	1	--
Acetone	67-64-1	x	x	--	--	2
Arsenic	7440-38-2	x		--	0.005	--
Chromium (VI)	18540-29-9			--	--	0.005
Copper	7440-50-8	x		--	0.01	0.01
Zinc	7440-66-6	x		--	--	0.3
Aluminum	7429-90-5	x		--	--	1
Acrylonitrile	107-13-1		x	--	0.1	0.01
Dioctyl phthalate	117-84-0	x	x	--	3	0.4
Tetrachloroethylene	127-18-4		x	--	0.008	0.008
Fluoranthene	206-44-0	x	x	0.1	--	0.4
beta-Hexachlorocyclohexane	319-85-7		x	--	0.05	0.0006
Lindane	58-89-9		x	--	0.003	0.00001
Dieldrin	60-57-1		x	--	--	0.0001
Chloroform	67-66-3	x	x	--	0.3	0.1
Strontium	7440-24-6	x		--	--	2
Tin	7440-31-5	x		--	--	0.3
Barium	7440-39-3	x		--	--	0.2
Boron	7440-42-8	x		--	0.2	0.2
Cadmium	7440-43-9	x		--	--	0.0005
Carbon disulfide	75-15-0	x	x	--	0.01	--
Heptachlor	76-44-8		x	--	0.0006	0.0001
Phosphorus	7723-14-0	x		--	--	0.0002

*This document is a draft for review purposes only and does not constitute Agency policy.*

Chemical name	CASRN	Concentration data available	Physico-chemical data available	PPRTV	ATSDR	
				sRfD <sup>a</sup> (mg/kg-day)	Acute oral MRL <sup>b</sup> (mg/kg-day)	Intermediate oral MRL <sup>c</sup> (mg/kg-day)
Diethyl phthalate	84-66-2		x	--	7	6
Dibutyl phthalate	84-74-2	x	x	--	0.5	--
Fluorene	86-73-7	x	x	--	--	0.4
<i>Dichloromethane</i>	<i>75-09-2</i>		x	--	<i>0.2</i>	--

<sup>a</sup> Reference dose (RfD): An estimate (with uncertainty spanning perhaps an order of magnitude) of a daily oral exposure to the human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime. It can be derived from a no observed-adverse-effect level (NOAEL), lowest observed-adverse-effect level (LOAEL), or benchmark dose (BMD), with uncertainty factors generally applied to reflect limitations of the data used. The RfD is generally used in the EPA's noncancer health assessments. Subchronic RfD (sRfD): Duration of exposure is up to 10% of an average lifespan.

<sup>b</sup> Minimum risk level (MRL): An ATSDR estimate of daily human exposure to a hazardous substance at or below which the substance is unlikely to pose a measurable risk of harmful (adverse), noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of harmful (adverse) health effects. Acute MRL: Duration of exposure is 1 to 14 days.

<sup>c</sup> Minimum risk level (MRL): An ATSDR estimate of daily human exposure to a hazardous substance at or below which the substance is unlikely to pose a measurable risk of harmful (adverse), noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of harmful (adverse) health effects. Intermediate MRL: Duration of exposure is >14 to 364 days.

## G.4. References for Appendix G

[ATSDR](http://www.atsdr.cdc.gov/glossary.html) (Agency for Toxic Substances and Disease Registry). (2009). Glossary of terms. Available online at <http://www.atsdr.cdc.gov/glossary.html>

[IARC](http://monographs.iarc.fr/ENG/Classification/index.php) (International Agency for Research on Cancer). (2015). IARC monographs - Classifications. Available online at <http://monographs.iarc.fr/ENG/Classification/index.php>

[NTP](http://ntp.niehs.nih.gov/results/pubs/longterm/defs/index.html) (National Toxicology Program). (2014a). Definition of carcinogenicity results. Available online at <http://ntp.niehs.nih.gov/results/pubs/longterm/defs/index.html>

[NTP](http://ntp.niehs.nih.gov/pubhealth/roc/roc13/index.html) (National Toxicology Program). (2014b). Report on carcinogens. Thirteenth edition. Research Triangle Park, NC: U.S. Department of Health and Human Services, Public Health Service. <http://ntp.niehs.nih.gov/pubhealth/roc/roc13/index.html>

[OEHHA. Title 27. California Code of Regulations Article 8. No Observable Effect Levels. § 25701](http://www.oehha.ca.gov/prop65/law/pdf/zip/RegsArt8.pdf) (2012). <http://www.oehha.ca.gov/prop65/law/pdf/zip/RegsArt8.pdf>

[U.S. EPA](#) (U.S. Environmental Protection Agency). (1996). Proposed guidelines for carcinogen risk assessment [EPA Report]. (EPA/600/P-92/003C). Washington, DC: U.S. Environmental Protection Agency, Risk Assessment Forum.

[U.S. EPA](http://www.epa.gov/raf/publications/pdfs/CANCER_GLS.PDF) (U.S. Environmental Protection Agency). (1999). Guidelines for carcinogen risk assessment [review draft] [EPA Report]. (NCEA-F-0644). Washington, DC. [http://www.epa.gov/raf/publications/pdfs/CANCER\\_GLS.PDF](http://www.epa.gov/raf/publications/pdfs/CANCER_GLS.PDF)

*This document is a draft for review purposes only and does not constitute Agency policy.*

- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011a). Plan to study the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA/600/R-11/122). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development.  
<http://www2.epa.gov/hfstudy/plan-study-potential-impacts-hydraulic-fracturing-drinking-water-resources-epa600r-11122>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011c). Terminology services (TS): Vocabulary catalog - IRIS glossary. Available online at  
[http://ofmpub.epa.gov/sor\\_internet/registry/termreg/searchandretrieve/glossariesandkeywordlists/search.do?details=&glossaryName=IRIS%20Glossary](http://ofmpub.epa.gov/sor_internet/registry/termreg/searchandretrieve/glossariesandkeywordlists/search.do?details=&glossaryName=IRIS%20Glossary) (accessed May 21, 2015).
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012c). Study of the potential impacts of hydraulic fracturing on drinking water resources: Progress report. (EPA/601/R-12/011). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development.  
<http://nepis.epa.gov/exe/ZyPURL.cgi?Dockey=P100FH8M.txt>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014b). Drinking water contaminants. Available online at  
<http://water.epa.gov/drink/contaminants/>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.  
<http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015e). Human health benchmarks for pesticides. Available online at <http://iaspub.epa.gov/apex/pesticides/?p=HHBP:HOME>
- [WHO](#) (World Health Organization). (2015). Concise international chemical assessment documents. Available online at <http://www.who.int/ipcs/publications/cicad/en/>

## Appendix H

---

# Description of EPA Hydraulic Fracturing Study Publications Cited in This Assessment

---

*This document is a draft for review purposes only and does not constitute Agency policy.*



## Appendix H. Description of EPA Hydraulic Fracturing Study Publications Cited in This Assessment

**Table H-1. Titles, descriptions, and citations for EPA hydraulic fracturing study publications cited in this assessment.**

Research project	Description	Citations
<b><i>Analysis of existing data</i></b>		
Literature Review	Review and assessment of existing papers and reports, focusing on peer-reviewed literature	Literature review is incorporated into this document.
Spills Database Analysis	Characterization of hydraulic fracturing-related spills using information obtained from selected state and industry data sources	U.S. EPA (U.S. Environmental Protection Agency). (2015). Review of state and industry spill data: characterization of hydraulic fracturing-related spills [EPA Report]. (EPA/601/R-14/001). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
Service Company Analysis	Analysis of information provided by nine hydraulic fracturing service companies in response to a September 2010 information request on hydraulic fracturing operations	Analysis of data received is incorporated into this document. <sup>1</sup>
Well File Review	Analysis of information provided by nine oil and gas operators in response to an August 2011 information request for 350 well files	U.S. EPA (U.S. Environmental Protection Agency). (2015). Review of well operator files for hydraulically fractured oil and gas production wells: Well design and construction [EPA Report]. (EPA/601/R-14/002). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.  Analysis of data received is also incorporated into this document. <sup>2</sup>

<sup>1</sup> Data received and incorporated into this document is cited as: U.S. EPA (U.S. Environmental Protection Agency). (2013). Data received from oil and gas exploration and production companies, including hydraulic fracturing service companies 2011 to 2013. Non-confidential business information source documents are located in Federal Docket ID: EPA-HQ-ORD2010-0674. Available at <http://www.regulations.gov>

<sup>2</sup> Data received and incorporated into this document is cited as: U.S. EPA (U.S. Environmental Protection Agency). (2011). Sampling data for flowback and produced water provided to EPA by nine oil and gas well operators (non-confidential business information). US Environmental Protection Agency. <http://www.regulations.gov/#!docketDetail:rpp=100:so=DESC:sb=docId:po=0:D=EPA-HQ-ORD-2010-0674>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Research project	Description	Citations
FracFocus Analysis	Analysis of data compiled from FracFocus 1.0, the national hydraulic fracturing chemical registry operated by the Ground Water Protection Council and the Interstate Oil and Gas Compact Commission	<p>U.S. EPA (U.S. Environmental Protection Agency). (2015). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency. <a href="http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf">http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf</a></p> <p>U.S. EPA (U.S. Environmental Protection Agency). (2015). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: project database. Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development.</p> <p>U.S. EPA (U.S. Environmental Protection Agency). (2015). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Data management and quality assessment report [EPA Report]. (EPA/601/R-14/006). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. <a href="http://www2.epa.gov/sites/production/files/2015-03/documents/fracfocus_data_management_report_final_032015_508.pdf">http://www2.epa.gov/sites/production/files/2015-03/documents/fracfocus_data_management_report_final_032015_508.pdf</a></p>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Research project	Description	Citations
<b>Scenario evaluations</b>		
Subsurface Migration Modeling	Numerical modeling of subsurface fluid migration scenarios that explore the potential for fluids, including liquids and gases to move from the fractured zone to drinking water aquifers	<p>Kim, J; Moridis, GJ. (2013). Development of the T+M coupled flow–geomechanical simulator to describe fracture propagation and coupled flow–thermal–geomechanical processes in tight/shale gas systems. <i>Computers and Geosciences</i> 60: 184-198. <a href="http://dx.doi.org/10.1016/j.cageo.2013.04.023">http://dx.doi.org/10.1016/j.cageo.2013.04.023</a></p> <p>Kim, J; Moridis, GJ. (In Press). Numerical analysis of fracture propagation during hydraulic fracturing operations in shale gas systems. <i>International Journal of Rock Mechanics and Mining Sciences</i>.</p> <p>Kim, J; Um, ES; Moridis, GJ. (2014). Fracture Propagation, Fluid Flow, and Geomechanics of Water-Based Hydraulic Fracturing in Shale Gas Systems and Electromagnetic Geophysical Monitoring of Fluid Migration. SPE Hydraulic Fracturing Technology Conference, The Woodlands, Texas, USA. <a href="http://dx.doi.org/10.2118/168578-MS">http://dx.doi.org/10.2118/168578-MS</a></p> <p>Reagan, MT; Moridis, GJ; Johnson, JN; Keen, ND. (2015). Numerical simulation of the environmental impact of hydraulic fracturing of tight/shale gas reservoirs on near-surface groundwater: background, base cases, shallow reservoirs, short-term gas and water transport. <i>Water Resour Res</i> 51: 1-31. <a href="http://dx.doi.org/10.1002/2014WR016086">http://dx.doi.org/10.1002/2014WR016086</a></p> <p>Rutqvist, J; Rinaldi, AP; Cappa, F; Moridis, GJ. (2013). Modeling of fault reactivation and induced seismicity during hydraulic fracturing of shale-gas reservoirs. <i>Journal of Petroleum Science and Engineering</i> 107: 31-44. <a href="http://dx.doi.org/10.1016/j.petrol.2013.04.023">http://dx.doi.org/10.1016/j.petrol.2013.04.023</a></p> <p>Rutqvist, J; Rinaldi, AP; Cappa, F; Moridis, GJ. (2015). Modeling of fault activation and seismicity by injection directly into a fault zone associated with hydraulic fracturing of shale-gas reservoirs. <i>Journal of Petroleum Science and Engineering</i> 127: 377-386. <a href="http://dx.doi.org/10.1016/j.petrol.2015.01.019">http://dx.doi.org/10.1016/j.petrol.2015.01.019</a></p>
Surface Water Modeling	Modeling of concentrations of selected chemicals at public water supplies downstream from wastewater treatment facilities that discharge treated hydraulic fracturing wastewater to surface waters	Weaver, JW; Xu, J; Mravik, SC. (In Press) Scenario analysis of the impact on drinking water intakes from bromide in the discharge of treated oil and gas waste water. <i>J Environ Eng</i> .

*This document is a draft for review purposes only and does not constitute Agency policy.*

Research project	Description	Citations
Water Availability Modeling	Assessment and modeling of current and future scenarios exploring the impact of water usage for hydraulic fracturing on drinking water availability in the Upper Colorado River Basin and the Susquehanna River Basin	U.S. EPA (U.S. Environmental Protection Agency). (2015). Case study analysis of the impacts of water acquisition for hydraulic fracturing on local water availability [EPA Report]. (EPA/600/R-14/179). Washington, D.C.
<b>Laboratory studies</b>		
Source Apportionment Studies	Identification and quantification of the source(s) of high bromide and chloride concentrations at public water supply intakes downstream from wastewater treatment plants discharging treated hydraulic fracturing wastewater to surface waters	U.S. EPA (U.S. Environmental Protection Agency). (2015). Sources contributing bromide and inorganic species to drinking water intakes on the Allegheny river in western Pennsylvania [EPA Report]. (EPA/600/R-14/430). Washington, D.C.
Analytical Method Development	Development of analytical methods for selected chemicals found in hydraulic fracturing fluids or wastewater	DeArmond, PD; DiGoregorio, AL. (2013). Characterization of liquid chromatography-tandem mass spectrometry method for the determination of acrylamide in complex environmental samples. Anal Bioanal Chem 405: 4159-4166. <a href="http://dx.doi.org/10.1007/s00216-013-6822-4">http://dx.doi.org/10.1007/s00216-013-6822-4</a> DeArmond, PD; DiGoregorio, AL. (2013). Rapid liquid chromatography-tandem mass spectrometry-based method for the analysis of alcohol ethoxylates and alkylphenol ethoxylates in environmental samples. J Chromatogr A 1305: 154-163. <a href="http://dx.doi.org/10.1016/j.chroma.2013.07.017">http://dx.doi.org/10.1016/j.chroma.2013.07.017</a>

*This document is a draft for review purposes only and does not constitute Agency policy.*

Research project	Description	Citations
Analytical Method Development (cont.)	Development of analytical methods for selected chemicals found in hydraulic fracturing fluids or wastewater (cont.)	U.S. EPA (U.S. Environmental Protection Agency). (2014). Development of rapid radiochemical method for gross alpha and gross beta activity concentration in flowback and produced waters from hydraulic fracturing operations [EPA Report]. (EPA/600/R-14/107). Washington, D.C. <a href="http://www2.epa.gov/hfstudy/development-rapid-radiochemical-method-gross-alpha-and-gross-beta-activity-concentration">http://www2.epa.gov/hfstudy/development-rapid-radiochemical-method-gross-alpha-and-gross-beta-activity-concentration</a> U.S. EPA (U.S. Environmental Protection Agency). (2014). The verification of a method for detecting and quantifying diethylene glycol, triethylene glycol, tetraethylene glycol, 2-butoxyethanol and 2-methoxyethanol in ground and surface waters [EPA Report]. (EPA/600/R-14/008). Washington, D.C. <a href="http://www2.epa.gov/hfstudy/verification-method-detecting-and-quantifying-diethylene-glycol-triethylene-glycol">http://www2.epa.gov/hfstudy/verification-method-detecting-and-quantifying-diethylene-glycol-triethylene-glycol</a>
<b>Retrospective case studies</b>		
<i>Investigations of whether reported drinking water impacts may be associated with or caused by hydraulic fracturing activities</i>		
Las Animas and Huerfano Counties, Colorado	Investigation of potential drinking water impacts from coalbed methane extraction in the Raton Basin	U.S. EPA (U.S. Environmental Protection Agency). (2015). Retrospective case study in the Raton Basin, Colorado: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/091). Washington, D.C.
Dunn County, North Dakota	Investigation of potential drinking water impacts from a well blowout during hydraulic fracturing for oil in the Bakken Shale	U.S. EPA (U.S. Environmental Protection Agency). (2015). Retrospective case study in Killdeer, North Dakota: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/103). Washington, D.C.
Bradford County, Pennsylvania	Investigation of potential drinking water impacts from shale gas development in the Marcellus Shale	U.S. EPA (U.S. Environmental Protection Agency). (2014). Retrospective case study in northeastern Pennsylvania: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/088). Washington, D.C.
Washington County, Pennsylvania	Investigation of potential drinking water impacts from shale gas development in the Marcellus Shale	U.S. EPA (U.S. Environmental Protection Agency). (2015). Retrospective case study in southwestern Pennsylvania: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/084). Washington, D.C.

*This document is a draft for review purposes only and does not constitute Agency policy.*

---

Research project	Description	Citations
Wise County, Texas	Investigation of potential drinking water impacts from shale gas development in the Barnett Shale	U.S. EPA (U.S. Environmental Protection Agency). (2015). Retrospective case study in Wise County, Texas: study of the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA 600/R-14/090). Washington, D.C.

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

# Appendix I

---

## Unit Conversions

## Appendix I. Unit Conversions

### 1 LENGTH

---

2 1 in (inch) = 2.54 cm (centimeters)  
 3 25.4 mm (millimeters)  
 4 25,400  $\mu\text{m}$  (microns)

5 1 ft (foot) = 0.3048 m (meters)  
 6 30.48 cm

7 1 mi (mile) = 5,280 ft  
 8 1,609.344 m  
 9 1.6093 km (kilometers)

### 10 AREA

---

11 1 ft<sup>2</sup> (square foot) = 0.0929 m<sup>2</sup> (square meters)

12 1 acre = 43,560 ft<sup>2</sup>  
 13 = 0.0016 mi<sup>2</sup> (square miles)  
 14 = 0.4047 ha (hectares)  
 15 = 4,046.825 m<sup>2</sup>

16 1 mi<sup>2</sup> = 639.9974 ac  
 17 = 258.9988 ha  
 18 = 2.5899 km<sup>2</sup> (square kilometers)

### 19 MASS

---

20 1 lb (pound) = 453.5924 g (grams)  
 21 = 0.4536 kg (kilograms)

22 1 ton (short ton, U.S.) = 2,000 lbs  
 23 = 907.185 kg  
 24 = 0.9072 metric tons

---

*This document is a draft for review purposes only and does not constitute Agency policy.*



---

**1 VOLUME OR CAPACITY (LIQUID MEASURE)**


---

2	1 bbl (barrel)	=	42 gal (gallons, U.S.)
3		=	158.9873 L (liters)
4	1 gal	=	231 in <sup>3</sup> (cubic inches)
5		=	0.1337 ft <sup>3</sup> (cubic feet)
6		=	3.7854 L
7		=	0.0039 m <sup>3</sup> (cubic meters)
8		=	3.7854 × 10 <sup>-9</sup> Mm <sup>3</sup> (million cubic meters)
9	1 Mgal (million gallons)	=	1.3368 × 10 <sup>5</sup> ft <sup>3</sup>
10	1 ft <sup>3</sup>	=	1,728 in <sup>3</sup>
11		=	7.4805 gal
12		=	28.3169 L
13		=	0.0283 m <sup>3</sup>
14	1 mi <sup>3</sup> (cubic mile)	=	4.1682 km <sup>3</sup> (cubic kilometers)
15			

**16 CONCENTRATION**


---

17	1 mg/L (milligram per liter)	=	1.0 × 10 <sup>-6</sup> kg/L (kilograms per liter)
18		=	1.0 × 10 <sup>-3</sup> g/L (grams per liter)
19		=	1,000 µg/L (micrograms per liter)
20		=	1.001 ppm (parts per million)
21		=	8.3454 × 10 <sup>-6</sup> lb/gal (pounds per gallon)
22		=	6.2428 × 10 <sup>-5</sup> lb/ft <sup>3</sup> (pounds per cubic foot)

**23 SPEED**


---

24	1 mi/hr (mile per hour)	=	1.4666̄ ft/s (feet per second)
25		=	0.4470 m/s (meters per second)

**26 DENSITY**


---

27	1 g/mL	=	1,000 g/L
28		=	1.0 × 10 <sup>6</sup> mg/L

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

---

**1 VOLUME PER UNIT TIME**


---

2	1 ft <sup>3</sup> /s (cubic foot per second)	=	448.8312 gpm (gallons per minute)
3		=	0.6163 Mgal/d (million gallons per day)
4		=	28.3169 L/s (liters per second)
5		=	0.0283 m <sup>3</sup> /s (cubic meters per second)
6	1 ft <sup>3</sup> /day (cubic feet per day)	=	0.0052 gpm
7		=	7.4805 gpd
8		=	0.0283 m <sup>3</sup> /d (cubic meters per day)
9			
10	1 bbl/day (barrel per day)	=	42 gpd
11		=	158.9873 L/d (liters per day)

**12 PRESSURE**


---

13	1 psi (pound per square inch)	=	6,894.7573 Pa (pascals)
14		=	0.068 atm (standard atmospheres)

**15 RADIATION**


---

**16 Activity**

17	1 Ci (curie)	=	$3.7 \times 10^{10}$ decays per second
18	1 Bq (becquerel)	≈	$2.703 \times 10^{-11}$ Ci
19		≈	27.027 pCi (picocuries)
20	1 pCi	=	0.037 Bq
21		=	0.037 decays per second
22		=	2.22 decays per minute

**23 Exposure**

24	1 rem (röntgen equivalent in man)	=	0.01 Sv (sieverts)
25	1 Sv	=	1 J/kg (joule per kilogram)

**26 ELECTRIC CONDUCTANCE**


---

27	1 S (siemen)	=	1 Ω <sup>-1</sup> (reciprocal of resistance)
28		=	1 A/V (ampere per volt)
29		=	1 kg <sup>-1</sup> • m <sup>-2</sup> • s <sup>3</sup> • A <sup>2</sup> (second cubed- ampere squared
30			per kilogram-square meter)
31		=	1.0 × 10 <sup>6</sup> μS (microsiemens)

---

*This document is a draft for review purposes only and does not constitute Agency policy.*

---

**1 TEMPERATURE**

---

2  $[\text{°F (degrees, Fahrenheit)} - 32] \times 5/9 = \text{°C (degrees, Celsius)}$

**3 PERMEABILITY**

---

4  $1 \text{ cm}^2 = 1.0 \times 10^{-4} \text{ m}^2$   
5  $\approx 1.0 \times 10^8 \text{ D (darcys)}$   
6  $1 \text{ D} \approx 1.0 \times 10^{-12} \text{ m}^2$   
7  $= 1,000 \text{ mD (millidarcys)}$   
8  $= 1.0 \times 10^6 \text{ }\mu\text{D (microdarcys)}$

## Appendix J

---

### Glossary

## Appendix J. Glossary

### J.1. Glossary Terms and Definitions

- 1 **Acid mine drainage:** Flow of water from areas that have been mined for coal or other mineral ores.  
2 The water has a low pH because of its contact with sulfur-bearing material and is harmful to  
3 aquatic organisms. ([U.S. EPA, 2013d](#))
- 4 **Additive:** A single chemical or chemical mixture designed to serve a specific purpose in the  
5 hydraulic fracturing fluid.<sup>1</sup>
- 6 **Adsorption:** Adhesion of molecules of gas, liquid, or dissolved solids to a surface. ([U.S. EPA, 2013d](#))
- 7 **Advection:** A mechanism for moving chemicals in flowing water, where a chemical moves along  
8 with the flow of the water itself.
- 9 **Aeration:** A process that promotes biological degradation of organic matter in water. The process  
10 may be passive (as when waste is exposed to air) or active (as when a mixing or bubbling device  
11 introduces the air). ([U.S. EPA, 2013d](#))
- 12 **Aerobic mesophiles:** Microorganisms that use oxygen for energy production and are tolerant of  
13 moderate temperatures.
- 14 **Analyte:** The element, ion, or compound that an analysis seeks to identify; the compound of  
15 interest. ([U.S. EPA, 2013d](#))
- 16 **Annulus:** Refers to either the space between the casing of a well and the wellbore or the space  
17 between any two strings of tubing or casing. ([U.S. EPA, 2013d](#))
- 18 **API number:** A unique identifying number for all oil and gas wells drilled in the United States. The  
19 system was developed by the American Petroleum Institute. ([Oil and Gas Mineral Services, 2010](#))
- 20 **Aquifer:** An underground geological formation, or group of formations, containing water. A source  
21 of ground water for wells and springs. ([U.S. EPA, 2013d](#))
- 22 **Base fluid:** The fluid into which additives and proppants are mixed to formulate a hydraulic  
23 fracturing fluid.
- 24 **Basin:** A depression in the crust of the earth, caused by plate tectonic activity and subsidence, in  
25 which sediments accumulate. Sedimentary basins vary from bowl-shaped to elongated troughs.  
26 Basins can be bounded by faults. Rift basins are commonly symmetrical; basins along continental  
27 margins tend to be asymmetrical. If rich hydrocarbon source rocks occur in combination with  
28 appropriate depth and duration of burial, then a petroleum system can develop within the basin.

---

<sup>1</sup> Definitions that have no associated citation in this glossary were developed for this assessment.

- 1 Most basins contain some amount of shale, thus providing opportunities for shale gas exploration  
2 and production. ([Schlumberger, 2014](#))
- 3 **Biogenic:** Methane that is produced in shallower formations by bacterial activity in anaerobic  
4 conditions. It is the ultimate dissimilation product of microbially mediated reactions of organic  
5 molecules.
- 6 **Blowout preventer (BOP):** Casinghead equipment that prevents the uncontrolled flow of oil, gas,  
7 and mud from the well by closing around the drill pipe or sealing the hole. ([Oil and Gas Mineral  
8 Services, 2010](#))
- 9 **Brackish water:** Mixed fresh and salt waters. Used here to qualitatively refer to water that contains  
10 higher total dissolved solids (TDS) than that typically used for fresh drinking water.
- 11 **BTEX:** An acronym for benzene, toluene, ethylbenzene, and xylenes. These chemicals are a group of  
12 single ringed aromatic hydrocarbon based on the benzene structure. These compounds are found in  
13 petroleum and are of specific importance because of their health effects.
- 14 **Caliper log:** A log that is used to check for any wellbore irregularities. It is run prior to primary  
15 cementing as a means of calculating the amount of cement needed. Also run in conjunction with  
16 other open hole logs for log corrections or run on cased holes to evaluate metal loss. ([NYSDEC,  
17 2011](#))
- 18 **Capillarity:** The action by which the surface of a liquid where it is in contact with a solid is elevated  
19 or depressed depending on the relative attraction of the molecules of the liquid for each other and  
20 for those of the solid. Capillary forces arise from the differential attraction between immiscible  
21 fluids and solid surfaces; these are the forces responsible for capillary rise in small-diameter tubes  
22 and porous materials. ([Adapted from Dake, 1978](#))
- 23 **Casing:** Steel pipe that is lowered into a wellbore. Casing extends from the bottom of the hole to the  
24 surface. ([Schlumberger, 2014](#))
- 25 **Casing inspection logs:** An in situ record of casing thickness and integrity, to determine whether  
26 and to what extent the casing has undergone corrosion. The term refers to an individual  
27 measurement, or a combination of measurements using acoustic, electrical, and mechanical  
28 techniques, to evaluate the casing thickness and other parameters. The log is usually presented  
29 with the basic measurements and an estimate of metal loss. It was first introduced in the early  
30 1960s. Today the terms casing-evaluation log and pipe-inspection log are used synonymously.  
31 ([Schlumberger, 2014](#))
- 32 **Cation exchange capacity:** The total amount of cations (positively charged ions) that a soil can  
33 hold.

- 1 **Cement:** Material used to support and seal the well casing to the rock formations exposed in the  
2 borehole. Cement also protects the casing from corrosion and prevents movement of injectate up  
3 the borehole. ([U.S. EPA, 2013d](#))
- 4 **Cement squeeze:** A remedial cementing operation designed to force cement into leak paths in  
5 wellbore tubulars. The required squeeze pressure is achieved by carefully controlling pump  
6 pressure. Squeeze cementing operations may be performed to repair poor primary cement jobs,  
7 isolate perforations, or repair damaged casing or liner. ([Schlumberger, 2014](#))
- 8 **Centralized waste treatment facility (CWT):** any facility that treats (for disposal, recycling or  
9 recovery of material) any hazardous or non-hazardous industrial wastes, hazardous or non-  
10 hazardous industrial wastewater, and/or used material received from off-site. ([U.S. EPA, 2012b](#))
- 11 **Coalbed methane:** Methane contained in coal seams. A coal seam is a layer or stratum of coal  
12 parallel to the rock stratification. ([U.S. EPA, 2013d](#))
- 13 **Collapse pressure:** The pressure at which a tube, or vessel, will catastrophically deform as a result  
14 of differential pressure acting from outside to inside of the vessel or tube. ([Schlumberger, 2014](#))
- 15 **Collar:** A threaded coupling used to join two lengths of pipe such as production tubing, casing, or  
16 liner. The type of thread and style of collar varies with the specifications and manufacturer of the  
17 tubing. ([Schlumberger, 2014](#))
- 18 **Combination truck:** A truck tractor or a truck tractor pulling any number of trailers. ([U.S.](#)  
19 [Department of Transportation, 2012](#))
- 20 **Community water systems:** Public water systems that supply water to the same population year-  
21 round. ([U.S. EPA, 2013c](#))
- 22 **Completion:** A term used to describe the assembly of equipment at the bottom of the well that is  
23 needed to enable production from an oil or gas well. It can also refer to the activities and methods  
24 (including hydraulic fracturing) used to prepare a well for production following drilling.
- 25 **Complexation:** A reaction between two chemicals that form a new complex, either through  
26 covalent bonding or ionic forces. This often results in one chemical solubilizing the other.
- 27 **Compressive strength:** Measure of the ability of a substance to withstand compression. ([NYSDEC,](#)  
28 [2011](#))
- 29 **Conductor casing:** This large diameter casing is usually the first string of casing in a well. It is set  
30 or driven into the unconsolidated material where the well will be drilled to keep the loose material  
31 from caving in. ([NYSDEC, 2011](#))
- 32 **Confidential business information (CBI):** Information that contains trade secrets, commercial or  
33 financial information, or other information that has been claimed as confidential by the submitter.  
34 The EPA has special procedures for handling such information. ([U.S. EPA, 2013d](#))

- 1 **Contaminant:** A substance that is either present in an environment where it does not belong or is  
2 present at levels that might cause harmful (adverse) health effects. ([U.S. EPA, 2013d](#))
- 3 **Conventional reservoir:** A reservoir in which buoyant forces keep hydrocarbons in place below a  
4 sealing caprock. Reservoir and fluid characteristics of conventional reservoirs typically permit oil  
5 or natural gas to flow readily into wellbores. The term is used to make a distinction from shale and  
6 other unconventional reservoirs, in which gas might be distributed throughout the reservoir at the  
7 basin scale, and in which buoyant forces or the influence of a water column on the location of  
8 hydrocarbons within the reservoir are not significant. ([Schlumberger, 2014](#))
- 9 **Crosslinked gels:** linear gels that are linked together by chemicals called crosslinkers, which may  
10 link two or more chains together.
- 11 **Crude oil:** A general term for unrefined petroleum or liquid petroleum. ([Schlumberger, 2014](#))
- 12 **Cumulative effects:** Refers to combined changes in the environment that can take place as a result  
13 of multiple activities over time and/or space.
- 14 **Cumulative water use/cumulative water:** Refers to the amount of water used or consumed by all  
15 hydraulic fracturing wells in a given area per year.
- 16 **Cyclical stress:** Refers to stress caused by frequent or rapid changes in temperature or pressure.
- 17 **Deviated well:** Any non-horizontal well in which the well bottom is intentionally located at a  
18 distance (e.g., hundreds of feet) laterally from the wellhead.
- 19 **Discharge:** Any emission (other than natural seepage), intentional or unintentional. Includes, but is  
20 not limited to, spilling, leaking, pumping, pouring, emitting, emptying, or dumping. ([U.S. EPA,](#)  
21 [2013d](#))
- 22 **Disinfection byproduct (DBP):** A compound formed by the reaction of a disinfectant such as  
23 chlorine with organic material in the water supply. ([U.S. EPA, 2013d](#))
- 24 **Domestic water use:** Includes indoor and outdoor water uses at residences, and includes uses such  
25 as drinking, food preparation, bathing, washing clothes and dishes, flushing toilets, watering lawns  
26 and gardens, and maintaining pools. ([USGS, 2015](#))
- 27 **Drill bit:** The tool used to crush or cut rock. Most bits work by scraping or crushing the rock as part  
28 of a rotational motion, while some bits work by pounding the rock vertically. ([Schlumberger, 2014](#))
- 29 **Drill collar:** A component of a drill string that provides weight on the bit for drilling. Drill collars  
30 are thick-walled tubular pieces machined from solid bars of steel, usually plain carbon steel but  
31 sometimes of nonmagnetic nickel-copper alloy or other nonmagnetic premium alloys.  
32 ([Schlumberger, 2014](#))
- 33 **Drill cuttings:** Ground rock produced by the drilling process.



- 1 **Drill string:** The combination of the drillpipe, the bottomhole assembly, and any other tools used to  
2 make the drill bit turn at the bottom of the wellbore. ([Schlumberger, 2014](#))
- 3 **Drilling fluid:** Any of a number of liquid and gaseous fluids and mixtures of fluids and solids used  
4 when drilling boreholes. ([Adapted from Schlumberger, 2014](#))
- 5 **Drinking water resource:** Any body of ground water or surface water that now serves, or in the  
6 future could serve, as a source of drinking water for public or private use ([U.S. EPA, 2013d](#))
- 7 **Dry gas:** Refers to natural gas that occurs in the absence of liquid hydrocarbons. ([Adapted from](#)  
8 [Schlumberger, 2014](#))
- 9 **Effluent:** Waste material being discharged into the environment, either treated or untreated. ([U.S.](#)  
10 [EPA, 2013d](#))
- 11 **Facultative anaerobes:** Microorganisms that can use oxygen for energy production if it is present  
12 in their environment, but can also use alternatives for energy production if no oxygen is present.
- 13 **Fault:** A fracture or fracture zone along which there has been displacement of the sides relative to  
14 each other. ([NYSDEC, 2011](#))
- 15 **Field:** Area of oil and gas production with at least one common reservoir for the entire area. ([Oil](#)  
16 [and Gas Mineral Services, 2010](#))
- 17 **Flowback:** The term is defined multiple ways in the literature. In general, it is either fluids  
18 predominantly containing hydraulic fracturing fluid that return from a well to the surface or a  
19 process used to prepare the well for production.
- 20 **Fluid:** A substance that flows when exposed to an external pressure; fluids include both liquids and  
21 gases.
- 22 **Fluid formulation:** The entire suite of chemicals, proppant, and base fluid injected into a well  
23 during hydraulic fracturing. ([U.S. EPA, 2013d](#))
- 24 **Formation:** A body of earth material with distinctive and characteristic properties and a degree of  
25 homogeneity in its physical properties. ([U.S. EPA, 2013d](#))
- 26 **Formation packer:** A specialized casing part that has the same inner diameter as the casing but  
27 whose outer diameter expands to make contact with the formation and seal the annulus between  
28 the casing and formation, preventing migration of fluids.
- 29 **Formation fluid:** Fluid that occurs naturally within the pores of rock. These fluids consist primarily  
30 of water, with varying concentrations of total dissolved solids, but may also contain oil or gas.  
31 Sometimes referred to as native fluids, native brines, or reservoir fluids.
- 32 **FracFocus Registry:** A registry for oil and gas well operators to disclose information about  
33 hydraulic fracturing well locations, and water and chemical use during hydraulic fracturing

- 
- 1 operations developed by the Ground Water Protection Council and the Interstate Oil and Gas  
2 Compact Commission.
- 3 **Fracture:** A crack or breakage surface within a rock.
- 4 **Fracture geometry:** Refers to characteristics of the fracture such as height and aperture (width).
- 5 **Fresh water:** Qualitatively refers to water with relatively low TDS that is most readily available for  
6 drinking water currently.
- 7 **Gelled fluids:** Fracturing fluids that are usually water-based with added gels to increase the fluid  
8 viscosity to aid in the transport of proppants. ([Spellman, 2012](#); [Gupta and Valkó, 2007](#))
- 9 **Ground water:** In the broadest sense, all subsurface water; more commonly that part of the  
10 subsurface water in the saturated zone. ([Solley et al., 1998](#))
- 11 **Halite:** A soft, soluble evaporate mineral commonly known as salt or rock salt. Can be critical in  
12 forming hydrocarbon traps and seals because it tends to flow rather than fracture during  
13 deformation, thus preventing hydrocarbons from leaking out of a trap even during and after some  
14 types of deformation. ([Schlumberger, 2014](#))
- 15 **Hazard evaluation:** A component of risk assessment that involves gathering and evaluating data  
16 on the types of health injuries or diseases (e.g., cancer) that may be produced by a chemical and on  
17 the conditions of exposure under which such health effects are produced.
- 18 **Hazard identification:** A process for determining if a chemical or a microbe can cause adverse  
19 health effects in humans and what those effects might be. ([U.S. EPA, 2013d](#))
- 20 **Henry's law constant:** Ratio of a chemical's vapor pressure in the atmosphere to its solubility in  
21 water. The higher the Henry's law constant, the more volatile the compound will be from water.  
22 ([NYSDEC, 2011](#))
- 23 **Horizontal drilling:** Drilling a portion of a well horizontally to expose more of the formation  
24 surface area to the wellbore. ([Oil and Gas Mineral Services, 2010](#))
- 25 **Horizontal well:** A well that is drilled vertically up to a point known as the kickoff point, where the  
26 well turns toward the horizontal, extending into and parallel with the approximately horizontal  
27 targeted producing formation.
- 28 **Hydraulic fracturing:** A stimulation technique used to increase production of oil and gas.  
29 Hydraulic fracturing involves the injection of fluids under pressures great enough to fracture the  
30 oil- and gas-production formations. ([U.S. EPA, 2011a](#))
- 31 **Hydraulic fracturing fluids:** Engineered fluids, typically consisting of a base fluid, additives, and  
32 proppant, that are pumped under high pressure into the well to create and hold open fractures in  
33 the formation.
-

- 1 **Hydraulic fracturing wastewater:** Flowback and produced water that is managed using practices  
2 that include but are not limited to reuse in subsequent hydraulic fracturing operations, treatment  
3 and discharge, and injection into disposal wells.
- 4 **Hydraulic fracturing water cycle:** The cycle of water in the hydraulic fracturing process,  
5 encompassing the acquisition of water, chemical mixing of the fracturing fluid, injection of the fluid  
6 into the formation, the production and management of flowback and produced water, and the  
7 ultimate treatment and disposal of hydraulic fracturing wastewaters.
- 8 **Hydraulic gradient:** Slope of a water table or potentiometric surface. More specifically, change in  
9 the hydraulic head per unit of distance in the direction of the maximum rate of decrease. ([U.S. EPA,](#)  
10 [2013d](#))
- 11 **Hydrocarbon:** An organic compound containing only hydrogen and carbon, often occurring in  
12 petroleum, natural gas, and coal. ([U.S. EPA, 2013d](#))
- 13 **Hydrostatic pressure:** The pressure exerted by a column of fluid at a given depth.
- 14 **Imbibition:** The displacement of a non-wet fluid (i.e., gas) by a wet fluid (typically water). ([Adapted](#)  
15 [from Dake, 1978](#))
- 16 **Immiscible:** The chemical property in which two or more liquids or phases are incapable of  
17 attaining homogeneity. ([U.S. EPA, 2013d](#))
- 18 **Impact:** Any observed change in the quality or quantity of drinking water resources, regardless of  
19 severity, that results from a mechanism.
- 20 **Impact, potential:** Any change in the quality or quantity of drinking water resources that could  
21 logically occur, but has not yet been observed, as the result of a mechanism or potential mechanism.
- 22 **Induced fracture:** A fracture created during hydraulic fracturing.
- 23 **Injection well:** A well into which fluids are being injected (40 CFR 144.3).
- 24 **Integrated risk information system (IRIS):** An electronic database that contains the EPA's latest  
25 descriptive and quantitative regulatory information about chemical constituents. Files on chemicals  
26 maintained in IRIS contain information related to both noncarcinogenic and carcinogenic health  
27 effects. ([U.S. EPA, 2013d](#))
- 28 **Intermediate casing:** Casing that seals off intermediate depths and geologic formations that may  
29 have considerably different reservoir pressures than deeper zones to be drilled. ([Devereux, 1998;](#)  
30 [Baker, 1979](#))
- 31 **Karst:** A type of topography that results from dissolution and collapse of carbonate rocks, such as  
32 limestone, dolomite, and gypsum, and that is characterized by closed depressions or sinkholes,  
33 caves, and underground drainage. ([Solley et al., 1998](#))

- 
- 1 **Kill fluid:** A weighted fluid with a density that is sufficient to overcome the formation pressure and  
2 prevent fluids from flowing up the wellbore.
- 3 **Large truck:** A truck with a gross vehicle weight rating greater than 10,000 pounds. ([U.S.](#)  
4 [Department of Transportation, 2012](#))
- 5 **Lateral:** A horizontal section of a well.
- 6 **Leakoff:** The fraction of the injected fluid that infiltrates into the formation (e.g., through an  
7 existing natural fissure) and is not recovered during production.
- 8 **Linear gel:** a series of chemicals linked together so that they form a chain.
- 9 **Liner:** A casing string that does not extend to the top of the wellbore, but instead is anchored or  
10 suspended from inside the bottom of the previous casing string. ([Schlumberger, 2014](#))
- 11 **Lost cement:** Refers to a failure of the cement to be circulated back to the surface, indicating that  
12 the cement has escaped into the formation.
- 13 **Lowest-observable-adverse effect level (LOAEL):** The lowest exposure level at which there are  
14 biologically significant increases in frequency or severity of adverse effects between the exposed  
15 population and its appropriate control group.
- 16 **Maximum allowable daily level (MADL):** The maximum allowable daily level of a reproductive  
17 toxicant at which the chemical would have no observable adverse reproductive effect, assuming  
18 exposure at 1,000 times that level.
- 19 **Maximum contaminant level (MCL):** The highest level of a contaminant that is allowed in  
20 drinking water. MCLs are enforceable standards. ([U.S. EPA, 2014b](#))
- 21 **Mechanical integrity:** The absence of significant leakage within the injection tubing, casing, or  
22 packer (known as internal mechanical integrity), or outside of the casing (known as external  
23 mechanical integrity). ([U.S. EPA, 2013d](#))
- 24 **Mechanism:** A means or series of events by which an activity within the hydraulic fracturing water  
25 cycle has been observed to change the quality or quantity of drinking water resources.
- 26 **Mechanism, potential:** A means or series of events by which hydraulic fracturing activities could  
27 logically or theoretically (for instance, based on modeling) change the quality or quantity of  
28 drinking water resources but one that has not yet been observed.
- 29 **Mechanism, suspected:** A means or series of events by which hydraulic fracturing activities could  
30 logically have resulted in an observed change in the quality or quantity of drinking water resources.  
31 Available evidence may or may not be sufficient to determine if it is the *only* mechanism that caused  
32 the observed change.

- 1 **Metropolitan combined statistical area:** A core urban area of 50,000 or more people. ([U.S.](#)  
2 [Census Bureau, 2013](#))
- 3 **Microaerophiles:** Microorganisms that require small amounts of oxygen for energy production.
- 4 **Microannuli:** Very small channels that form in the cement and that may serve as pathways for fluid  
5 migration to drinking water resources.
- 6 **Micropolitan combined statistical area:** An urban core of at least 10,000, but less than 50,000,  
7 people. ([U.S. Census Bureau, 2013](#))
- 8 **Microseismic monitoring:** A technique to track the propagation of a hydraulic fracture as it  
9 advances through a formation. ([Schlumberger, 2014](#))
- 10 **Minimum risk level (MRL):** An estimate of daily human exposure to a hazardous substance at or  
11 below which the substance is unlikely to pose a measurable risk of harmful (adverse),  
12 noncancerous effects. MRLs are calculated for a route of exposure (inhalation or oral) over a  
13 specified time period (acute, intermediate, or chronic).
- 14 **Mobility:** The ratio of effective permeability to phase viscosity. The overall mobility is a sum of the  
15 individual phase viscosities. Well productivity is directly proportional to the product of the mobility  
16 and the layer thickness product. ([Schlumberger, 2014](#))
- 17 **National Pollution Discharge Elimination System (NPDES):** A national program under  
18 Section 402 of the Clean Water Act for regulation of discharges of pollutants from point sources to  
19 waters of the United States. Discharges are illegal unless authorized by an NPDES permit. ([U.S. EPA,](#)  
20 [2013d](#))
- 21 **National Secondary Drinking Water Regulations (NSDWR):** Non-enforceable guidelines  
22 regulating contaminants that may cause cosmetic effects (such as skin or tooth discoloration) or  
23 aesthetic effects (such as taste, odor, or color) in drinking water (also referred to as secondary  
24 standards). ([U.S. EPA, 2014b](#))
- 25 **Natural gas:** A naturally occurring mixture of hydrocarbon and nonhydrocarbon gases in porous  
26 formations beneath the earth's surface, often in association with petroleum. The principal  
27 constituent of natural gas is methane. ([Schlumberger, 2014](#))
- 28 **Natural organic matter (NOM):** Complex organic compounds that are formed from decomposing  
29 plant animal and microbial material in soil and water. ([U.S. EPA, 2013d](#))
- 30 **Non-community water systems:** Water systems that supply water to at least 25 of the same  
31 people at least six months per year, but not year-round. ([U.S. EPA, 2013c](#))
- 32 **Octanol-water partition coefficient ( $K_{ow}$ ):** A coefficient representing the ratio of the solubility of a  
33 compound in octanol (a nonpolar solvent) to its solubility in water (a polar solvent). The higher the  
34  $K_{ow}$ , the more nonpolar the compound. Log  $K_{ow}$  is generally used as a relative indicator of the

- 1 tendency of an organic compound to adsorb to soil. Log  $K_{ow}$  values are generally inversely related to  
2 aqueous solubility and directly proportional to molecular weight. ([U.S. EPA, 2013d](#))
- 3 **Offset well:** An existing wellbore close to a proposed well that provides information for planning  
4 the proposed well. ([Schlumberger, 2014](#))
- 5 **Open hole completion:** A well completion that has no casing or liner set across the reservoir  
6 formation, allowing the produced fluids to flow directly into the wellbore. ([Schlumberger, 2014](#))
- 7 **Oral slope factor (OSF):** An upper-bound, approximating a 95% confidence limit, on the increased  
8 cancer risk from a lifetime oral exposure to an agent. This estimate, usually expressed in units of  
9 proportion (of a population) affected per mg/kg day, is generally reserved for use in the low dose  
10 region of the dose response relationship, that is, for exposures corresponding to risks less than 1 in  
11 100.
- 12 **Organic carbon-water partition coefficient ( $K_{oc}$ ):** A coefficient representing the amount of a  
13 compound that is adsorbed to soil to the amount of a compound that is dissolved in water,  
14 normalized to the total organic carbon content of the soil. The higher the  $K_{oc}$ , the more likely a  
15 compound is to adsorb to soils and sediments, and the less likely it is to migrate with water. Along  
16 with log  $K_{ow}$ , log  $K_{oc}$  is used as a relative indicator of the tendency of an organic compound to adsorb  
17 to soil.
- 18 **Orphaned well:** An inactive oil or gas well with no known (or financially solvent) owner.
- 19 **Overburden:** Material of any nature, consolidated or unconsolidated, that overlies a deposit of  
20 useful minerals or ores. ([U.S. EPA, 2013d](#))
- 21 **Packer:** A device that can be run into a wellbore with a smaller initial outside diameter that then  
22 expands externally to seal the wellbore. ([Schlumberger, 2014](#))
- 23 **Pad fluid:** a mixture of base fluid, typically water and additives designed to create, elongate, and  
24 enlarge fractures along the natural channels of the formation when injected under high pressure.
- 25 **Partial cementing:** Cementing a casing string along only a portion of its length.
- 26 **Passby flow:** A prescribed, low-streamflow threshold below which withdrawals are not allowed.  
27 ([U.S. EPA, 2015d](#))
- 28 **Peer review:** A documented critical review of a specific major scientific and/or technical work  
29 product. Peer review is intended to uncover any technical problems or unresolved issues in a  
30 preliminary or draft work product through the use of independent experts. This information is then  
31 used to revise the draft so that the final work product will reflect sound technical information and  
32 analyses. The process of peer review enhances the scientific or technical work product so that the  
33 decision or position taken by the EPA, based on that product, has a sound and credible basis. ([U.S.](#)  
34 [EPA, 2013d](#))



- 1 **Perforation:** The communication tunnel created from the casing or liner into the reservoir  
2 formation through which injected fluids and oil or gas flows. Also refers to the process of creating  
3 communication channels, e.g., via the use of a jet perforating gun.
- 4 **Permeability:** The ability of a material (e.g., rock or soil) to transmit fluid to move through pore  
5 spaces.
- 6 **Persistence:** The length of time a compound stays in the environment, once introduced. A  
7 compound may persist for less than a second or indefinitely.
- 8 **Physicochemical properties:** The inherent physical and chemical properties of a molecule such as  
9 boiling point, density, physical state, molecular weight, vapor pressure, etc. These properties define  
10 how a chemical interacts with its environment. ([U.S. EPA, 2013d](#))
- 11 **Play:** A set of oil or gas accumulations sharing similar geologic, geographic properties, such as  
12 source rock, hydrocarbon type, and migration pathways. ([Oil and Gas Mineral Services, 2010](#))
- 13 **Poisson's ratio:** A ratio of transverse-to-axial (or latitudinal-to-longitudinal) strain; characterizes  
14 how a material is deformed under pressure.
- 15 **Polar molecule:** A molecule with a slightly positive charge at one part of the molecule and a  
16 slightly negative charge on another. The water molecule, H<sub>2</sub>O, is an example of a polar molecule,  
17 where the molecule is slightly positive around the hydrogen atoms and negative around the oxygen  
18 atom.
- 19 **Porosity:** A measure of pore space, or the percentage of the material (e.g., rock or soil) volume that  
20 can be occupied by oil, gas, or water.
- 21 **Produced water:** Water that flows from oil and gas wells.
- 22 **Production casing:** The deepest casing set and serves primarily as the conduit for producing fluids,  
23 although when cemented to the wellbore, this casing can also serve to seal off other subsurface  
24 zones including ground water resources. ([Devereux, 1998](#); [Baker, 1979](#))
- 25 **Production well:** A well that is used to bring fluids (such as oil or gas) to the surface.
- 26 **Production zone:** Refers to the portion of a subsurface rock zone that contains oil or gas to be  
27 extracted (sometimes using hydraulic fracturing). The production zone is sometimes referred to as  
28 the target zone.
- 29 **Proppant/propping agent:** A granular substance (sand grains, aluminum pellets, or other  
30 material) that is carried in suspension by the fracturing fluid and that serves to keep the cracks  
31 open when fracturing fluid is withdrawn after a fracture treatment. ([U.S. EPA, 2013d](#))
- 32 **Protected ground water resource:** The deepest aquifer that the state or other regulatory agency  
33 requires to be protected from fluid migration through or along wellbores.

- 1 **Public water system source:** The source of the surface or ground water used by a public water  
2 system, including source wells, intakes, reservoirs, infiltration galleries, and springs.
- 3 **Public water systems:** Water systems that provide water for human consumption from surface or  
4 ground water through pipes or other infrastructure to at least 15 service connections or serve an  
5 average of at least 25 people for at least 60 days a year. ([Safe Drinking Water Act, 2002](#))
- 6 **Publicly owned treatment works (POTW):** Any device or system used in the treatment (including  
7 recycling and reclamation) of municipal sewage or industrial wastes of a liquid nature that is  
8 owned by a state or municipality. This definition includes sewers, pipes, or other conveyances only  
9 if they convey wastewater to a POTW providing treatment. ([U.S. EPA, 2013d](#))
- 10 **Quality assurance (QA):** An integrated system of management activities involving planning,  
11 implementation, documentation, assessment, reporting, and quality improvement to ensure that a  
12 process, item, or service is of the type and quality needed and expected by the customer. ([U.S. EPA,](#)  
13 [2013d](#))
- 14 **Quality assurance project plan (QAPP):** A formal document describing in comprehensive detail  
15 the necessary quality assurance procedures, quality control activities, and other technical activities  
16 that need to be implemented to ensure that the results of the work performed will satisfy the stated  
17 performance or acceptance criteria. ([U.S. EPA, 2013d](#))
- 18 **Quality management plan:** A document that describes a quality system in terms of the  
19 organizational structure, policy and procedures, functional responsibilities of management and  
20 staff, lines of authority, and required interfaces for those planning, implementing, documenting, and  
21 assessing all activities conducted. ([U.S. EPA, 2013d](#))
- 22 **Radioactive tracer log:** A record of the presence of tracer material placed in or around the  
23 borehole to measure fluid movement in injection wells. ([Schlumberger, 2014](#))
- 24 **Radionuclide:** Radioactive particle, man-made or natural, with a distinct atomic weight number.  
25 Emits radiation in the form of alpha or beta particles, or as gamma rays. Can have a long life as soil  
26 or water pollutant. Prolonged exposure to radionuclides increases the risk of cancer. ([U.S. EPA,](#)  
27 [2013d](#))
- 28 **Reference dose (RfD):** An estimate (with uncertainty spanning perhaps an order of magnitude) of  
29 a daily oral exposure to the human population (including sensitive subgroups) that is likely to be  
30 without an appreciable risk of deleterious effects during a lifetime.
- 31 **Reference value (RfV):** An estimate of an exposure for a given duration to the human population  
32 (including susceptible subgroups) that is likely to be without an appreciable risk of adverse health  
33 effects over a lifetime. Reference value is a generic term not specific to a given route of exposure.
- 34 **Relative permeability:** A dimensionless property allowing for comparison of the different abilities  
35 of fluids to flow in multiphase settings. If a single fluid is present, its relative permeability is equal



- 1 to 1, but the presence of multiple fluids generally inhibits flow and decreases the relative  
2 permeability.
- 3 **Reservoir:** A porous and permeable geologic formation where hydrocarbons collect under  
4 pressure over geological time.
- 5 **Residuals:** The solids generated or retained during the treatment of wastewater. ([U.S. EPA, 2013d](#))
- 6 **Safe Drinking Water Act (SDWA):** The act designed to protect the nation’s drinking water supply  
7 by establishing national drinking water standards (maximum contaminant levels or specific  
8 treatment techniques) and by regulating underground injection control wells. ([U.S. EPA, 2013d](#))
- 9 **Sandstone:** A clastic sedimentary rock whose grains are predominantly sand sized. The term is  
10 commonly used to imply consolidated sand or a rock made of predominantly quartz sand, although  
11 sandstones often contain feldspar, rock fragments, mica, and numerous additional mineral grains  
12 held together with silica or another type of cement. The relatively high porosity and permeability of  
13 sandstones make them good reservoir rocks. ([Schlumberger, 2014](#))
- 14 **Science Advisory Board (SAB):** A federal advisory committee that provides a balanced, expert  
15 assessment of scientific matters relevant to the EPA. An important function of the Science Advisory  
16 Board is to review EPA’s technical programs and research plans. ([U.S. EPA, 2013d](#))
- 17 **Service company:** A company that assists well operators by providing specialty services, including  
18 hydraulic fracturing. ([U.S. EPA, 2013d](#))
- 19 **Shale:** A fine-grained, fissile, detrital sedimentary rock formed by consolidation of clay- and silt-  
20 sized particles into thin, relatively impermeable layers. ([Schlumberger, 2014](#))
- 21 **Shale gas:** Natural gas generated and stored in shale.
- 22 **Shale oil:** Oil present in unconventional oil reservoirs that are made up of shale.
- 23 **Shut-in:** The process of sealing off a well by either closing the valves at the wellhead, a downhole  
24 safety valve, or a blowout preventer.
- 25 **Slickwater:** A type of fracturing fluid that consists mainly of water with a very low portion of  
26 additives like polymers that serve as friction reducers to reduce friction loss when pumping the  
27 fracturing fluid downhole. ([Barati and Liang, 2014](#))
- 28 **Solubility:** The amount of mass of a compound that will dissolve in a unit volume of solution. ([U.S.](#)  
29 [EPA, 2013d](#))
- 30 **Sorption:** The general term used to describe the partitioning of a chemical between soil and water  
31 and depends on the nature of the solids and the properties of the chemical.
- 32 **Source water:** Surface or ground water, or reused wastewater, acquired for use in hydraulic  
33 fracturing. ([U.S. EPA, 2013d](#))

- 
- 1 **Spacer fluid:** A fluid pumped before the cement to clean drilling mud out of the wellbore.
- 2 **Spud (spud a well):** To start the well drilling process by removing rock, dirt, and other  
3 sedimentary material with the drill bit. ([U.S. EPA, 2013d](#))
- 4 **Stages (frac stages):** A single reservoir interval that is hydraulically stimulated in succession with  
5 other intervals.
- 6 **Stimulation:** Refers to (1) injecting fluids to clear the well or pore spaces near the well of drilling  
7 mud or other materials that create blockage and inhibit optimal production (i.e., matrix treatment)  
8 and (2) injecting fluid to fracture the rock to optimize the production of oil or gas.
- 9 **Stray gas:** Refers to the phenomenon of natural gas (primarily methane) migrating into shallow  
10 drinking water resources or to the surface.
- 11 **Strings:** An assembled length of steel pipe configured to suit a specific wellbore.
- 12 **Subsurface formation:** A mappable body of rock of distinctive rock type(s), including the rock's  
13 pore volume (i.e., the void space within a formation that fluid flow can occur, as opposed to the bulk  
14 volume which includes both pore and solid phase volume), with a unique stratigraphic position.
- 15 **Surface casing:** The shallowest cemented casing, with the widest diameter. Cemented surface  
16 casing generally serves as an anchor for blowout protection equipment and to seal off drinking  
17 water resources. ([Baker, 1979](#))
- 18 **Surface water:** All water naturally open to the atmosphere (rivers, lakes, reservoirs, ponds,  
19 streams, impoundments, seas, estuaries, etc.). ([U.S. EPA, 2013d](#))
- 20 **Surfactant:** Used during the hydraulic fracturing process to decrease liquid surface tension and  
21 improve fluid passage through the pipes. ([U.S. EPA, 2013d](#))
- 22 **Sustained casing pressure:** Refers to cases when the pressure in any well annulus that is  
23 measurable at the wellhead rebuilds after it is bled down, not caused solely by temperature  
24 fluctuations or imposed by the operator. If the pressure is relieved by venting natural gas from the  
25 annulus to the atmosphere, it will build up again once the annulus is closed (i.e., the pressure is  
26 sustained). ([Skjerven et al., 2011](#))
- 27 **Technically recoverable resources:** The volumes of oil and natural gas that could be produced  
28 with current technology, regardless of oil and natural gas prices and production costs. ([EIA, 2013](#))
- 29 **Temperature log:** A log of the temperature of the fluids in the borehole; a differential temperature  
30 log records the rate of change in temperature with depth and is sensitive to very small changes.  
31 ([U.S. EPA, 2013d](#))
- 32 **Tensile strength:** The force per unit cross-sectional area required to pull a substance apart.  
33 ([Schlumberger, 2014](#))
-

- 1 **Thermogenic:** Methane that is produced by high temperatures and pressures in deep formations  
2 over geologic timescales. Thermogenic methane is formed by the thermal breakdown, or cracking,  
3 of organic material that occurs during deep burial of sediment.
- 4 **Tight oil:** Oil found in relatively impermeable reservoir rock. ([Schlumberger, 2014](#))
- 5 **Total dissolved solids (TDS):** The quantity of dissolved material in a given volume of water. Total  
6 dissolved solids can include salts (e.g., sodium chloride), dissolved metals, radionuclides, and  
7 dissolved organics. ([U.S. EPA, 2013d](#))
- 8 **Toxicity:** The degree to which a substance or mixture of substances can harm humans or animals.  
9 Acute toxicity involves harmful effects in an organism through a single or short-term exposure.  
10 Chronic toxicity is the ability of a substance or mixture of substances to cause harmful effects over  
11 an extended period, usually upon repeated or continuous exposure, sometimes lasting for the entire  
12 life of the exposed organism. Subchronic toxicity is the ability of the substance to cause effects for  
13 more than 1 year but less than the lifetime of the exposed organism. ([U.S. EPA, 2013d](#))
- 14 **Tubing:** The narrowest casing set within a completed well, either hung directly from the wellhead  
15 or secured at its bottom using a packer. Tubing is not typically cemented in the well.
- 16 **Unconventional reservoir:** A reservoir characterized by lower permeability than conventional  
17 reservoirs. It can be the same formation where hydrocarbons are formed and also serve as the  
18 source for hydrocarbons that migrate and accumulate in conventional reservoirs. Unconventional  
19 reservoirs can include methane-rich coalbeds and oil- and/or gas-bearing shales and tight sands.
- 20 **Unconventional resource:** An umbrella term for oil and natural gas that is produced by means  
21 that do not meet the criteria for conventional production. What has qualified as unconventional at  
22 any particular time is a complex function of resource characteristics, the available exploration and  
23 production technologies, the economic environment, and the scale, frequency, and duration of  
24 production from the resource. Perceptions of these factors inevitably change over time and often  
25 differ among users of the term. At present, the term is used in reference to oil and gas resources  
26 whose porosity, permeability, fluid trapping mechanism, or other characteristics differ from  
27 conventional sandstone and carbonate reservoirs. Coalbed methane, gas hydrates, shale gas,  
28 fractured reservoirs, and tight gas sands are considered unconventional resources. ([Schlumberger,  
29 2014](#))
- 30 **Underground Injection Control (UIC):** The program under the Safe Drinking Water Act that  
31 regulates the use of wells to pump fluids into the ground. ([U.S. EPA, 2013d](#))
- 32 **Unsaturated zone:** The soil zone above the water table that is only partially filled by water; also  
33 referred to as the “vadose zone.”
- 34 **Vapor pressure:** The force per unit area exerted by a vapor in an equilibrium state with its pure  
35 solid, liquid, or solution at a given temperature. Vapor pressure is a measure of a substance's

1 propensity to evaporate. Vapor pressure increases exponentially with an increase in temperature.  
2 ([U.S. EPA, 2013d](#))

3 **Vertical well:** A well in which the wellbore is vertical throughout its entire length, from the  
4 wellhead at the surface to the production zone.

5 **Viscosity:** A measure of the internal friction of a fluid that provides resistance to shear within the  
6 fluid, informally referred to as how "thick" a fluid is.

7 **Volatile:** Readily vaporizable at a relatively low temperature. ([U.S. EPA, 2013d](#))

8 **Volatilization:** The process in which a chemical leaves the liquid phase and enters the gas phase.

9 **Wastewater treatment:** Chemical, biological, and mechanical procedures applied to an industrial  
10 or municipal discharge or to any other sources of contaminated water in order to remove, reduce,  
11 or neutralize contaminants. ([U.S. EPA, 2013d](#))

12 **Water availability:** There is no standard definition for water availability, and it has not been  
13 assessed recently at the national scale ([U.S. GAO, 2014](#)). Instead, a number of water availability  
14 indicators have been suggested (e.g., [Roy et al., 2005](#)). Here, availability is most often used to  
15 qualitatively refer to the amount of a location's water that could, currently or in the future, serve as  
16 a source of drinking water ([U.S. GAO, 2014](#)), which is a function of water inputs to a hydrologic  
17 system (e.g., rain, snowmelt, groundwater recharge) and water outputs from that system occurring  
18 either naturally or through competing demands of users.

19 **Water consumption:** Water that is removed from the local hydrologic cycle following its use (e.g.,  
20 via evaporation, transpiration, incorporation into products or crops, consumption by humans or  
21 livestock), and is therefore unavailable to other water users ([Maupin et al., 2014](#)).

22 **Water intensity:** The amount of water used per unit of energy obtained. ([Nicot et al., 2014](#);  
23 [Laurenzi and Jersey, 2013](#))

24 **Water reuse:** Any hydraulic fracturing wastewater that is used to offset total fresh water  
25 withdrawals for hydraulic fracturing, regardless of the level of treatment required.

26 **Water use:** Water withdrawn for a specific purpose, part or all of which may be returned to the  
27 local hydrologic cycle.

28 **Water withdrawal:** Water removed from the ground or diverted from a surface-water source for  
29 use. ([Nicot et al., 2014](#); [Laurenzi and Jersey, 2013](#))

30 **Well blowout:** The uncontrolled flow of fluids out of a well.

31 **Well communication:** Refers to fractures intersecting abandoned or active (producing) offset  
32 wells near the well that is being stimulated.

- 1 **Well logging:** A continuous measurement of physical properties in or around the well with  
2 electrically powered instruments to infer formation properties. Measurements may include  
3 electrical properties (resistivity and conductivity), sonic properties, active and passive nuclear  
4 measurements, measurements of the wellbore, pressure measurement, formation fluid sampling,  
5 sidewall coring tools, and others. Measurements may be taken via a wireline, which is a wire or  
6 cable that is used to deploy tools and instruments downhole and that transmits data to the surface.  
7 ([Adapted from Schlumberger, 2014](#))
- 8 **Well operator:** A company that controls and operates oil and gas wells. ([U.S. EPA, 2013d](#))
- 9 **Well pad:** A temporary drilling site, usually constructed of local materials such as sand and gravel.  
10 After the drilling operation is over, most of the pad is usually removed or plowed back into the  
11 ground. ([NYSDEC, 2011](#))
- 12 **Wellbore:** The drilled hole or borehole, including the open hole or uncased portion of the well.
- 13 **Wet gas:** Refers to natural gas that typically contains less than 85% methane along with ethane and  
14 more complex hydrocarbons.
- 15 **Wetting/nonwetting:** The preferential attraction of a fluid to the surface. In typical reservoirs,  
16 water preferentially wets the surface, and gas is nonwetting. ([Adapted from Dake, 1978](#))
- 17 **Workover:** Refers to any maintenance activity performed on a well that involves ceasing  
18 operations and removing the wellhead.
- 19 **Young's modulus:** A ratio of stress to strain that is a measure of the rigidity of a material.

## J.2. References for Appendix J

- [Baker, R.](#) (1979). A primer of oilwell drilling (4th ed.). Austin, TX: Petroleum Extension Service (PETEX).
- [Barati, R; Liang, J.T.](#) (2014). A review of fracturing fluid systems used for hydraulic fracturing of oil and gas wells. J Appl Polymer Sci Online pub. <http://dx.doi.org/10.1002/app.40735>
- [Dake, L.P.](#) (1978). Fundamentals of reservoir engineering. Boston, MA: Elsevier.  
<http://www.ing.unp.edu.ar/asignaturas/reservorios/Fundamentals%20of%20Reservoir%20Engineering%20%28L.P.%20Dake%29.pdf>
- [Devereux, S.](#) (1998). Practical well planning and drilling manual. Tulsa, OK: PennWell Publishing Company.  
<http://www.pennwellbooks.com/practical-well-planning-and-drilling-manual/>
- [EIA](#) (Energy Information Administration). (2013). Technically recoverable shale oil and shale gas resources: an assessment of 137 shale formations in 41 countries outside the United States (pp. 730). Washington, D.C.: Energy Information Administration, U.S. Department of Energy.  
<http://www.eia.gov/analysis/studies/worldshalegas/>
- [Gupta, DVS; Valkó, P.](#) (2007). Fracturing fluids and formation damage. In M Economides; T Martin (Eds.), Modern fracturing: enhancing natural gas production (pp. 227-279). Houston, TX: Energy Tribune Publishing Inc.
- [Laurenzi, JI; Jersey, GR.](#) (2013). Life cycle greenhouse gas emissions and freshwater consumption of Marcellus shale gas. Environ Sci Technol 47: 4896-4903. <http://dx.doi.org/10.1021/es305162w>

- [Maupin, MA; Kenny, JF; Hutson, SS; Lovelace, JK; Barber, NL; Linsey, KS.](#) (2014). Estimated use of water in the United States in 2010. (USGS Circular 1405). Reston, VA: U.S. Geological Survey. <http://dx.doi.org/10.3133/cir1405>
- [Nicot, JP; Scanlon, BR; Reedy, RC; Costley, RA.](#) (2014). Source and fate of hydraulic fracturing water in the Barnett Shale: a historical perspective. *Environ Sci Technol* 48: 2464-2471. <http://dx.doi.org/10.1021/es404050r>
- [NYSDEC](#) (New York State Department of Environmental Conservation). (2011). Revised draft supplemental generic environmental impact statement (SGEIS) on the oil, gas and solution mining regulatory program: Well permit issuance for horizontal drilling and high-volume hydraulic fracturing to develop the Marcellus shale and other low-permeability gas reservoirs. Albany, NY: NY SDEC. <http://www.dec.ny.gov/energy/75370.html>
- [Oil and Gas Mineral Services.](#) (2010). MineralWise: Oil and gas terminology. Available online at <http://www.mineralweb.com/library/oil-and-gas-terms/>
- [Roy, SB; Ricci, PF; Summers, KV; Chung, CF; Goldstein, RA.](#) (2005). Evaluation of the sustainability of water withdrawals in the United States, 1995 to 2025. *J Am Water Resour Assoc* 41: 1091-1108.
- [Safe Drinking Water Act. Title XIV of the Public Health Service Act Safety of Public Water Systems](#) (Safe Drinking Water Act) as amended through P.L. 107-377, (2002). <http://www.epw.senate.gov/sdwa.pdf>
- [Schlumberger](#) (Schlumberger Limited). (2014). Schlumberger oilfield glossary. Available online at <http://www.glossary.oilfield.slb.com/>
- [Skjerven, T; Lunde, Ø; Perander, M; Williams, B; Farquhar, R; Sinet, I; Sæby, J; Haga, HB; Finnseth, Ø; Johnsen, S.](#) (2011). Norwegian Oil and Gas Association recommended guidelines for well integrity. (117, Revision 4). Norway: Norwegian Oil and Gas Association. <http://www.norskoljeoggass.no/Global/Retningslinjer/Boring/117%20-%20Recommended%20guidelines%20Well%20integrity%20rev4%2006.06.%2011.pdf>
- [Solley, WB; Pierce, RR; Perlman, HA.](#) (1998). Estimated use of water in the United States in 1995. (USGS Circular: 1200). U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/cir1200>
- [Spellman, FR.](#) (2012). Environmental impacts of hydraulic fracturing. In *Environmental impacts of hydraulic fracturing*. Boca Raton, Florida: CRC Press.
- [U.S. Census Bureau.](#) (2013). Metropolitan and micropolitan statistical areas main. Available online at <http://www.census.gov/population/metro/> (accessed January 12, 2015).
- [U.S. Department of Transportation.](#) (2012). Large truck and bus crash facts 2012. Washington, D.C.: Federal Motor Carrier Safety Administration, U.S. Department of Transportation. <http://ai.fmcsa.dot.gov/CarrierResearchResults/PDFs/LargeTruckandBusCrashFacts2012.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011a). Plan to study the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA/600/R-11/122). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/plan-study-potential-impacts-hydraulic-fracturing-drinking-water-resources-epa600r-11122>
- [U.S. EPA. General definitions, 40 CFR § 437.2](#) (2012b). <http://www.gpo.gov/fdsys/pkg/CFR-2012-title40-vol31/pdf/CFR-2012-title40-vol31-sec437-2.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013c). Drinking water and ground water statistics, fiscal year 2011. Washington, DC: U.S. Environmental Protection Agency, Office of Water. <http://water.epa.gov/scitech/datait/databases/drink/sdwisfed/upload/epa816r13003.pdf>



- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013d). Terminology services (TS): Terms and acronyms. Available online at [http://iaspub.epa.gov/sor\\_internet/registry/termreg/searchandretrieve/termsandacronyms/search.do](http://iaspub.epa.gov/sor_internet/registry/termreg/searchandretrieve/termsandacronyms/search.do)
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014b). Drinking water contaminants. Available online at <http://water.epa.gov/drink/contaminants/>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015d). Case study analysis of the impacts of water acquisition for hydraulic fracturing on local water availability [EPA Report]. (EPA/600/R-14/179). Washington, D.C.
- [U.S. GAO](#) (U.S. Government Accountability Office). (2014). Freshwater: Supply concerns continue, and uncertainties complicate planning. Report to Congressional requesters. (GAO-14-430). Washington, DC: U.S. Government Accountability Office (GAO). <http://www.gao.gov/assets/670/663343.pdf>
- [USGS](#) (U.S. Geological Survey). (2015). Water use in the United States. Available online at <http://water.usgs.gov/watuse/>

---

## References: All Appendices

---

- [Abrams, R.](#) (2013). Advanced oxidation frac water recycling system. Presentation presented at 20th International Petroleum Environmental Conference, November 12-14, 2013, San Antonio, TX.
- [Acharya, HR; Henderson, C; Matis, H; Kommepalli, H; Moore, B; Wang, H.](#) (2011). Cost effective recovery of low-TDS frac flowback water for reuse. (Department of Energy: DE-FE0000784). Niskayuna, NY: GE Global Research. [http://www.netl.doe.gov/file%20library/Research/oil-gas/FE0000784\\_FinalReport.pdf](http://www.netl.doe.gov/file%20library/Research/oil-gas/FE0000784_FinalReport.pdf)
- [Afzal, W; Mohammadi, AH; Richon, D.](#) (2009). Volumetric properties of mono-, di-, tri-, and polyethylene glycol aqueous solutions from (273.15 to 363.15) K: experimental measurements and correlations. Journal of Chemical and Engineering Data 54: 1254-1261. <http://dx.doi.org/10.1021/jc800694a>
- [Ahmann, D; Roberts, AL; Krumholz, LR; Morel, FM.](#) (1994). Microbe grows by reducing arsenic [Letter]. Nature 371: 750. <http://dx.doi.org/10.1038/371750a0>
- [Alain, K; Pignet, P; Zbinden, M; Quillevere, M; Duchiron, F; Donval, JP; Lesongeur, F; Raguene, G; Crassous, P; Querellou, J; Cambon-Bonavita, MA.](#) (2002). Caminicella sporogenes gen. nov., sp. nov., a novel thermophilic spore-forming bacterium isolated from an East-Pacific Rise hydrothermal vent. Int J Syst Evol Microbiol 52: 1621-1628.
- [Alfa Aesar.](#) (2015). A16163: Formaldehyde, 37% w/w aq. soln., stab. with 7-8% methanol. Available online at <https://www.alfa.com/en/catalog/A16163> (accessed May 4, 2015).
- [Ali, M; Taoutaou, S; Shafqat, AU; Salehapour, A; Noor, S.](#) (2009). The use of self healing cement to ensure long term zonal isolation for HPHT wells subject to hydraulic fracturing operations in Pakistan. Paper presented at International Petroleum Technology Conference, December 7-9, 2009, Doha, Qatar.
- [ALL Consulting](#) (ALL Consulting, LLC). (2013). Water treatment technology fact sheet: Electrodialysis [Fact Sheet]. Tulsa, OK. <http://www.all-llc.com/publicdownloads/ED-EDRFactSheet.pdf>
- [Alzahrani, S; Mohammad, AW; Hilal, N; Abdullah, P; Jaafar, O.](#) (2013). Comparative study of NF and RO membranes in the treatment of produced water-Part I: Assessing water quality. Desalination 315: 18-26. <http://dx.doi.org/10.1016/j.desal.2012.12.004>
- [André, L; Rabemanana, V; Vuataz, FD.](#) (2006). Influence of water-rock interactions on fracture permeability of the deep reservoir at Soultz-sous-Forêts, France. Geothermics 35: 507-531. <http://dx.doi.org/10.1016/j.geothermics.2006.09.006>
- [API](#) (American Petroleum Institute). (1999). Recommended practice for care and use of casing and tubing [Standard] (18th ed.). (API RP 5C1). Washington, DC: API Publishing Services.



- [API](#) (American Petroleum Institute). (2004). Recommended practice for centralizer placement and stop collar testing (First ed.). (API RP 10D-2 (R2010)).
- [API](#) (American Petroleum Institute). (2009a). Hydraulic fracturing operations - Well construction and integrity guidelines [Standard] (First ed.). Washington, DC: API Publishing Services.
- [API](#) (American Petroleum Institute). (2009b). Packers and bridge plugs (Second ed.). (API Spec 11D1).
- [API](#) (American Petroleum Institute). (2010a). Isolating potential flow zones during well construction [Standard] (1st ed.). (RP 65-2). Washington, DC: API Publishing Services.  
<http://www.techstreet.com/products/preview/1695866>
- [API](#) (American Petroleum Institute). (2010b). Specification for cements and materials for well cementing [Standard] (24th ed.). (ANSI/API SPECIFICATION 10A). Washington, DC: API Publishing Services.  
<http://www.techstreet.com/products/1757666>
- [API](#) (American Petroleum Institute). (2011). Specification for casing and tubing - Ninth edition [Standard] (9th ed.). (API SPEC 5CT). Washington, DC: API Publishing Services.  
<http://www.techstreet.com/products/1802047>
- [API](#) (American Petroleum Institute). (2013). Recommended practice for testing well cements [Standard] (2nd ed.). (RP 10B-2). Washington, DC: API Publishing Services.  
<http://www.techstreet.com/products/1855370>
- [Arthur, JD.](#) (2012). Understanding and assessing well integrity relative to wellbore stray gas intrusion issues. Presentation presented at Ground Water Protection Council Stray Gas - Incidence & Response Forum, July 24-26, 2012, Cleveland, OH.
- [Arthur, JD; Bohm, B; Cornue, D.](#) (2009). Environmental considerations of modern shale gas development. Paper presented at SPE Annual Technical Conference and Exhibition, October 4-7, 2009, New Orleans, LA.
- [Arthur, JD; Langhus, BG; Patel, C.](#) (2005). Technical summary of oil and gas produced water treatment technologies. Tulsa, OK: ALL Consulting, LLC.  
<http://www.odinoilandgas.com/Portals/0/TreatmentOptionsReport.pdf>
- [ATSDR](#) (Agency for Toxic Substances and Disease Registry). (2009). Glossary of terms. Available online at <http://www.atsdr.cdc.gov/glossary.html>
- [AWWA](#) (American Water Works Association). (1999). Residential end uses of water. In PW Mayer; WB DeOreo (Eds.). Denver, CO: AWWA Research Foundation and American Water Works Association.  
[http://www.waterrf.org/PublicReportLibrary/RFR90781\\_1999\\_241A.pdf](http://www.waterrf.org/PublicReportLibrary/RFR90781_1999_241A.pdf)
- [Baker, R.](#) (1979). A primer of oilwell drilling (4th ed.). Austin, TX: Petroleum Extension Service (PETEX).
- [Banasiak, LJ; Schäfer, AI.](#) (2009). Removal of boron, fluoride and nitrate by electro dialysis in the presence of organic matter. J Memb Sci 334: 101-109. <http://dx.doi.org/10.1016/j.memsci.2009.02.020>
- [Bank, T.](#) (2011). Trace metal geochemistry and mobility in the Marcellus shale. In Proceedings of the Technical Workshops for the Hydraulic Fracturing Study: Chemical & Analytical Methods. Bank, T. <http://www2.epa.gov/sites/production/files/documents/tracemetalgeochemistryandmobilityinthemarcellusformation1.pdf>
- [Bank, T; Fortson, LA; Malizia, TR; Benelli, P.](#) (2012). Trace metal occurrences in the Marcellus Shale [Abstract]. Geological Society of America Abstracts with Programs 44: 313.
- [Baragi, JG; Maganur, S; Malode, V; Baragi, SJ.](#) (2013). Excess molar volumes and refractive indices of binary liquid mixtures of acetyl acetone with n-Nonane, n-Decane and n-Dodecane at (298.15, 303.15, and 308.15) K. Journal of Molecular Liquids 178: 175-177. <http://dx.doi.org/10.1016/j.molliq.2012.11.022>
- [Barati, R; Liang, JT.](#) (2014). A review of fracturing fluid systems used for hydraulic fracturing of oil and gas wells. J Appl Polymer Sci Online pub. <http://dx.doi.org/10.1002/app.40735>

- [Barbot, E; Vidic, NS; Gregory, KB; Vidic, RD.](#) (2013). Spatial and temporal correlation of water quality parameters of produced waters from Devonian-age shale following hydraulic fracturing. *Environ Sci Technol* 47: 2562-2569.
- [Barrett, ME.](#) (2010). Evaluation of sand filter performance. (CRWR Online Report 10-7). Austin, TX: Center for Research in Water Resources, University of Texas at Austin.  
<http://www.crrw.utexas.edu/reports/pdf/2010/rpt10-07.pdf>
- [Benko, KL; Drewes, JE.](#) (2008). Produced water in the Western United States: Geographical distribution, occurrence, and composition. *Environ Eng Sci* 25: 239-246.
- [Bennett, GM; Yuill, JL.](#) (1935). The crystal form of anhydrous citric acid. *J Chem Soc* 1935: 130.  
<http://dx.doi.org/10.1039/JR9350000130>
- [Bjilmann, E.](#) (1906). [Studien über organische Thiosäuren III]. *Justus Liebigs Annalen der Chemie* 348: 133-143. <http://dx.doi.org/10.1002/jlac.19063480110>
- [Biltz, W; Balz, G.](#) (1928). [Über molekular- und atomvolumina. XVIII. Das volumen des ammoniaks in kristallisierten ammoniumsalzen]. *Zeitschrift für Anorganische und Allgemeine Chemie* 170: 327-341.  
<http://dx.doi.org/10.1002/zaac.19281700141>
- [Blanco, A; Garcia-Abuin, A; Gomez-Diaz, D; Navaza, JM; Villaverde, OL.](#) (2013). Density, speed of sound, viscosity, surface tension, and excess volume of n-ethyl-2-pyrrolidone plus ethanolamine (or diethanolamine or triethanolamine) from T = (293.15 to 323.15) K. *Journal of Chemical and Engineering Data* 58: 653-659. <http://dx.doi.org/10.1021/je301123j>
- [Blauch, ME; Myers, RR; Moore, TR; Lipinski, BA.](#) (2009). Marcellus shale post-frac flowback waters - where is all the salt coming from and what are the implications? In *Proceedings of the SPE Eastern Regional Meeting*. Richardson, TX: Society of Petroleum Engineers.
- [Blondes, MS; Gans, KD; Thordsen, JJ; Reidy, ME; Thomas, B; Engle, MA; Kharaka, YK; Rowan, EL.](#) (2014). Data: U.S. Geological Survey National Produced Waters Geochemical Database v2.0 (Provisional) [Database]: U.S. Geological Survey :: USGS. Retrieved from  
<http://energy.usgs.gov/EnvironmentalAspects/EnvironmentalAspectsOfEnergyProductionandUse/ProducedWaters.aspx#3822349-data>
- [Bloomfield, C; Kelson, W; Pruden, G.](#) (1976). Reactions between metals and humidified organic matter. *Journal of Soil Science* 27: 16-31. <http://dx.doi.org/10.1111/j.1365-2389.1976.tb01971.x>
- [Boschee, P.](#) (2012). Handling produced water from hydraulic fracturing. *Oil and Gas Facilities* 1: 23-26.
- [Boschee, P.](#) (2014). Produced and flowback water recycling and reuse: Economics, limitations, and technology. *Oil and Gas Facilities* 3: 16-22.
- [Bottero, S; Picioreanu, C; Delft, TU; Enzien, M; van Loosdrecht, MCM; Bruining, H; Heimovaara, T.](#) (2010). Formation damage and impact on gas flow caused by biofilms growing within proppant packing used in hydraulic fracturing. Paper presented at SPE International Symposium and Exhibit on Formation Damage Control, February 10-12, 2010, Lafayette, Louisiana.
- [Brufatto, C; Cochran, J; Conn, L; El-Zeghaty, SZA, A; Fraboulet, B; Griffin, T; James, S; Munk, T; Justus, F; Levine, JR; Montgomery, C; Murphy, D; Pfeiffer, J; Pornpoch, T; Rishmani, L.](#) (2003). From mud to cement - Building gas wells. *Oilfield Rev* 15: 62-76.
- [Bruff, M; Jikich, SA.](#) (2011). Field demonstration of an integrated water treatment technology solution in Marcellus shale. Paper presented at SPE Eastern Regional Meeting, August 17-19, 2011, Columbus, OH.
- [BTGS](#) (Bureau of Topographic and Geologic Survey). (2011). Geochemical analyses of selected lithologies from geologic units in central, north-central, and southeastern Pennsylvania. (OFMI 1101.0). Middletown, PA: Bureau of Topographic and Geologic Survey, Pennsylvania Geological Survey.

- [Bukhari, AA.](#) (2008). Investigation of the electro-coagulation treatment process for the removal of total suspended solids and turbidity from municipal wastewater. *Bioresour Technol* 99: 914-921. <http://dx.doi.org/10.1016/j.biortech.2007.03.015>
- [CAPP](#) (Canadian Association of Petroleum Producers). (2013). CAPP hydraulic fracturing operating practice: Wellbore construction and quality assurance. (2012-0034). <http://www.capp.ca/getdoc.aspx?DocId=218137&DT=NTV>
- [Carpenter, EL; Davis, HS.](#) (1957). Acrylamide. Its preparation and properties. *Journal of Applied Chemistry* 7: 671-676. <http://dx.doi.org/10.1002/jctb.5010071206>
- [Casanova, C; Wilhelm, E; Grolier, JPE; Kehiaian, HV.](#) (1981). Excess volumes and excess heat-capacities of (water + alkanolic acid). *The Journal of Chemical Thermodynamics* 13: 241-248. [http://dx.doi.org/10.1016/0021-9614\(81\)90123-3](http://dx.doi.org/10.1016/0021-9614(81)90123-3)
- [Cayol, JL; Ollivier, B; Lawson anani soh, A; Fardeau, ML; Ageron, E; Grimont, PAD; Prensier, G; Guezennec, J; Magot, M; Garcia, JL.](#) (1994). *Haloicola saccharolytica* subsp. *senegalensis* subsp. nov., Isolated from the sediments of a Hypersaline lake, and emended description of *Haloicola saccharolytica*. *International Journal of Systematic Bacteriology* 44: 805-811. <http://dx.doi.org/10.1099/00207713-44-4-805>
- [CCG](#) (Chemical Computing Group). (2011). Molecular Operating Environment (MOE) Linux (Version 2011.10) [Computer Program]. Montreal, Quebec. Retrieved from <http://www.chemcomp.com/software.htm>
- [CCST](#) (California Council on Science and Technology). (2014). Advanced well stimulation technologies in California: An independent review of scientific and technical information. Sacramento, CA. <http://ccst.us/publications/2014/2014wst.pdf>
- [CCST](#) (California Council on Science and Technology). (2015). An independent scientific assessment of well stimulation in California, Volume 1: Well stimulation technologies and their past, present, and potential future use in California. Sacramento, CA. <http://www.ccst.us/publications/2015/2015SB4-v1.pdf>
- [Chafer, A; Lladosa, E; Monton, JB; Cruz Burguet, M, a.](#) (2010). Liquid-liquid equilibria for the system 1-methyl propyl ethanoate (1) + acetic acid (2) + water (3) at (283.15 and 323.15) K. *Journal of Chemical and Engineering Data* 55: 523-525. <http://dx.doi.org/10.1021/je900332x>
- [Chapman, EC; Capo, RC; Stewart, BW; Kirby, CS; Hammack, RW; Schroeder, KT; Edenborn, HM.](#) (2012). Geochemical and strontium isotope characterization of produced waters from Marcellus Shale natural gas extraction. *Environ Sci Technol* 46: 3545-3553.
- [Chasib, KF.](#) (2013). Extraction of phenolic pollutants (phenol and p-chlorophenol) from industrial wastewater. *Journal of Chemical and Engineering Data* 58: 1549-1564. <http://dx.doi.org/10.1021/je4001284>
- [Chermak, JA; Schreiber, ME.](#) (2014). Mineralogy and trace element geochemistry of gas shales in the United States: Environmental implications. *Int J Coal Geol* 126: 32-44. <http://dx.doi.org/10.1016/j.coal.2013.12.005>
- [Cheung, K; Klassen, P; Mayer, B; Goodarzi, F; Aravena, R.](#) (2010). Major ion and isotope geochemistry of fluids and gases from coalbed methane and shallow groundwater wells in Alberta, Canada. *Appl Geochem* 25: 1307-1329. <http://dx.doi.org/10.1016/j.apgeochem.2010.06.002>
- [Choppin, GR.](#) (2006). Actinide speciation in aquatic systems. *Mar Chem* 99: 83-92. <http://dx.doi.org/10.1016/j.marchem.2005.003.011>
- [Choppin, GR.](#) (2007). Actinide speciation in the environment. *Journal of Radioanal Chem* 273: 695-703. <http://dx.doi.org/10.1007/s10967-007-0933-3>

- [Clark, CE; Veil, JA](#). (2009). Produced water volumes and management practices in the United States (pp. 64). (ANL/EVS/R-09/1). Argonne, IL: Argonne National Laboratory.  
[http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL\\_EVS\\_R09\\_produced\\_water\\_volume\\_report\\_2437.pdf](http://www.circleofblue.org/waternews/wp-content/uploads/2010/09/ANL_EVS_R09_produced_water_volume_report_2437.pdf)
- [Cluff, M; Hartsock, A; Macrae, J; Carter, K; Mouser, PJ](#). (2014). Temporal changes in microbial ecology and geochemistry in produced water from hydraulically fractured Marcellus Shale Gas Wells. Environ Sci Technol 48: 6508-6517. <http://dx.doi.org/10.1021/es501173p>
- [Colborn, T; Kwiatkowski, C; Schultz, K; Bachran, M](#). (2011). Natural gas operations from a public health perspective. Hum Ecol Risk Assess 17: 1039-1056. <http://dx.doi.org/10.1080/10807039.2011.605662>
- [Collado, L; Cleenwerck, I; Van Trappen, S; De Vos, P; Figueras, MJ](#). (2009). Arcobacter mytili sp. nov., an indoxyl acetate-hydrolysis-negative bacterium isolated from mussels. Int J Syst Evol Microbiol 59: 1391-1396. <http://dx.doi.org/10.1099/ij.s.0.003749-0>
- [Craft, R](#). (2004). Crashes involving trucks carrying hazardous materials. (FMCSA-RI-04-024). Washington, D.C.: U.S. Department of Transportation. <http://ntl.bts.gov/lib/51000/51300/51302/fmcsa-ri-04-024.pdf>
- [Cramer, DD](#). (2008). Stimulating unconventional reservoirs: Lessons learned, successful practices, areas for improvement. SPE Unconventional Reservoirs Conference, February 10-12, 2008, Keystone, CO.
- [Crescent](#) (Crescent Consulting, LLC). (2011). East Mamm creek project drilling and cementing study. Oklahoma City, OK. <http://cogcc.state.co.us/Library/PiceanceBasin/EastMammCreek/ReportFinal.pdf>
- [Crique, J; Allard, S; Salhi, E; Joll, CA; Heitz, A; von Gunten, U, rs](#). (2012). Iodate and Iodo-Trihalomethane Formation during Chlorination of Iodide-Containing Waters: Role of Bromide. Environ Sci Technol 46: 7350-7357. <http://dx.doi.org/10.1021/es301301g>
- [Crook, R](#). (2008). Cementing: Cementing horizontal wells. Halliburton.
- [Curtis, JB](#). (2002). Fractured shale-gas systems. AAPG Bulletin 86: 1921-1938.  
<http://dx.doi.org/10.1306/61EEDDBE-173E-11D7-8645000102C1865D>
- [Dahm, KG; Guerra, KL; Xu, P; Drewes, JE](#). (2011). Composite geochemical database for coalbed methane produced water quality in the Rocky Mountain region. Environ Sci Technol 45: 7655-7663.  
<http://dx.doi.org/10.1021/es201021n>
- [Dake, LP](#). (1978). Fundamentals of reservoir engineering. Boston, MA: Elsevier.  
<http://www.ing.unp.edu.ar/assignaturas/reservorios/Fundamentals%20of%20Reservoir%20Engineering%20%28L.P.%20Dake%29.pdf>
- [Dao, TD; Mericq, JP; Laborie, S; Cabassud, C](#). (2013). A new method for permeability measurement of hydrophobic membranes in Vacuum Membrane Distillation process. Water Res 47: 20962104.
- [Davis, JP; Struchtemeyer, CG; Elshahed, MS](#). (2012). Bacterial communities associated with production facilities of two newly drilled thermogenic natural gas wells in the Barnett Shale (Texas, USA). Microb Ecol 64: 942-954. <http://dx.doi.org/10.1007/s00248-012-0073-3>
- [de Oliveira, LH; da Silva, JL, Jr; Aznar, M](#). (2011). Apparent and partial molar volumes at infinite dilution and solid-liquid equilibria of dibenzothiophene plus alkane systems. Journal of Chemical and Engineering Data 56: 3955-3962. <http://dx.doi.org/10.1021/je200327s>
- [Dejoye Tanzi, C; Abert Vian, M; Ginies, C; Elmaataoui, M; Chemat, F](#). (2012). Terpenes as green solvents for extraction of oil from microalgae. Molecules 17: 8196-8205.  
<http://dx.doi.org/10.3390/molecules17078196>
- [Devereux, S](#). (1998). Practical well planning and drilling manual. Tulsa, OK: PennWell Publishing Company.  
<http://www.pennwellbooks.com/practical-well-planning-and-drilling-manual/>

- Dhondge, SS; Pandhurnekar, CP; Parwate, DV. (2010). Density, speed of sound, and refractive index of aqueous binary mixtures of some glycol ethers at T=298.15 K. Journal of Chemical and Engineering Data 55: 3962-3968. <http://dx.doi.org/10.1021/je901072c>
- Diehl, SF; Goldhaber, MB; Hatch, JR. (2004). Modes of occurrence of mercury and other trace elements in coals from the warrior field, Black Warrior Basin, Northwestern Alabama. Int J Coal Geol 59: 193-208. <http://dx.doi.org/10.1016/j.coal.2004.02.003>
- DOE (U.S. Department of Energy). (2006). A guide to practical management of produced water from onshore oil and gas operations in the United States. Washington, DC: U.S. Department of Energy, National Petroleum Technology Office. [http://fracfocus.org/sites/default/files/publications/a\\_guide\\_to\\_practical\\_management\\_of\\_produced\\_water\\_from\\_onshore\\_oil\\_and\\_gas\\_operations\\_in\\_the\\_united\\_states.pdf](http://fracfocus.org/sites/default/files/publications/a_guide_to_practical_management_of_produced_water_from_onshore_oil_and_gas_operations_in_the_united_states.pdf)
- DOE (U.S. Department of Energy). (2014). Water management strategies for improved coalbed methane production in the Black Warrior Basin. Available online at <http://www.netl.doe.gov/research/oil-and-gas/project-summaries/natural-gas-resources/de-fe0000888>
- Dresel, PE; Rose, AW. (2010). Chemistry and origin of oil and gas well brines in western Pennsylvania (pp. 48). (Open-File Report OFOG 1001.0). Harrisburg, PA: Pennsylvania Geological Survey, 4th ser. <http://www.marcellus.psu.edu/resources/PDFs/brines.pdf>
- Drewes, J; Cath, T; Debroux, J; Veil, J. (2009). An integrated framework for treatment and management of produced water - Technical assessment of produced water treatment technologies (1st ed.). (RPSEA Project 07122-12). Golden, CO: Colorado School of Mines. [http://aqwatec.mines.edu/research/projects/Tech\\_Assessment\\_PW\\_Treatment\\_Tech.pdf](http://aqwatec.mines.edu/research/projects/Tech_Assessment_PW_Treatment_Tech.pdf)
- Dubey, GP; Kumar, K. (2011). Thermodynamic properties of binary liquid mixtures of diethylenetriamine with alcohols at different temperatures. Thermochim Acta 524: 7-17. <http://dx.doi.org/10.1016/j.tca.2011.06.003>
- Dubey, GP; Kumar, K. (2013). Studies of thermodynamic, thermophysical and partial molar properties of liquid mixtures of diethylenetriamine with alcohols at 293.15 to 313.15 K. Journal of Molecular Liquids 180: 164-171. <http://dx.doi.org/10.1016/j.molliq.2013.01.011>
- Duhon, H. (2012). Produced water treatment: Yesterday, today, and tomorrow. Oil and Gas Facilities 3: 29-31.
- Dunkel, M. (2013). Reducing fresh water use in upstream oil and gas hydraulic fracturing. In Summary of the technical workshop on wastewater treatment and related modeling (pp. A37-A43). Irving, TX: Pioneer Natural Resources USA, Inc. <http://www2.epa.gov/hfstudy/summary-technical-workshop-wastewater-treatment-and-related-modeling>
- Duraisamy, RT; Beni, AH; Henni, A. (2013). State of the art treatment of produced water. In W Elshorbagy; RK Chowdhury (Eds.), Water treatment (pp. 199-222). Rijeka, Croatia: InTech. <http://dx.doi.org/10.5772/53478>
- Dusseault, MB; Gray, MN; Nawrocki, PA. (2000). Why oilwells leak: Cement behavior and long-term consequences. Paper presented at SPE International Oil and Gas Conference and Exhibition in China, November 7-10, 2000, Beijing, China.
- Dyshin, AA; Eliseeva, OV; Kiselev, MG; Al'per, GA. (2008). The volume characteristics of solution of naphthalene in heptane-ethanol mixtures at 298.15 K. Russian Journal of Physical Chemistry A, Focus on Chemistry 82: 1258-1261. <http://dx.doi.org/10.1134/S0036024408080037>
- Easton, J. (2014). Optimizing fracking wastewater management. Pollution Engineering January 13.
- Egorov, GI; Makarov, DM; Kolker, AM. (2013). Volume properties of liquid mixture of water plus glycerol over the temperature range from 278.15 to 348.15 K at atmospheric pressure. Thermochim Acta 570: 16-26. <http://dx.doi.org/10.1016/j.tca.2013.07.012>



- [EIA](#) (Energy Information Administration). (2013). Technically recoverable shale oil and shale gas resources: an assessment of 137 shale formations in 41 countries outside the United States (pp. 730). Washington, D.C.: Energy Information Administration, U.S. Department of Energy.  
<http://www.eia.gov/analysis/studies/worldshalegas/>
- [Ely, JW; Horn, A; Cathey, R; Fraim, M; Jakhete, S](#). (2011). Game changing technology for treating and recycling frac water. Paper presented at SPE Annual Technical Conference and Exhibition, October 30 - November 2, 2011, Denver, CO.
- [Enform](#). (2013). Interim industry recommended practice 24: fracture stimulation: Interwellbore communication 3/27/2013 (1.0 ed.). (IRP 24). Calgary, Alberta: Enform Canada.  
[http://www.enform.ca/safety\\_resources/publications/PublicationDetails.aspx?a=29&type=irp](http://www.enform.ca/safety_resources/publications/PublicationDetails.aspx?a=29&type=irp)
- [Engle, MA; Rowan, EL](#). (2014). Geochemical evolution of produced waters from hydraulic fracturing of the Marcellus Shale, northern Appalachian Basin: A multivariate compositional data analysis approach. *Int J Coal Geol* 126: 45-56. <http://dx.doi.org/10.1016/j.coal.2013.11.010>
- [ER](#) (Eureka Resources, LLC). (2014). Crystallization technology. Available online at [http://www.eureka-resources.com/wp-content/uploads/2013/07/EURE-022\\_Crystallization\\_53013.pdf](http://www.eureka-resources.com/wp-content/uploads/2013/07/EURE-022_Crystallization_53013.pdf) (accessed March 4, 2015).
- [Ertel, D; McManus, K; Bogdan, J](#). (2013). Marcellus wastewater treatment: Case study. In Summary of the technical workshop on wastewater treatment and related modeling (pp. A56-A66). Williamsport, PA: Eureka Resources, LLC. <http://www2.epa.gov/hfstudy/summary-technical-workshop-wastewater-treatment-and-related-modeling>
- [Fadeeva, YA; Shmukler, LE; Safonova, LP](#). (2004). Physicochemical properties of the H3PO4-dimethylformamide system. *Russian Journal of General Chemistry* 74: 174-178.  
<http://dx.doi.org/10.1023/B:RUGC.0000025496.07304.66>
- [Fakhru'l-Razi, A; Pendashteh, A; Abdullah, LC; Biak, DR; Madaeni, SS; Abidin, ZZ](#). (2009). Review of technologies for oil and gas produced water treatment [Review]. *J Hazard Mater* 170: 530-551.
- [Faria, MAF; Martins, RJ; Cardoso, MJE, M; Barcia, OE](#). (2013). Density and viscosity of the binary systems ethanol + butan-1-ol, + pentan-1-ol, + heptan-1-ol, + octan-1-ol, nonan-1-ol, + decan-1-ol at 0.1 mpa and temperatures from 283.15 K to 313.15 K. *Journal of Chemical and Engineering Data* 58: 3405-3419.  
<http://dx.doi.org/10.1021/je400630f>
- [Fels, G](#). (1900). Ueber die Frage der isomorphen vertretung von halogen und hydroxyl. In *Zeitschrift fur Kristallographie, Kristallgeometrie, Kristallphysik, Kristallchemie*. Frankfurt: Leipzig.  
<http://babel.hathitrust.org/cgi/pt?id=uc1.b3327977;view=1up;seq=5>
- [Fertl, WH; Chilingar, GV](#). (1988). Total organic carbon content determined from well logs. *SPE Formation Evaluation* 3: 407-419. <http://dx.doi.org/10.2118/15612-PA>
- [Fichter, J; Moore, R; Braman, S; Wunch, K; Summer, E; Holmes, P](#). (2012). How hot is too hot for bacteria? A technical study assessing bacterial establishment in downhole drilling, fracturing, and stimulation operations. Paper presented at NACE International Corrosion Conference & Expo, March 11-15, 2012, Salt Lake City, UT.
- [Filgueiras, AV; Lavilla, I; Bendicho, C](#). (2002). Chemical sequential extraction for metal partitioning in environmental solid samples. *J Environ Monit* 4: 823-857. <http://dx.doi.org/10.1039/b207574c>
- [finemech](#) (finemech Precision Mechanical Components). (2012). Technical resources: Liquid nitrogen, LN2. Available online at [http://www.finemech.com/tech\\_resources/liquid\\_nitrogen.html](http://www.finemech.com/tech_resources/liquid_nitrogen.html)
- [Fisher, JG; Santamaria, A](#). (2002). Dissolved organic constituents in coal-associated waters and implications for human and ecosystem health. Paper presented at 9th Annual International Petroleum Environmental Conference, October 22-25, 2002, Albuquerque, NM.

- [Fisher, RS.](#) (1998). Geologic and geochemical controls on naturally occurring radioactive materials (NORM) in produced water from oil, gas, and geothermal operations. *Environmental Geosciences* 5: 139-150. <http://dx.doi.org/10.1046/j.1526-0984.1998.08018.x>
- [Francis, AJ.](#) (2007). Microbial mobilization and immobilization of plutonium. *J Alloy Comp* 444: 500-505. <http://dx.doi.org/10.1016/j.jallcom.2007.01.132>
- [Francis, RA; Small, MJ; Vanbriesen, JM.](#) (2009). Multivariate distributions of disinfection by-products in chlorinated drinking water. *Water Res* 43: 3453-3468. <http://dx.doi.org/10.1016/j.watres.2009.05.008>
- [Fredrickson, JK; Balkwill, DL.](#) (2006). Geomicrobial processes and biodiversity in the deep terrestrial subsurface. *Geomicrobiology Journal* 23: 345-356. <http://dx.doi.org/10.1080/01490450600875571>
- [Fuess, H; Bats, JW; Dannohl, H; Meyer, H; Schweig, A.](#) (1982). Comparison of observed and calculated densities. XII. Deformation density in complex anions. II. Experimental and theoretical densities in sodium formate. *Acta Crystallogr B* B38: 736-743. <http://dx.doi.org/10.1107/S0567740882003999>
- [Fujino, S; Hwang, C; Morinaga, K.](#) (2004). Density, surface tension, and viscosity of PbO-B2O3-SiO2 glass melts. *Journal of the American Ceramic Society* 87: 10-16. <http://dx.doi.org/10.1111/j.1151-2916.2004.tb19937.x>
- [Gadd, GM.](#) (2004). Microbial influence on metal mobility and application for bioremediation. *Geoderma* 122: 109-119. <http://dx.doi.org/10.1016/j.geoderma.2004.01.002>
- [García, MT; Mellado, E; Ostos, JC; Ventosa, A.](#) (2004). *Halomonas organivorans* sp. nov., a moderate halophile able to degrade aromatic compounds. *Int J Syst Evol Microbiol* 54: 1723-1728. <http://dx.doi.org/10.1099/ijs.0.63114-0>
- [Gauthier, MJ; Lafay, B; Christen, R; Fernandez, L; Acquaviva, M; Bonin, P; Bertrand, JC.](#) (1992). *Marinobacter hydrocarbonoclasticus* gen. nov., sp. nov., a New, Extremely Halotolerant, Hydrocarbon-Degrading Marine Bacterium. *International Journal of Systematic Bacteriology* 42: 568-576. <http://dx.doi.org/10.1099/00207713-42-4-568>
- [Gilmore, K; Hupp, R; Glathar, J.](#) (2013). Transport of Hydraulic Fracturing Water and Wastes in the Susquehanna River Basin, Pennsylvania. *J Environ Eng* 140: B4013002. [http://dx.doi.org/10.1061/\(ASCE\)EE.1943-7870.0000810](http://dx.doi.org/10.1061/(ASCE)EE.1943-7870.0000810)
- [Glorius, M; Moll, H; Geipel, G; Bernhard, G.](#) (2008). Complexation of uranium(VI) with aromatic acids such as hydroxamic and benzoic acid investigated by TRLFS. *Journal of Radioanal Chem* 277: 371-377. <http://dx.doi.org/10.1007/s10967-007-7082-6>
- [Gomes, J; Cocke, D; Das, K; Guttula, M; Tran, D; Beckman, J.](#) (2009). Treatment of produced water by electrocoagulation. Shiner, TX: KASELCO, LLC. <http://www.kaselco.com/index.php/library/industry-white-papers>
- [Goodwin, S; Carlson, K; Knox, K; Douglas, C; Rein, L.](#) (2014). Water intensity assessment of shale gas resources in the Wattenberg field in northeastern Colorado. *Environ Sci Technol* 48: 5991-5995. <http://dx.doi.org/10.1021/es404675h>
- [Grabowski, A; Nercessian, O; Fayolle, F; Blanchet, D; Jeanthon, C.](#) (2005). Microbial diversity in production waters of a low-temperature biodegraded oil reservoir. *FEMS Microbiol Ecol* 54: 427-443. <http://dx.doi.org/10.1016/j.femsec.2005.05.007>
- [Guolin, J; Xiaoyu, W; Chunjie, H.](#) (2008). The effect of oilfield polymer-flooding wastewater on anion exchange membrane performance. *Desalination* 220: 386-393.
- [Gupta, DVS; Valkó, P.](#) (2007). Fracturing fluids and formation damage. In M Economides; T Martin (Eds.), *Modern fracturing: enhancing natural gas production* (pp. 227-279). Houston, TX: Energy Tribune Publishing Inc.

- [GWPC and ALL Consulting](#) (Ground Water Protection Council (GWPC) and ALL Consulting). (2009). Modern shale gas development in the United States: A primer. (DE-FG26-04NT15455). Washington, DC: U.S. Department of Energy, Office of Fossil Energy and National Energy Technology Laboratory. <http://www.gwpc.org/sites/default/files/Shale%20Gas%20Primer%202009.pdf>
- [Habuda-Stanic, M; Ravancic, ME; Flanagan, A.](#) (2014). A Review on Adsorption of Fluoride from Aqueous Solution. *Materials* 7: 6317-6366. <http://dx.doi.org/10.3390/ma7096317>
- [Hagen, R; Kaatze, U.](#) (2004). Conformational kinetics of disaccharides in aqueous solutions. *J Chem Phys* 120: 9656-9664. <http://dx.doi.org/10.1063/1.1701835>
- [Halldorson, B.](#) (2013). Successful oilfield water management: Five unique case studies. Presentation presented at EPA Technical Workshop - Wastewater Treatment and Related Modeling Research, April 18, 2013, Triangle Park, NC.
- [Halliburton.](#) (2014). Hydraulic fracturing 101. Available online at [http://www.halliburton.com/public/projects/pubsdata/hydraulic\\_fracturing/fracturing\\_101.html](http://www.halliburton.com/public/projects/pubsdata/hydraulic_fracturing/fracturing_101.html)
- [Haluszczak, LO; Rose, AW; Kump, LR.](#) (2013). Geochemical evaluation of flowback brine from Marcellus gas wells in Pennsylvania, USA. *Appl Geochem* 28: 55-61. <http://dx.doi.org/10.1016/j.apgeochem.2012.10.002>
- [Hamieh, BM; Beckman, JR.](#) (2006). Seawater desalination using Dewvaporation technique: theoretical development and design evolution. *Desalination* 195: 1-13. <http://dx.doi.org/10.1016/j.desal.2005.09.034>
- [Hammer, R; VanBriesen, I.](#) (2012). In frackings wake: New rules are needed to protect our health and environment from contaminated wastewater. New York, NY: Natural Resources Defense Council. <http://www.nrdc.org/energy/files/fracking-wastewater-fullreport.pdf>
- [Hansen, E; Mulvaney, D; Betcher, M.](#) (2013). Water resource reporting and water footprint from Marcellus Shale development in West Virginia and Pennsylvania. Durango, CO: Earthworks Oil & Gas Accountability Project. [http://www.downstreamstrategies.com/documents/reports\\_publication/marcellus\\_wv\\_pa.pdf](http://www.downstreamstrategies.com/documents/reports_publication/marcellus_wv_pa.pdf)
- [Harkness, JS; Dwyer, GS; Warner, NR; Parker, KM; Mitch, WA; Vengosh, A.](#) (2015). Iodide, Bromide, and Ammonium in Hydraulic Fracturing and Oil and Gas Wastewaters: Environmental Implications. *Environ Sci Technol* 49: 1955-1963. <http://dx.doi.org/10.1021/es504654n>
- [Harlow, A; Wiegand, G; Franck, EU.](#) (1997). The Density of Ammonia at High Pressures to 723 K and 950 MPa. *101: 1461-1465.* <http://dx.doi.org/10.1002/bbpc.199700007>
- [Harwood, DW; Viner, JG; Russell, ER.](#) (1993). Procedure for developing truck accident and release rates for hazmat routing. *Journal of Transportation Engineering* 119: 189-199. [http://dx.doi.org/10.1061/\(ASCE\)0733-947X\(1993\)119:2\(189\)](http://dx.doi.org/10.1061/(ASCE)0733-947X(1993)119:2(189))
- [Hatch, JR; Leventhal, JS.](#) (1981). Geochemistry of organic-rich shales and coals from middle Pennsylvanian Cherokee group and lower part of Marmaton group, Oklahoma, Kansas, Missouri, and Iowa [Abstract]. *AAPG Bulletin* 65: 936.
- [Hayes, T.](#) (2009). Sampling and analysis of water streams associated with the development of Marcellus shale gas. Des Plaines, IL: Marcellus Shale Coalition. <http://eidmarcellus.org/wp-content/uploads/2012/11/MSCCommission-Report.pdf>
- [Hayes, T; Severin, B.](#) (2012a). Characterization of flowback water from the the Marcellus and the Barnett shale regions. Barnett and Appalachian shale water management and reuse technologies. (08122-05.09; Contract 08122-05). Hayes, T; Severin, B. [http://www.rpsea.org/media/files/project/2146b3a0/08122-05-RT-Characterization\\_Flowback\\_Waters\\_Marcellus\\_Barnett\\_Shale\\_Regions-03-20-12.pdf](http://www.rpsea.org/media/files/project/2146b3a0/08122-05-RT-Characterization_Flowback_Waters_Marcellus_Barnett_Shale_Regions-03-20-12.pdf)



- [Hayes, T; Severin, BF.](#) (2012b). Evaluation of the aqua-pure mechanical vapor recompression system in the treatment of shale gas flowback water - Barnett and Appalachian shale water management and reuse technologies. (08122-05.11). Hayes, T; Severin, BF. <http://barnettshalewater.org/documents/08122-05.11-EvaluationofMVR-3-12-2012.pdf>
- [Hayes, TD; Arthur, D.](#) (2004). Overview of emerging produced water treatment technologies. Paper presented at 11th Annual International Petroleum Environmental Conference, October 12-15, 2004, Albuquerque, NM.
- [Hayes, TD; Halldorson, B; Horner, P; Ewing, J; Werline, JR; Severin, BF.](#) (2014). Mechanical vapor recompression for the treatment of shale-gas flowback water. *Oil and Gas Facilities* 3: 54-62.
- [Haynes, WM.](#) (2014). CRC handbook of chemistry and physics. In WM Haynes (Ed.), (95 ed.). Boca Raton, FL: CRC Press. <http://www.hbcnetbase.com/>
- [He, YM; Jiang, RF; Zhu, F; Luan, TG; Huang, ZQ; Ouyang, GF.](#) (2008). Excess molar volumes and surface tensions of 1,2,4-trimethylbenzene and 1,3,5-trimethylbenzene with isopropyl acetate and isobutyl acetate at (298.15, 308.15, and 313.15)K. *Journal of Chemical and Engineering Data* 53: 1186-1191. <http://dx.doi.org/10.1021/jc800046k>
- [Hedlund, BP; Geiselbrecht, AD; Staley, JT.](#) (2001). *Marinobacter* strain NCE312 has a *Pseudomonas*-like naphthalene dioxygenase. *FEMS Microbiol Lett* 201: 47-51.
- [Hernlem, BJ; Vane, LM; Sayles, GD.](#) (1999). The application of siderophores for metal recovery and waste remediation: Examination of correlations for prediction of metal affinities. *Water Res* 33: 951-960.
- [Horsey, CA.](#) (1981). Depositional environments of the Pennsylvanian Pottsville Formation in the Black Warrior Basin of Alabama. *Journal of Sedimentary Research* 51: 799-806. <http://dx.doi.org/10.1306/212F7DB5-2B24-11D7-8648000102C1865D>
- [House of Representatives](#) (U.S. House of Representatives). (2011). Chemicals used in hydraulic fracturing. Washington, D.C.: U.S. House of Representatives, Committee on Energy and Commerce, Minority Staff. <http://democrats.energycommerce.house.gov/sites/default/files/documents/Hydraulic-Fracturing-Chemicals-2011-4-18.pdf>
- [Hua, GH; Reckhow, DA; Kim, J.](#) (2006). Effect of bromide and iodide ions on the formation and speciation of disinfection byproducts during chlorination. *Environ Sci Technol* 40: 3050-3056. <http://dx.doi.org/10.1021/es0519278>
- [Huffman, HM; Fox, SW.](#) (1938). Thermal data. X. The heats of combustion and free energies, at 25, of some organic compounds concerned in carbohydrate metabolism. *J Am Chem Soc* 60: 1400-1403. <http://dx.doi.org/10.1021/ja01273a036>
- [Hyne, NJ.](#) (2012). Nontechnical guide to petroleum geology, exploration, drilling and production. In *Nontechnical guide to petroleum geology, exploration, drilling and production* (3 ed.). Tulsa, OK: PennWell Corporation.
- [IARC](#) (International Agency for Research on Cancer). (2015). IARC monographs - Classifications. Available online at <http://monographs.iarc.fr/ENG/Classification/index.php>
- [Igunnu, ET; Chen, GZ.](#) (2014). Produced water treatment technologies. *International Journal of Low-Carbon Technologies* 9: 157-177. <http://dx.doi.org/10.1093/ijlct/cts049>
- [Inc., L.](#) (2012). Leadscope [Computer Program]. Columbus, Ohio. Retrieved from <http://www.leadscope.com>
- [IUPAC](#) (International Union of Pure and Applied Chemistry). (2014). Global availability of information on agrochemicals: Triisopropanolamine. Available online at <http://sitem.herts.ac.uk/aeru/iupac/Reports/1338.htm>

- [Jackson, RE; Gorody, AW; Mayer, B; Roy, JW; Ryan, MC; Van Stempvoort, DR.](#) (2013). Groundwater protection and unconventional gas extraction: the critical need for field-based hydrogeological research. *Ground Water* 51: 488-510. <http://dx.doi.org/10.1111/gwat.12074>
- [Jiang, L; Guillot, D; Meraji, M; Kumari, P; Vidick, B; Duncan, B; Gaafar, GR; Sansudin, SB.](#) (2012). Measuring isolation integrity in depleted reservoirs. SPWLA 53rd Annual Logging Symposium, June 16 - 20, 2012, Cartagena, Colombia.
- [Jones, DB; Saglam, A; Song, H; Karanfil, T.](#) (2012). The impact of bromide/iodide concentration and ratio on iodinated trihalomethane formation and speciation. *Water Res* 46: 11-20. <http://dx.doi.org/10.1016/j.watres.2011.10.005>
- [Julian, JY; King, GE; Johns, JE; Sack, JK; Robertson, DB.](#) (2007). Detecting ultrasmall leaks with ultrasonic leak detection, case histories from the North Slope, Alaska. Paper presented at International Oil Conference and Exhibition in Mexico, June 27-30, 2007, Veracruz, Mexico.
- [Kashem, MA; Singh, BR; Kondo, T; Huq, SMI; Kawai, S.](#) (2007). Comparison of extractability of Cd, Cu, Pb and Zn with sequential extraction in contaminated and non-contaminated soils. *Int J Environ Sci Tech* 4: 169-176. <http://dx.doi.org/10.1007/BF03326270>
- [Katsoyiannis, A; Samara, C.](#) (2007). The fate of dissolved organic carbon (DOC) in the wastewater treatment process and its importance in the removal of wastewater contaminants. *Environ Sci Pollut Res Int* 14: 284-292. <http://dx.doi.org/10.1065/espr2006.05.302>
- [Kim, HM; Hwang, CY; Cho, BC.](#) (2010). *Arcobacter marinus* sp. nov. *Int J Syst Evol Microbiol* 60: 531-536. <http://dx.doi.org/10.1099/ijs.0.007740-0>
- [Kimball, B.](#) (2010). Water treatment technologies for global unconventional gas plays. Presentation presented at US - China Industry Oil and Gas Forum, September 16, 2010, Fort Worth, TX.
- [Kirksey, J.](#) (2013). Optimizing wellbore integrity in well construction. Presentation presented at North American Wellbore Integrity Workshop, October 16-17, 2013, Denver, CO.
- [Kiselev, VD; Kashaeva, HA; Shakirova, II; Potapova, LN; Konovalov, AI.](#) (2012). Solvent effect on the enthalpy of solution and partial molar volume of the ionic liquid 1-butyl-3-methylimidazolium tetrafluoroborate. *Journal of Solution Chemistry* 41: 1375-1387. <http://dx.doi.org/10.1007/s10953-012-9881-9>
- [Kose, B; Ozgun, H; Ersahin, ME; Dizge, N; Koseoglu, DY; Atay, B; Kaya, R; Altinbas, M; Sayili, S; Hoshan, P; Atay, D; Eren, E; Kinaci, C; Koyuncu, I.](#) (2012). Performance evaluation of a submerged membrane bioreactor for the treatment of brackish oil and natural gas field produced water. *Desalination* 285: 295-300.
- [Kraemer, TF; Reid, DF.](#) (1984). The occurrence and behavior of radium in saline formation water of the U.S. Gulf Coast region. *Isotope Geoscience* 2: 153-174.
- [Krakowiak, J; Bobicz, D; Grzybkowski, W.](#) (2001). Limiting partial molar volumes of tetra-n-alkylammonium perchlorates in N,N-dimethylacetamide, triethylphosphate and dimethyl sulfoxide at T=298.15 K. *The Journal of Chemical Thermodynamics* 33: 121-133. <http://dx.doi.org/10.1006/jcht.2000.0725>
- [Krasner, SW.](#) (2009). The formation and control of emerging disinfection by-products of health concern [Review]. *Philos Transact A Math Phys Eng Sci* 367: 4077-4095. <http://dx.doi.org/10.1098/rsta.2009.010>
- [Laavi, H; Pokki, JP; Uusi-Kyyny, P; Massimi, A; Kim, Y; Sapei, E; Alopaeus, V.](#) (2013). Vapor-liquid equilibrium at 350 K, excess molar enthalpies at 298 K, and excess molar volumes at 298 K of binary mixtures containing ethyl acetate, butyl acetate, and 2-butanol. *Journal of Chemical and Engineering Data* 58: 1011-1019. <http://dx.doi.org/10.1021/je400036b>

- [Laavi, H; Zaitseva, A; Pokki, JP; Uusi-Kyyny, P; Kim, Y; Alopaeus, V.](http://dx.doi.org/10.1021/je300678r) (2012). Vapor-liquid equilibrium, excess molar enthalpies, and excess molar volumes of binary mixtures containing methyl isobutyl ketone (MIBK) and 2-butanol, tert-pentanol, or 2-ethyl-1-hexanol. *Journal of Chemical and Engineering Data* 57: 3092-3101. <http://dx.doi.org/10.1021/je300678r>
- [Lalucat, J; Bennasar, A; Bosch, R; Garcia-Valdes, E; Palleroni, NJ.](http://dx.doi.org/10.1128/MMBR.00047-05) (2006). Biology of *Pseudomonas stutzeri* [Review]. *Microbiol Mol Biol Rev* 70: 510-547. <http://dx.doi.org/10.1128/MMBR.00047-05>
- [Langmuir, D; Herman, JS.](http://dx.doi.org/10.1016/0016-7037(80)90226-4) (1980). The mobility of thorium in natural waters at low temperatures. *Geochim Cosmo Acta* 44: 1753-1766. [http://dx.doi.org/10.1016/0016-7037\(80\)90226-4](http://dx.doi.org/10.1016/0016-7037(80)90226-4)
- [Langmuir, D; Riese, AC.](http://dx.doi.org/10.1016/0016-7037(85)90226-4) (1985). THE THERMODYNAMIC PROPERTIES OF RADIUM. *Geochim Cosmo Acta* 49: 1593-1601.
- [Laurenzi, JJ; Jersey, GR.](http://dx.doi.org/10.1021/es305162w) (2013). Life cycle greenhouse gas emissions and freshwater consumption of Marcellus shale gas. *Environ Sci Technol* 47: 4896-4903. <http://dx.doi.org/10.1021/es305162w>
- [LEau LLC.](http://www.usbr.gov/research/AWT/reportpdfs/report120.pdf) (2008). Dew vaporation desalination 5,000-gallon-per-day pilot plant. (Desalination and Water Purification Research and Development Program Report No. 120). Denver, CO: Bureau of Reclamation, U.S. Department of the Interior. <http://www.usbr.gov/research/AWT/reportpdfs/report120.pdf>
- [Lee, K; Neff, J.](http://dx.doi.org/10.1007/978-1-4614-0046-2) (2011). Produced water: Environmental risks and advances in mitigation technologies. New York, NY: Springer. <http://dx.doi.org/10.1007/978-1-4614-0046-2>
- [Leventhal, JS; Hosterman, JW.](http://dx.doi.org/10.1016/0016-7037(82)90226-4) (1982). Chemical and mineralogical analysis Of Devonian black-shale samples from Martin County, Kentucky - Carroll and Washington counties, Ohio - Wise County, Virginia - and Overton County, Tennessee, USA. *Chem Geol* 37: 239-264.
- [Li, L; Brantley, SL.](http://water.usgs.gov/wrri/2011grants/progress/2011PA159B.pdf) (2011). Development of a subsurface reactive transport model for predicting potential water quality problems at Marcellus shale. (USGS Project 2011PA159B). Li, L; Brantley, SL. <http://water.usgs.gov/wrri/2011grants/progress/2011PA159B.pdf>
- [Lovley, DR; Chapelle, FH.](http://dx.doi.org/10.1029/95RG01305) (1995). Deep subsurface microbial processes. *Rev Geophys* 33: 365-381. <http://dx.doi.org/10.1029/95RG01305>
- [Lovley, DR; Phillips, EJ.](http://dx.doi.org/10.1016/0016-7037(86)90226-4) (1986). Organic matter mineralization with reduction of ferric iron in anaerobic sediments. *Appl Environ Microbiol* 51: 683-689.
- [Ludzack, FJ; Noran, DK.](http://dx.doi.org/10.1016/0016-7037(65)90226-4) (1965). Tolerance of high salinities by conventional wastewater treatment processes. *J Water Pollut Control Fed* 37: 1404-1416.
- [Luh, J; Mariñas, BJ.](http://dx.doi.org/10.1021/es300077x) (2012). Bromide ion effect on N-nitrosodimethylamine formation by monochloramine. *Environ Sci Technol* 46: 5085-5092. <http://dx.doi.org/10.1021/es300077x>
- [Lyons, WC; Pligsa, GJ.](http://www.elsevier.com/books/standard-handbook-of-petroleum-and-natural-gas-engineering/lyons-phd-pe/978-0-7506-7785-1) (2004). Standard handbook of petroleum and natural gas engineering (2nd ed.). Houston, TX: Gulf Professional Publishing. <http://www.elsevier.com/books/standard-handbook-of-petroleum-and-natural-gas-engineering/lyons-phd-pe/978-0-7506-7785-1>
- [Ma, G; Geza, M; Xu, P.](http://dx.doi.org/10.1016/0016-7037(14)90226-4) (2014). Review of flowback and produced water management, treatment, and beneficial use for major shale gas development basins. *Shale Energy Engineering Conference 2014*, Pittsburgh, Pennsylvania, United States.
- [Mak, TCW.](http://dx.doi.org/10.1063/1.1697212) (1965). Hexamethylenetetramine hexahydrate: A new type of clathrate hydrate. *J Chem Phys* 43: 2799. <http://dx.doi.org/10.1063/1.1697212>
- [Manios, T; Stentiford, EI; Millner, P.](http://dx.doi.org/10.1081/ESE-120019865) (2003). Removal of total suspended solids from wastewater in constructed horizontal flow subsurface wetlands. *J Environ Sci Health A Tox Hazard Subst Environ Eng* 38: 1073-1085. <http://dx.doi.org/10.1081/ESE-120019865>

- [Martinez-Reina, M; Amado-Gonzalez, E; Mauricio Munoz-Munoz, Y.](#) (2012). Study of liquid-liquid equilibria of toluene plus (hexane, heptane, or cyclohexane) with 1-ethyl-3-methylimidazolium ethylsulfate at 308.15 K. Bull Chem Soc Jpn 85: 1138-1144. <http://dx.doi.org/10.1246/bcsj.20120112>
- [Martinez, CE; McBride, MB.](#) (2001). Cd, Cu, Pb, and Zn coprecipitates in Fe oxide formed at different pH: Aging effects on metal solubility and extractability by citrate. Environ Toxicol Chem 20: 122-126. <http://dx.doi.org/10.1002/etc.5620200112>
- [Masood, AKM; Pethrick, RA; Swinton, FL.](#) (1976). Physicochemical studies of super-cooled liquids - cyclic carbonates and alpha,beta-unsaturated aldehydes. Faraday Trans 1 72: 20-28. <http://dx.doi.org/10.1039/f19767200020>
- [Mata, JA; Martínez-Cánovas, J; Quesada, E; Béjar, V.](#) (2002). A detailed phenotypic characterisation of the type strains of Halomonas species. Syst Appl Microbiol 25: 360-375. <http://dx.doi.org/10.1078/0723-2020-00122>
- [Matamoros, V; Mujeriego, R; Bayona, JM.](#) (2007). Trihalomethane occurrence in chlorinated reclaimed water at full-scale wastewater treatment plants in NE Spain. Water Res 41: 3337-3344. <http://dx.doi.org/10.1016/j.watres.2007.04.021>
- [Maupin, MA; Kenny, JF; Hutson, SS; Lovelace, JK; Barber, NL; Linsey, KS.](#) (2014). Estimated use of water in the United States in 2010. (USGS Circular 1405). Reston, VA: U.S. Geological Survey. <http://dx.doi.org/10.3133/cir1405>
- [Maxwell, SC.](#) (2011). Hydraulic fracture height growth. Recorder 36: 18-22.
- [McDaniel, BW; Rispler, KA.](#) (2009). Horizontal wells with multistage fracs prove to be best economic completion for many low permeability reservoirs. Paper presented at SPE Eastern Regional Meeting, September 23-15, 2009, Charleston, WV.
- [McDaniel, J; Watters, L; Shadravan, A.](#) (2014). Cement sheath durability: Increasing cement sheath integrity to reduce gas migration in the Marcellus Shale Play. In SPE hydraulic fracturing technology conference proceedings. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/168650-MS>
- [McGowan, L; Herbert, R; Muyzer, G.](#) (2004). A comparative study of hydrocarbon degradation by *Marinobacter* sp., *Rhodococcus* sp. and *Corynebacterium* sp. isolated from different mat systems. Ophelia 58: 271-281. <http://dx.doi.org/10.1080/00785236.2004.10410235>
- [McGuire, MJ; Karanfil, T; Krasner, SW; Reckhow, DA; Roberson, JA; Summers, RS; Westerhoff, P; Xie, Y.](#) (2014). Not your granddad's disinfection by-product problems and solutions. JAWWA 106: 54-73. <http://dx.doi.org/10.5942/jawwa.2014.106.0128>
- [McLin, K; Brinton, D; Moore, J.](#) (2011). Geochemical modeling of water-rock-proppant interactions. Thirty-Sixth Workshop on Geothermal Reservoir Engineering, January 31 - February 2, 2011, Stanford University, Stanford, California.
- [Miller, P.](#) (2011). Future of hydraulic fracturing depends on effective water treatment. Hydrocarbon Process 90: 13-13.
- [Mitchell, AL; Small, M; Casman, EA.](#) (2013). Surface water withdrawals for Marcellus Shale gas development: performance of alternative regulatory approaches in the Upper Ohio River Basin. Environ Sci Technol 47: 12669-12678. <http://dx.doi.org/10.1021/es403537z>
- [Mohan, AM; Gregory, KB; Vidic, RD; Miller, P; Hammack, RW.](#) (2011). Characterization of microbial diversity in treated and untreated flowback water impoundments from gas fracturing operations. Paper presented at SPE Annual Technical Conference and Exhibition, October 30 - November 2, 2011, Denver, CO.
- [Montgomery, C.](#) (2013). Fracturing fluid components. In A Bunder; J McLennon; R Jeffrey (Eds.), Effective and Sustainable Hydraulic Fracturing. Croatia: InTech. <http://dx.doi.org/10.5772/56422>

- [Moosavi, M; Motahari, A; Omrani, A; Rostami, AA.](#) (2013). Thermodynamic study on some alkanediol solutions: Measurement and modeling. *Thermochim Acta* 561: 1-13. <http://dx.doi.org/10.1016/j.tca.2013.03.010>
- [Moses, CO; Herman, JS.](#) (1991). Pyrite oxidation at circumneutral pH. *Geochim Cosmo Acta* 55: 471-482.
- [MSC](#) (Marcellus Shale Coalition). (2013). Recommended practices: Drilling and completions. (MSC RP 2013-3). Pittsburgh, Pennsylvania.
- [Munter, R.](#) (2000). Industrial wastewater treatment. In LC Lundin (Ed.), *Sustainable water management in the Baltic Sea Basin book II: Water use and management* (pp. 195-210). Sida, Sweden: Baltic University Programme Publication. <http://www.balticuniv.uu.se/index.php/boll-online-library/831-swm-2-water-use-and-management>
- [Murali Mohan, A; Hartsock, A; Bibby, KJ; Hammack, RW; Vidic, RD; Gregory, KB.](#) (2013a). Microbial community changes in hydraulic fracturing fluids and produced water from shale gas extraction. *Environ Sci Technol* 47: 13141-13150. <http://dx.doi.org/10.1021/es402928b>
- [Murali Mohan, A; Hartsock, A; Hammack, RW; Vidic, RD; Gregory, KB.](#) (2013b). Microbial communities in flowback water impoundments from hydraulic fracturing for recovery of shale gas. *FEMS Microbiol Ecol.* <http://dx.doi.org/10.1111/1574-6941.12183>
- [Murray, KE.](#) (2013). State-scale perspective on water use and production associated with oil and gas operations, Oklahoma, U.S. *Environ Sci Technol* 47: 4918-4925. <http://dx.doi.org/10.1021/es4000593>
- [Muylaert, K; Dasseville, R; De Brabandere, L; Dehairs, F; Vyverman, W.](#) (2005). Dissolved organic carbon in the freshwater tidal reaches of the Schelde estuary. *Estuar Coast Shelf Sci* 64: 591-600. <http://dx.doi.org/10.1016/j.ecss.2005.04.010>
- [Myers, CR; Nealson, KH.](#) (1988). Bacterial manganese reduction and growth with manganese oxide as the sole electron acceptor. *Science* 240: 1319-1321. <http://dx.doi.org/10.1126/science.240.4857.1319>
- [Newman, DK.](#) (2001). Microbiology - How bacteria respire minerals. *Science* 292: 1312-1313. <http://dx.doi.org/10.1126/science.1060572>
- [Nicot, JP; Reedy, RC; Costley, RA; Huang, Y.](#) (2012). Oil & gas water use in Texas: Update to the 2011 mining water use report. Nicot, JP; Reedy, RC; Costley, RA; Huang, Y. [http://www.twdb.state.tx.us/publications/reports/contracted\\_reports/doc/0904830939\\_2012Update\\_MiningWaterUse.pdf](http://www.twdb.state.tx.us/publications/reports/contracted_reports/doc/0904830939_2012Update_MiningWaterUse.pdf)
- [Nicot, JP; Scanlon, BR.](#) (2012). Water use for shale-gas production in Texas, U.S. *Environ Sci Technol* 46: 3580-3586. <http://dx.doi.org/10.1021/es204602t>
- [Nicot, JP; Scanlon, BR; Reedy, RC; Costley, RA.](#) (2014). Source and fate of hydraulic fracturing water in the Barnett Shale: a historical perspective. *Environ Sci Technol* 48: 2464-2471. <http://dx.doi.org/10.1021/es404050r>
- [NLM](#) (National Institutes of Health, National Library of Medicine). (2014). ChemID plus advanced. Available online at <http://chem.sis.nlm.nih.gov/chemidplus/>
- [NMSU DACC WUTAP](#) (New Mexico State University, Doña Ana Community College, Water Utilities Technical Assistance Program). (2007). New Mexico wastewater systems operator certification study manual - Version 1.1. Santa Fe, NM: New Mexico Environment Department. <http://www.nmrwa.org/sites/nmrwa.org/files/WastewaterOperatorStudyManual.pdf>
- [Nordstrom, DK; Alpers, CN.](#) (1999). Geochemistry of acid mine waters. In GS Plumlee; MJ Logsdon (Eds.), *The Environmental Geochemistry of Mineral Deposits Part A: Processes, Techniques, and Health Issues* Society of Economic Geologists, Denver (pp. 133-160). Littleton, CO: Society of Economic Geologists.
- [North Dakota State Water Commission.](#) (2014). Facts about North Dakota fracking and water use. Bismarck, ND. <http://www.swc.nd.gov/4dlink9/4dcgi/GetContentPDF/PB-2419/Fact%20Sheet.pdf>



- [NTP](http://ntp.niehs.nih.gov/results/pubs/longterm/defs/index.html) (National Toxicology Program). (2014a). Definition of carcinogenicity results. Available online at <http://ntp.niehs.nih.gov/results/pubs/longterm/defs/index.html>
- [NTP](http://ntp.niehs.nih.gov/pubhealth/roc/roc13/index.html) (National Toxicology Program). (2014b). Report on carcinogens. Thirteenth edition. Research Triangle Park, NC: U.S. Department of Health and Human Services, Public Health Service. <http://ntp.niehs.nih.gov/pubhealth/roc/roc13/index.html>
- [NYSDEC](http://www.dec.ny.gov/energy/75370.html) (New York State Department of Environmental Conservation). (2011). Revised draft supplemental generic environmental impact statement (SGEIS) on the oil, gas and solution mining regulatory program: Well permit issuance for horizontal drilling and high-volume hydraulic fracturing to develop the Marcellus shale and other low-permeability gas reservoirs. Albany, NY: NY SDEC. <http://www.dec.ny.gov/energy/75370.html>
- [Obolensky, A; Singer, PC.](http://dx.doi.org/10.1021/es702974f) (2008). Development and interpretation of disinfection byproduct formation models using the Information Collection Rule database. *Environ Sci Technol* 42: 5654-5660. <http://dx.doi.org/10.1021/es702974f>
- [OEHHA. Title 27, California Code of Regulations Article 8. No Observable Effect Levels, § 25701](http://www.oehha.ca.gov/prop65/law/pdf/zip/RegsArt8.pdf) (2012). <http://www.oehha.ca.gov/prop65/law/pdf/zip/RegsArt8.pdf>
- [Oil and Gas Mineral Services.](http://www.mineralweb.com/library/oil-and-gas-terms/) (2010). MineralWise: Oil and gas terminology. Available online at <http://www.mineralweb.com/library/oil-and-gas-terms/>
- [Oka, S.](http://dx.doi.org/10.1246/bcsj.35.986) (1962). Studies on lactone formation in vapor phase. III. Mechanism of lactone formation from diols. *Bull Chem Soc Jpn* 35: 986-989. <http://dx.doi.org/10.1246/bcsj.35.986>
- [ONG Services.](http://www.onglis.com/Home/Search?SearchString=Reserved+environmental+services&Distance=&searchAddress=&CategoryTypeID=1&SubCategoryID) (2015). ONGList: Reserved Environmental Services. Available online at <http://www.onglis.com/Home/Search?SearchString=Reserved+environmental+services&Distance=&searchAddress=&CategoryTypeID=1&SubCategoryID>
- [Orem, W; Tatu, C; Varonka, M; Lerch, H; Bates, A; Engle, M; Crosby, L; Mcintosh, J.](http://dx.doi.org/10.1016/j.coal.2014.01.003) (2014). Organic substances in produced and formation water from unconventional natural gas extraction in coal and shale. *Int J Coal Geol* 126: 20-31. <http://dx.doi.org/10.1016/j.coal.2014.01.003>
- [Orem, WH; Tatu, CA; Lerch, HE; Rice, CA; Bartos, TT; Bates, AL; Tewalt, S; Corum, MD.](http://dx.doi.org/10.1016/j.apgeochem.2007.04.010) (2007). Organic compounds in produced waters from coalbed natural gas wells in the Powder River Basin, Wyoming, USA. *Appl Geochem* 22: 2240-2256. <http://dx.doi.org/10.1016/j.apgeochem.2007.04.010>
- [OSHA. Title 29 - Department of Labor. Subpart z Toxic and hazardous substances, hazard communication, § 1910.1200](http://www.gpo.gov/fdsys/pkg/CFR-2013-title29-vol6/xml/CFR-2013-title29-vol6-sec1910-1200.xml) (2013). <http://www.gpo.gov/fdsys/pkg/CFR-2013-title29-vol6/xml/CFR-2013-title29-vol6-sec1910-1200.xml>
- [PA DEP](http://files.dep.state.pa.us/OilGas/BOGM/BOGMPortalFiles/MarcellusShale/Frac%20list%206-30-2010.pdf) (Pennsylvania Department of Environmental Protection). (2010). Chemicals used by hydraulic fracturing companies in Pennsylvania for surface and hydraulic fracturing activities. Harrisburg, PA: Pennsylvania Department of Environmental Protection (PADEP). <http://files.dep.state.pa.us/OilGas/BOGM/BOGMPortalFiles/MarcellusShale/Frac%20list%206-30-2010.pdf>.
- [PA DEP](http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study-Report-Rev.-0-01-15-2015.pdf) (Pennsylvania Department of Environmental Protection). (2015). Technologically enhanced naturally occurring radioactive materials (TENORM) study report. Harrisburg, PA. <http://www.elibrary.dep.state.pa.us/dsweb/Get/Document-105822/PA-DEP-TENORM-Study-Report-Rev.-0-01-15-2015.pdf>
- [Pal, A; Kumar, H; Maan, R; Sharma, HK.](http://dx.doi.org/10.1021/je300789a) (2013). Densities and speeds of sound of binary liquid mixtures of some n-alkoxypropanols with methyl acetate, ethyl acetate, and n-butyl acetate at T = (288.15, 293.15, 298.15, 303.15, and 308.15) K. *Journal of Chemical and Engineering Data* 58: 225-239. <http://dx.doi.org/10.1021/je300789a>

- [Parker, KM; Zeng, T; Harkness, J; Vengosh, A; Mitch, WA.](#) (2014). Enhanced formation of disinfection byproducts in shale gas wastewater-impacted drinking water supplies. *Environ Sci Technol* 48: 11161-11169. <http://dx.doi.org/10.1021/es5028184>
- [Pashin, JC; Mcintyre-Redden, MR; Mann, SD; Kopaska-Merkel, DC; Varonka, M; Orem, W.](#) (2014). Relationships between water and gas chemistry in mature coalbed methane reservoirs of the Black Warrior Basin. *Int J Coal Geol* 126: 92-105. <http://dx.doi.org/10.1016/j.coal.2013.10.002>
- [Pijper, WP.](#) (1971). Molecular and crystal structure of glycolic acid. *Acta Crystallogr B* 27: 344-348. <http://dx.doi.org/10.1107/S056774087100219X>
- [Pope, PG; Martin-Doole, M; Speitel, GE; Collins, MR.](#) (2007). Relative significance of factors influencing DXAA formation during chloramination. *JAWWA* 99: 144-156.
- [Radwan, MHS; Hanna, AA.](#) (1976). Binary azeotropes containing butyric acids. *Journal of Chemical and Engineering Data* 21: 285-289. <http://dx.doi.org/10.1021/je60070a032>
- [Rahm, BG; Bates, JT; Bertoia, LR; Galford, AE; Yoxthimer, DA; Riha, SJ.](#) (2013). Wastewater management and Marcellus Shale gas development: trends, drivers, and planning implications. *J Environ Manage* 120: 105-113. <http://dx.doi.org/10.1016/j.jenvman.2013.02.029>
- [Rani, M; Maken, S.](#) (2013). Excess molar enthalpies and excess molar volumes of formamide+1-propanol or 2-propanol and thermodynamic modeling by Prigogine-Flory-Patterson theory and Treszczanowicz-Benson association model. *Thermochim Acta* 559: 98-106. <http://dx.doi.org/10.1016/j.tca.2013.02.010>
- [Ravot, G; Magot, M; Ollivier, B; Patel, BK; Ageron, E; Grimont, PA; Thomas, P; Garcia, JL.](#) (1997). *Haloanaerobium congolense* sp. nov., an anaerobic, moderately halophilic, thiosulfate- and sulfur-reducing bacterium from an African oil field. *FEMS Microbiol Lett* 147: 81-88.
- [Rawat, BS; Gulati, IB; Mallik, KL.](#) (1976). Study of some sulphur-group solvents for aromatics extraction by gas chromatography. *Journal of Applied Chemistry and Biotechnology* 26: 247-252. <http://dx.doi.org/10.1002/jctb.5020260504>
- [Renpu, W.](#) (2011). *Advanced well completion engineering* (Third ed.). Houston, TX: Gulf Professional Publishing.
- [Rice, CA; Flores, RM; Stricker, GD; Ellis, MS.](#) (2008). Chemical and stable isotopic evidence for water/rock interaction and biogenic origin of coalbed methane, Fort Union Formation, Powder River Basin, Wyoming and Montana USA. *Int J Coal Geol* 76: 76-85. <http://dx.doi.org/10.1016/j.coal.2008.05.002>
- [Richardson, SD; Plewa, MJ; Wagner, ED; Schoeny, R; Demarini, DM.](#) (2007). Occurrence, genotoxicity, and carcinogenicity of regulated and emerging disinfection by-products in drinking water: A review and roadmap for research [Review]. *Mutat Res* 636: 178-242. <http://dx.doi.org/10.1016/j.mrrev.2007.09.00>
- [Rodnikova, MN; Solonina, IA; Egorov, GI; Makarov, DM; Gunina, MA.](#) (2012). The bulk properties of dioxane solutions in ethylene glycol at 2575C. *Russian Journal of Physical Chemistry A, Focus on Chemistry* 86: 330-332. <http://dx.doi.org/10.1134/S0036024412020239>
- [Ross, D; King, G.](#) (2007). Well completions. In MJ Economides; T Martin (Eds.), *Modern fracturing: Enhancing natural gas production* (1 ed., pp. 169-198). Houston, Texas: ET Publishing.
- [Rowan, EL; Engle, MA; Kirby, CS; Kraemer, TF.](#) (2011). Radium content of oil- and gas-field produced waters in the northern Appalachian Basin (USA): Summary and discussion of data. (Scientific Investigations Report 20115135). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/sir/2011/5135/>
- [Roy, SB; Ricci, PF; Summers, KV; Chung, CF; Goldstein, RA.](#) (2005). Evaluation of the sustainability of water withdrawals in the United States, 1995 to 2025. *J Am Water Resour Assoc* 41: 1091-1108.
- [Rozell, DJ; Reaven, SJ.](#) (2012). Water pollution risk associated with natural gas extraction from the Marcellus Shale. *Risk Anal* 32: 13821393. <http://dx.doi.org/10.1111/j.1539-6924.2011.01757.x>

- [Sabins, F.](#) (1990). Problems in cementing horizontal wells. *J Pet Tech* 42: 398-400.  
<http://dx.doi.org/10.2118/20005-PA>
- [Safe Drinking Water Act. Title XIV of the Public Health Service Act Safety of Public Water Systems](#) (Safe Drinking Water Act) as amended through P.L. 107-377, (2002). <http://www.epw.senate.gov/sdwa.pdf>
- [Sarkar, BK; Choudhury, A; Sinha, B.](#) (2012). Excess molar volumes, excess viscosities and ultrasonic speeds of sound of binary mixtures of 1,2-dimethoxyethane with some aromatic liquids at 298.15 K. *Journal of Solution Chemistry* 41: 53-74. <http://dx.doi.org/10.1007/s10953-011-9780-5>
- [Sarkar, L; Roy, MN.](#) (2009). Density, viscosity, refractive index, and ultrasonic speed of binary mixtures of 1,3-dioxolane with 2-methoxyethanol, 2-ethoxyethanol, 2-butoxyethanol, 2-propylamine, and cyclohexylamine. *Journal of Chemical and Engineering Data* 54: 3307-3312.  
<http://dx.doi.org/10.1021/jc900240s>
- [Schlumberger](#) (Schlumberger Limited). (2014). Schlumberger oilfield glossary. Available online at <http://www.glossary.oilfield.slb.com/>
- [Schrodinger.](#) (2012). Qikprop [Computer Program]. New York, New York: Schrodinger, LLC. Retrieved from <http://www.schrodinger.com/products/14/17>
- [Shafer, L.](#) (2011). Water recycling and purification in the Pinedale anticline field: results from the anticline disposal project. In 2011 SPE Americas E&P health, safety, security & environmental conference. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/141448-MS>
- [Shaffer, DL; Arias Chavez, LH; Ben-Sasson, M; Romero-Vargas Castrillón, S; Yip, NY; Elimelech, M.](#) (2013). Desalination and reuse of high-salinity shale gas produced water: drivers, technologies, and future directions. *Environ Sci Technol* 47: 9569-9583.
- [Shammas, NK.](#) (2010). Wastewater renovation by flotation. In LK Wang; NK Shammas; WA Selke; DB Aulenbach (Eds.), *Flotation technology* (pp. 327-345). New York, NY: Humana Press.  
[http://dx.doi.org/10.1007/978-1-60327-133-2\\_9](http://dx.doi.org/10.1007/978-1-60327-133-2_9)
- [Shanley, P; Collin, RL.](#) (1961). The crystal structure of the high temperature form of choline chloride. *Acta Cryst* 14: 79-80. <http://dx.doi.org/10.1107/S0365110X61000292>
- [Sheets, MSD.](#) (a) Encana/Halliburton Energy Services, Inc.: Duncan, Oklahoma. Provided by Halliburton Energy Services during an onsite visit by the EPA on May 10, 2010; (b) Encana Oil and Gas (USA), Inc.: Denver, Colorado. Provided to US EPA Region 8. Material Safety Data Sheets.
- [Sigma-Aldrich.](#) (2007). Material safety data sheet: Tert-butyl hydroperoxide (70% solution in water). Available online at [http://www.orcbs.msu.edu/msds/111607\\_DLI\\_027\\_TERT-BUTYL.PDF](http://www.orcbs.msu.edu/msds/111607_DLI_027_TERT-BUTYL.PDF)
- [Sigma-Aldrich.](#) (2010). Product information: Sodium chloride. Available online at [https://www.sigmaaldrich.com/content/dam/sigma-aldrich/docs/Sigma-Aldrich/Product Information Sheet/s7653pis.pdf](https://www.sigmaaldrich.com/content/dam/sigma-aldrich/docs/Sigma-Aldrich/Product%20Information%20Sheet/s7653pis.pdf)
- [Sigma-Aldrich.](#) (2014a). Material safety data sheet: Phosphorus acid. Available online at <http://www.sigmaaldrich.com/catalog/product/sial/215112?lang=en&region=US>
- [Sigma-Aldrich.](#) (2014b). Material safety data sheet: Potassium carbonate. Available online at <http://www.sigmaaldrich.com/catalog/product/aldrich/367877?lang=en&region=US>
- [Sigma-Aldrich.](#) (2015a). Material safety data sheet: Aluminum chloride [Fact Sheet]. St. Louis, MO.  
<http://www.sigmaaldrich.com/catalog/product/aldrich/563919?lang=en&region=US>
- [Sigma-Aldrich.](#) (2015b). Material safety data sheet: Peracetic acid solution. Available online at <http://www.sigmaaldrich.com/catalog/product/sial/269336?lang=en&region=US>
- [Sigma-Aldrich.](#) (2015c). Material safety data sheet: Sulfur dioxide. Available online at <http://www.sigmaaldrich.com/catalog/product/aldrich/295698?lang=en&region=US>



- [Sigma-Aldrich](http://www.sigmaaldrich.com/catalog/product/aldrich/339741?lang=en&region=US). (2015d). Material safety data sheet: Sulfuric acid. Available online at <http://www.sigmaaldrich.com/catalog/product/aldrich/339741?lang=en&region=US>
- [Sigma-Aldrich](http://www.sigmaaldrich.com/catalog/product/aldrich/447218?lang=en&region=US). (2015e). Material safety data sheet: Trimethyl borate. Available online at <http://www.sigmaaldrich.com/catalog/product/aldrich/447218?lang=en&region=US>
- [Singer, P.](#) (2010). Anomalous DBP speciation patterns: Examples and explanations. Water Quality Technology Conference and Exposition 2010, November, 14-18, 2010, Savannah, GA.
- [Sirivedhin, T; Dallbauman, L.](#) (2004). Organic matrix in produced water from the Osage-Skiatook petroleum environmental research site, Osage county, Oklahoma. *Chemosphere* 57: 463-469.
- [Skjerven, T; Lunde, Ø; Perander, M; Williams, B; Farquhar, R; Sinet, J; Sæby, J; Haga, HB; Finnseth, Ø; Johnsen, S.](#) (2011). Norwegian Oil and Gas Association recommended guidelines for well integrity. (117, Revision 4). Norway: Norwegian Oil and Gas Association. <http://www.norskoljeoggass.no/Global/Retningslinjer/Boring/117%20-%20Recommended%20guidelines%20Well%20integrity%20rev4%2006.06.%2011.pdf>
- [Smirnov, VI; Badelin, VG.](#) (2013). Enthalpy characteristics of dissolution of L-tryptophan in water plus formamides binary solvents at 298.15 K. *Russian Journal of Physical Chemistry A, Focus on Chemistry* 87: 1165-1169. <http://dx.doi.org/10.1134/S0036024413070285>
- [Solley, WB; Pierce, RR; Perlman, HA.](#) (1998). Estimated use of water in the United States in 1995. (USGS Circular: 1200). U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/cir1200>
- [Spellman, FR.](#) (2012). Environmental impacts of hydraulic fracturing. In *Environmental impacts of hydraulic fracturing*. Boca Raton, Florida: CRC Press.
- [SRBC.](#) (2012). Flowback and Produced Water Volume.
- [States, S; Cyprych, G; Stoner, M; Wydra, F; Kuchta, J; Monnell, J; Casson, L.](#) (2013). Marcellus Shale drilling and brominated THMs in Pittsburgh, Pa., drinking water. *J Am Water Works Assoc* 105: E432-E448. <http://dx.doi.org/10.5942/jawwa.2013.105.0093>
- [Stein, D; Griffin Jr, TJ; Dusterhoft, D.](#) (2003). Cement pulsation reduces remedial cementing costs. *GasTIPS* 9: 22-24.
- [Steinhauser, O; Boresch, S; Bertagnolli, H.](#) (1990). The effect of density variation on the structure of liquid hydrogen chloride. A Monte Carlo study. *J Chem Phys* 93: 2357-2363. <http://dx.doi.org/10.1063/1.459015>
- [Stepan, DJ; Shockey, RE; Kurz, BA; Kalenze, NS; Cowan, RM; Ziman, JJ; Harju, JA.](#) (2010). Bakken water opportunities assessment: Phase I. (2010-EERC-04-03). Bismarck, ND: North Dakota Industrial Commission. <http://www.nd.gov/ndic/ogrp/info/g-018-036-fi.pdf>
- [Struchtemeyer, CG; Elshahed, MS.](#) (2012). Bacterial communities associated with hydraulic fracturing fluids in thermogenic natural gas wells in North Central Texas, USA. *FEMS Microbiol Ecol* 81: 13-25. <http://dx.doi.org/10.1111/j.1574-6941.2011.01196.x>
- [Stumm, W; Morgan, JJ.](#) (1981). *Aquatic chemistry: An introduction emphasizing chemical equilibria in natural waters* (2nd ed.). New York, NY: Wiley.
- [Sturchio, NC; Banner, JL; Binz, CM; Heraty, LB; Musgrove, M.](#) (2001). Radium geochemistry of ground waters in Paleozoic carbonate aquifers, midcontinent, USA. *Appl Geochem* 16: 109-122.
- [Swanson, VE.](#) (1955). Uranium in marine black shales of the United States. In *Contributions to the geology of uranium and thorium by the United States Geological Survey and Atomic Energy Commission for the United Nations International Conference on Peaceful Uses of Atomic Energy, Geneva, Switzerland, 1955* (pp. 451-456). Reston, VA: U.S. Geological Survey. <http://pubs.usgs.gov/pp/0300/report.pdf>

- [Tchobanoglous, G; Burton, FL; Stensel, HD.](#) (2013). Wastewater engineering: Treatment and reuse. In th (Ed.), (9780070418783 ed.). Boston, MA: McGraw-Hill.
- [Thalladi, VR; Nusse, M; Boese, R.](#) (2000). The melting point alternation in alpha,omega-alkanedicarboxylic acids. *J Am Chem Soc* 122: 9227-9236. <http://dx.doi.org/10.1021/ja0011459>
- [Tiemann, M; Folger, P; Carter, NT.](#) (2014). Shale energy technology assessment: Current and emerging water practices. Washington, DC: Congressional Research Service. <http://nationalaglawcenter.org/wp-content/uploads/assets/crs/R43635.pdf>
- [Timmis, KN.](#) (2010). Handbook of hydrocarbon and lipid microbiology. Berlin, Germany: Springer-Verlag. <http://www.springer.com/life+sciences/microbiology/book/978-3-540-77584-3>
- [Tourtelot, HA.](#) (1979). Black shale - its deposition and diagenesis. *Clays and Clay Minerals* 27: 313-321. <http://dx.doi.org/10.1346/CCMN.1979.0270501>
- [Tuttle, MLW; Breit, GN; Goldhaber, MB.](#) (2009). Weathering of the New Albany Shale, Kentucky: II. Redistribution of minor and trace elements. *Appl Geochem* 24: 1565-1578. <http://dx.doi.org/10.1016/j.apgeochem.2009.04.034>
- [U.S. Census Bureau.](#) (2013). Metropolitan and micropolitan statistical areas main. Available online at <http://www.census.gov/population/metro/> (accessed January 12, 2015).
- [U.S. Department of Transportation.](#) (2012). Large truck and bus crash facts 2012. Washington, D.C.: Federal Motor Carrier Safety Administration, U.S. Department of Transportation. <http://ai.fmcsa.dot.gov/CarrierResearchResults/PDFs/LargeTruckandBusCrashFacts2012.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (1996). Proposed guidelines for carcinogen risk assessment [EPA Report]. (EPA/600/P-92/003C). Washington, DC: U.S. Environmental Protection Agency, Risk Assessment Forum.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (1999). Guidelines for carcinogen risk assessment [review draft] [EPA Report]. (NCEA-F-0644). Washington, DC. [http://www.epa.gov/raf/publications/pdfs/CANCER\\_GLS.PDF](http://www.epa.gov/raf/publications/pdfs/CANCER_GLS.PDF)
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2004). Evaluation of impacts to underground sources of drinking water by hydraulic fracturing of coalbed methane reservoirs. (EPA/816/R-04/003). Washington, DC.: U.S. Environmental Protection Agency, Office of Solid Waste.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2005). Membrane filtration guidance manual. (EPA 815-R-06-009). Washington, D.C. <http://www.epa.gov/ogwdw/disinfection/lt2/pdfs/guide lt2 membranefiltration final.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2006). National Primary Drinking Water Regulations: Stage 2 Disinfectants and Disinfection Byproducts Rule. <http://water.epa.gov/lawsregs/rulesregs/sdwa/stage2/>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011a). Plan to study the potential impacts of hydraulic fracturing on drinking water resources [EPA Report]. (EPA/600/R-11/122). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/plan-study-potential-impacts-hydraulic-fracturing-drinking-water-resources-epa600r-11122>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011b). Sampling data for flowback and produced water provided to EPA by nine oil and gas well operators (non-confidential business information). US Environmental Protection Agency. <http://www.regulations.gov/#!docketDetail;rpp=100;so=DESC;sb=docId;po=0;D=EPA-HQ-ORD-2010-0674>

- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2011c). Terminology services (TS): Vocabulary catalog - IRIS glossary. Available online at [http://ofmpub.epa.gov/sor\\_internet/registry/termreg/searchandretrieve/glossariesandkeywordlists/search.do?details=&glossaryName=IRIS%20Glossary](http://ofmpub.epa.gov/sor_internet/registry/termreg/searchandretrieve/glossariesandkeywordlists/search.do?details=&glossaryName=IRIS%20Glossary) (accessed May 21, 2015).
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012a). Estimation Programs Interface Suite for Microsoft Windows (EPI Suite) [Computer Program]. Washington DC: US Environmental Protection Agency. Retrieved from <http://www.epa.gov/oppt/exposure/pubs/episuitedl.htm>
- [U.S. EPA](#). General definitions, 40 CFR § 437.2 (2012b). <http://www.gpo.gov/fdsys/pkg/CFR-2012-title40-vol31/pdf/CFR-2012-title40-vol31-sec437-2.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2012c). Study of the potential impacts of hydraulic fracturing on drinking water resources: Progress report. (EPA/601/R-12/011). Washington, DC: U.S. Environmental Protection Agency, Office of Research and Development. <http://nepis.epa.gov/exe/ZyPURL.cgi?Dockey=P100FH8M.txt>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013a). Data received from oil and gas exploration and production companies, including hydraulic fracturing service companies 2011 to 2013. Non-confidential business information source documents are located in Federal Docket ID: EPA-HQ-ORD2010-0674. Available at <http://www.regulations.gov>.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013b). Distributed structure-searchable toxicity (DSSTOX) database network. Available online at <http://www.epa.gov/ncct/dsstox/index.html>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013c). Drinking water and ground water statistics, fiscal year 2011. Washington, DC: U.S. Environmental Protection Agency, Office of Water. <http://water.epa.gov/scitech/datait/databases/drink/sdwisfed/upload/epa816r13003.pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2013d). Terminology services (TS): Terms and acronyms. Available online at [http://iaspub.epa.gov/sor\\_internet/registry/termreg/searchandretrieve/termsandacronyms/search.do](http://iaspub.epa.gov/sor_internet/registry/termreg/searchandretrieve/termsandacronyms/search.do)
- [U.S. EPA](#). [Announcement of preliminary regulatory determinations for contaminants on the third drinking water contaminant candidate list](#), EPA-HQ-OW-2012-0155 62715 -62750 (62736 pages) (2014a). <https://www.federalregister.gov/articles/2014/10/20/2014-24582/announcement-of-preliminary-regulatory-determinations-for-contaminants-on-the-third-drinking-water#page-62715>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014b). Drinking water contaminants. Available online at <http://water.epa.gov/drink/contaminants/>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2014c). Substance registry services. Available online at [http://ofmpub.epa.gov/sor\\_internet/registry/substreg/home/overview/home.do](http://ofmpub.epa.gov/sor_internet/registry/substreg/home/overview/home.do)
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015a). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0 [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency. <http://www2.epa.gov/hfstudy/analysis-hydraulic-fracturing-fluid-data-fracfocus-chemical-disclosure-registry-1-pdf>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015b). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Data management and quality assessment report [EPA Report]. (EPA/601/R-14/006). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. [http://www2.epa.gov/sites/production/files/2015-03/documents/fracfocus\\_data\\_management\\_report\\_final\\_032015\\_508.pdf](http://www2.epa.gov/sites/production/files/2015-03/documents/fracfocus_data_management_report_final_032015_508.pdf)

- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015c). Analysis of hydraulic fracturing fluid data from the FracFocus chemical disclosure registry 1.0: Project database [EPA Report]. (EPA/601/R-14/003). Washington, D.C.: U.S. Environmental Protection Agency, Office of Research and Development. <http://www2.epa.gov/hfstudy/epa-project-database-developed-fracfocuss-1-disclosures>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015d). Case study analysis of the impacts of water acquisition for hydraulic fracturing on local water availability [EPA Report]. (EPA/600/R-14/179). Washington, D.C.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015e). Human health benchmarks for pesticides. Available online at <http://iaspub.epa.gov/apex/pesticides/f?p=HHBP:HOME>
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015f). Review of well operator files for hydraulically fractured oil and gas production wells: Well design and construction [EPA Report]. (EPA/601/R-14/002). Washington, D.C.: Office of Research and Development, U.S. Environmental Protection Agency.
- [U.S. EPA](#) (U.S. Environmental Protection Agency). (2015g). Technical development document for proposed effluent limitation guidelines and standards for oil and gas extraction. (EPA-821-R-15-003). Washington, D.C. <http://water.epa.gov/scitech/wastetech/guide/oilandgas/unconv.cfm>
- [U.S. GAO](#) (U.S. Government Accountability Office). (2014). Freshwater: Supply concerns continue, and uncertainties complicate planning. Report to Congressional requesters. (GAO-14-430). Washington, DC: U.S. Government Accountability Office (GAO). <http://www.gao.gov/assets/670/663343.pdf>
- [USGS](#) (U.S. Geological Survey). (1961). Geology and geochemistry of uranium in marine black shales: a review. (U.S. Geological Survey Professional Paper 356-C). Reston, VA. <http://pubs.usgs.gov/pp/0356c/report.pdf>
- [USGS](#) (U.S. Geological Survey). (1997). Radioactive elements in coal and fly ash: Abundance, forms, and environmental significance [Fact Sheet]. (U.S. Geological Survey Fact Sheet FS-163-97). <http://pubs.usgs.gov/fs/1997/fs163-97/FS-163-97.pdf>
- [USGS](#) (U.S. Geological Survey). (2002). Water quality and environmental isotopic analyses of ground-water samples collected from the Wasatch and Fort Union formations in areas of coalbed methane development: implications to recharge and groundwater flow, eastern Powder river basin, Wyoming. (Report 02-4045). Reston, VA. <http://pubs.usgs.gov/wri/wri024045/>
- [USGS](#) (U.S. Geological Survey). (2014). Withdrawal and consumption of water by thermoelectric power plants in the United States, 2010. (Scientific Investigations Report 20145184). Reston, VA. <http://dx.doi.org/10.3133/sir20145184>
- [USGS](#) (U.S. Geological Survey). (2015). Water use in the United States. Available online at <http://water.usgs.gov/watuse/>
- [Van Voast, WA](#). (2003). Geochemical signature of formation waters associated with coalbed methane. AAPG Bulletin 87: 667-676.
- [Vanengelen, MR; Peyton, BM; Mormile, MR; Pinkart, HC](#). (2008). Fe(III), Cr(VI), and Fe(III) mediated Cr(VI) reduction in alkaline media using a Halomonas isolate from Soap Lake, Washington. Biodegradation 19: 841-850. <http://dx.doi.org/10.1007/s10532-008-9187-1>
- [Veil, JA](#). (2010). Water management technologies used by Marcellus shale gas producers - Final Report. (DOE Award No.: FWP 49462). Veil, JA. [http://fracfocus.org/sites/default/files/publications/water\\_management\\_in\\_the\\_marcellus.pdf](http://fracfocus.org/sites/default/files/publications/water_management_in_the_marcellus.pdf)
- [Vengosh, A; Jackson, RB; Warner, N; Darrah, TH; Kondash, A](#). (2014). A critical review of the risks to water resources from unconventional shale gas development and hydraulic fracturing in the United States. Environ Sci Technol 48: 36-52. <http://dx.doi.org/10.1021/es405118y>

- [Verdegem, MCI; Bosma, RH.](#) (2009). Water withdrawal for brackish and inland aquaculture, and options to produce more fish in ponds with present water use. *Water Policy* 11: 52-68. <http://dx.doi.org/10.2166/wp.2009.003>
- [Vidic, RD; Brantley, SL; Vandenbossche, JM; Yoxtheimer, D; Abad, JD.](#) (2013). Impact of shale gas development on regional water quality [Review]. *Science* 340: 1235009. <http://dx.doi.org/10.1126/science.1235009>
- [Vijaya Kumar, R; Anand Rao, M; Venkateshwara Rao, M; Ravi Kumar, YVL; Prasad, DHL.](#) (1996). Bubble temperature measurements on 2-propyn-1-ol with 1,2-dichloroethane, 1,1,1-trichloroethane, and 1,1,2,2-tetrachloroethane. *Journal of Chemical and Engineering Data* 41: 1020-1023. <http://dx.doi.org/10.1021/je9600156>
- [Vine, JD.](#) (1956). Uranium-bearing coal in the United States. In *Contributions to the geology of uranium and thorium by the United States Geological Survey and Atomic Energy Commission for the United Nations International Conference on Peaceful Uses of Atomic Energy, Geneva, Switzerland, 1955*. Reston, VA: U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/pp300>
- [Vine, JD; Tourtelot, EB.](#) (1970). Geochemistry of black shale deposits; A summary report. *Econ Geol* 65: 253-272. <http://dx.doi.org/10.2113/gsecongeo.65.3.253>
- [Vinson, DS; Vengosh, A; Hirschfeld, D; Dwyer, GS.](#) (2009). Relationships between radium and radon occurrence and hydrochemistry in fresh groundwater from fractured crystalline rocks, North Carolina (USA). *Chem Geol* 260: 159-171. <http://dx.doi.org/10.1016/j.chemgeo.2008.10.022>
- [Vulgamore, TB; Clawson, TD; Pope, CD; Wolhart, SL; Mayerhofer, MJ; Machovoe, SR; Waltman, CK.](#) (2007). Applying hydraulic fracture diagnostics to optimize stimulations in the Woodford Shale. Richardson, TX: Society of Petroleum Engineers. <http://dx.doi.org/10.2118/110029-MS>
- [Walsh, JM.](#) (2013). Water management for hydraulic fracturing in unconventional resources Part 1. Oil and Gas Facilities 2.
- [Ward, CR.](#) (2002). Analysis and significance of mineral matter in coal seams. *Int J Coal Geol* 50: 135-168. [http://dx.doi.org/10.1016/S0166-5162\(02\)00117-9](http://dx.doi.org/10.1016/S0166-5162(02)00117-9)
- [Warner, NR; Christie, CA; Jackson, RB; Vengosh, A.](#) (2013). Impacts of shale gas wastewater disposal on water quality in western Pennsylvania. *Environ Sci Technol* 47: 11849-11857. <http://dx.doi.org/10.1021/es402165b>
- [Warner, NR; Jackson, RB; Darrah, TH; Osborn, SG; Down, A; Zhao, K; White, A; Vengosh, A.](#) (2012). Reply to Engelder: Potential for fluid migration from the Marcellus Formation remains possible. *PNAS* 109: E3626-E3626. <http://dx.doi.org/10.1073/pnas.1217974110>
- [Wasylishen, R; Fulton, S.](#) (2012). Reuse of flowback & produced water for hydraulic fracturing in tight oil. Calgary, Alberta, Canada: The Petroleum Technology Alliance Canada (PTAC). <http://www.ptac.org/projects/151>
- [Watson, TL; Bachu, S.](#) (2009). Evaluation of the potential for gas and CO2 leakage along wellbores. *S P E Drilling & Completion* 24: 115-126. <http://dx.doi.org/10.2118/106817-PA>
- [Weaver, TR; Frappe, SK; Cherry, JA.](#) (1995). Recent cross-formational fluid flow and mixing in the shallow Michigan Basin. *Geol Soc Am Bulletin* 107: 697-707. [http://dx.doi.org/10.1130/0016-7606\(1995\)107<0697:RCFFFA>2.3.CO;2](http://dx.doi.org/10.1130/0016-7606(1995)107<0697:RCFFFA>2.3.CO;2)
- [Webster, IT; Hancock, GI; Murray, AS.](#) (1995). Modelling the effect of salinity on radium desorption from sediments. *Geochim Cosmo Acta* 59: 2469-2476. [http://dx.doi.org/10.1016/0016-7037\(95\)00141-7](http://dx.doi.org/10.1016/0016-7037(95)00141-7)
- [White, GI.](#) (1992). Naturally occurring radioactive materials (NORM) in oil and gas industry equipment and wastes: A literature review. (DOE/ID/01570-T158). Bartlesville, OK: U.S. Department of Energy.
- [WHO](#) (World Health Organization). (2015). Concise international chemical assessment documents. Available online at <http://www.who.int/ipcs/publications/cicad/en/>



- [Wignall, PG; Myers, KJ.](#) (1988). Interpreting benthic oxygen levels in mudrocks: A new approach. *Geology* 16: 452-455. [http://dx.doi.org/10.1130/0091-7613\(1988\)016<0452:IBOLIM>2.3.CO;2](http://dx.doi.org/10.1130/0091-7613(1988)016<0452:IBOLIM>2.3.CO;2)
- [Wilt, JW.](#) (1956). Notes - the halodecarboxylation of cyanoacetic acid. *J Org Chem* 21: 920-921. <http://dx.doi.org/10.1021/jo01114a607>
- [Wojtanowicz, AK.](#) (2008). Environmental control of well integrity. In ST Orszulik (Ed.), *Environmental technology in the oil industry* (pp. 53-75). Houten, Netherlands: Springer Netherlands.
- [Woolard, CR; Irvine, RL.](#) (1995). Treatment of of hypersaline wastewater in the sequencing batch reactor. *Water Res* 29: 1159-1168.
- [Wuchter, C; Banning, E; Mincer, TJ; Drenzek, NJ; Coolen, MJ.](#) (2013). Microbial diversity and methanogenic activity of Antrim Shale formation waters from recently fractured wells. *FMICB* 4: 1-14. <http://dx.doi.org/10.3389/fmicb.2013.00367>
- [WVWRI](#) (West Virginia Water Research Institute, West Virginia University). (2012). Zero discharge water management for horizontal shale gas well development. (DE-FE0001466). [https://www.netl.doe.gov/FileLibrary/Research/Oil-Gas/Natural Gas/shale gas/fe0001466-final-report.pdf](https://www.netl.doe.gov/FileLibrary/Research/Oil-Gas/Natural%20Gas/shale%20gas/fe0001466-final-report.pdf)
- [Xiao, LN; Xu, JN; Hu, YY; Wang, LM; Wang, Y; Ding, H; Cui, XB; Xu, JQ.](#) (2013). Synthesis and characterizations of the first [V16039Cl]6- (V16039) polyanion. *Dalton Transactions (Online)* 42: 5247-5251. <http://dx.doi.org/10.1039/c3dt33081h>
- [Yakimov, MM; Denaro, R; Genovese, M; Cappello, S; D'Auria, G; Chernikova, TN; Timmis, KN; Golyshin, PN; Giluliano, L.](#) (2005). Natural microbial diversity in superficial sediments of Milazzo Harbor (Sicily) and community successions during microcosm enrichment with various hydrocarbons. *Environ Microbiol* 7: 1426-1441. <http://dx.doi.org/10.1111/j.1462-5822.2005.00829.x>
- [Yang, JS; Lee, JY; Baek, K; Kwon, TS; Choi, J.](#) (2009). Extraction behavior of As, Pb, and Zn from mine tailings with acid and base solutions. *J Hazard Mater* 171: 1-3. <http://dx.doi.org/10.1016/j.jhazmat.2009.06.021>
- [Yang, X; Shang, C.](#) (2004). Chlorination byproduct formation in the presence of humic acid, model nitrogenous organic compounds, ammonia, and bromide. *Environ Sci Technol* 38: 4995-5001. <http://dx.doi.org/10.1021/es049580g>
- [Yoshizawa, S; Wada, M; Kita-Tsukamoto, K; Ikemoto, E; Yokota, A; Kogure, K.](#) (2009). *Vibrio azureus* sp. nov., a luminous marine bacterium isolated from seawater. *Int J Syst Evol Microbiol* 59: 1645-1649. <http://dx.doi.org/10.1099/ijs.0.004283-0>
- [Yoshizawa, S; Wada, M; Yokota, A; Kogure, K.](#) (2010). *Vibrio sagamiensis* sp. nov., luminous marine bacteria isolated from sea water. *J Gen Appl Microbiol* 56: 499-507.
- [Younos, T; Tulou, KE.](#) (2005). Overview of desalination techniques. *Journal of Contemporary Water Research & Education* 132: 3-10. <http://dx.doi.org/10.1111/j.1936-704X.2005.mp132001002.x>
- [Zapeczka, OS; Szabo, Z.](#) (1988). Natural radioactivity in ground watera review. In *National Water Summary 1986Hydrologic Events and Ground-Water Quality*, Water-Supply Paper 2325. Reston, VA: U.S. Geological Survey. <http://pubs.er.usgs.gov/publication/wsp2325>
- [Zeikus, JG; Hegge, PW; Thompson, TE; Phelps, TJ; Langworthy, TA.](#) (1983). Isolation and description of *Haloanaerobium praevalens* gen. nov. and sp. nov., an obligately anaerobic halophile common to Great Salt Lake sediments. *Curr Microbiol* 9: 225-233. <http://dx.doi.org/10.1007/BF01567586>
- [Zhang, L; Guo, Y; Xiao, J; Gong, X; Fang, W.](#) (2011). Density, refractive index, viscosity, and surface tension of binary mixtures of exo-tetrahydrodicyclopentadiene with some n-alkanes from (293.15 to 313.15) K. *Journal of Chemical and Engineering Data* 56: 4268-4273. <http://dx.doi.org/10.1021/jc200757a>
- [Zhang, T; Gregory, K; Hammack, RW; Vidic, RD.](#) (2014). Co-precipitation of radium with barium and strontium sulfate and its impact on the fate of radium during treatment of produced water from unconventional gas extraction. *Environ Sci Technol* 48: 4596-4603. <http://dx.doi.org/10.1021/es405168b>

[Zhang, Z; Yang, L; Xing, Y; Li, W.](#) (2013). Vapor-liquid equilibrium for ternary and binary mixtures of 2-isopropoxypropane, 2-propanol, and n,n-dimethylacetamide at 101.3 kPa. Journal of Chemical and Engineering Data 58: 357-363. <http://dx.doi.org/10.1021/je300994y>

# ISSUE IDENTIFICATION CENTRE



Office of Research and Development  
Washington, DC 20460

Official Business  
Penalty for Private Use  
\$300