

# Advanced HTTP Activity Analysis

2009

# Goal

The goal of this training is to get you familiar with basic HTTP traffic and understand how to target and exploit it using X-KEYSCORE

# Agenda



# What is HTTP?

HTTP stands for Hypertext Transfer Protocol and it's the primary protocol for transferring data on the World Wide Web

# Why are we interested in HTTP?



facebook



YAHOO!



twitter



myspace.com  
a place for friends

Because nearly everything a typical user does on the Internet uses HTTP




CNN.com



Google  
Earth



@mail.ru

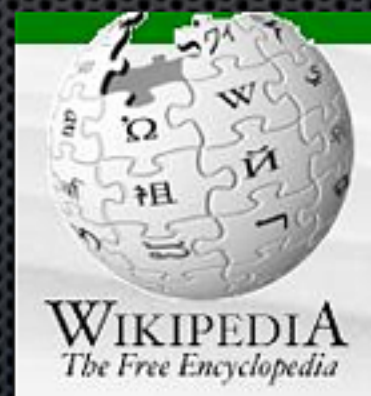

Gmail  
by Google BETA

# Why are we interested in HTTP?

- Almost all web-browsing uses HTTP:
  - Internet surfing
  - Webmail (Yahoo/Hotmail/Gmail/etc.)
  - OSN (Facebook/MySpace/etc.)
  - Internet Searching (Google/Bing/etc.)
  - Online Mapping (Google Maps/Mapquest/etc.)

# How does HTTP work?

- HTTP is comprised of requests from clients to servers and their corresponding responses
- Many analysts are already familiar with the terms “client-to-server” or “server-to-client” collection (also referred to as “client side” or “server side” collection).


# How does HTTP work?

- A “Client” is usually referring to a Browser (like Firefox or IE) which is also referred to as the “User Agent”
- The “Server” can also be referred to as the “web-server” or “origin-server” which is the machine that is storing the data that is being accessed (like a web-page, a map, an inbox, etc)




# HTTP Activity

- HTTP activity comes in two types:

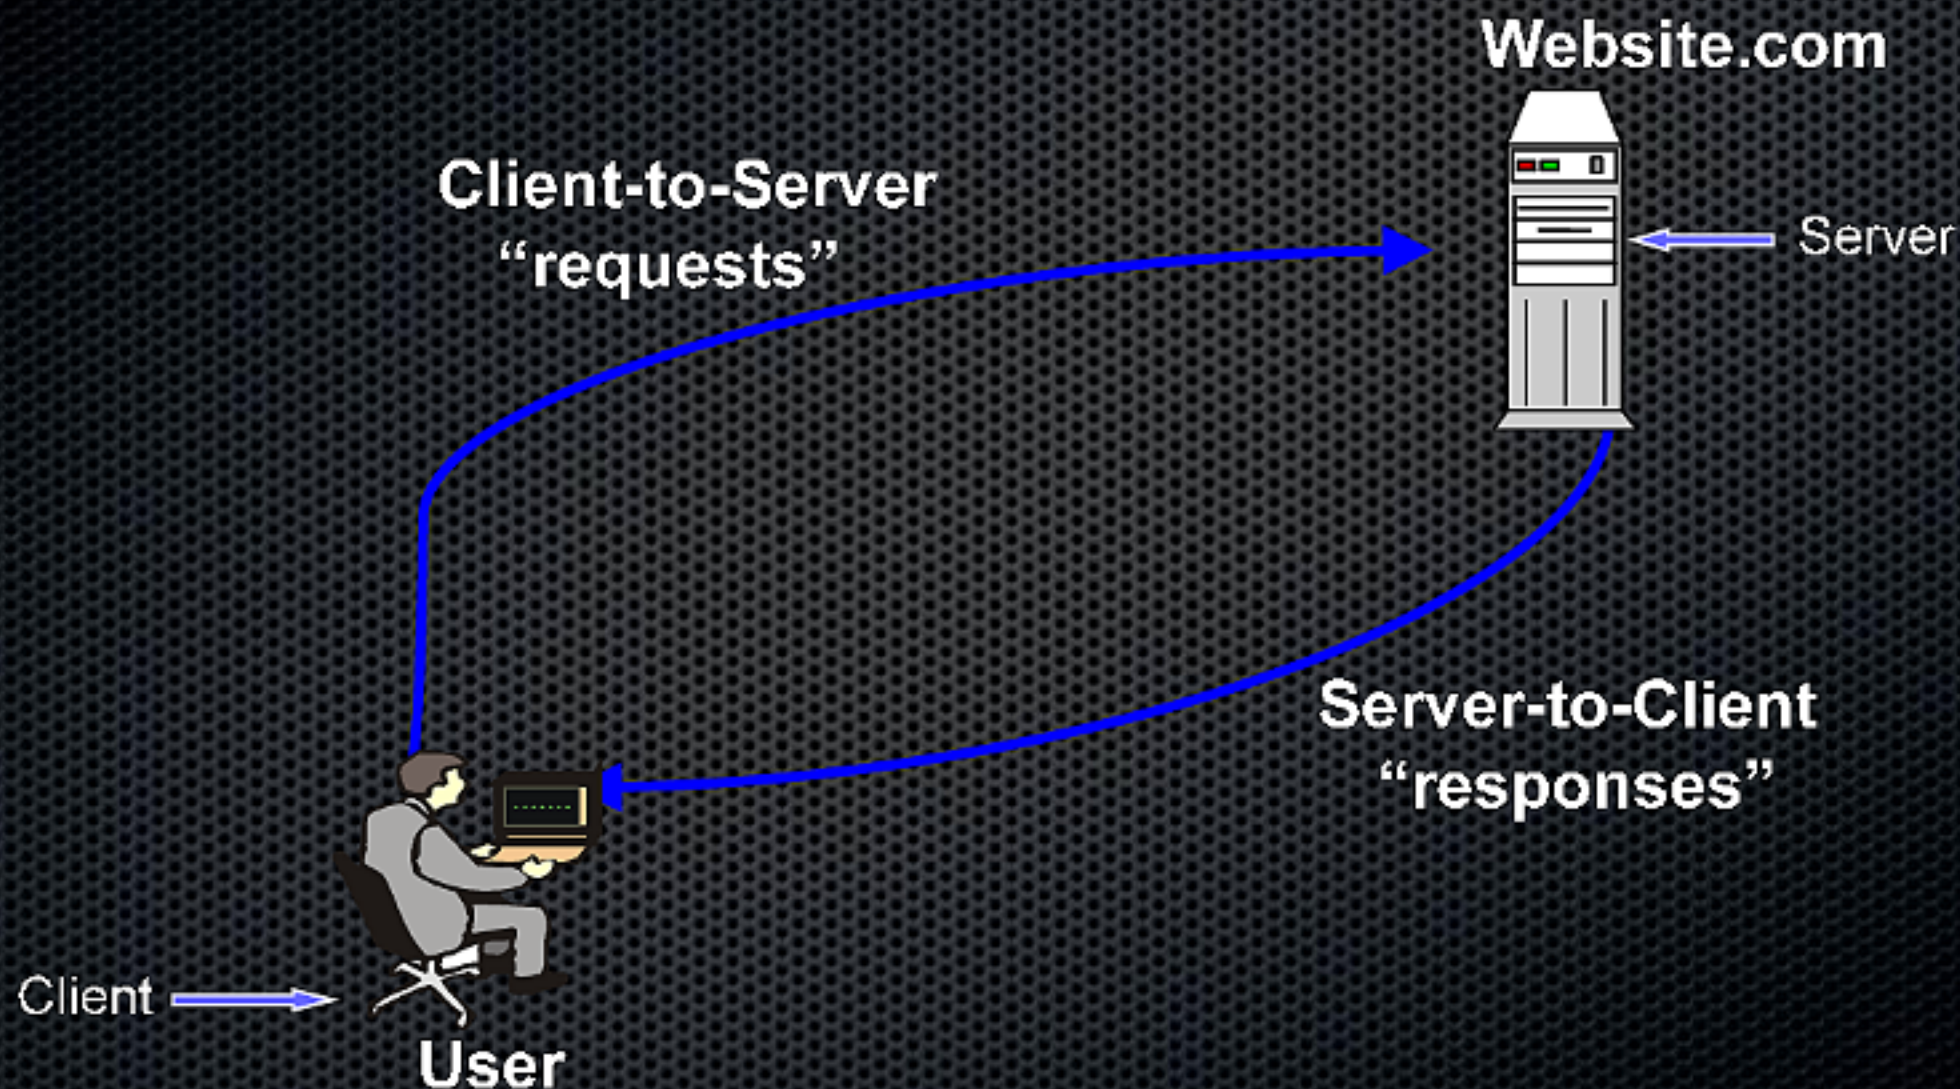

# HTTP Activity

- HTTP activity comes in two types:

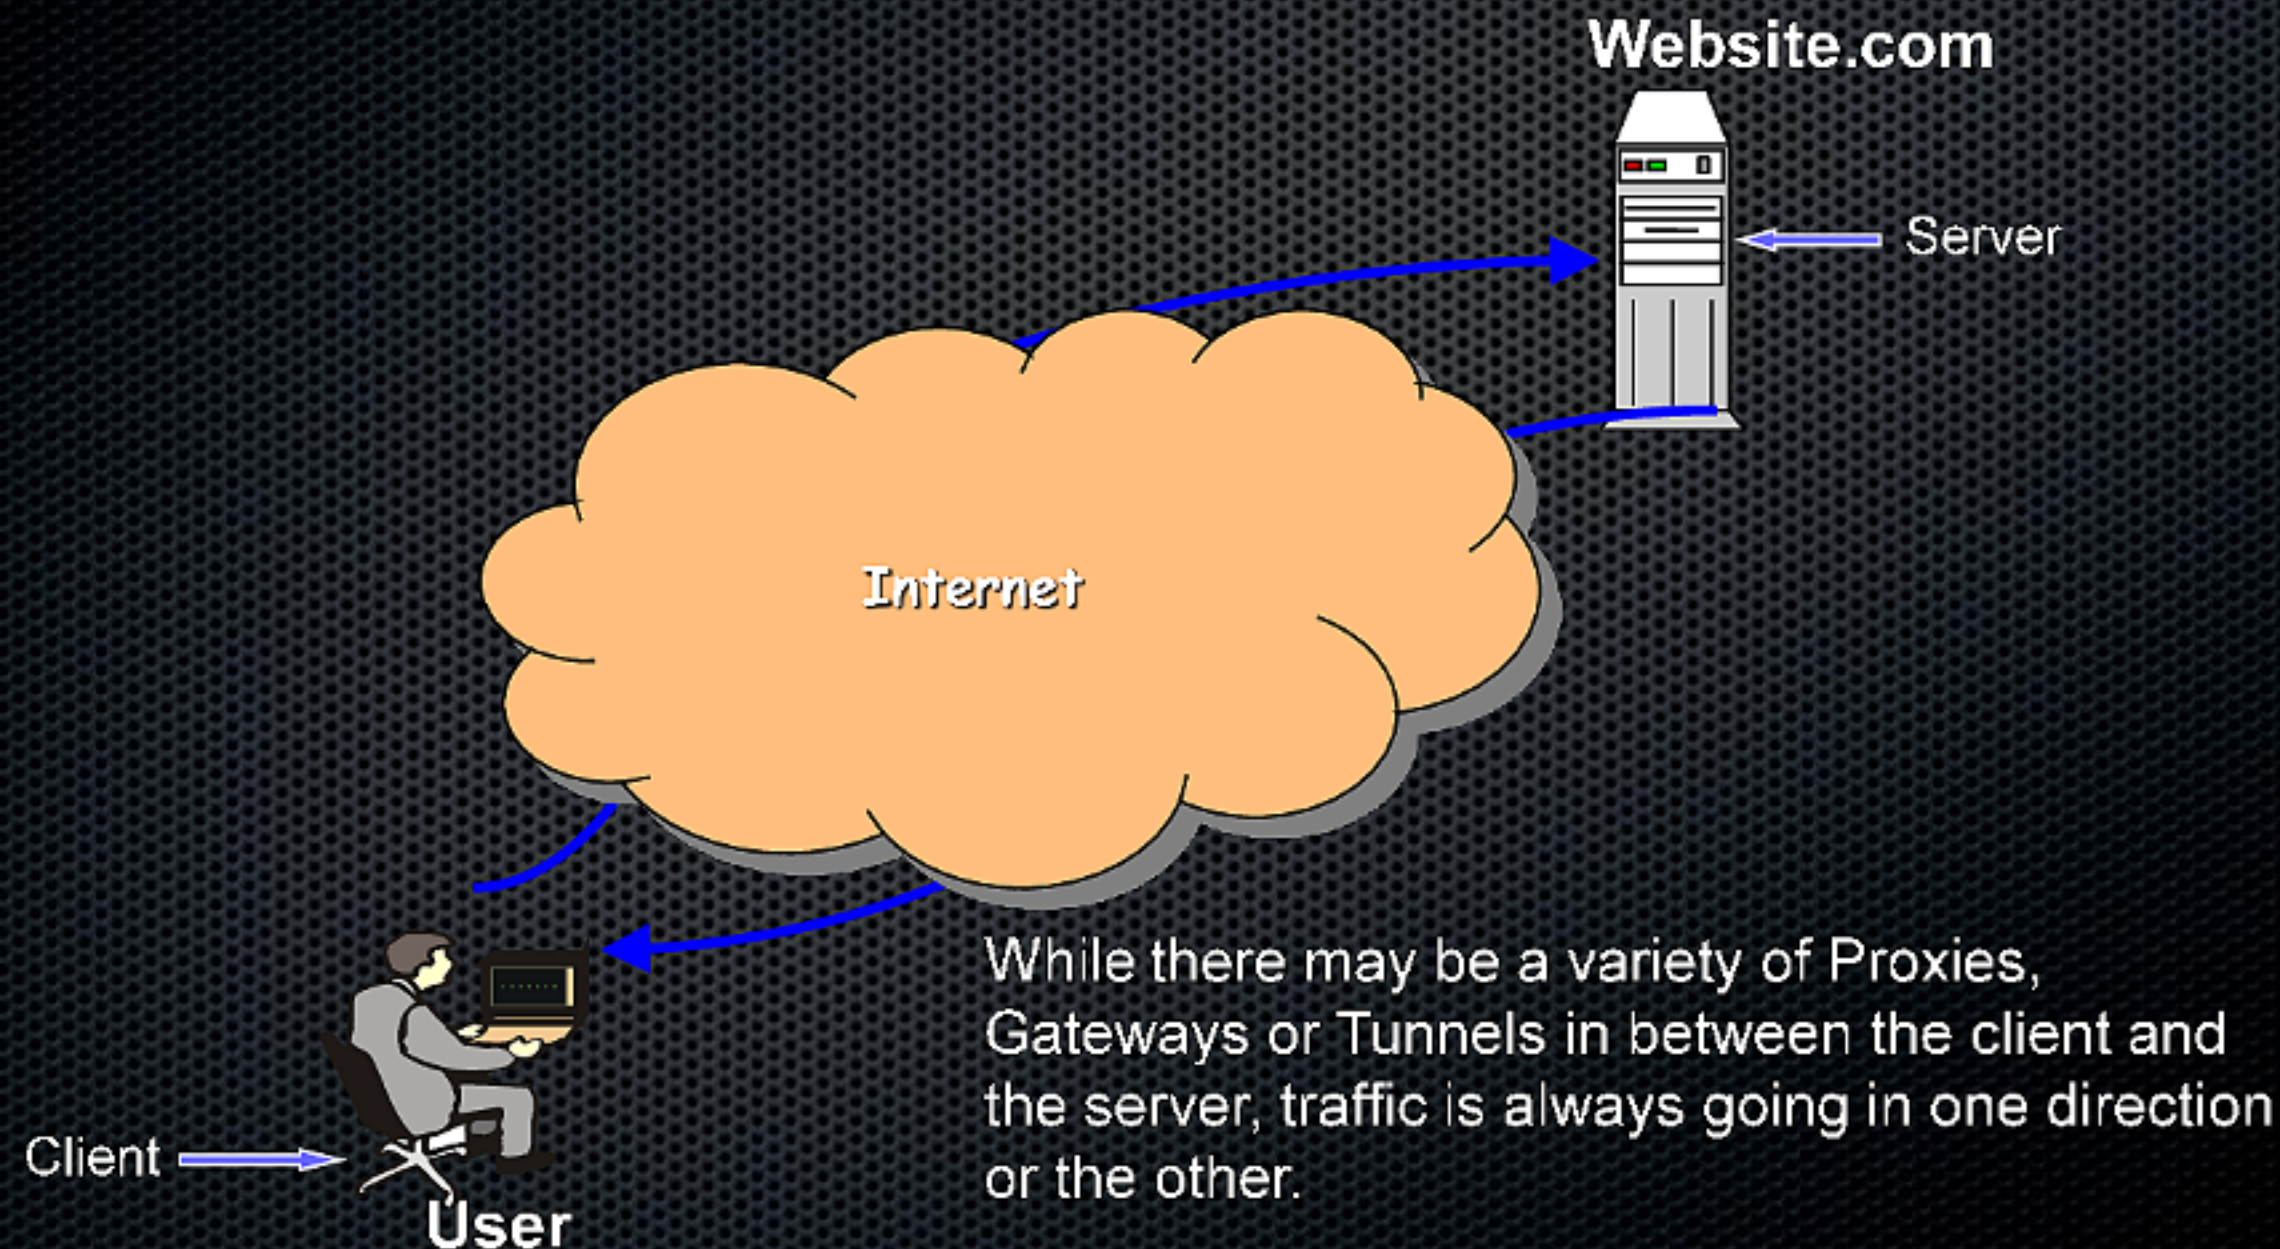

While there may be a variety of Proxies, Gateways or Tunnels in between the client and the server, traffic is always going in one direction or the other.

# Client vs. Server Side Traffic

- How do you know which side you're looking at?
- Client-to-Server requests are generally small in size and are computers talking to other computers
- They contain standard HTTP header fields like "Host:" "Accept:" "Connection" etc.

# HTTP Activity Examples

## Client-to-Server request:

TOP SECRET//COMINT//20320108

ID: sess\_orig\_proc

Type: HTTP-GET [Printer Friendly Version](#)

DNI Display

Raw Data

DNI Format

Services ▼

```

GET /Hezbollah-Terrorism-Judith-Palmer-Harik/dp/1860648932 HTTP/1.1
User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US) AppleWebKit/525.19 (KHTML, like
Gecko) Chrome/1.0.154.48 Safari/525.19
Referer: http://www.google.com.pk/search?hl=en&q=written books on hizbollah&btnG=Google
Search&meta=
Accept: text/xml,application/xml,application/xhtml+xml,text/html;q=0.9,text/plain;q=0.8,image/png,*/*;q=0.5
Accept-Encoding: gzip, deflate, bzip2, sdch
Cookie: ubid-man=185-5525816-8765531
apn-user-id=P1YXY7QF1PUYQ5
Accept-Language: en-US,en
Accept-Charset: ISO-8859-1,*,utf-8
Host: www.amazon.com
Connection: Keep-Alive

```

# Client vs. Server Side Traffic

- Server-to-Client responses are generally larger in size and are what web-pages look like at the internet.
- When you're at a computer accessing the Internet, you're only seeing Server-to-Client traffic.

# HTTP Activity Examples

## Server-to-Client Response:






Document Information Type: HTTP ID: sess\_orig\_proc  
Printer Friendly Version

DNI Display Raw Data DNI Form

HTTP Header Information

Services

**Bonus question: Why are the images in this web-page missing?**

    [Barca reinstates 6-point lead over Real](#)  [Isfahan to exhibit expressionist art](#)

[Home Page](#)  
[Iran](#)  
[Middle East](#)  
[Iraq](#)  
[Palestine](#)  
[Lebanon](#)  
[Turkey](#)  
[Persian Gulf](#)  
[Others](#)  
[US](#)  
[Asia/Pacific](#)  
[Africa](#)  
[Europe](#)  
[Americas](#)  
[Sci/Tech](#)  
[Health](#)  
[Sports](#)



**Kuwait government 'resigns' over economy**  
 Mon, 16 Mar 2009 19:07:16 GMT









The Kuwaiti government has submitted its resignation to the country's emir amid a row over the premier's handling of the economic crisis.

"The resignation has been submitted formally and it's up to the emir (ruler) to decide," Reuters quoted Nasser al-Duwailah, a parliamentarian, as saying on Monday.

The resignation would further delay the approval of 1.5 billion dinars (USD 5.11 billion) rescue package which is to be injected to the Persian Gulf nation's economy to ease the impact of the global financial crisis.

The government has not commented on the report.

**Latest News**  
 [Kuwait govern economy](#)  
 [Childhood diet risk](#)  
 [US-Russian pa shield row](#)  
 [Judges want M confiscated](#)  
 [Leader pardons](#)  
 [Ancient book r](#)  
 [Lieberman eyes ally](#)  
 [Intelligent peop](#)

# HTTP Activity

- XKS HTTP Activity Meta-data differs greatly depending on which side of traffic we're collecting
- In nearly all cases it's better to have client-to-server traffic

# HTTP Activity Client-to-Server

```

GET /search?tab=urdu&order=sortboth&q=musharraf&start=3&scope=urdu&link=next HTTP/1.1
Accept: */*
Referer: http://search.bbc.co.uk/search?tab=urdu&order=sortboth&q=musharraf&start=2&scope=urdu
Accept-Language: en-us
Accept-Encoding: gzip, deflate
User-Agent: Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1; SV1)
Host: search.bbc.co.uk
Cookie: BBC-UID=b479a5f4ad230a53063d513630203acb22684634a0e0b164c45f96efc054cf950Mozilla%2f4%2e0%20%28cc
Cache-Control: max-stale=0
Connection: Keep-Alive
X-BlueCoat-Via: 66808702E9A98546
  
```

Host	URL Path	URL Args
search.bbc.co.uk	/search	tab=urdu&order=sortboth&q=musharraf&start=3&scope=urdu&link=next

Search Terms	Language	Browser	Via
musharraf	en	Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1; SV1)	66808702E9A98546

Referer
http://search.bbc.co.uk/search?tab=urdu&order=sortboth&q=musharraf&start=2&scope=urdu

Cookie
BBC-UID=b479a5f4ad230a53063d513630203acb22684634a0e0b164c45f96efc054cf950Mozilla%2f4%2e0%20%28com



# HTTP Activity Server-to-Client

Application Info

HTTP Type

Press TV - Kuwait government 'resigns' over economy






response

Document Information Type: HTTP Enter Friendly Yes, no ID: sess\_xrig\_proc

DNI Display Raw Data DNI Forms

HTTP Header Information Content Type: HTML

Services

    [Banco reinstates € point lead over Real](#)  [Lebanon to exhibit censored poster](#)

[Home Page](#)  
[Iran](#)  
[Middle East](#)  
[Iraq](#)  
[Pakistan](#)  
[Lebanon](#)  
[Turkey](#)  
[Persian Gulf](#)  
[Others](#)  
[US](#)  
[Asia/Pacific](#)  
[Africa](#)  
[Europe](#)  
[Americas](#)  
[Sci/Tech](#)  
[Health](#)  
[Sports](#)









**Kuwait government 'resigns' over economy**  
 Mon, 16 Mar 2009 19:07:16 GMT

The Kuwaiti government has submitted its resignation to the country's emir amid a row over the premier's handling of the economic crisis.

"The resignation has been submitted formally and it's up to the emir (ruler) to decide," Reuters quoted Nasser al-Duwailah, a parliamentarian, as saying on Monday.

The resignation would further delay the approval of 1.5 billion dinars (USD 5.1 billion) rescue package which is to be injected to the Persian Gulf nation's economy to ease the impact of the global financial crisis.

The government has not commented on the report.

[Latest News](#)  
 [Kuwait government economy](#)  
 [Childhood disease](#)  
 [US-Russia to shield row](#)  
 [Judges want M condoned](#)  
 [Leader pardon](#)  
 [Ancient book r](#)  
 [Lebanon eyes ally](#)  
 [Iraqi government](#)

# HTTP Activity – HTTP Types

- Meta-data will also tell you which side of traffic you're looking at
- Client-to-server has two main types:

HTTP Type
<b>get</b>

HTTP Type
<b>post</b>

- Server-to-client has only one:

HTTP Type
<b>response</b>

# HTTP Activity – Get vs Post

- A 'GET' is you requesting data from the server (most web surfing)
- A 'POST' is you sending data to the server (i.e. signing in, filling out a form, composing an E-mail, uploading a file etc.)

Let's break down the important parts of a client-to-server request

# HTTP Client-to-Server

```
GET /home.html
```

```
Host: sample.website.com
```

```
User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316 (USG-25) Firefox/3.0.10
```

```
Accept: image/png,image/*;q=0.8,*/*;q=0.5
```

```
Accept-Language: en-us,en;q=0.5
```

```
Accept-Encoding: gzip,deflate
```

```
Accept-Charset: ISO-8859-1,utf-8;q=0.7,*;q=0.7
```

```
Keep-Alive: 300
```

```
Connection: keep-alive
```

First thing to note is the Host: line which tells you the name of the server that the client is requesting data from

# Host Field

It's important to note, that in many cases users think they're at websites like [www.yahoo.com](http://www.yahoo.com), but behind the scenes data is coming from a number of different servers without the user knowing it:

GET /mc/modules/mc/abContacts?mcCrumb=RIIDb59tjm & jsrand=98037807 & rand=2127033459 HTTP/1.0	
Accept:	*/*
Accept-Language:	fa
Referer:	http://us.mc575.mail.yahoo.com/mc/showFolder;_ylc=X3oDMTBucmhobGR0BF9TAzM5ODMwMTAyNwRhYwNkZWxNc2dz?mid=1_21857_AERkxELAANvjSi6wUQ76lZa4fY&fid=Inbox&sort=date&order=up&startMid=36&filterBy=
x-requested-with:	XMLHttpRequest
Accept-Encoding:	gzip, deflate
User-Agent:	Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1; SV1; .NET CLR 2.0.50727)
Host:	us.mc575.mail.yahoo.com
Cookie:	d=lvAXlfvaYnFGmmIfaw3zBCVVRre2jUKZLwwoyKsrijaxG0XVYaJhF95dLsZ5C0x1eDlcTcaHS_vpi MG Y

**Bonus question: What would the impact of this be in how you formulate your X-KEYSCORE queries using the Host field?**

# HTTP Client-to-Server

```
GET /home.html
```

```
Host: sample.website.com
```

```
User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316 (USG-25) Firefox/3.0.10
```

```
Accept: image/png,image/*;q=0.8,*/*;q=0.5
```

```
Accept-Language: en-us,en;q=0.5
```

```
Accept-Encoding: gzip,deflate
```

```
Accept-Charset: ISO-8859-1,utf-8;q=0.7,*;q=0.7
```

```
Keep-Alive: 300
```

```
Connection: keep-alive
```

Second the GET line tells you which files the user is requesting from the server.

If you simply take that line and append it to the Host line you have the live public URL that the user is requesting:

```
http://sample.website.com/home.html
```

# HTTP Client-to-Server

```
GET /example.php?region=iraq
```

```
Host: sample.website.com
```

```
User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316 (USG-25) Firefox/3.0.10
```

```
Accept: image/png,image/*;q=0.8,*/*;q=0.5
```

```
Accept-Language: en-us,en;q=0.5
```

```
Accept-Encoding: gzip,deflate
```

```
Accept-Charset: ISO-8859-1,utf-8;q=0.7,*;q=0.7
```

```
Keep-Alive: 300
```

```
Connection: keep-alive
```

When the GET line has a ? mark in it, then the GET request is also passing information to the server.

So in this case the client is requesting the file example.php but it's also passing along a value that could have been entered by the user.



# URL Lines

When there is a ? mark in the URL line, then X-KEYSCORE is breaking it up into two parts. The first part is called the URL Path and the second part is called the URL Argument.

URL Path

/search

URL Args

tab=urdu&order=sortboth&q=musharraf&start=3&scope=urdu&link=next

Notice all of the “arguments” (each separated by &’s) in this URL:

```
GET /search?tab=urdu&order=sortboth&q=musharraf&start=3&scope=urdu&link=next HTTP/1.1
```

```
Accept: */*
```

```
Referer: http://search.bbc.co.uk/search?tab=urdu&order=sortboth&q=musharraf&start=2&scope=urdu
```

```
Accept-Language: en-us
```

```
Accept-Encoding: gzip, deflate
```

```
User-Agent: Mozilla/4.0 (compatible; MSN
```

```
Host: search.bbc.co.uk
```

```
Cookie: BBC-UID=b479a5f4ad230a53063d510
```

```
Cache-Control: max-stale=0
```

```
Connection: Keep-Alive
```

```
X-BlueCoat-Via: 66808702E9A98546
```

**Bonus question: Any idea what the information that is being passed in the URL Argument in this example are for?**

%20%28cc

# HTTP Client-to-Server

GET /home.html

Host: sample.website.com

User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316 (USG-25) Firefox/3.0.10

Accept: image/png,image/\*;q=0.8,\*/\*;q=0.5

Accept-Language: en-us,en;q=0.5

Accept-Encoding: gzip,deflate

Accept-Charset: ISO-8859-1,utf-8;q=0.7,\*;q=0.7

Keep-Alive: 300

Connection: keep-alive

The User-Agent line gives you information on what type of client is requesting the data. In this case, we can see that it was a Firefox 3.0 browser from a Windows NT 5.1 (XP) machine.

# User Agents

# User Agents

The User Agent (also known as the “browser”) can be very valuable.

While it can not be trusted to be absolutely unique, in many cases you can use it to unwind a proxy or multi-user environment.

It can also help provide hints if the origins of the request came from a mobile device:

```
User-Agent: Mozilla/5.0 (SymbianOS/9.2; U; Series60/3.1 NokiaE53-1/100 21.110; Profile/MIDP-2.0 Configuration/like Gecko) Safari/413
```

```
User-Agent: NokiaN72/5.0706.4.0.1 Series60/2.8 Profile/MIDP-2.0 Configuration/CLDC-1.1
```

```
User-Agent: iPhone Mail (5H11)
```

# HTTP Client-to-Server

GET /home.html

Host: sample.website.com

User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316 (USG-25) Firefox/3.0.10

Accept: image/png,image/\*;q=0.8,\*/\*;q=0.5

Accept-Language: en-us,en;q=0.5

Accept-Encoding: gzip,deflate

Accept-Charset: ISO-8859-1,utf-8;q=0.7,\*;q=0.7

Keep-Alive: 300

Connection: keep-alive

The various “Accept” lines instruct the server on the types of responses the client can accept back.

Let's look at a simplified version  
of a HTTP request and response

# What is Web (HTTP) Activity

This shows how a person logs on to a webpage



The client's port can be any high-numbered port, 3434 is just an example

# What is Web (HTTP) Activity

This shows how a person logs on to a webpage




The client's port can be any high-numbered port, 3434 is just an example



# What is Web (HTTP) Activity



This shows how a person logs on to a webpage

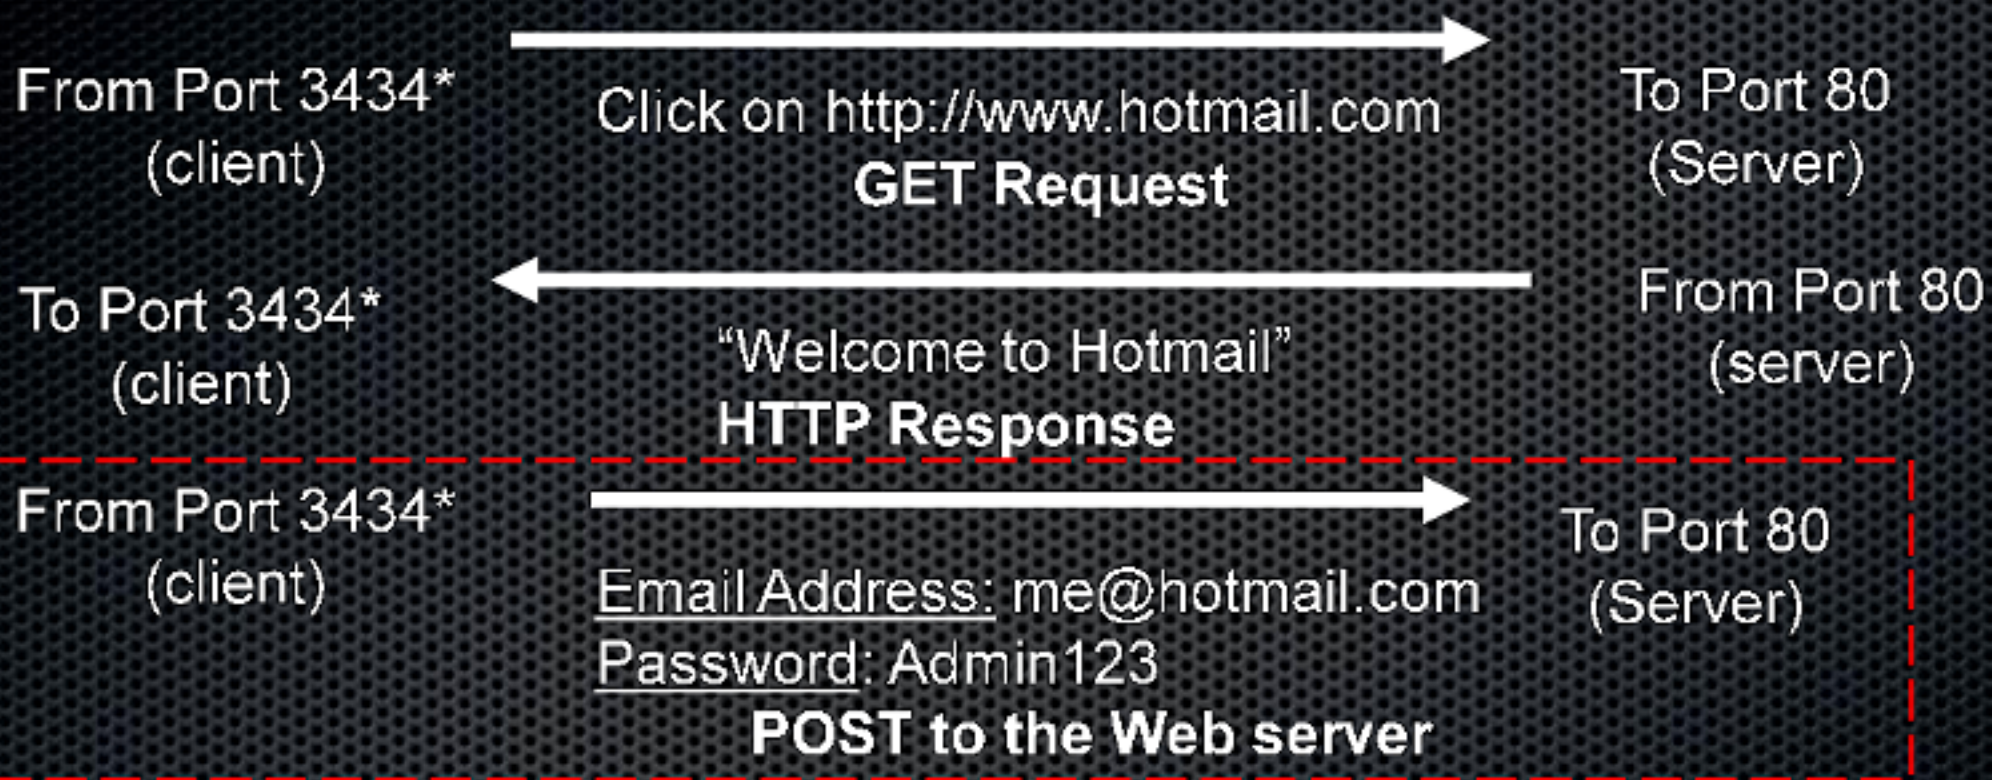

The client's port can be any high-numbered port, 3434 is just an example

# What is Web (HTTP) Activity

This shows how a person logs on to a webpage

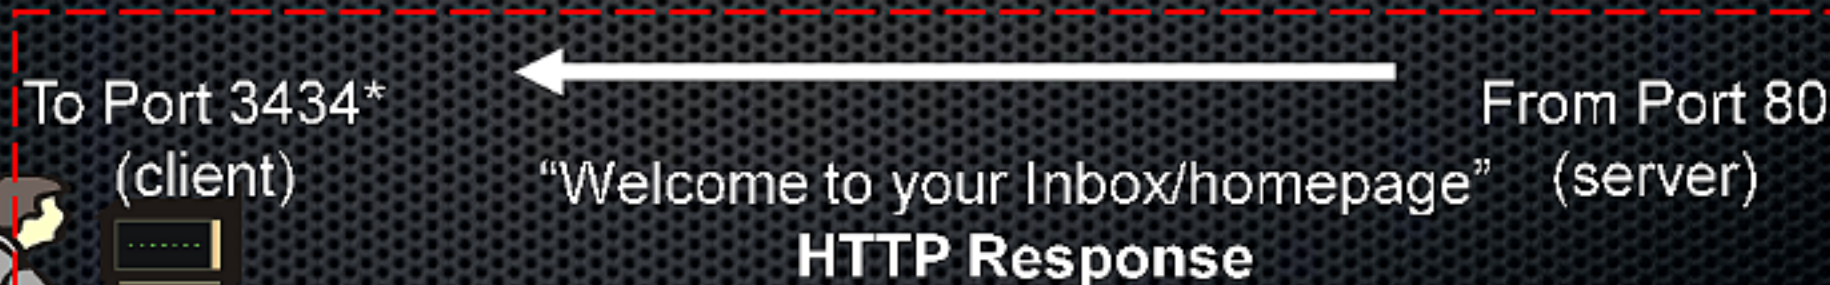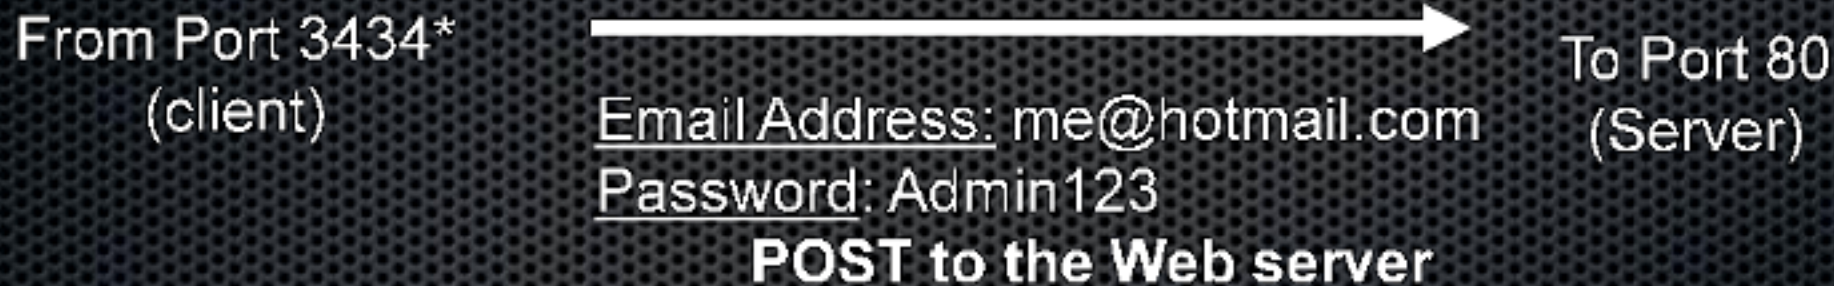

The client's port can be any high-numbered port, 3434 is just an example

# HTTP Activity

- Real traffic, however, can be a little more complicated.
- Almost all web pages are built from multiple files.
- For example, every single image or banner ad on a web page is a separate file that needs to be individually requested before the server that has the file can respond

# HTTP Activity – Real World

- Let's look at the "NSA Today" home page.

Dynamic Page -- Highest Possible Classification is  
TOP SECRET//COMINT//REL TO USA, AUS, CAN, GBR, NZL

**Current Conditions**  
Weather Information

[Daily's Hot Links](#) [Search](#) [Searchlight](#) [Ext. Connections](#) [Orgs](#) [Projects](#) [EA Outages](#)

3 Oct 2009  
**TAKE 2**  
Xtreme Media  
Agency Mass Mailers  
Today's **EVENTS**  
[Multivision Ads](#)  
[Technology Expo](#)  
[Weight Watchers @](#)

NSA Daily "Need to Know" [Past News](#)

**(U//FOUO) NSAG Hosts the CENTCOM Senior Enlisted Leader**

(U//FOUO) On 9 September 2009, NSA/CSS Georgia (NSAG) had the privilege of hosting a visit from Command Sergeant Major (CSM) [redacted] Command Senior Enlisted Leader for United States Central Command (CENTCOM).

(U//FOUO) Pictured: NSA Georgia CSM [redacted] welcomes Command Sergeant Major [redacted] Command Senior Enlisted Leader for United States Central Command

(U//FOUO) This was CSM [redacted] first visit to NSAG. The first stop during his visit was with ITD at the helpdesk. SGM [redacted] of ITD, provided the CSM an overview of our maintenance operations and communications hub. CSM [redacted] told the ITD personnel, "you keep doing what you do, my comms run through here....and I need my comms."

**NSA IN THE NEWS**  
From the **DIRECTOR**  
LTG Keith B. Alexander, United States Army  
**Mission Messages**  
[Top IAD News](#)  
[\(U\) Securing the](#)

# HTTP Activity – Real World

- It looks like one page, but each of the images and banners are separate data files that your browser pieces back together

Dynamic Page -- Highest Possible Classification is  
TOP SECRET//COMINT//REL TO USA, AUS, CAN, GBR, NZL

NSA **DAILY**  
...the best minute you spend today

Current Conditions  
Weather Information

5 Oct 2009  
**TAKE 2**

XtraMedia

Agency Mass Mailers

Today's **EVENTS**

Multivision Ads  
Technology Exam  
Weight Watchers @

NSA Daily "Need to Know" [Past News](#)

**(U//FOUO) NSAG Hosts the CENTCOM Senior Enlisted Leader**

(U//FOUO) NSAG Georgia (NSAG) had the privilege of hosting a visit from Command Sergeant Major (CSM) [REDACTED] Command Senior Enlisted Leader for United States Central Command (CENTCOM).

(U//FOUO) Pictured: NSA Georgia CSM [REDACTED] welcomes Command Sergeant Major [REDACTED] Command Senior Enlisted Leader for United States Central Command

(U//FOUO) This was CSM [REDACTED] first visit to NSAG. The first stop during his visit was with ITD at the helpdesk. SGM [REDACTED] of ITD, provided the CSM an overview of our maintenance operations and communications hub. CSM [REDACTED] told the ITD personnel, "you keep doing what you do, my comms run through here ...and I need my comms."

**NSA IN THE NEWS**

From the **DIRECTOR**

Keith B. Alexander, United States Army

Mission Messages

Top AD News:  
[\(U\) Securing the](#)

# HTTP Activity – Real World

- In fact, to build the NSA Today home page it takes 34 separate files from 4 different servers
- However, most people probably don't notice, because the entire page loads in <300 milliseconds.
- If we had a slow internet connection, we'd notice the images would initially be missing.

# HTTP Activity Real-Word

Notice that all of the images are missing. They are all separate server-to-client responses and therefore completely separate "sessions" in X-KEYSCORE or PINWALE

The screenshot shows a web browser interface with a navigation menu on the left and a main content area. The navigation menu includes links for Home Page, Iran, Middle East, Iraq, Palestine, Lebanon, Turkey, Persian Gulf, Others, US, Asia/Pacific, Africa, Europe, Americas, Sci/Tech, and Health. The main content area features a news article titled "Kuwait government 'resigns' over economy" dated Mon, 16 Mar 2009 19:07:16 GMT. The article text states: "The Kuwaiti government has submitted its resignation to the county's emir amid a row over the premier's handling of the economic crisis." and "The resignation has been submitted formally and it's up to the emir (ruler) to decide," Reuters quoted Nasser al-Duwailah, a parliamentarian, as saying on Monday. Below this, it says: "The resignation would further delay the approval of 1.5 billion dinars (USD 5.11 billion) rescue package which is to be injected to the Persian Gulf nation's economy to ease the impact of the global financial crisis." and "The government has not commented on the report." The article is surrounded by several missing image placeholders (represented by small icons and empty boxes) and a search bar with a "Go" button. A "Latest News" sidebar on the right lists several news items with missing image placeholders: "Kuwait governr economy", "Childhood diet risk", "US-Russian pa shield row", "Judges want M confiscated", "Leader pardons", "Ancient book r", "Lieberman eyes ally", and "Intelligent peop".

# HTTP Activity – Real World

- It's important to note that not all of the data on one web-page came from the same server.
- For example, most of the NSA Today home page come from [home.www.nsa](http://home.www.nsa.gov), but the image of the current weather conditions came from [wk-admiral208.corp.nsa.ic.gov](http://wk-admiral208.corp.nsa.ic.gov)




# HTTP Activity – Real World

- This happens all the time on the Internet.
- The cnn.com home page, may have an ad on it that was from the Google ad server and etc.
- And this does have an impact on our collection!


# HTTP Activity

- This is the traffic path for building the NSA today home page

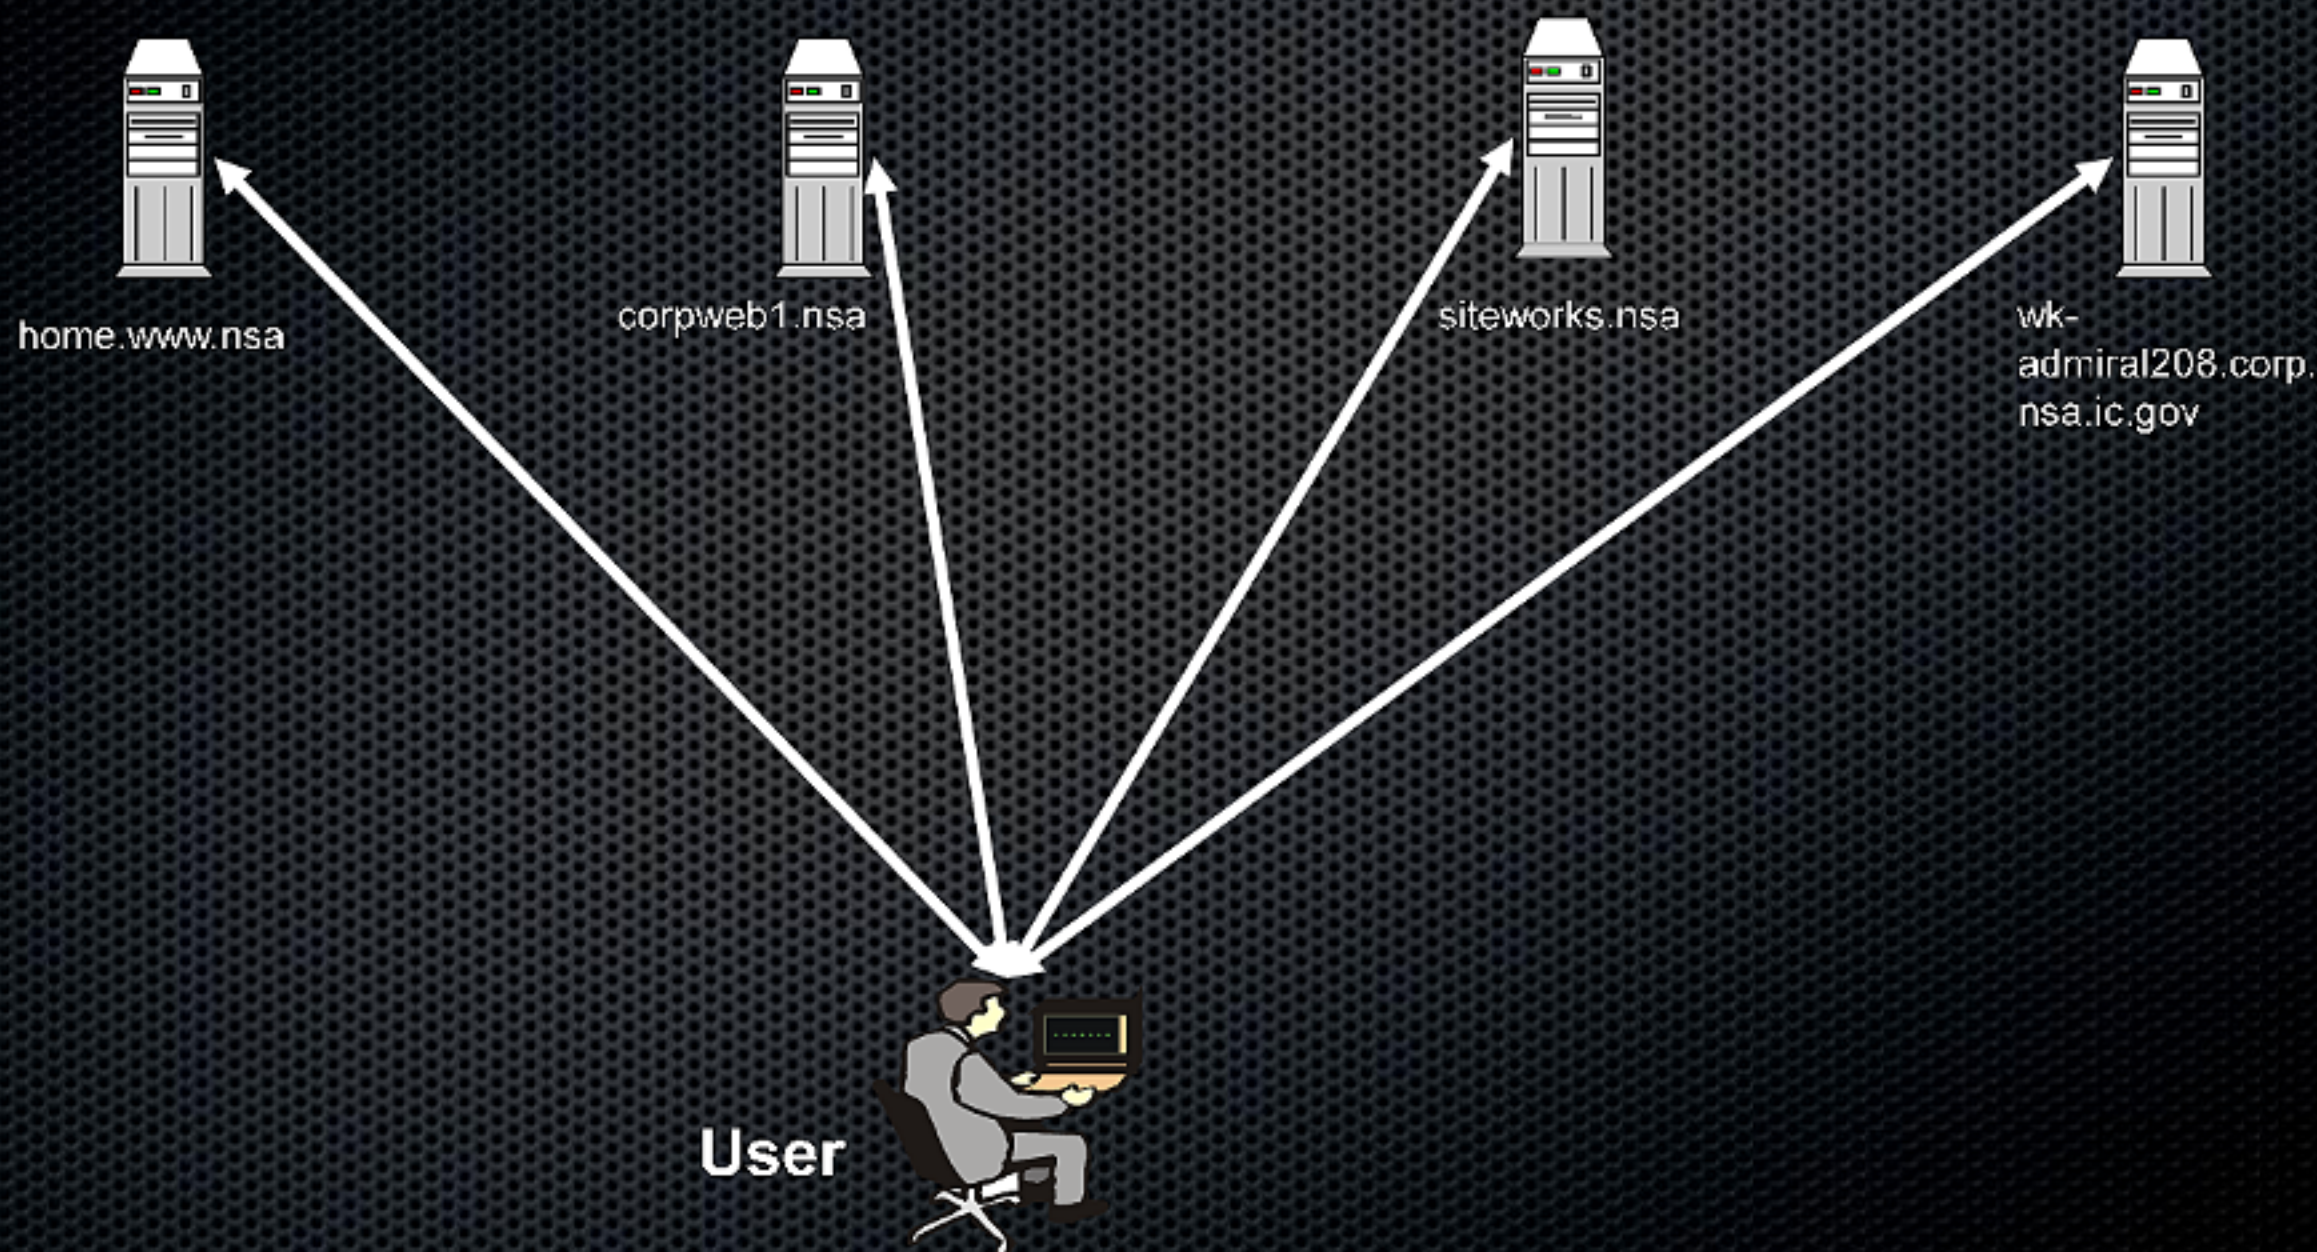

# HTTP Activity

- What happens if we only have collection on one of the paths?

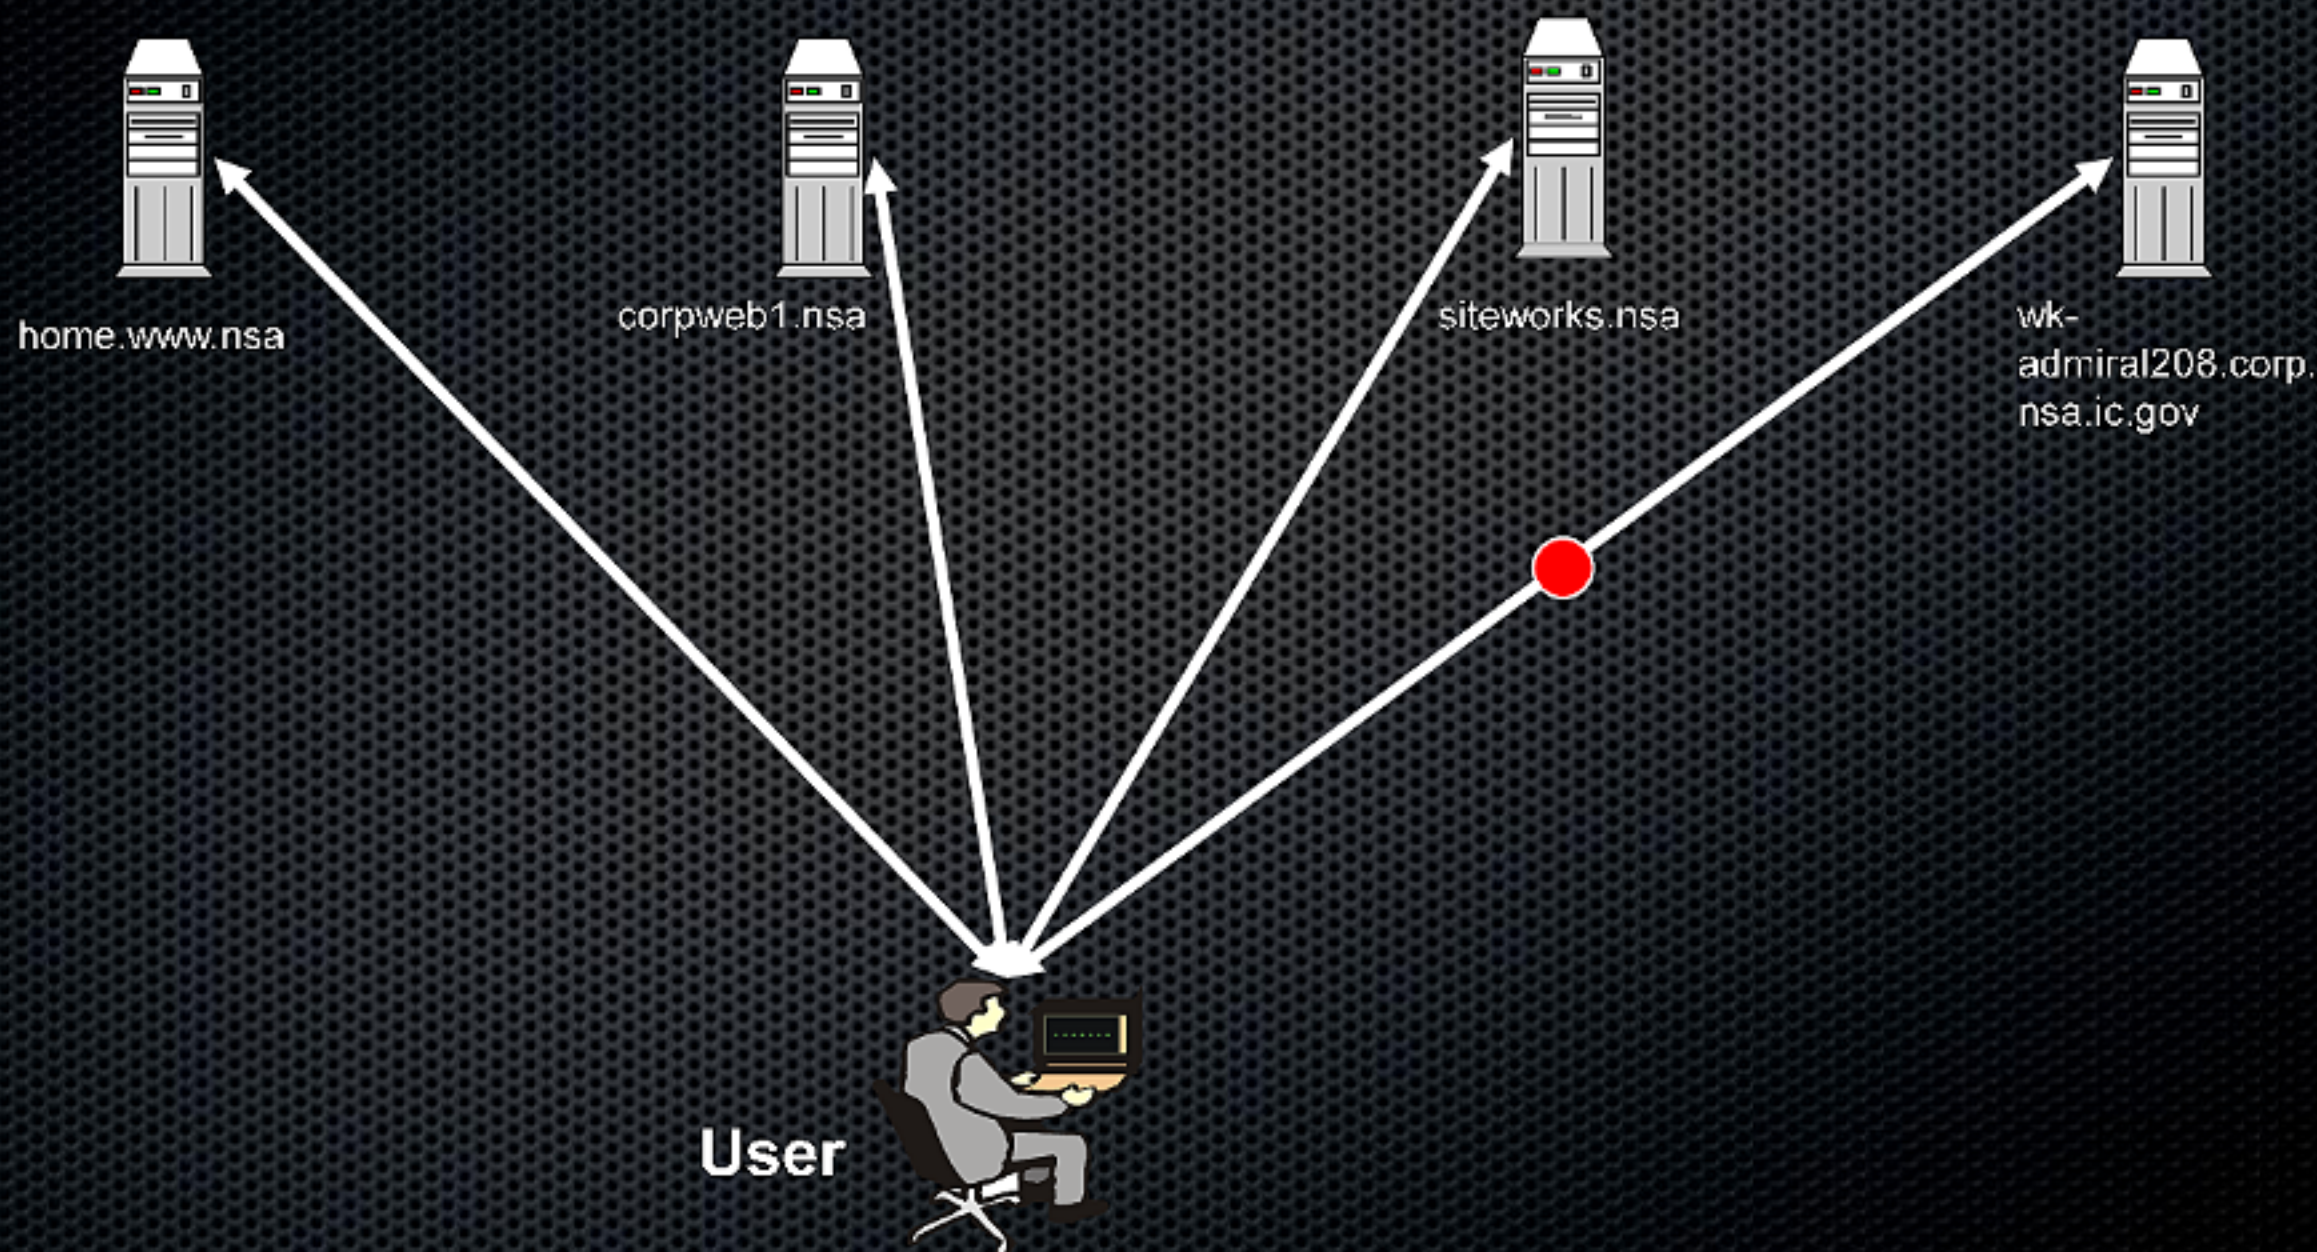

# What would that traffic look like?

```
GET /current.jpg
Host: wk-admiral208.corp.nsa.ic.gov
User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316 (USG-25) Firefox/3.0.10
Accept: image/png,image/*;q=0.8,*/*;q=0.5
Accept-Language: en-us,en;q=0.5
Accept-Encoding: gzip,deflate
Accept-Charset: ISO-8859-1,utf-8;q=0.7,*;q=0.7
Keep-Alive: 300
Connection: keep-alive
Referer: http://home.www.nsa/
If-Modified-Since: Thu, 08 Oct 2009 19:31:56 GMT
If-None-Match: "d945-16c1-842db643"
Cache-Control: max-age=0
```

If we only saw this one GET request and not the other 33 required to build the NSA Today home page, would we be able to determine what the user was actually doing?

# What exactly is that telling us?

- First off, we know what file they are requesting.
- They want current.jpg from the wk-admiral208.corp.nsa.ic.gov server.
- That's actually a live public URL  
(<http://wk-admiral208.corp.nsa.ic.gov/current.jpg>)
- Do we have any indication why they wanted that image? Answer is yes! Look at the referer field.

# What exactly is that telling us?

- They were referred from <http://home.www.nsa/>
- The referer is in essence, telling you what site was “linking” to the new site.
- Warning! The referer can act in misleading ways.

# Referer Field

- The referer field is the address of the page that links to new GET request.
- However, this link could have been automatic to the user.
- I.e. in the case of the current weather image, the link was automatic and the user wasn't even aware of the action

# Referer Field

- The referer field could also indicate a user action.
- For example, imagine we were on the NSA Today webpage and clicked the link to the SID Today page.
- What would that traffic look like?



# Referer Field

GET /

Host: sidtoday.nsa

User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316 (USG-25) Firefox/3.0.10

Accept: text/html,application/xhtml+xml,application/xml;q=0.9,\*/\*;q=0.8

Accept-Language: en-us,en;q=0.5

Accept-Encoding: gzip,deflate

Accept-Charset: ISO-8859-1,utf-8;q=0.7,\*;q=0.7

Keep-Alive: 300

Connection: keep-alive

Referer: http://home.www.nsa/

Cookie: CFID=565238; CFTOKEN=66534796;

CFGLOALS=urlltoken%3DCFID%23%3D565238%26CFTOKEN%23%3D66534796%26jsessionid%23%3Da830dba3a04b67ae6e351b7463444f72496d%23lastvisit%3D%7Bts%20%272009%2D10%2D09%2015%3A38%3A04%27%7D%23timecreated%3D%7Bts%20%272009%2D06%2D19%2010%3A27%3A23%27%7D%23hitcount%3D13%23cftoken%3D66534796%23cfid%3D565238%23; JSESSIONID=a830dba3a04b67ae6e351b7463444f72496d

# Referer Field

- Now we're seeing a request go to host "sidtoday.nsa" with the referer from <http://home.www.nsa>
- How can we tell from the traffic that the first automatic referer we saw for the current weather was any different from the user-generated referer we saw for the SID Today article?

# Cookies!

# Cookies

- Cookies are small pieces of text-based data stored on your machine by your web browser.
- Almost all websites have cookies enabled and they have a variety of uses, including to help the web-site track the activities of their users.
- Most analysts are probably familiar with “machine specific cookies” like the Yahoo B cookie
- However cookies are used for a variety of reasons

# What can cookies be used for?

- Cookies can be used to authenticate a user.
- For example in many cases, the “active user” for Yahoo web-mail traffic is seen encoded in the l= part of the cookie string.

	v=1
	n=4ed046e653aef
	l=iebj0d_10o0p838t/o ( Yahoo login id: ██████████ )
Y	p=1zkwsy012000000 ( Gender: female, Birth year: 1984, Postal code: ██████████ )
	lz=
	t=jb
	lg=en-US ( Language/content: English )
	int=us ( Country: United States )

# What can cookies be used for?

- Cookies can be used to store information about the user that the website is interested in
- Look at how the p= value below tells the website information about the user of this account:

Y	v=1 n=4edq46n653aef l=ieb10d_10o0p838t/o ( Yahoo login id: ██████████ ) <b>p=f2kvvsy012000000 ( Gender: female, Birth year: 1984, Postal code: ██████████ )</b> lz= r=jb lg=en-US ( Language/content: English ) int=us ( Country: United States )
---	--

# What can cookies be used for?

- Cookies can be used to identify a single machine from hundreds of other users on the same proxy IP address
- The Yahoo B cookie is a “machine specific cookie”

```
f6146fh596u4b  
b=4  
B d=GtdIlgXBpYEQvWQEGtVnWhaxlPNw-  
s=9e  
i=8OSsR4OwqEO5oGGF2kJh
```

# What can cookies be used for?

- Important note: All three of those examples are just subsets of the full Yahoo cookie string



## How do we know what each cookie value is used for?

- Nearly every web-site uses cookies that in most cases they designed for their own uses, so how do we know what they all mean?
- Protocol Exploitation can examine the traffic to try to determine if there is any information contained in cookie strings that we might be interested, for example we'd like to know if any part of the cookie acts like a "machine specific cookie."

## How do we know what each cookie value is used for?


- However, there are far more cookie options out in the wild than PE can possibly examine.
- So even if they aren't aware of a machine specific cookie, it doesn't mean that it doesn't exist.
- X-KEYSCORE gives you access to the full cookie string, so if you're adventurous enough you can do your own protocol exploitation.

# Remember: Cookies are there for a reason!

- Websites put cookies on people's computers for a reason.
- If the data is valuable for a website, it may be valuable to us as well.


# How long do cookies live for?

- Cookies, like any other file on a computer, can be deleted by the user.
- Almost all browsers give you the option to view, manage and delete your cookies

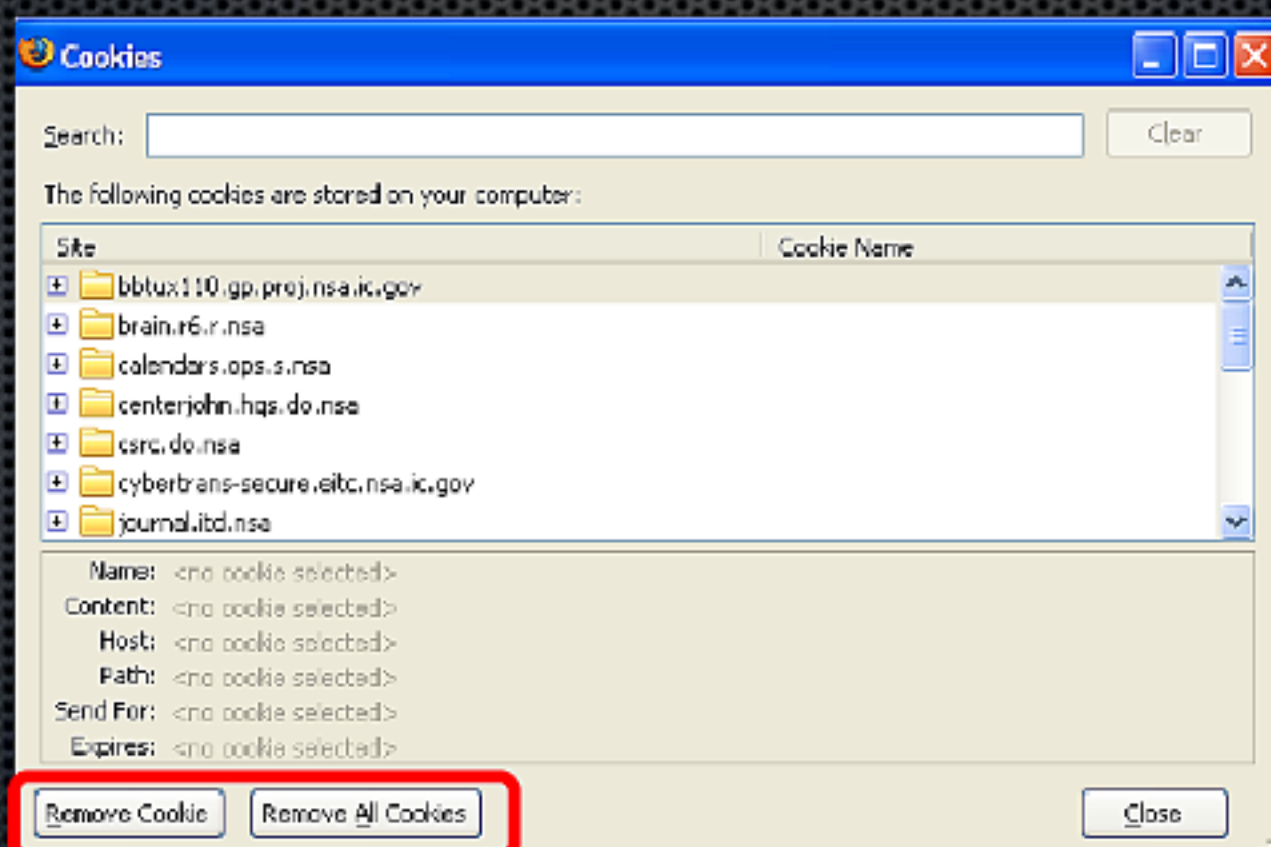

# Cookies

You can see what cookies have been stored on your machine by going into the “options” window of your browser and selecting “show cookies”

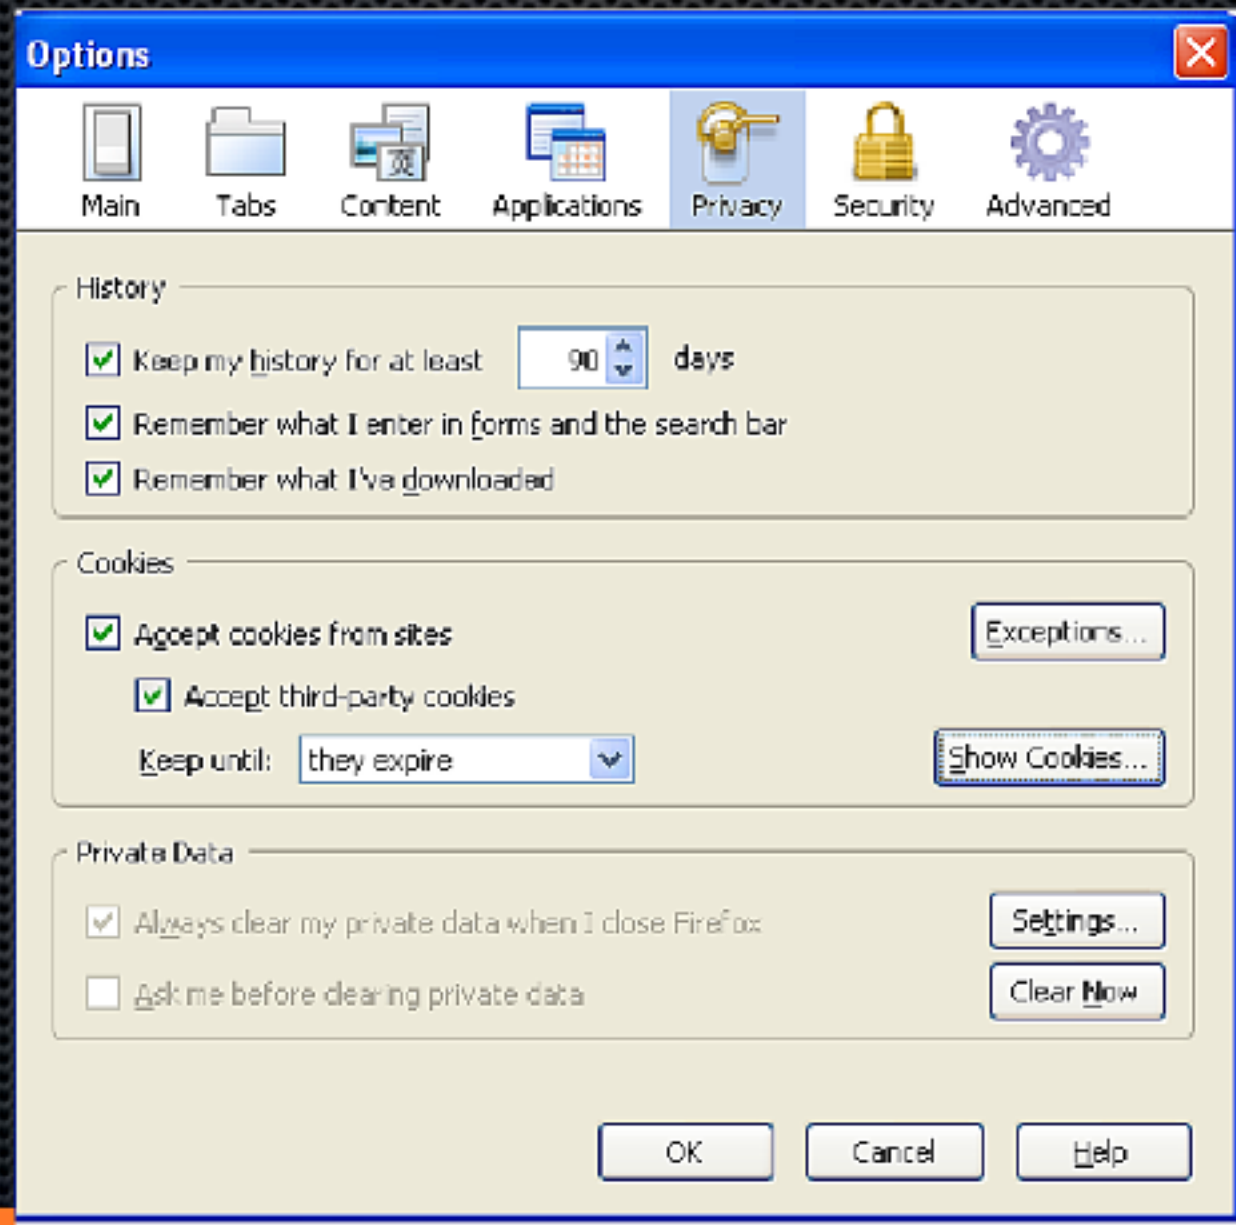

# Searches

# Searching the Internet

When a user searches the Internet from one of the many web-based search engines (Google, Bing, etc.) what does the traffic look like?

# Searching the Internet: Client-to-Server

- In most cases, the client-to-server traffic is a GET request where the search term is passed in the URL Arguments:

```
GET /search?hl=fr&q=iran&lr= HTTP/1.1
```

```
Host: www.google.com
```

```
Accept: image/gif, image/x-bitmap, image/jpeg, image/pjpeg, application/x-shockwave-flash,  
application/vnd.ms-powerpoint, application/vnd.ms-excel, application/msword, */*
```

```
Cookie: PREF=ID=74f6d7addf51ccd4:U=ccbee9ee665a7dde:TB=2:TM=1255354439:LM=125543326  
4:S=_M1i4RfO2ohl81maNID=27=cMFLkpvJCIWI0FC5E3Pu2C6-8_nsMS2zztfvOew9-  
QYDPWUza4AscyogIQRGNSkdZsi2jL65 fIM-R4HgovMBEa66bfITXn8TH3Ukm-  
X5hp45rLAb_Y3rNZ42HGIZyne
```

```
Accept-Encoding: gzip, deflate
```

```
User-Agent: Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1)
```

```
Connection: Keep-Alive
```

```
Cache-Control: no-cache
```



## Searching the Internet: Client-to-Server

- Notice how the URL Path is /search and one part of the URL argument is q=iran
- Each website can configure their URL's differently, so while with Google the search term is contained in the q= part of the URL, a different search form might have it as query= or search\_term= etc.

```
http://www.youtube.com/results?search_query=iran&search_type=&aq=o
```

## Searching the Internet: Client-to-Server

- X-KEYSCORE tries to account for all the variations of search terms contained in the URL Argument for what it extracts for the “Search Term” column.
- However, there are always other varieties out there that we haven’t built it hooks for yet, so anytime you see something that you think should be extracted, please contact the team ( [REDACTED] )

## “Referer Searches”

- What happens when a user clicks on a search result?
- Let's start by showing the query itself, in this example, we're going to query the NSA Net Google for “XKEYSCORE”

# “Referer Searches”

## What does that GET request look like?

```
GET /search?q=xkeyscore&btnG=Google
```

```
Host: google4.q.nsa
```

```
User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316  
(USG-25) Firefox/3.0.10
```

```
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
```

```
Accept-Language: en-us,en;q=0.5
```

```
Accept-Encoding: gzip,deflate
```

```
Accept-Charset: ISO-8859-1,utf-8;q=0.7,*;q=0.7
```

```
Keep-Alive: 300
```

```
Connection: keep-alive
```


We know from this session that the client is requesting the data from the host 'google4.q.nsa' and we see the search term in the URL Argument

# “Referer Searches”

## What happens when a user clicks on a search result?

```
GET /redmine
Host: xkeyscore.r1.r.nsa
User-Agent: Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.10) Gecko/2009042316
  (USG-25) Firefox/3.0.10
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
Accept-Language: en-us,en;q=0.5
Accept-Encoding: gzip,deflate
Accept-Charset: ISO-8859-1,utf-8;q=0.7,*;q=0.7
Keep-Alive: 300
Connection: keep-alive
Cookie: _session_id=ffd87ac8682e8fa8f421b4ffdf9693ae
Referer: http://google4.q.nsa/search?q=xkeyscore&btnG=Google+Search
```

First, we can determine the full URL by adding the GET line to the host: <http://xkeyscore.r1.r.nsa/redmine>

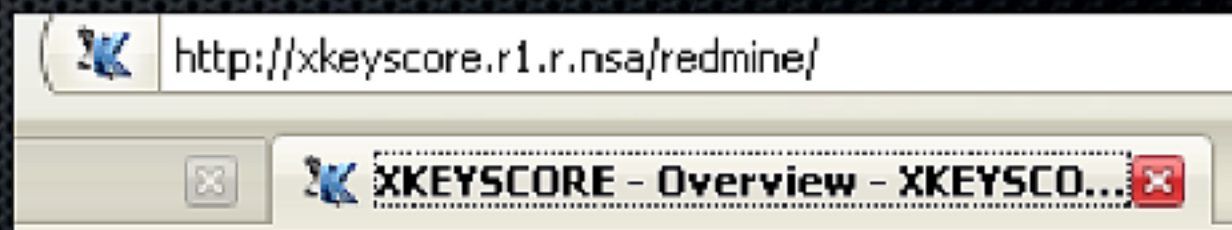

## “Referer Searches”

- Secondly, we get some hints as to why the user was requesting that page from the Referer line:

```
Referer: http://google4.q.nsa/search?q=xkeyscore&btnG=Google+Search
```

- Note that it was the same URL that we were at immediately before we clicked the “result” link

# “Referer Searches”


Let's look at that process again:



First, a client-to-server request is sent that contains the query on “xkeyscore”

# “Referer Searches”


Let's look at that process again:

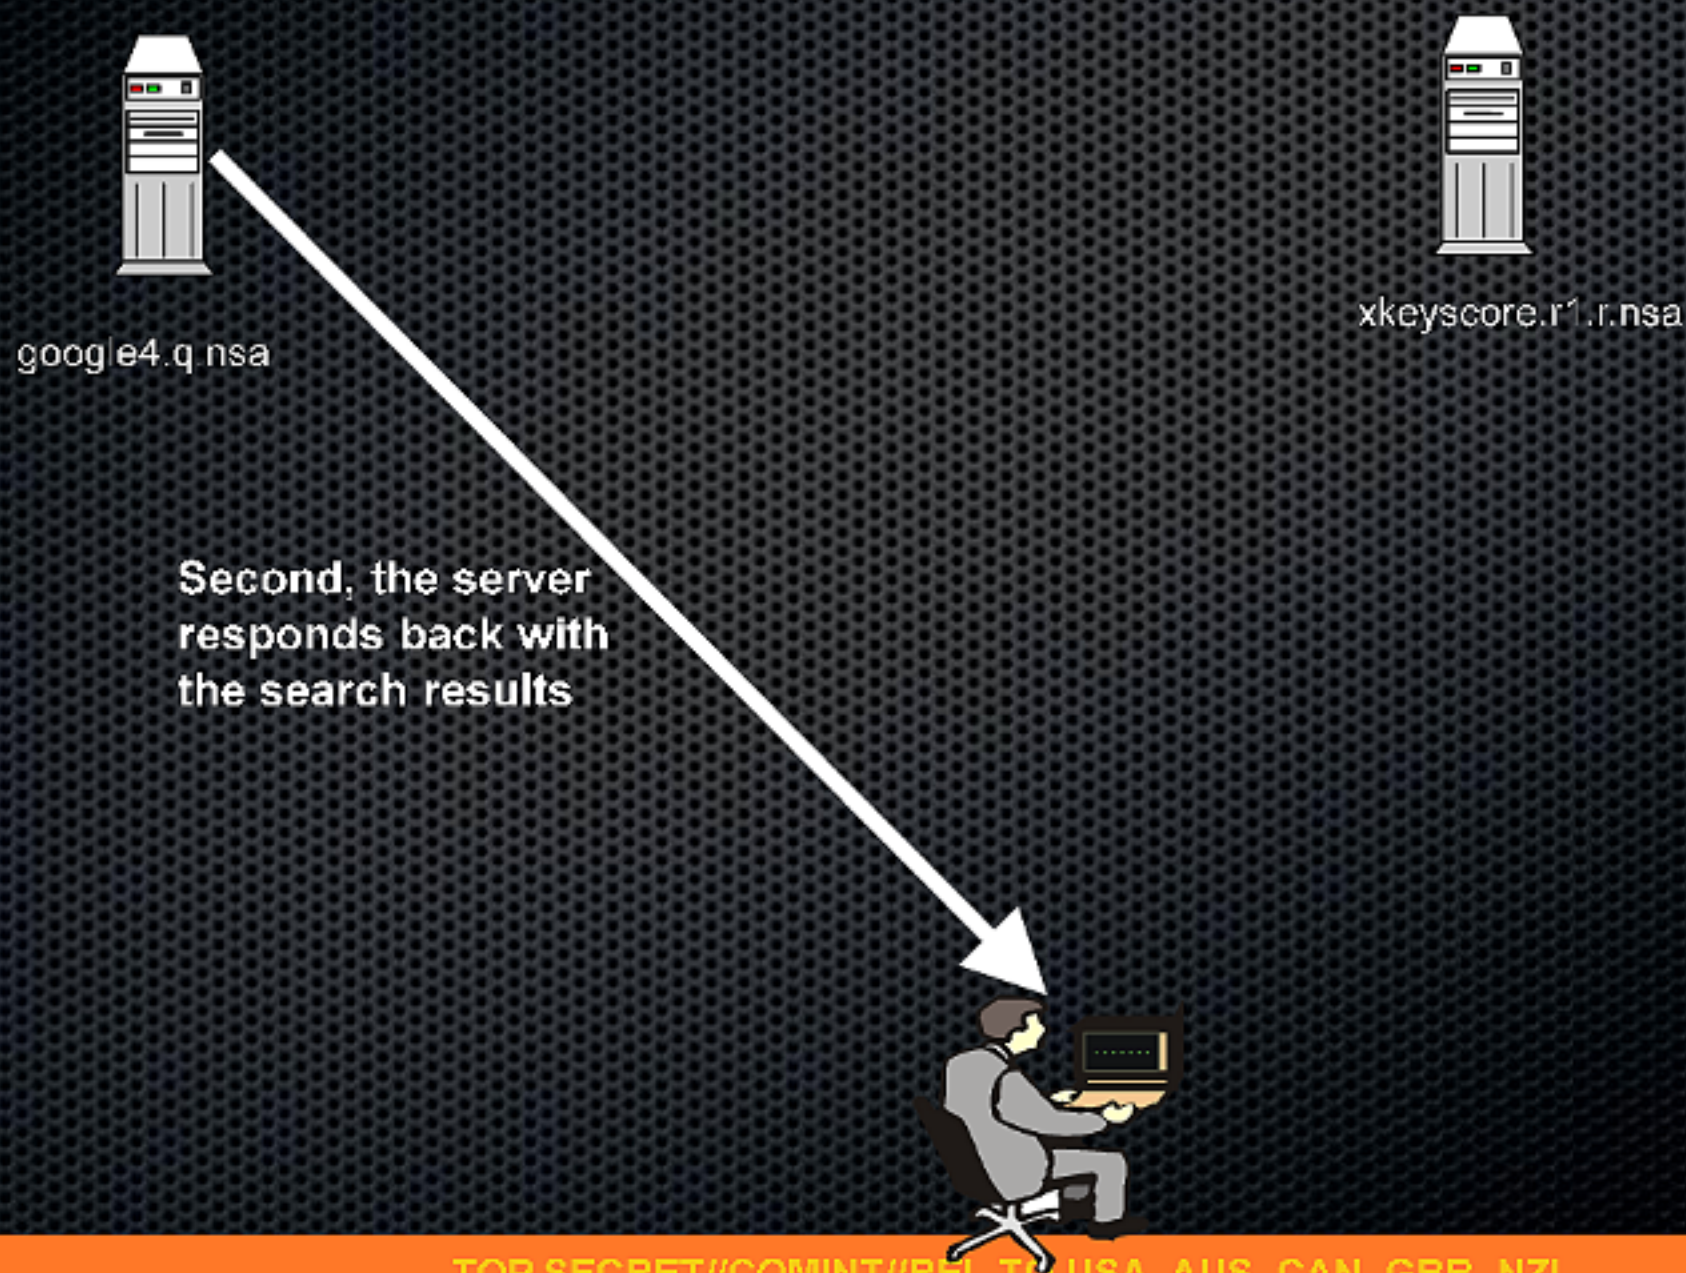




# “Referer Searches”

Let's look at that process again:

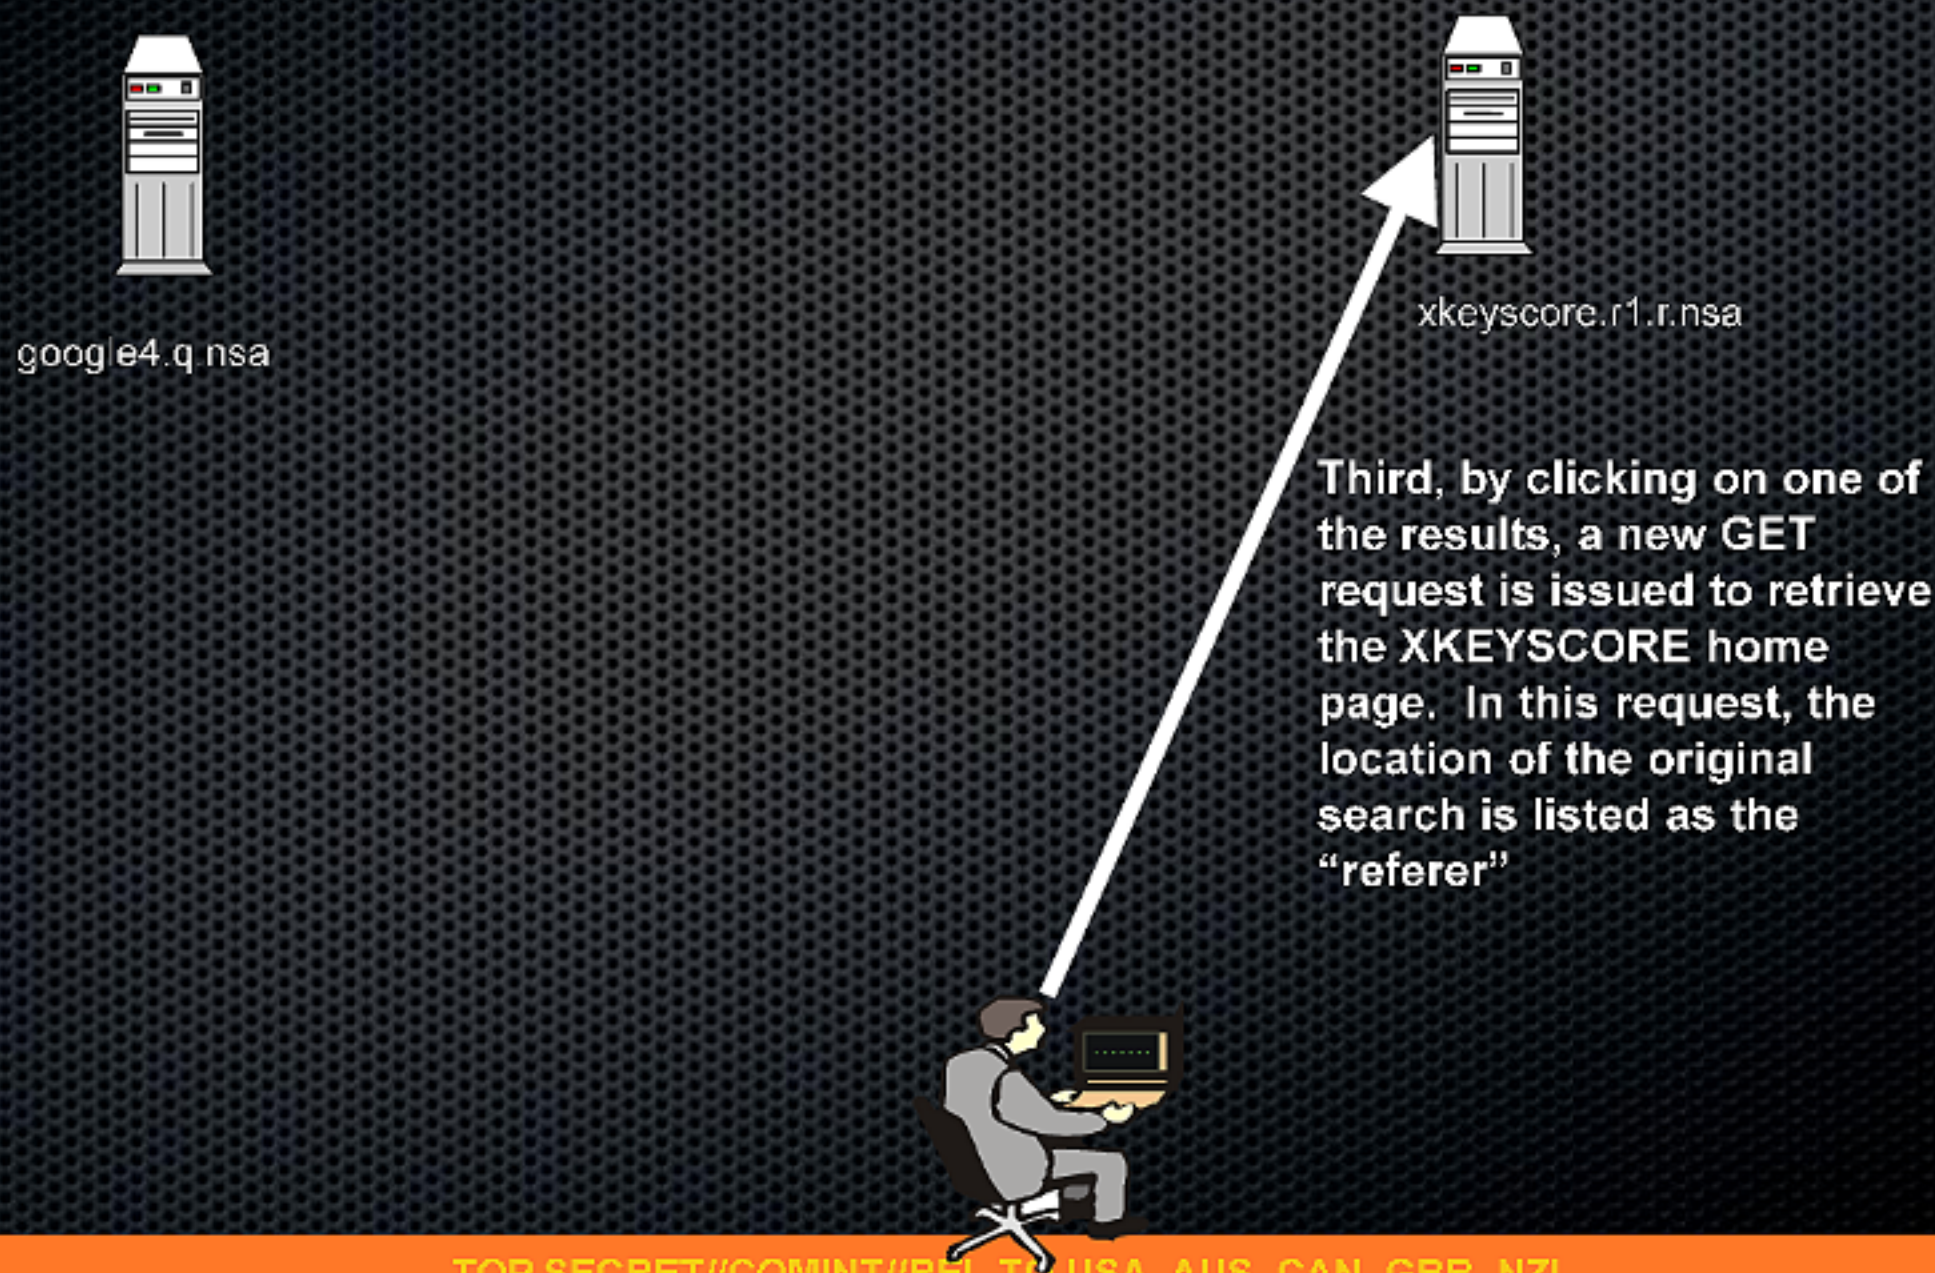

# “Referer Searches”

Let's look at that process again:

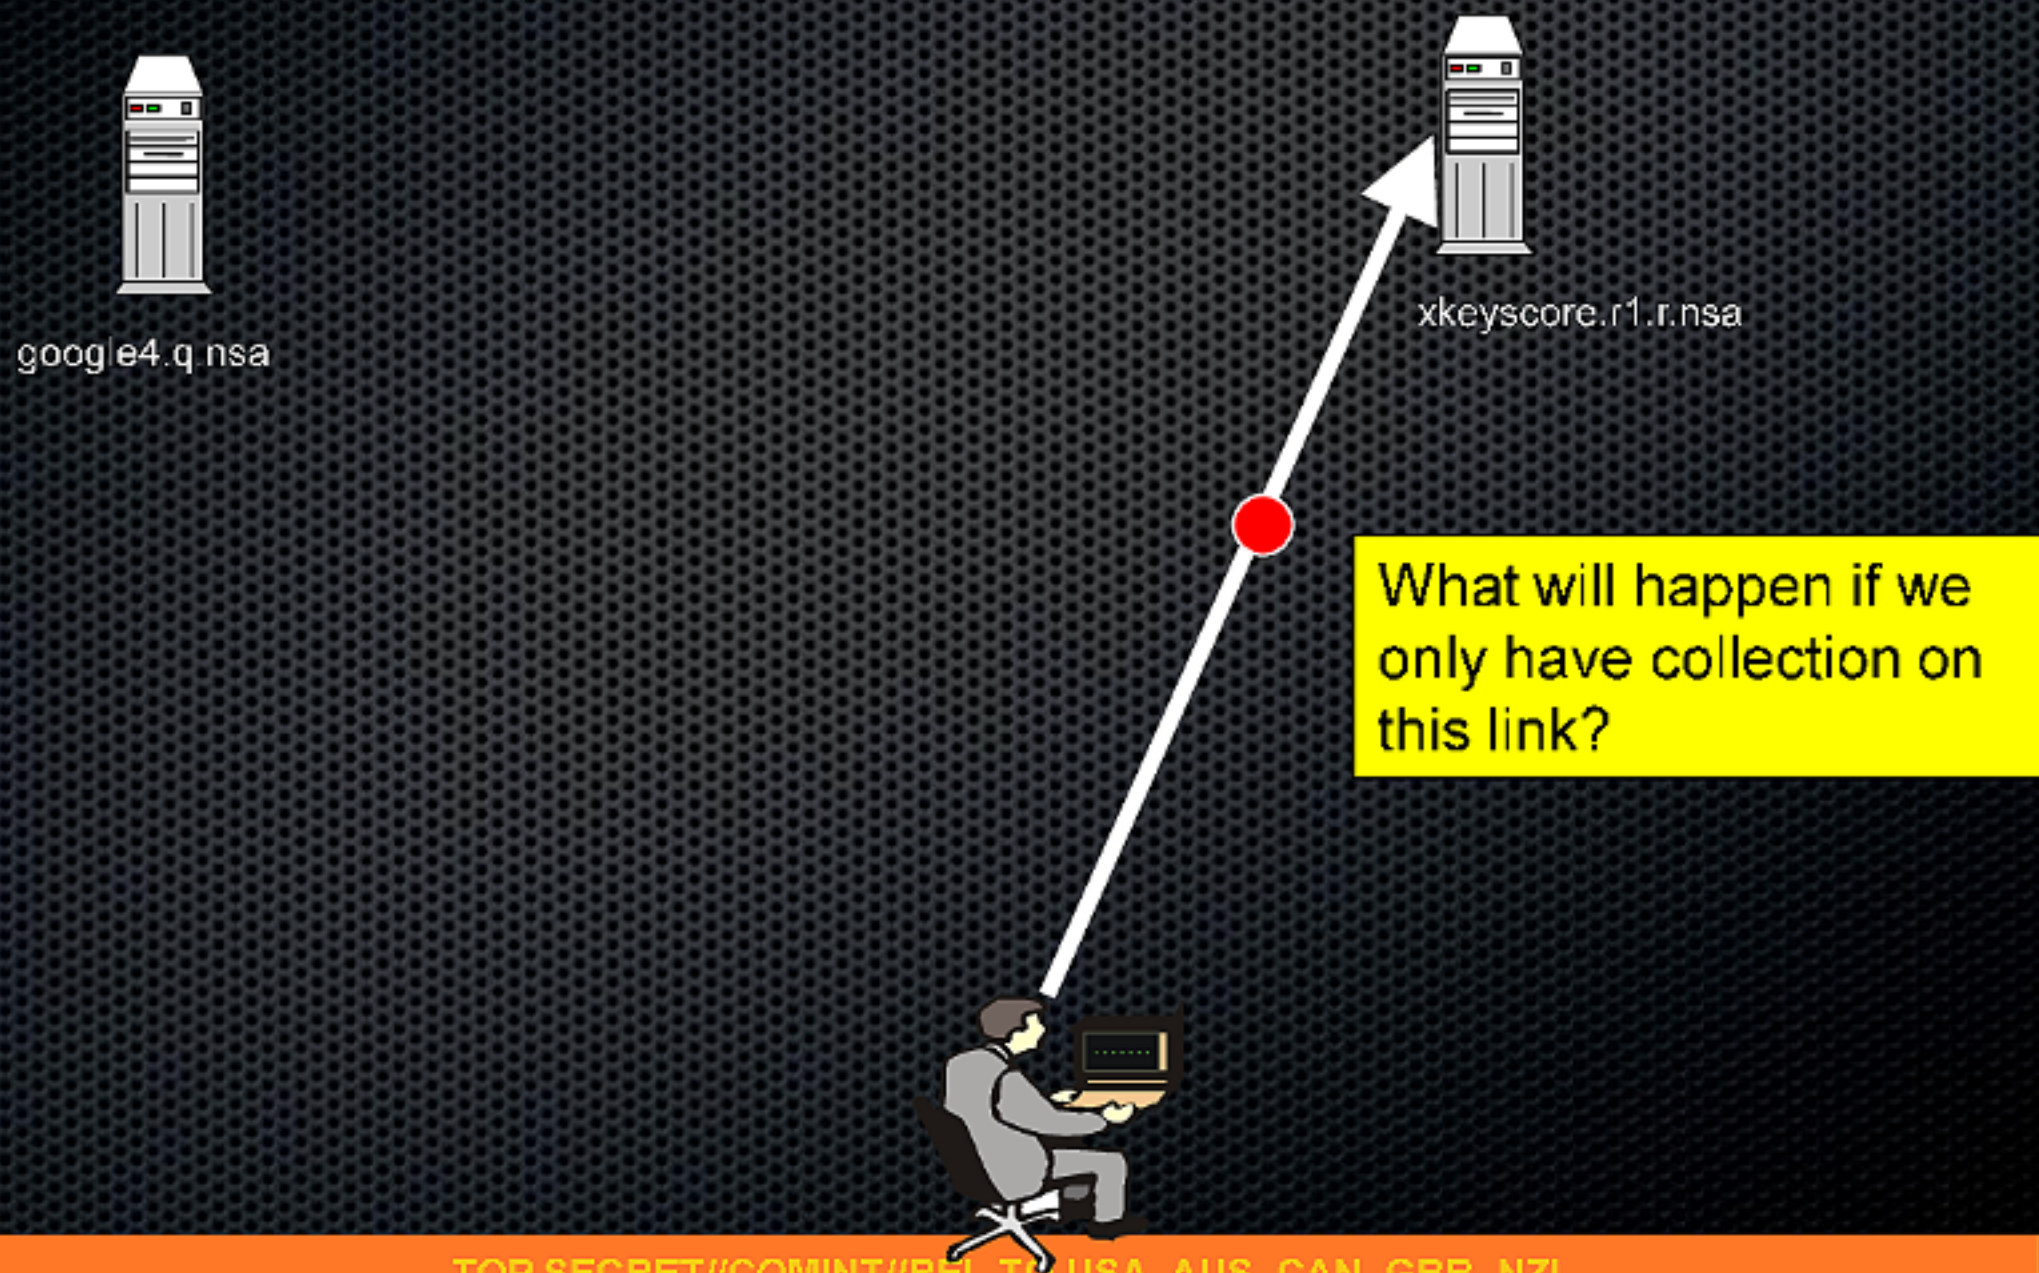

## “Referer Searches”

When XKEYSCORE sees a search contained in the “referrer” field, we still extract it out as meta-data into the “search terms” but we append it with (referrer) to denote where it was originally found:

Search Terms ▲  
**(referrer) the legal status of the caspian sea**

HTTP Type	Host	URL Path	URL Args
get	www.parstimes.com	/law/caspian_status.html	

Referer

<http://www.google.com/search?hl=fa&source=hp&q=the+legal+status+of+the+caspian+sea&lr=>

# “Referer Searches”

```
GET /law/caspian_status.html HTTP/1.1
Accept: */*
Host: www.parstimes.com
Referer: http://www.google.com/search?hl=fa&source=hp&q=the+legal+status+of+the+caspian+sea&lr=
Accept-Language: fa
Accept-Encoding: gzip, deflate
User-Agent: Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1; SV1; .NET CLR 2.0.50727; InfoPath.2)
Cache-Control: max-stale=0
Connection: close
X-BlueCoat-Via: 0A6F53530F3F63EE
```

Can we guess what happened here?

# Referer searches

## Another example:

ID: sess\_orig\_proc

Type: HTTP-GET [Printer Friendly Version](#)

**DNI Display** Raw Data DNI Format

Services ▾

---

GET /Hezbollah-Terrorism-Judith-Palmer-Harik/dp/1860648932 HTTP/1.1	
User-Agent:	Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US) AppleWebKit/525.19 (KHTML, like Gecko) Chrome/1.0.154.48 Safari/525.19
Referer:	http://www.google.com.pk/search?hl=en&q=written books on hizbollah&btnG=Google Search&meta=
Accept:	text/xml,application/xml,application/xhtml+xml,text/html;q=0.9,text/plain;q=0.8,image/png,*/*;q=0.5
Accept-Encoding:	gzip, deflate, bzip2, sdch
Cookie:	ubid-man=185-5525816-8765531 apn-user-id=P1YXY7QF1PUYQ5
Accept-Language:	en-US,en
Accept-Charset:	ISO-8859-1,*,utf-8
Host:	www.amazon.com
Connection:	Keep-Alive

# Proxy Information

# Proxy Information

- In a lot of cases we're going to see HTTP Activity from behind a proxy or proxies.
- What is a proxy?
  - A proxy is a server that is acting as an intermediary for HTTP requests from clients
- Why do proxies exist?
  - **Performance:** Proxy can cache responses for static pages
  - **Censorship:** Proxy can filter traffic
  - **Security:** Proxy can look for malware
  - **Access-Control:** Proxy can control access to restricted content

# Proxy Information


- Routinely, we're going to see ISP level proxies.
- That is, instead of having each individual user request web pages directly from the web servers, the ISP is going to collect all of those requests first, and then proxy them out through a handful of proxy IP addresses.
- When the response is returned, the proxy passes it on to the appropriate user



# Proxy Information

- Why would the ISP want to proxy traffic?
- In many cases the ISP won't have to supply public IP addresses to all it's users
- It can simply give them a private IP address, and then use a handful of public IP addresses for its proxies which are the machines actually requesting the traffic from the web-servers

# Proxies on the Internet

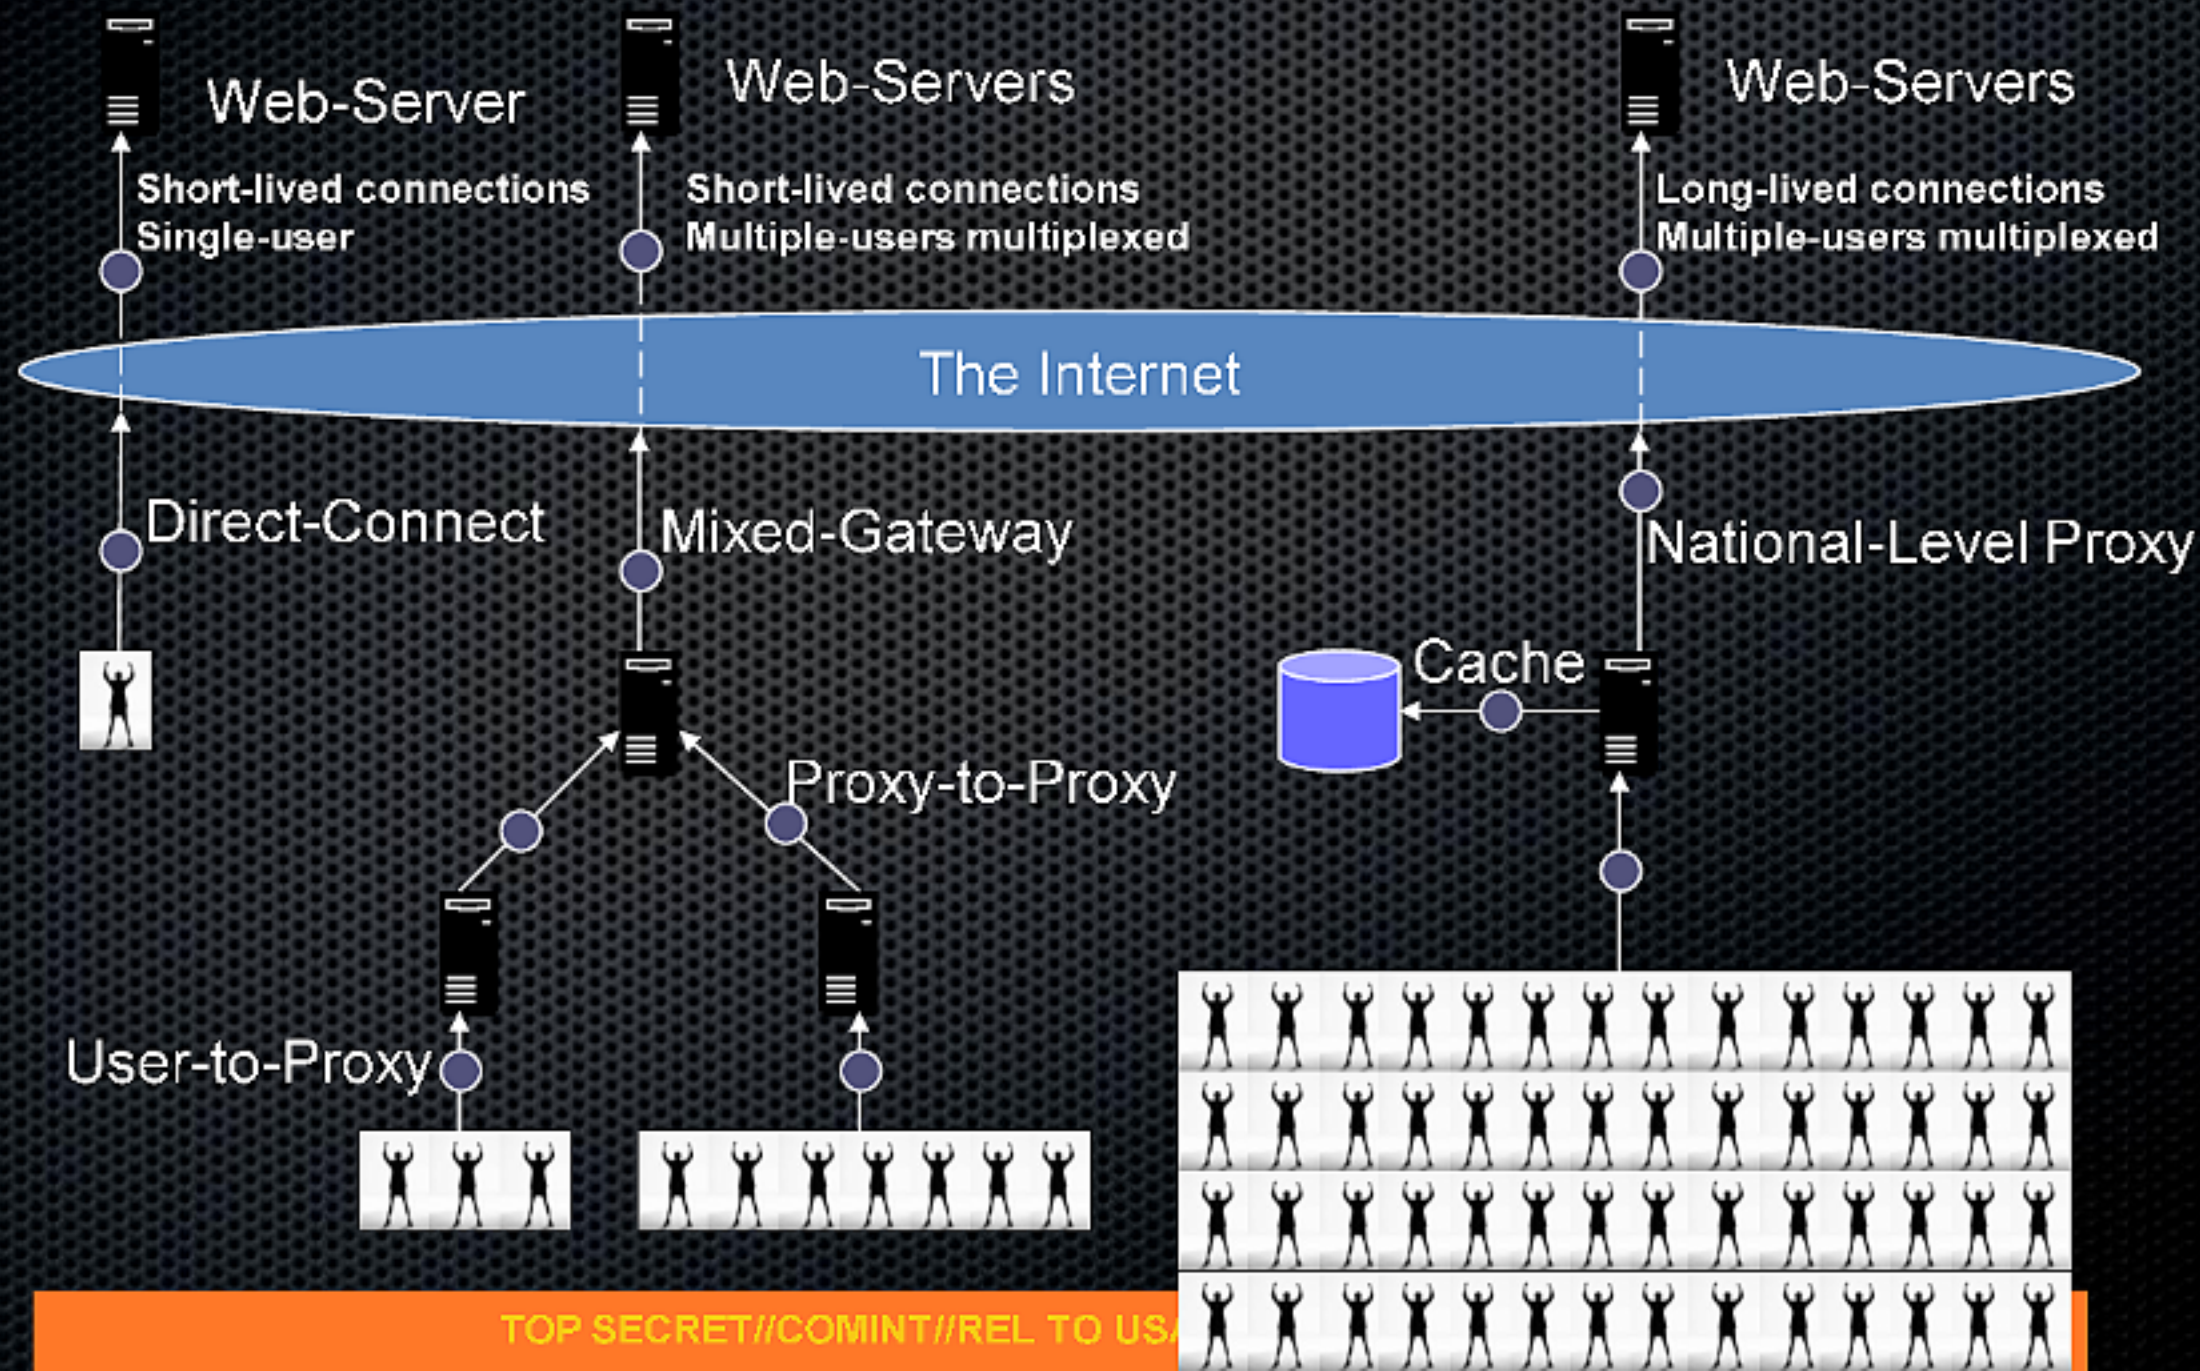

# Identifying a Proxy

- How do you know that the IP address that you think is your target is really a proxy?
- First step, check NKB.
- They have services that attempt\* to automatically detect proxies

\* These services are in no way 100% accurate so this is only the first step in checking to see if the IP Address is a proxy

# Identifying a Proxy: NKB

Query: IP Address [REDACTED]				
Date: 2009-10-27@09:21:50				
Description	Value	Confidence	Classification	
<b>Location</b> <a href="#">Add Analyst Input</a>				
IP Range	[i] [REDACTED]		(TS//SI//REL TO USA, FVEY)	
Lat/Long (precision)	[i] (none found)		(TS//SI//REL TO USA, FVEY)	
City	[i] ZAHEDAN		(TS//SI//REL TO USA, FVEY)	
Country	[i] IR (IRAN)		(TS//SI//REL TO USA, FVEY)	
<b>Provider</b> <a href="#">Add Analyst Input</a>				
IP Owner	[i] RAYANE FARAZ IRANSHAHR COMPANY , INTERNET SERVICE PROVIDER		(U//FOUO)	
Autonomous System Route Prefix	[i] [REDACTED] 0.0/17		(U//FOUO)	
Autonomous System Number	[i] 12880		(U//FOUO)	
Autonomous System Name	[i] DCI-AS DCI Autonomous System		(U//FOUO)	
<b>Device</b> <a href="#">Add Analyst Input</a>				
FQDN	[i] (none found)			
Domain	[i] [REDACTED]		(U//FOUO)	
Service	PROXY		(U//FOUO)	
Service	TRANSPARENTPROXY		(U//FOUO)	

# Identifying a Proxy

- Other things to be on the look out for:
- X-Forwarded-For IP Address
  - What is it?
  - An X-Forwarded-For IP address the proxy passing on to the server what it thinks is the IP address of the user
  - Think of it as the proxy telling the server “this is who I think this request came from”
  - It’s important to note that multiple proxies can, and often, are present, so one proxy might just be reporting the IP address of another proxy

# Identifying a Proxy

X-Forwarded-For IP Address as seen in traffic:

GET / HTTP/1.0	
User-Agent:	Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1; SV1)
Host:	www.ebay.com
Pragma:	no-cache
Via:	1.0 s.jonoobnet.com (squid/3.0.STABLE10)
X-Forwarded-For:	[REDACTED]
Cache-Control:	max-age=259200
Connection:	keep-alive

# Some Examples of X-Forwarded-For headers:

X-Forwarded-For: [REDACTED]

X-Forwarded-For: [REDACTED]

X-Forwarded-For: [REDACTED]

X-Forwarded-For: [REDACTED]

X-Forwarded-For: [REDACTED]

X-Forwarded-For: 192.168.1.10, 10.0.0.22, [REDACTED]

X-Forwarded-For: [REDACTED]

X-Forwarded-For: 127.0.0.1, [REDACTED]

X-Forwarded-For: [REDACTED] google.com, [REDACTED]



## Multiple-Layers of Proxies!

In-general, the first IP is the one closet to the original requestor  
Keep in mind – these can be totally fake

# Identifying a Proxy

- Similar to the X-Forwarded-For Tag is the “VIA tag”
- The VIA tag is the proxy identify itself

GET / HTTP/1.0	
User-Agent:	Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1; SV1)
Host:	www.ebay.com
Pragma:	no-cache
Via:	[REDACTED] (squid/3.0.STABLE10)
X-Forwarded-For:	217.219.95.135
Cache-Control:	max-age=259200
Connection:	keep-alive



# Identifying a Proxy

- The Via: tag may even contain some good information about the proxy
- Be careful though because this information could be falsified:

```
Via: 1.0 tehran-proxy-srv:3128 (squid/2.5.STABLE1)
```

# Identifying a Proxy




- Remember though that the X-Forwarded-For and VIA lines can be falsified and don't have to be present!
- If they're not present, how can you tell the IP address is a proxy?
- Test it in MARINA!




# Testing IP Addresses in MARINA

- The primary side effect of a proxy is too many users online at the same time
- So if all else fails, try querying on the IP address (assuming its USSID18 compliant of course!) in MARINA to see how many users were active within an hour time frame
- It's not scientific but generally it will help

# Testing IP Addresses in MARINA

For example look at these results:

Specify Date Range   to      
(YYYYMMDD [hhmmss]): Data available back to 1 Dec 2008

Search for User Activity by...    
that...    
the value(s)...   


3178 Records 1 - 500  

There were 274 unique “Active Users” in that hour, think it’s a proxy?

# HTTP Header Fingerprint (HHFP)

# What is the HHFP?

- GCHQ created the HHFP to help identify individual users behind a single proxy IP address
- The HHFP is a hash of multiple header fields that can be used to identify a single user behind a proxy

# What is the HHFP?

- At least one of these values must be present:
  - X-Forwarded-For IP Address
  - Via
  - Client IP address
- If so, the HHFP is a hash of those values combined with the User Agent string

# What is the HHFP?

EX: Here's an Iranian proxy IP Address that has multiple HHFP's underneath it.

NOTE: There's no guarantee that an HHFP is identifying a single unique user, it's entirely possible that more than one user will have the same HHFP

A screenshot of a file explorer window showing a list of files. The window title is partially obscured by a black box, but the text "(32) 0%" is visible. The list contains 32 entries, each with a file icon, a hexadecimal name, a count in parentheses, and a percentage. The files are sorted by name. The file "3c785e51 (1) 3%" is highlighted with a grey background.

File Name	Count	Percentage
008b6e2c	(1)	3%
018a707f	(1)	3%
0932e663	(1)	3%
0aee1ed4	(1)	3%
0ba2b5e1	(1)	3%
0ced7c48	(1)	3%
13312787	(1)	3%
135c8dc3	(1)	3%
19429340	(1)	3%
19dda1fa	(1)	3%
1a171e21	(1)	3%
1dd33d95	(1)	3%
1f661ca6	(1)	3%
20f8c73f	(1)	3%
219109f0	(1)	3%
225c2c7b	(1)	3%
23e57929	(1)	3%
2a0150bd	(1)	3%
2d504fe1	(1)	3%
2f8bad21	(1)	3%
31b545bd	(1)	3%
3a07f515	(1)	3%
3c785e51	(1)	3%
45340ef9	(1)	3%
5470cbdb	(1)	3%
73138ecd	(1)	3%
94f197d9	(1)	3%
9b3392a2	(1)	3%
a01fc614	(1)	3%
ac062e81	(1)	3%



## Pros and Cons of HHFP

- On the positive side, the HHFP is a single 8 digit value which can help identify a single user behind a proxy
- On the negative side, it requires an XFF IP address, Via string or Client IP Address and since many sessions do not contain all three, they'll have no HHFP string
- Also even with the HHFP, all of the fields that are used to build it are available in the XKS HTTP Activity query so it's not providing you with any data you don't already have access to

# XKS's HTTP Activity Search

# XKS HTTP Activity Search

After that overview of how HTTP Activity works, let's look into how to effectively target it through XKS queries

# XKS HTTP Activity Search

- HTTP Activity indexes every HTTP session
- Client-to-server and server-to-client
- Can be queried on any of the unique HTTP meta-data fields or any of the “standard” DNI fields (IP Address, SIGAD, CASENOTATION etc).

# XKS HTTP Activity Search

- Unique Meta-data fields of this search include:

Fields already covered in this training:

HTTP Type:	<input type="text"/>
Host:	<input type="text"/>
URL Path:	<input type="text"/>
URL Args:	<input type="text"/>
Search Terms:	<input type="text"/>
Language:	<input type="text"/>
Active User:	<input type="text"/>
TDI Type:	<input type="text"/>
TDI:	<input type="text"/>
Character Encoding:	<input type="text"/>
Content Start:	<input type="text"/>
Content Stop:	<input type="text"/>
Content Total:	<input type="text"/>

Referer:	<input type="text"/>
X Forwarded For:	<input type="text"/>
Via:	<input type="text"/>
Proxy Hash (HHFP):	<input type="text"/>
Cookie:	<input type="text"/>
Browser:	<input type="text"/>
Attachment Filename:	<input type="text"/>
Server Type:	<input type="text"/>
Geo Info <a href="#">[fulltext]</a> :	<input type="text"/>
Misc Info <a href="#">[fulltext]</a> :	<input type="text"/>
Links of Interest:	<input type="text"/>

# XKS HTTP Activity Search

- In addition to all of the common fields like:

IP Address:	<input type="text"/>	From <input type="button" value="v"/>
IP Address:	<input type="text"/>	To <input type="button" value="v"/>
Port:	<input type="text"/>	From <input type="button" value="v"/>
Port:	<input type="text"/>	To <input type="button" value="v"/>
Country:	<input type="text"/>	From <input type="button" value="v"/>
Country:	<input type="text"/>	To <input type="button" value="v"/>
City (IP):	<input type="text"/>	From <input type="button" value="v"/>
City (IP):	<input type="text"/>	To <input type="button" value="v"/>

Application Type:	<input type="text"/>	<input type="button" value="v"/>
Application Info:	<input type="text"/>	
Application:	<input type="text"/>	<input type="button" value="v"/>
AppID (+Fingerprints) <a href="#">[fulltext]</a> :	<input type="text"/>	

Data Length:	<input type="text"/>
Session Length:	<input type="text"/>

DVBS MAC:	<input type="text"/>
DVBS PID:	<input type="text"/>
SMAC:	<input type="text"/>
DMAC:	<input type="text"/>

SIGAD:	<input type="text"/>	<input type="button" value="v"/>
Casenotation:	<input type="text"/>	<input type="button" value="v"/>
Session ID (UUID):	<input type="text"/>	

# XKS HTTP Activity Search

- Most commonly HTTP Activity query searches in XKS will be to enable “persona analysis”
- Based on MARINA, TRAFFICTHIEF or PINWALE, we’ll want to query XKS to discover all of the HTTP Activity that occurred around the targets session of interest

# Simple HTTP Searches

- In order to do a “persona analysis” type search, all we’ll need to fill in is the IP of the target (assuming it’s USSID18 compliant) and a short time range “around” the time of the activity:

Datetime: Custom Start: 2009-10-26 09:30 Stop: 2009-10-27 11:00

IP Address: 1.1.1.1

IP Address:

From  
From  
Either



# XKS HTTP Activity Search

Another common query is analysts who want to see all traffic from a given IP address (or IP addresses) to a specific website.

# XKS HTTP Activity Search

- For example let's say we want to see all traffic from IP Address 1.2.3.4 to the website [www.website.com](http://www.website.com)
- While we can just put the IP address and the "host" into the search form, remember what we saw before about the various host names for a given website

# Host Field

It's important to note, that in many cases users think they're at websites like [www.yahoo.com](http://www.yahoo.com), but behind the scenes data is coming from a number of different servers without the user knowing it:

GET /mc/modules/mc/abContacts?mcCrumb=RIIDb59tjm & jsrand=98037807 & rand=2127033459 HTTP/1.0					
Accept:	*/*				
Accept-Language:	fa				
Referer:	http://us.mc575.mail.yahoo.com/mc/showFolder;_ylc=X3oDMTBucmhobGR0BF9TAzM5ODMwMTAyNwRhYwNkZWxNc2dz?mid=1_21857_ABRkxELAANvjSi6wUQ76lZa4fY&fid=Inbox&sort=date&order=up&startMid=36&filterBy=				
x-requested-with:	XMLHttpRequest				
Accept-Encoding:	gzip, deflate				
User-Agent:	Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1; SV1; .NET CLR 2.0.50727)				
Host:	us.mc575.mail.yahoo.com				
Cookie:	<table border="1"> <tr> <td>MG</td> <td>d=lvAXIbvaYnFGmmIfw3zBCVVRe2jUKZLwwoyKsRjxG0XVYaJhF95dLsZ5C0x1eDlcTcaHS_vpi ad9XvB0emj5Rr1 v=1</td> </tr> <tr> <td>Y</td> <td>v=1 n=66k3gh6as55lf l=cc70cc03_01sqgz/o ( Yahoo login id: ██████████ ) p=m2g265i013000000 ( Gender: male, Birth year: 1980, Postal code: ██████████ ) r=hq l=en-US ( Language/content: English )</td> </tr> </table>	MG	d=lvAXIbvaYnFGmmIfw3zBCVVRe2jUKZLwwoyKsRjxG0XVYaJhF95dLsZ5C0x1eDlcTcaHS_vpi ad9XvB0emj5Rr1 v=1	Y	v=1 n=66k3gh6as55lf l=cc70cc03_01sqgz/o ( Yahoo login id: ██████████ ) p=m2g265i013000000 ( Gender: male, Birth year: 1980, Postal code: ██████████ ) r=hq l=en-US ( Language/content: English )
MG	d=lvAXIbvaYnFGmmIfw3zBCVVRe2jUKZLwwoyKsRjxG0XVYaJhF95dLsZ5C0x1eDlcTcaHS_vpi ad9XvB0emj5Rr1 v=1				
Y	v=1 n=66k3gh6as55lf l=cc70cc03_01sqgz/o ( Yahoo login id: ██████████ ) p=m2g265i013000000 ( Gender: male, Birth year: 1980, Postal code: ██████████ ) r=hq l=en-US ( Language/content: English )				

# XKS HTTP Activity Search

- In order to account for all of the possible host names, we must front-wildcard the host name.
- Be careful when front-wildcarding because beyond being resource intensive for XKS, it can be dangerous from a USSID18 perspective

## Hints for wildcarding a host name

- If you're trying to query for traffic to the website [www.website.com](http://www.website.com) the best way to wildcard it is:
  - \*.website.com
- Notice that the . before the hostname website is still there, that way we will properly hit on ads.website.com images.website.com but avoid the false hits on [www.anotherwebsite.com](http://www.anotherwebsite.com)

# Hints for wildcarding a host name

IP Address:

1.2.3.4

From



Host:

\*.website.com

Why are we only interested in traffic coming from our IP of interest going to our website of interest?

# Helpful GUI Shortcuts

- Earlier we talked about how XKS broke a GET request into the URL Path and URL Argument (separated by a ?)
- **Ex:** `http://forum.██████████/showthread.php?t=131485`
- Get's broken out to:

Host	URL Path	URL Args
<code>forum.██████████</code>	<code>/showthread.php</code>	<code>t=131485</code>

# Helpful GUI Shortcuts

- So if we were to query for this URL we would need to enter those fields in separately:


Host	URL Path	URL Args
forum.██████████	/showthread.php	t=131485

Host:	forum ██████████
URL Path:	/showthread.php
URL Args:	t=131485



# Helpful GUI Shortcuts

- Or we could use the “URL Field Builder” to simply copy and paste the full URL and let XKS break it into its appropriate parts:

Host:   [\[Populate with URL Field Builder\]](#)

URL Path:

URL Args:

**URL Field Builder**

Enter a URL that will be automatically parsed to populate the host, path, and argument fields:

Enter Cancel

# Helpful GUI Shortcuts

**URL Field Builder**

Enter a URL that will be automatically parsed to populate the host, path, and argument fields:

http://forum [REDACTED] /showthread.php?t=131485

Enter Cancel



Host: forum [REDACTED]

URL Path: /showthread.php

URL Args: t=131485